



Project No.: TM-2203000603P
Report No.: TMTN2203000452NR

FCC ID: Y4O-JP21

Page: 1 / 146
Rev.: 00

FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10: 2013

TEST REPORT

For

Audio Device

Model: JP21

Brand: DENON DJ

Issued for

inMusic Brands, Inc.

200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8, Jiucengling, Xinhua Dist.,

Tainan City, Taiwan

Issued Date: August 04, 2022

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: TMTN2203000452NR

Page: 2 / 146
Rev.: 00

REVISION HISTORY

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 04, 2022	Initial Issue	ALL	Polly Wang



Report No.: TMTN2203000452NR

Page: 3 / 146

Rev.: 00

TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	7
5. FACILITIES AND ACCREDITATIONS.....	7
5.1 FACILITIES.....	7
5.2 EQUIPMENT.....	7
5.3 LABORATORY ACCREDITATIONS LISTINGS	7
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	8
6. CALIBRATION AND UNCERTAINTY.....	9
6.1 MEASURING INSTRUMENT CALIBRATION.....	9
6.2 MEASUREMENT UNCERTAINTY	9
7. SETUP OF EQUIPMENT UNDER TEST.....	10
7.1 SETUP CONFIGURATION OF EUT.....	10
7.2 SUPPORT EQUIPMENT	11
7.3 EUT OPERATING CONDITION	13
8. APPLICABLE LIMITS AND TEST RESULTS.....	16
8.1 6dB BANDWIDTH.....	16
8.2 MAXIMUM PEAK OUTPUT POWER.....	30
8.3 DUTY CYCLE	45
8.4 POWER SPECTRAL DENSITY	58
8.5 CONDUCTED SPURIOUS EMISSION.....	72
8.6 RADIATED EMISSIONS.....	94
8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS.....	94
8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHZ	99
8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHZ	101
8.6.4 RESTRICTED BAND EDGES.....	116
8.7 POWERLINE CONDUCTED EMISSIONS	136
9. ANTENNA REQUIREMENT	140
9.1 STANDARD APPLICABLE	140
9.2 ANTENNA CONNECTED CONSTRUCTION	140
APPENDIX I SETUP PHOTOS	141

1. TEST REPORT CERTIFICATION

Applicant : inMusic Brands, Inc.
200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Manufacturer : inMusic Brands, Inc.
200 Scenic View Drive, Cumberland, RI 02864, U.S.A.

Equipment Under Test : Audio Device

Model : JP21

Brand : DENON DJ

Date of Test : March 30, 2022 ~ April 26, 2022

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C AND ANSI C63.10: 2013	No non-compliance noted

Statements of Conformity
Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Approved by:

John Chen
Supervisor

2. EUT DESCRIPTION

Product Name	Audio Device
Model	JP21
Brand	DENON DJ
Received Date	March 29, 2022
Frequency Range	IEEE 802.11b/g, 802.11n HT20: 2412MHz~2462MHz Bluetooth 5.0: 2402MHz~2480MHz
Transmit Power	IEEE 802.11b Mode: 19.37dBm (86.497mW) IEEE 802.11g Mode: 19.47dBm (88.512mW) IEEE 802.11n HT20 Mode: 18.73dBm (74.645mW) Bluetooth 4.0 Mode: 4.00dBm (2.512mW) Bluetooth 5.0 Mode: 4.01dBm (2.518mW)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20: 5MHz Bluetooth 5.0: 2MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20: 11 Channels Bluetooth 5.0 : 40 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 130, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps Bluetooth 5.0: 2 Mbps
Type of Modulation	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) Bluetooth 5.0: GFSK
Antenna Type	Type: WLAN ANTENNA Model: DB1EM60-I0300-S Manufacturer: BRITO Gain: 4.6 dBi
Power Rating	DC 12V, 3A(Power by Adapter)
Hardware Version	INM-JP21-Main
Software Version	N/A
Firmware Version	planck-2022_02_08_07_46-jschaffmeister-planck-AIRDJ-14447-20a9919636-HEAD-c30d3a416c-INTERNAL-UpdateImage
Temperature Range	0°C ~ +40°C
Reported Date	June 01, 2022

Power Adapter :

No.	Manufacturer	Model No.	Power Input	Power Output
1	FSP	FSP036-RHBN3	AC 100-240V~,1.8A, 50-60Hz	DC 12.0V, 3.0A, 36.0W

REMARK:

- The sample (**JP21**) selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- This submittal(s) (test report) is intended for FCC ID: **Y40-JP21** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
- For more details, please refer to the User's manual of the EUT.

3. DESCRIPTION OF TEST MODES

The EUT is a Audio Device. It has one transmitter chains and one receive chains (1x1 configurations) and BT5.0. The 1x1 configuration is implemented with one outside chains (Chain 0).

The RF chipset is manufactured by Broadcom.

The antenna peak gain 4.6dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps long data rate (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 6.5Mbps data rate (worst case) were chosen for full testing.

GFSK mode

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2402
Middle	2442
High	2480

Bluetooth 5.0 (GFSK) mode: 1Mbps data rate (worst case) were chosen for full testing.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW1109).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada (TW1109)
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:


PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	$\pm 3.3456\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	$\pm 2.6828\text{dB}$
Radiated Emission, 1 to 8 GHz	$\pm 2.6485\text{dB}$
Radiated Emission, 8 to 18 GHz	$\pm 2.6852\text{dB}$
Radiated Emission, 18 to 26.5 GHz	$\pm 2.6485\text{dB}$
Radiated Emission, 26 to 40 GHz	$\pm 3.0295\text{dB}$
Power Line Conducted Emission	$\pm 1.91\text{dB}$
Band Width	136.49kHz
Peak Output Power MU	$\pm 1.904\text{dB}$
Band Edge MU	$\pm 0.302\text{dBuV}$
Channel Separation MU	361.69Hz
Duty Cycle MU	0.064ms
Frequency Stability MU	0.223kHz

Uncertainty figures are valid to a confidence level of 95%, K=2


7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

FOR RF TEST

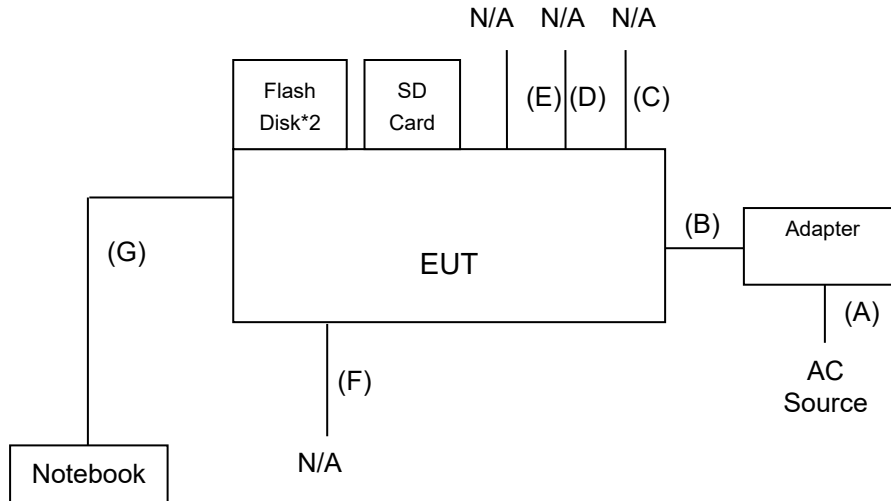

FOR EMI TEST

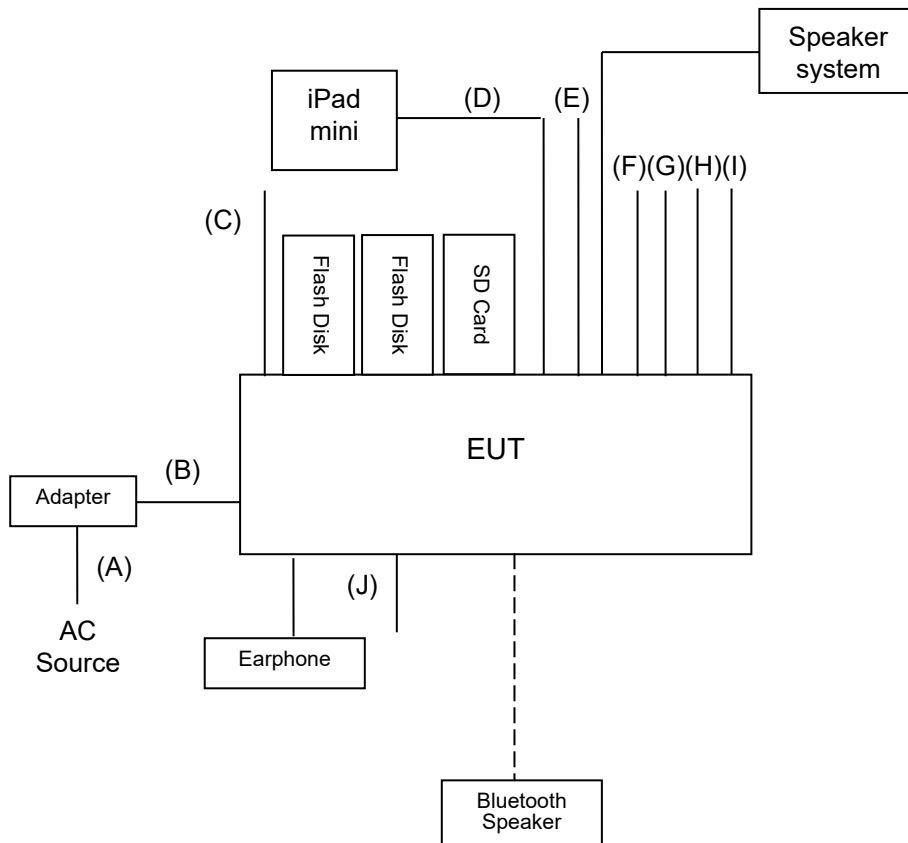

7.2 SUPPORT EQUIPMENT

RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	SD CARD	TOSHIBA	2GB	DOC	N/A
2	Flash Disk	Transcend	Jet Flash700	DOC	N/A
3	Notebook	Acer	MS2229	DOC	Unshielded, 1.8m with one core

No.	Signal cable description	
A	AC Power	Unshielded, 1.0m, 1pcs.
B	DC Power	Unshielded, 1.5m, 1pcs with one core.
C	USB	Shielded, 1.8m, 1pcs with one core.
D	Audio	Shielded, 0.8m, 4pcs.
E	Audio	Shielded, 1.0m, 4pcs.
F	Audio	Shielded, 1.2m, 2pcs.
G	USB	Unshielded, 1.5m, 1pcs.

EMI test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	iPad mini	Apple	A1432	DOC	N/A
2	Earphone	N/A	N/A	DOC	N/A
3	SD Card	TOSHIBA	2GB	DOC	N/A
4	Speaker System	T.C.STAR	TCS2285	DOC	N/A
5	Flash Disk	Transcend	Jet Flash700	DOC	N/A
6	Bluetooth speaker	PHILIPS	TAS1505	N/A	N/A

No.	Signal cable description	
A	AC Power	Unshielded, 1.0m, 1pcs.
B	DC Power	Unshielded, 1.5m, 1pcs with one core.
C	USB	Shielded, 1.0m, 1pcs with one core.
D	Audio	Shielded, 1.0m, 1pcs.
E	Audio	Shielded, 1.0m, 1pcs.
F	Audio	Shielded, 1.0m, 1pcs.
G	Audio	Shielded, 1.0m, 1pcs.
H	Audio	Shielded, 1.0m, 1pcs.
I	Audio	Shielded, 1.0m, 1pcs.
J	Earphone	Shielded, 1.0m, 1pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

7.3 EUT OPERATING CONDITION

RF Setup

1. Set up a whole system as the setup diagram.
2. The "Tera Term" software was used for testing
3. Key in "root" , "connmanctl enable wifi".

TX Mode Key in:

B Mode :

```
wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 01 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 15
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0
```

G Mode :

```
wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -r 06 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 13 (13,12,11)
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0
```



Report No.: TMTN2203000452NR

Page: 14 / 146

Rev.: 00

HT20 Mode :

```
wl down
wl mpc 0
wl country ALL
wl band b
wl up
wl 2g_rate -h 0 -b 20
wl channel 01 (01,06,11)
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
wl phy_txpwrctrl 1
wl txpwr1 -o -d 12 (12,11)
wl pkteng_start 00:90:4c:14:43:19 tx 100 1000 0
```

RX Mode Key in:

```
wl down
wl band auto
wl mpc 0
wl country ALL
wl channel 01 (01,06,11)
wl bi 65535
wl up
wl phy_watchdog 0
wl scansuppress 1
wl phy_forcecal 1
```

4. All of the function are under run.

5. Start test.

Report No.: TMTN2203000452NR

Bluetooth:

1. Set up a whole system as the setup diagram.
2. The "Tera Term" software was used for testing.
3. Key in :
root
cd /sys/class/bluetooth/hci0
ls -al
cd rfkill2/
echo 1 >state
echo 0 > /sys/class/rfkill/rfkill1/soft
bluetoothctl
power on
4. Press "Ctrl + z"

TX Mode**BLE 1M Key in:**

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x08 0x0001e 00(00,14,27) 25 00
```

BLE 2M**BLE 2M Key in:**

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x08 0x0034 00(00,14,27) 25 00 02
```

RX Mode**BLE1M Key in:**

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x3f 0x0052 EE FF C0 88 00 00 E8 03 00(00,27,4E) 04 00 01 FF FF
```

BLE2M Key in:

```
hciconfig hci0 up  
hcidtool cmd 0x03 0x0003  
hcidtool cmd 0x08 0x0033 00(00,14,27) 02 00
```

5. All of the function are under run.
6. Start test.

8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6dB BANDWIDTH

LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Chamber Room #966					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/22/2021	07/21/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2022
Power Sensor	Anritsu	MA2491A	033265	05/18/2021	05/17/2022
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP



TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5 % of the emission bandwidth (EBW).
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.

TEST RESULTS

No non-compliance noted.

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	27.4°C, 55%	Test Date	2022/04/26

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	8.05	500	PASS
Middle	2437	8.06	500	PASS
High	2462	8.05	500	PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	15.50	500	PASS
Middle	2437	15.22	500	PASS
High	2462	15.21	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	15.22	500	PASS
Middle	2437	15.22	500	PASS
High	2462	15.21	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.1dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C , 65%	Test Date	2022/04/26

Bluetooth 4.0 (GFSK) mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	711	500	PASS
Middle	2442	718	500	PASS
High	2480	716	500	PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C , 65%	Test Date	2022/04/26


Bluetooth 5.0 (GFSK) mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2402	1150	500	PASS
Middle	2442	1140	500	PASS
High	2480	1160	500	PASS

NOTE :


1. At final test to get the worst-case emission at 2Mbps.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.


6dB BANDWIDTH (802.11b MODE)

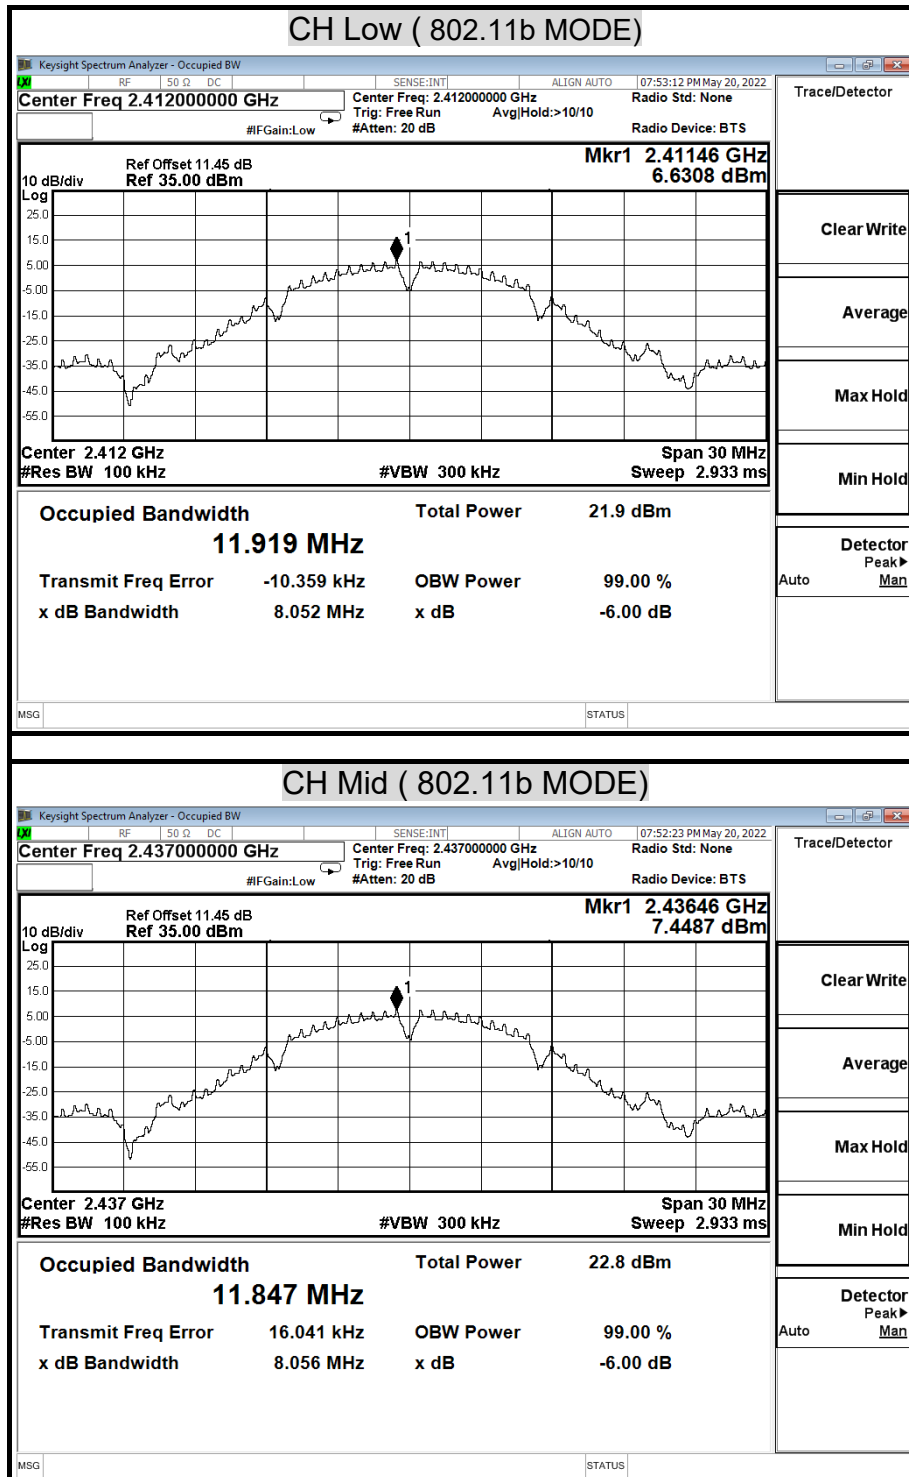

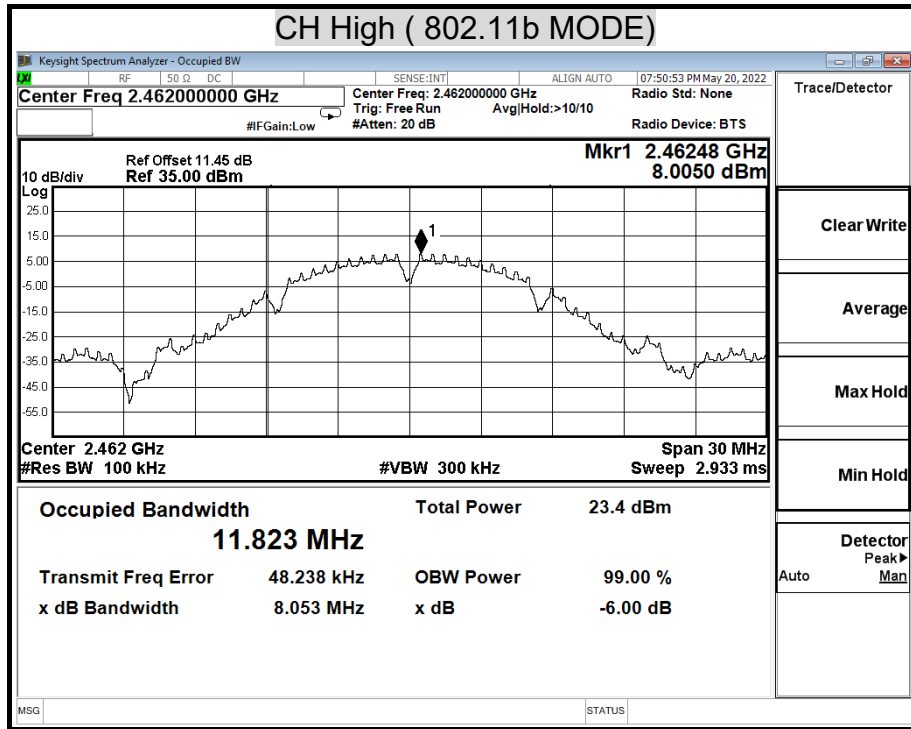



6dB BANDWIDTH (802.11g MODE)

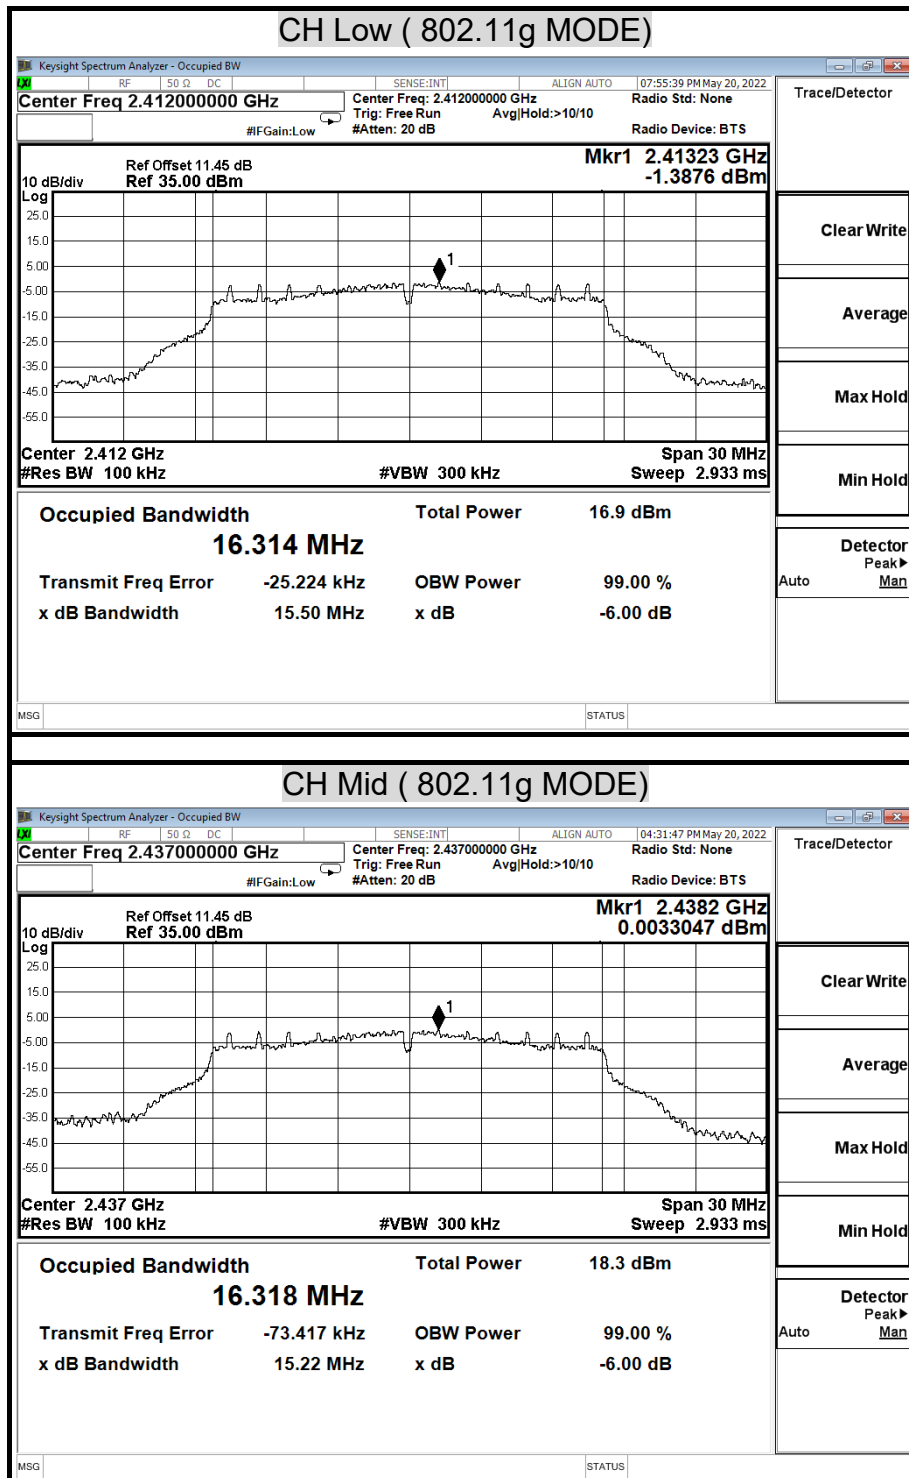

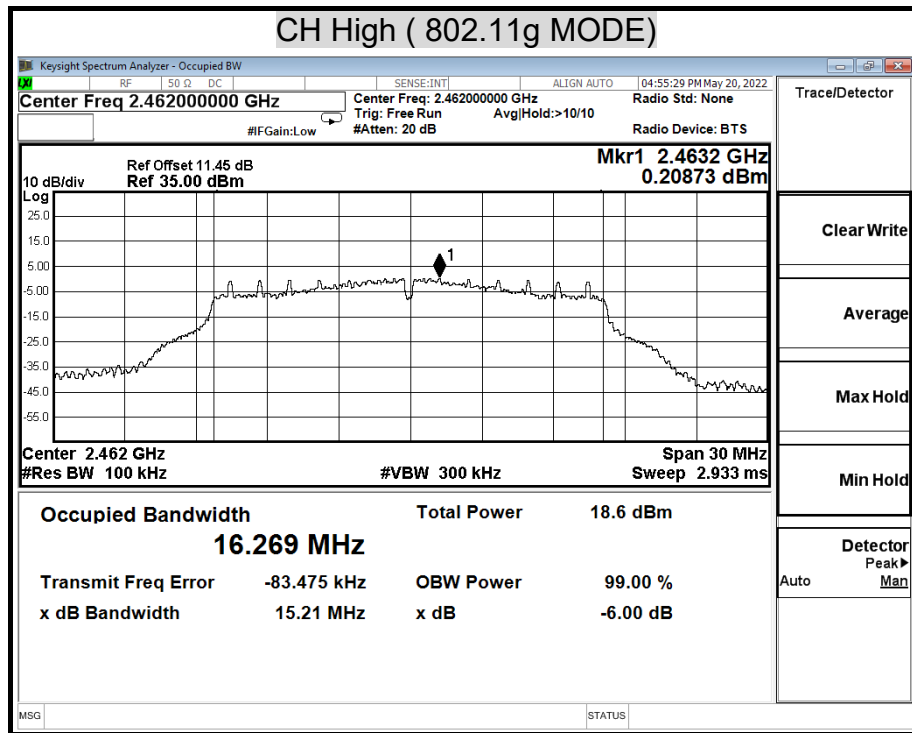



6dB BANDWIDTH (802.11n HT20 MODE)

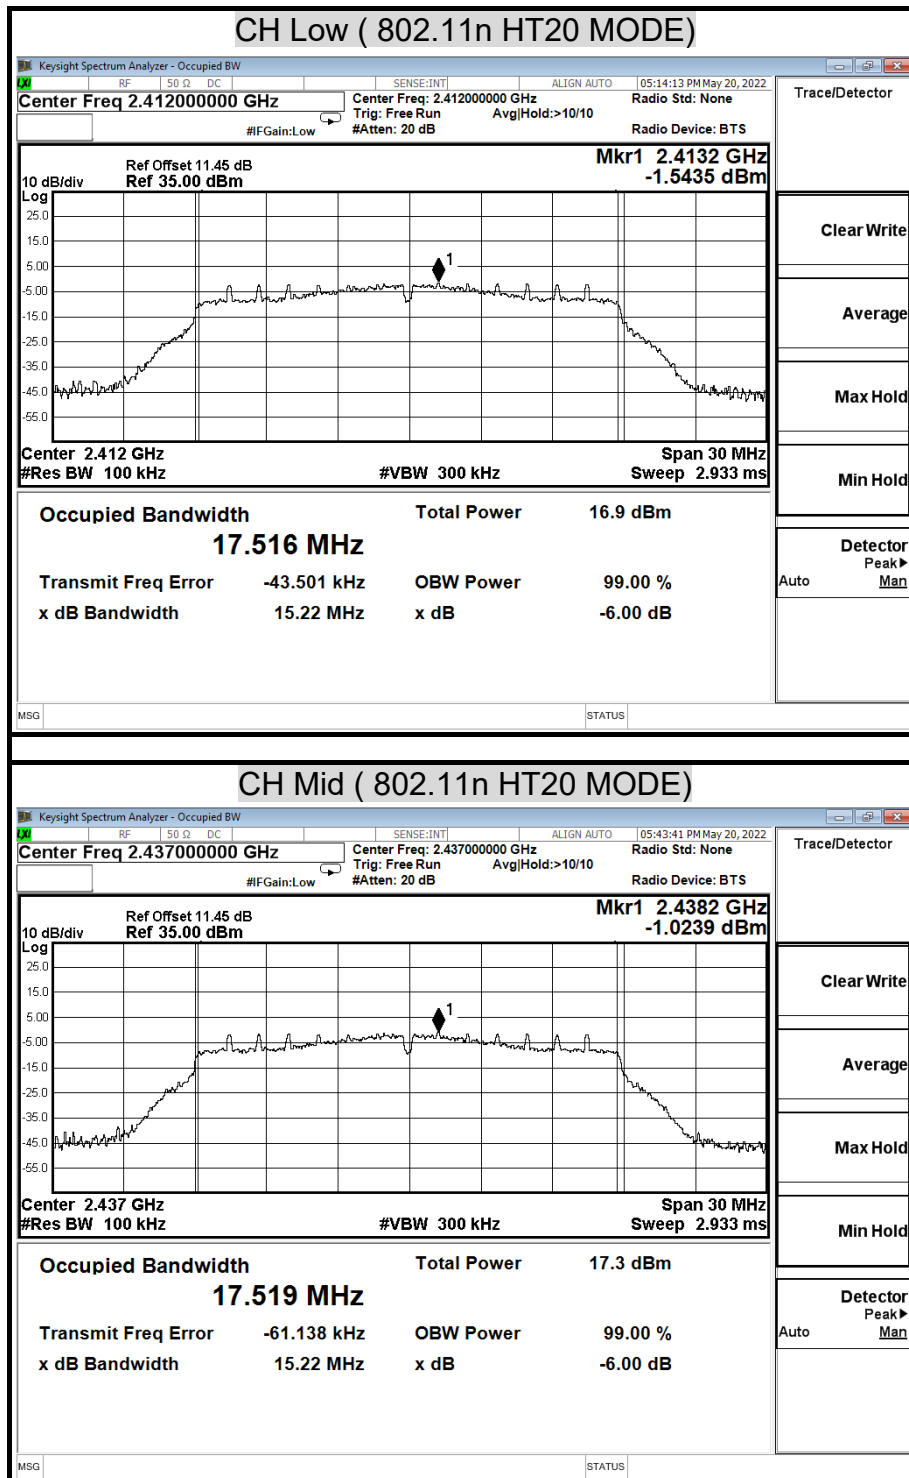

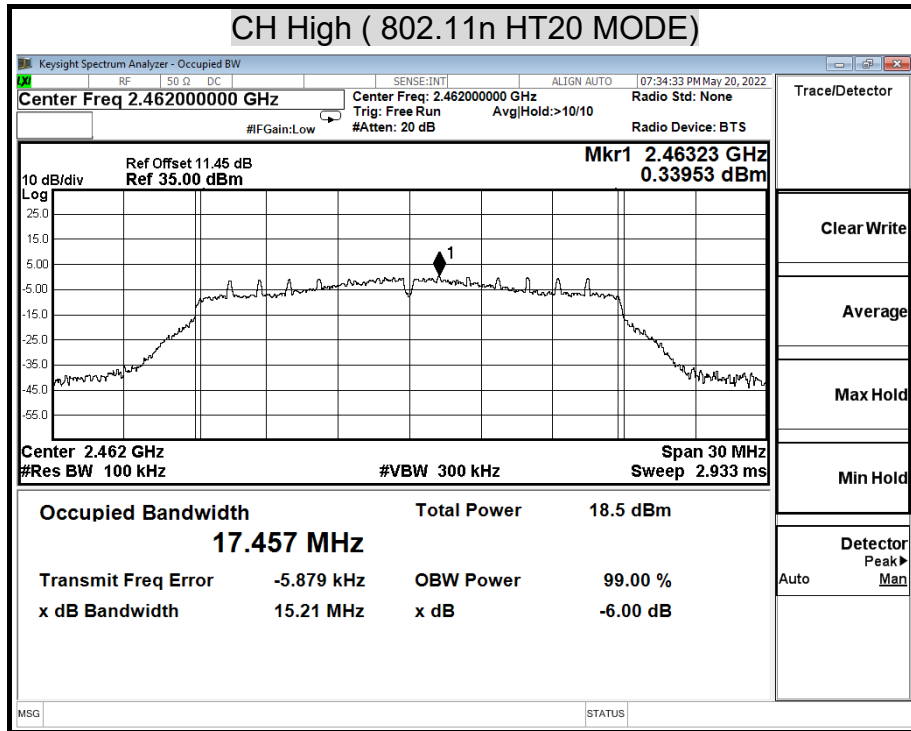



6dB BANDWIDTH (GFSK(4.0) MODE)

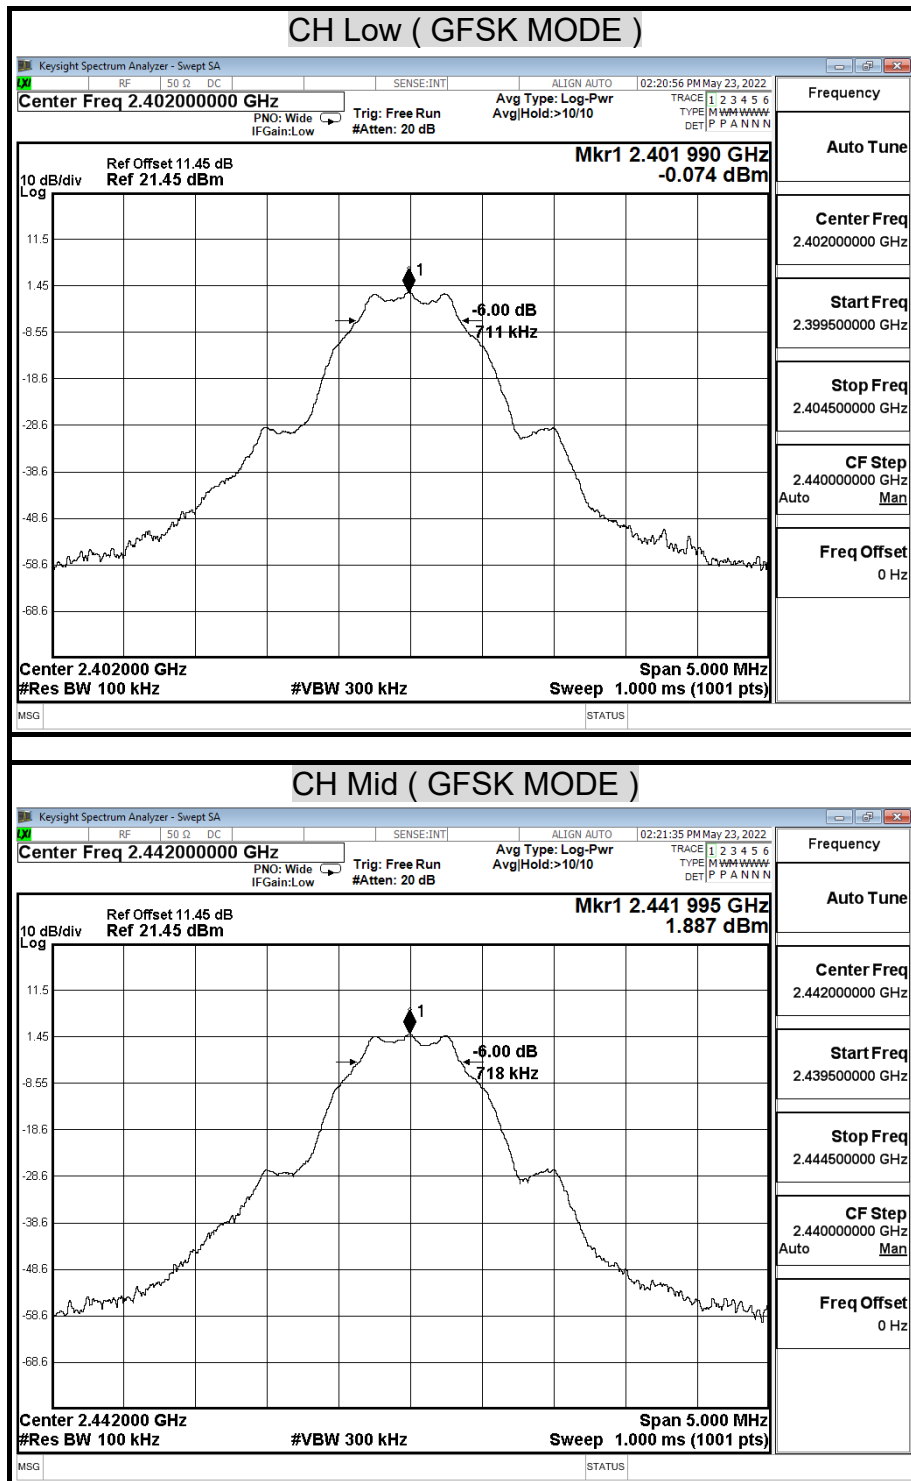

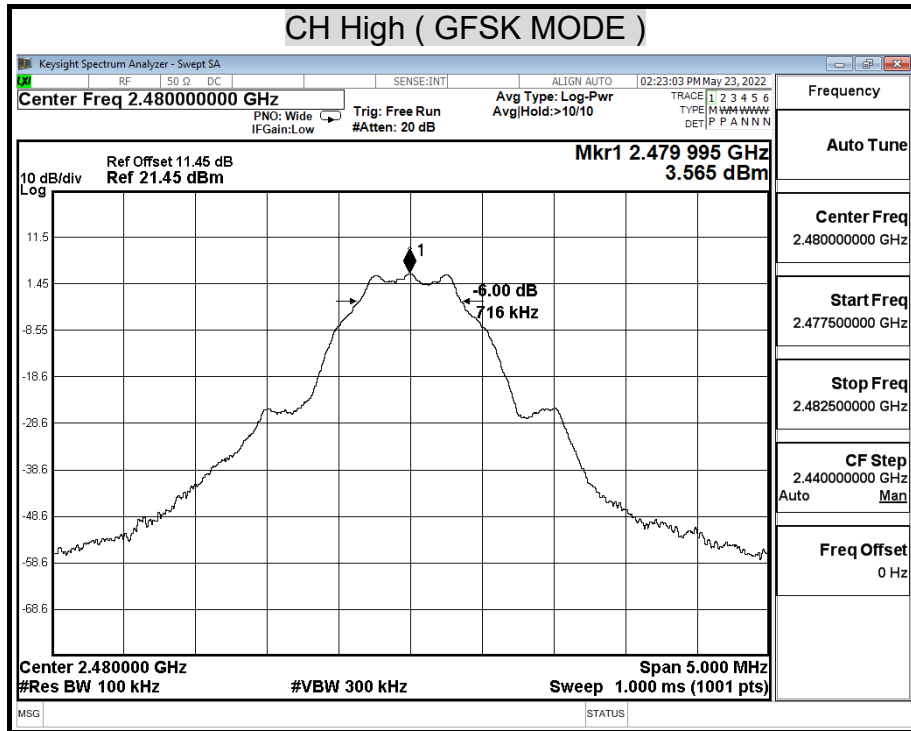

6dB BANDWIDTH (GFSK(5.0) MODE)

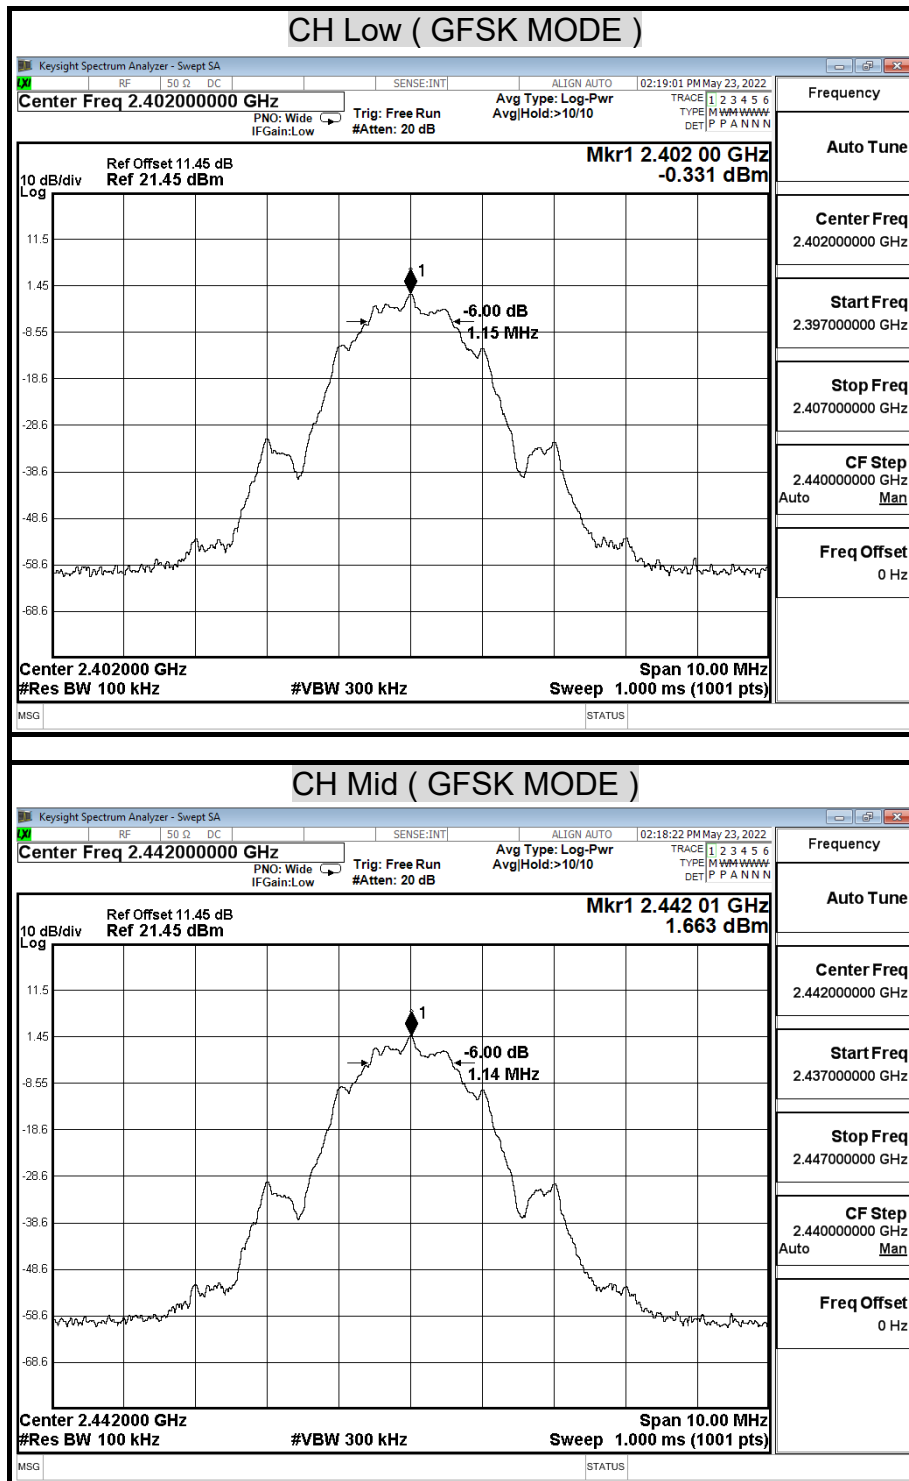

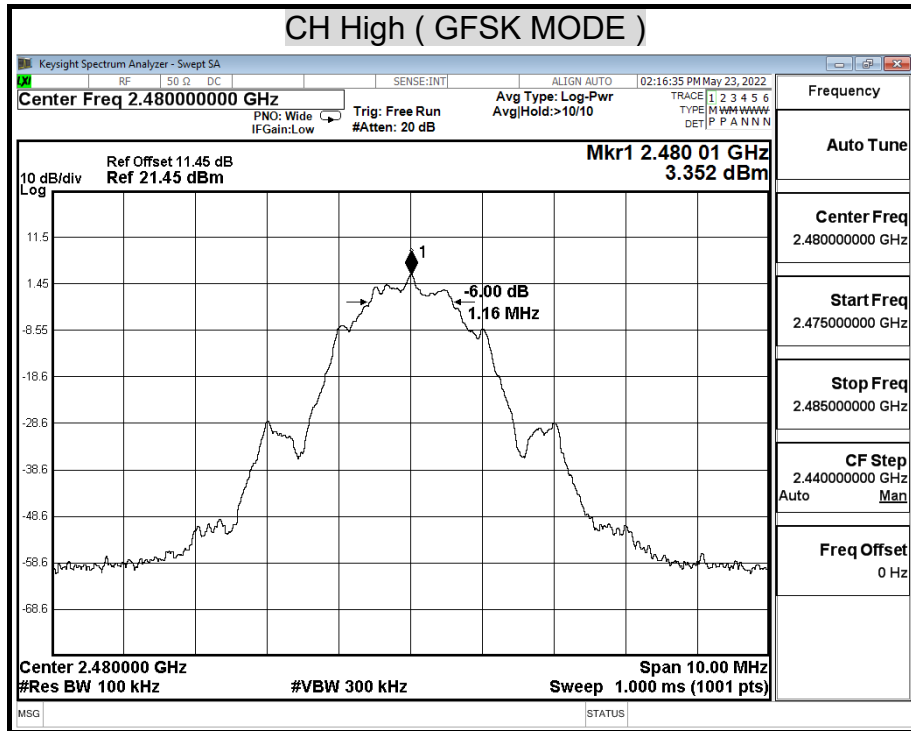

8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT


§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

Chamber Room #966					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/22/2021	07/21/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2022
Power Sensor	Anritsu	MA2491A	033265	05/18/2021	05/17/2022
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

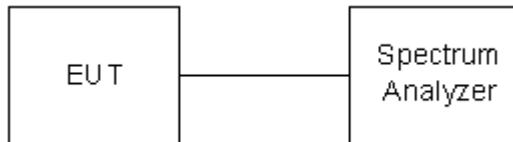TEST SETUP**TEST PROCEDURE**

The tests were performed in accordance with KDB 558074 8.3.1.1.

11.9.1.1 RBW $\geq$ DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than

the DTS bandwidth is available to perform the measurement:

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq [3 \times \text{RBW}]$.
- c) Set span $\geq [3 \times \text{RBW}]$.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

TEST RESULTS

No non-compliance noted

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	27.4°C, 55%	Test Date	2022/04/26

IEEE 802.11b mode

Channel	Frequency (MHz)	Data Rate	Power Set	Output Power (dBm)	Output Power Total		Limit (dBm)	Result
				ChainA	(dBm)	(W)		
Low	2412	1	15	18.94	18.94	0.0783	30.00	PASS
Middle	2437	1	15	19.37	19.37	0.0865		PASS
High	2462	1	15	19.37	19.37	0.0865		PASS

NOTE :

1. At final test to get the worst-case emission at 1Mbps long.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Frequency (MHz)	Data Rate	Power Set	Output Power (dBm)	Output Power Total		Limit (dBm)	Result
				ChainA	(dBm)	(W)		
Low	2412	6	13	19.06	19.06	0.0805	30.00	PASS
Middle	2437	6	12	19.25	19.25	0.0841		PASS
High	2462	6	11	19.47	19.47	0.0885		PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Data Rate	Power Set	Output Power (dBm)	Output Power Total		Limit (dBm)	Result
				ChainA	(dBm)	(W)		
Low	2412	MCS1	12	17.50	17.50	0.0562	30.00	PASS
Middle	2437	MCS1	12	18.02	18.02	0.0634		PASS
High	2462	MCS1	11	18.73	18.73	0.0746		PASS

NOTE :

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26

Bluetooth 4.0 (GFSK) mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	0.22	30.00	PASS
Middle	2442	2.35	30.00	PASS
High	2480	4.00	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 1Mbps.
 2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Bluetooth 5.0 (GFSK) mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2402	0.33	30.00	PASS
Middle	2442	2.38	30.00	PASS
High	2480	4.01	30.00	PASS

NOTE : 1. At final test to get the worst-case emission at 2Mbps.
 2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

Report No.: TMTN2203000452NR

Average Power Data

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	16.04
Middle	2437	16.49
High	2462	16.54

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	10.62
Middle	2437	11.11
High	2462	11.25

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Average Power (dBm)
		Chain 0
Low	2412	8.44
Middle	2437	9.58
High	2462	10.43


Bluetooth 4.0 (GFSK) mode


Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	-0.10
Middle	2442	1.94
High	2480	3.55

Bluetooth 5.0 (GFSK) mode


Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2402	-0.23
Middle	2442	1.90
High	2480	3.46

MAXIMUM PEAK OUTPUT POWER (802.11b MODE)

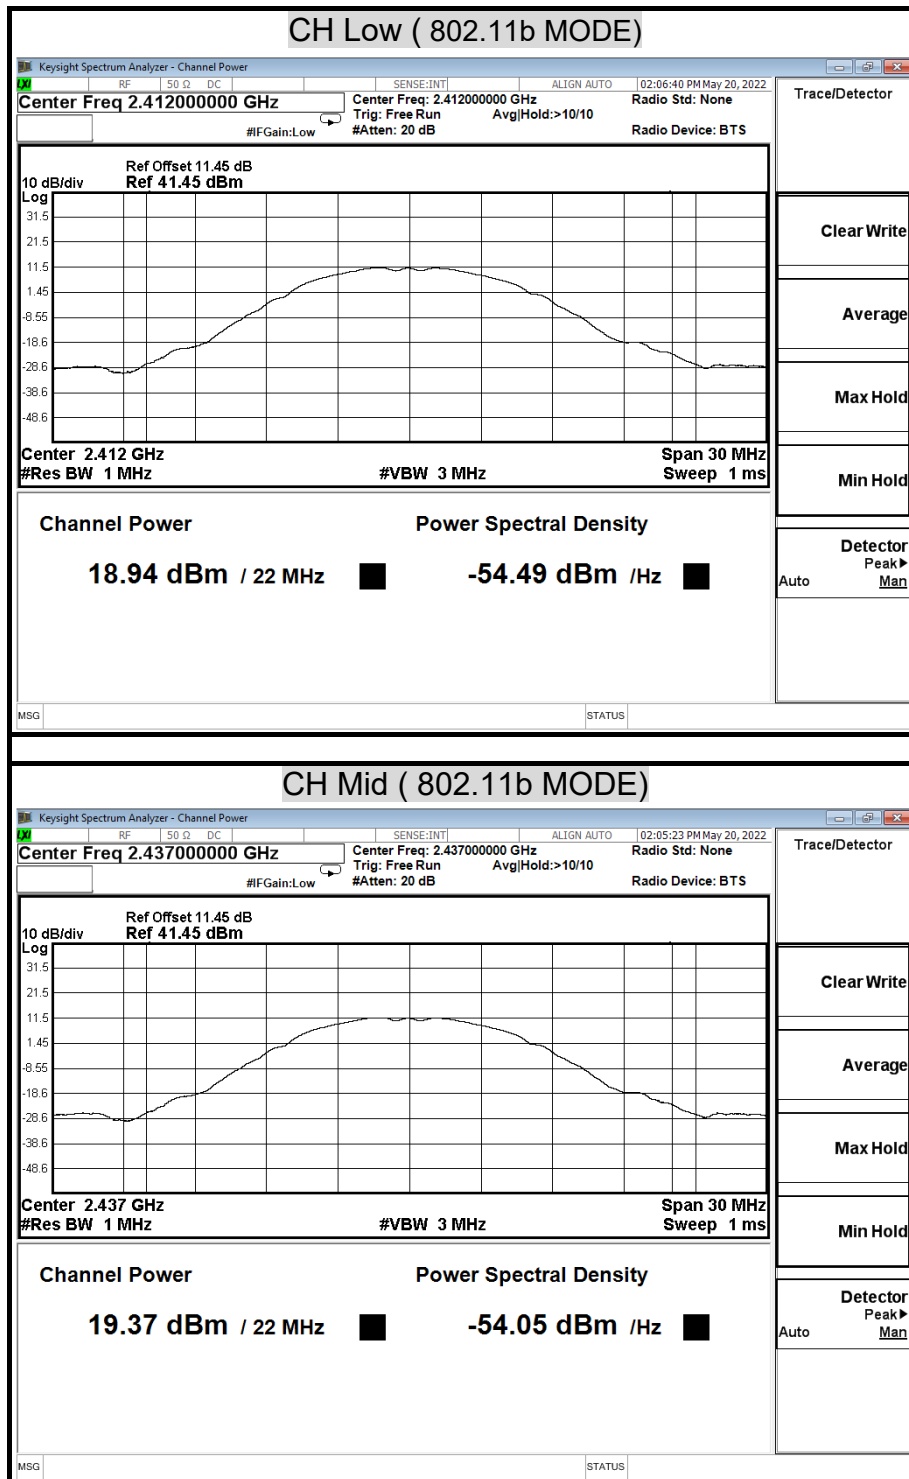

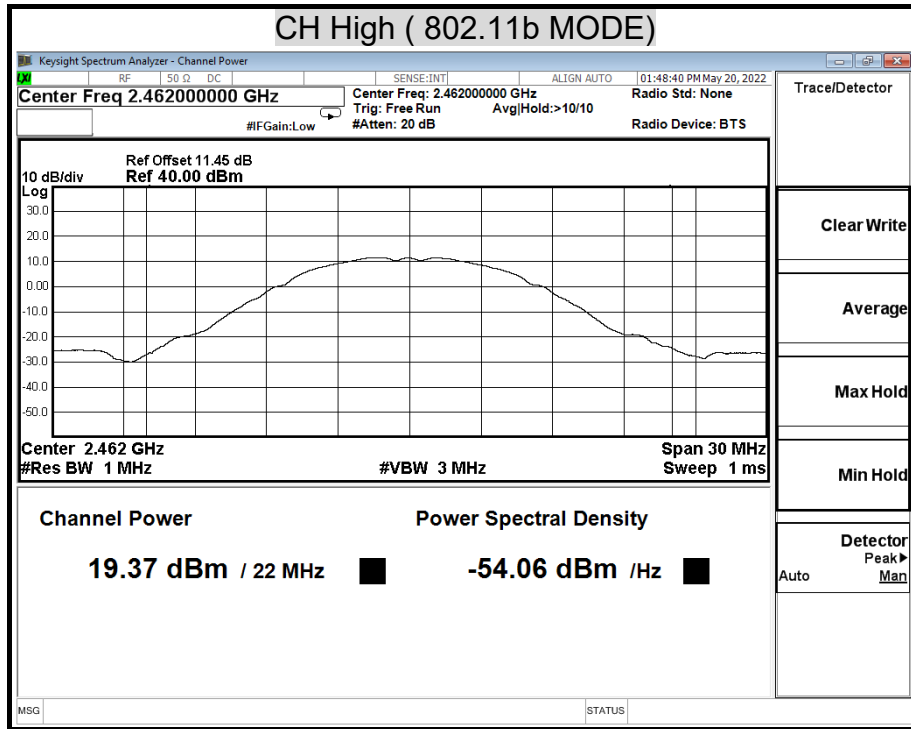

MAXIMUM PEAK OUTPUT POWER (802.11g MODE)

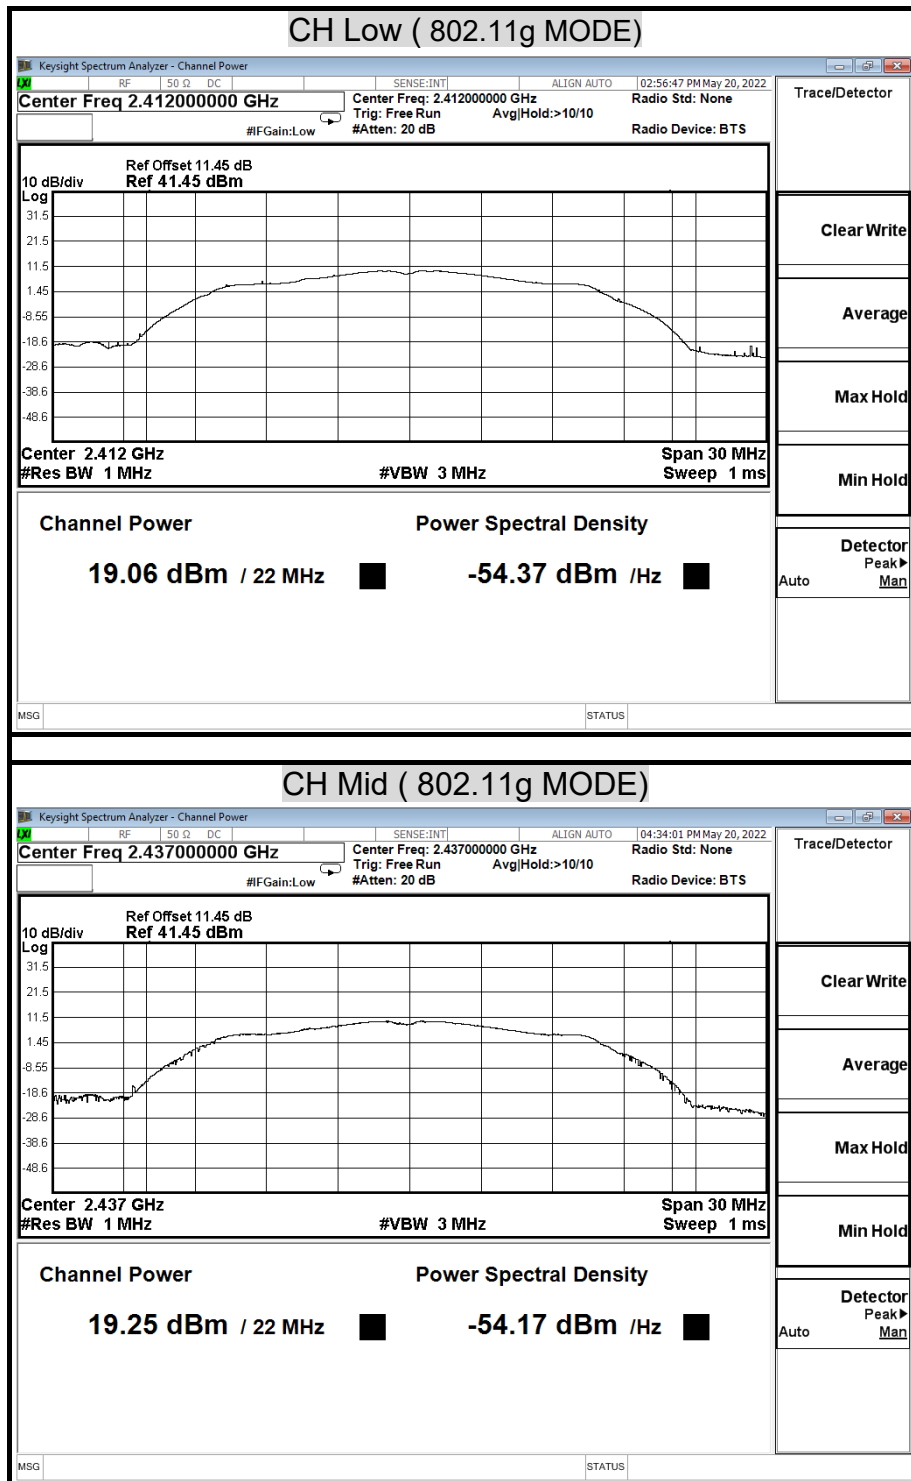





Report No.: TMTN2203000452NR


Page: 38 / 146

Rev.: 00

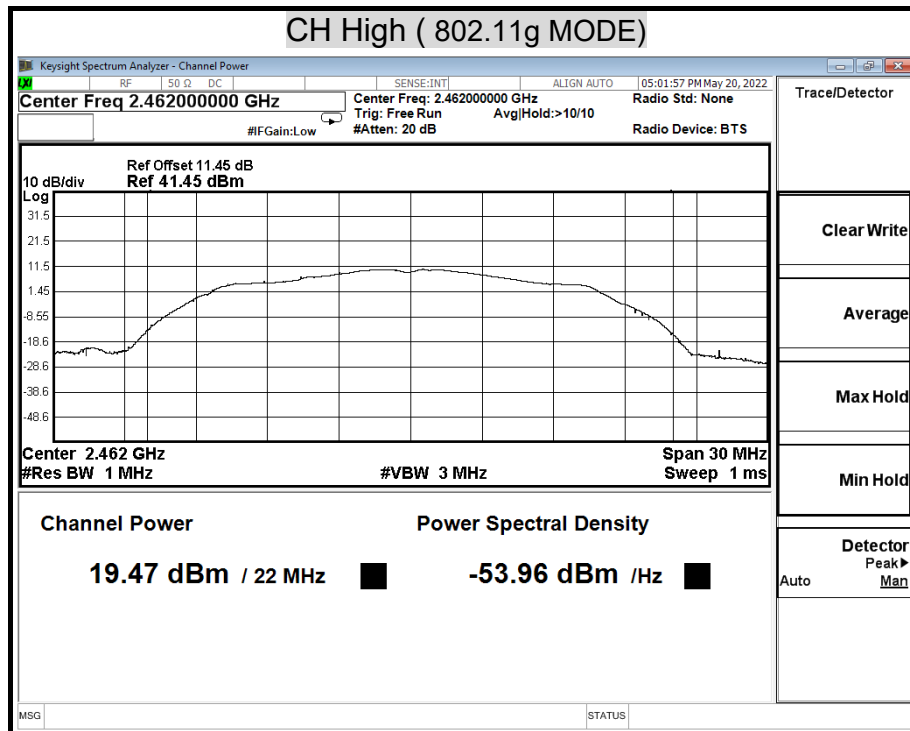


MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE)

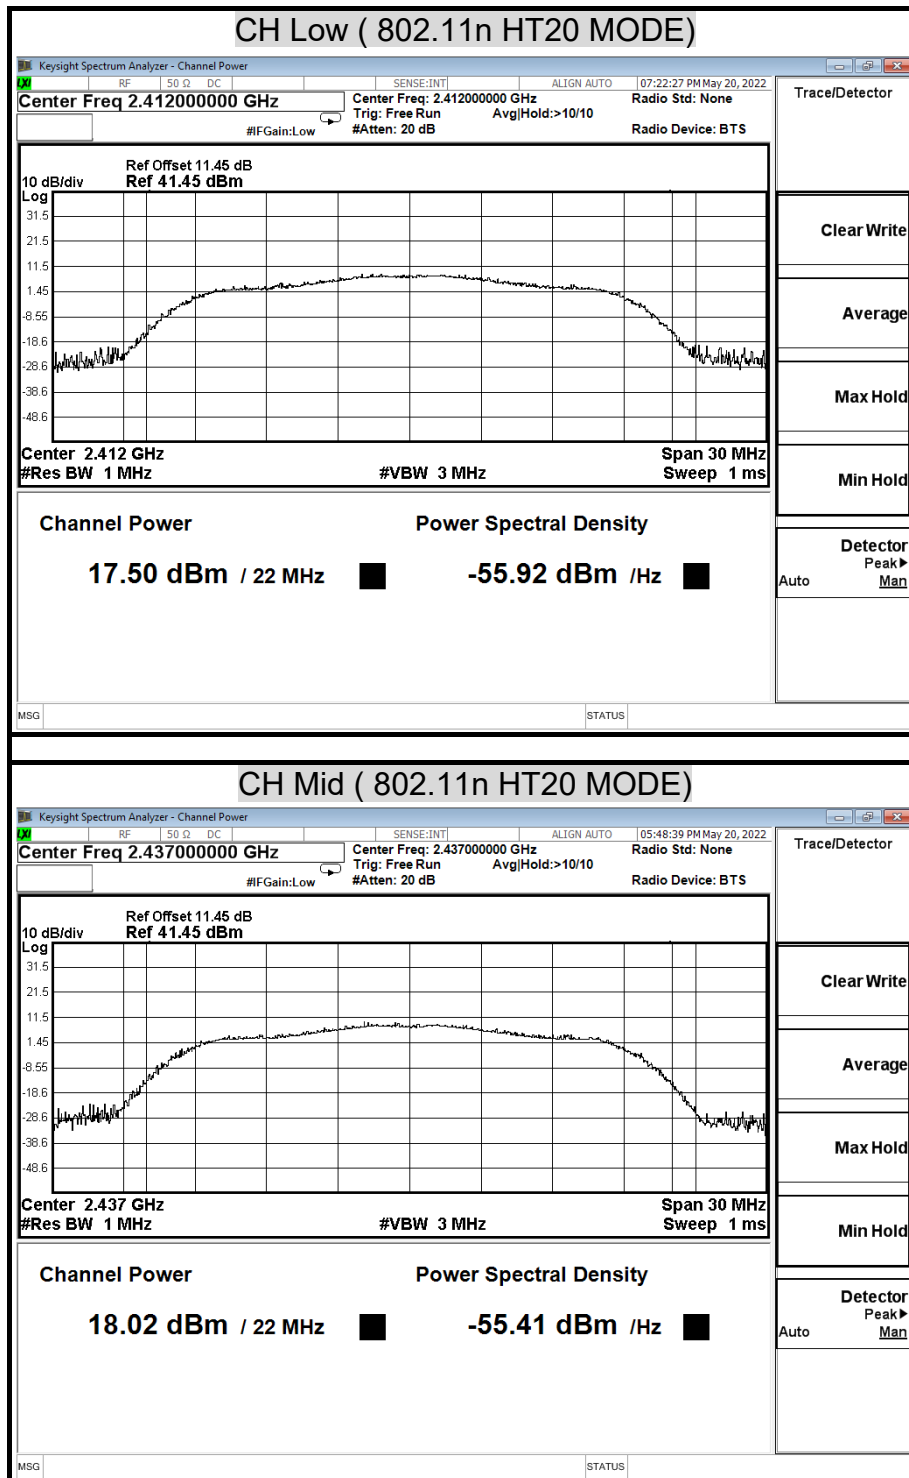

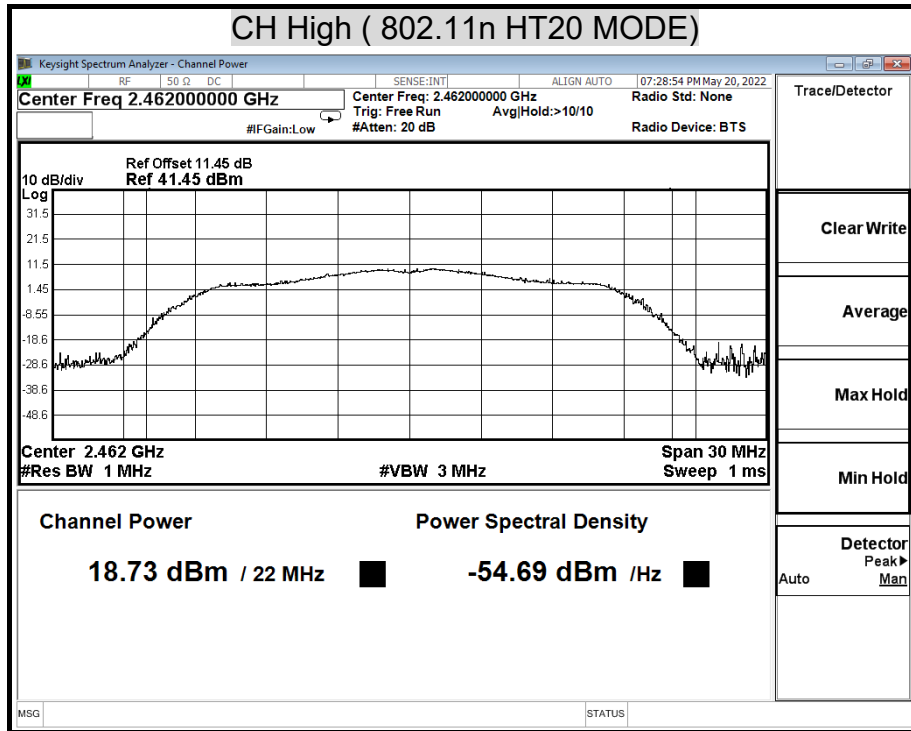


MAXIMUM PEAK OUTPUT POWER (GFSK(4.0) MODE)

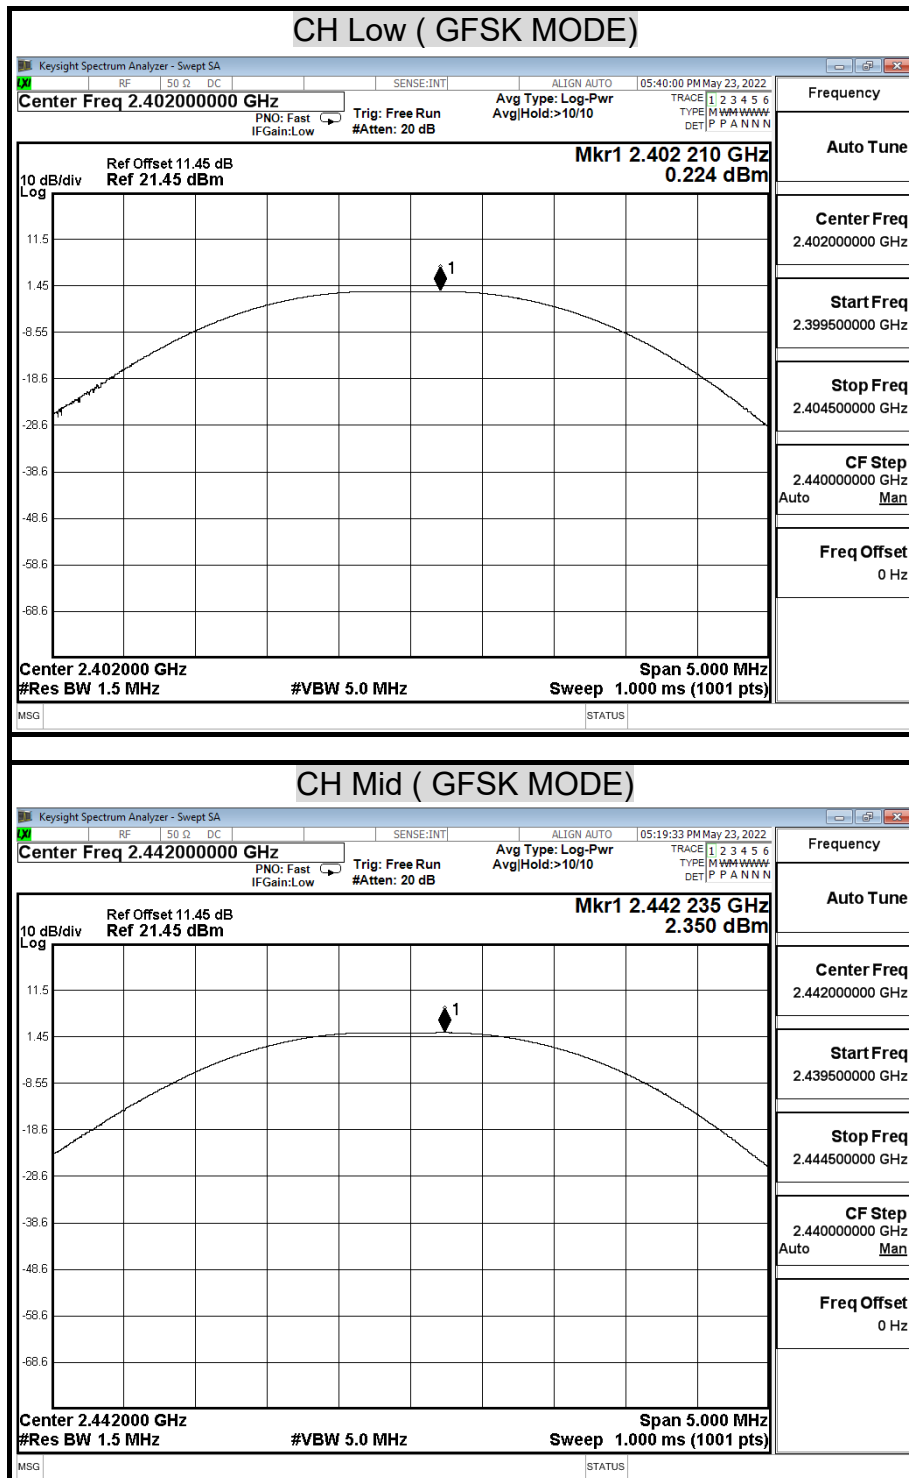





Report No.: TMTN2203000452NR

Page: 42 / 146
Rev.: 00

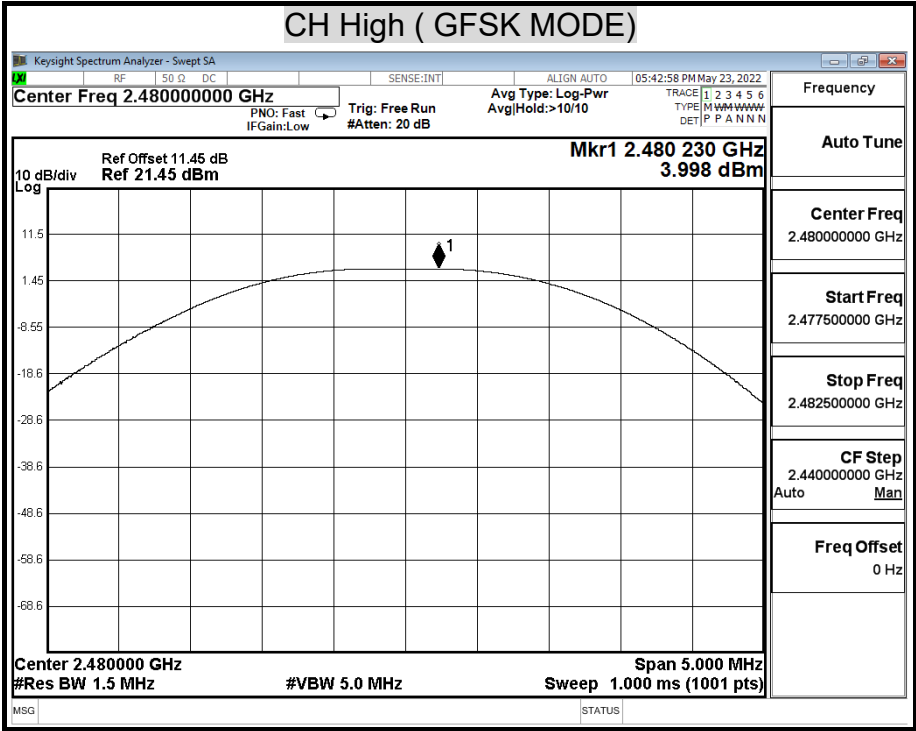

MAXIMUM PEAK OUTPUT POWER (GFSK(5.0) MODE)

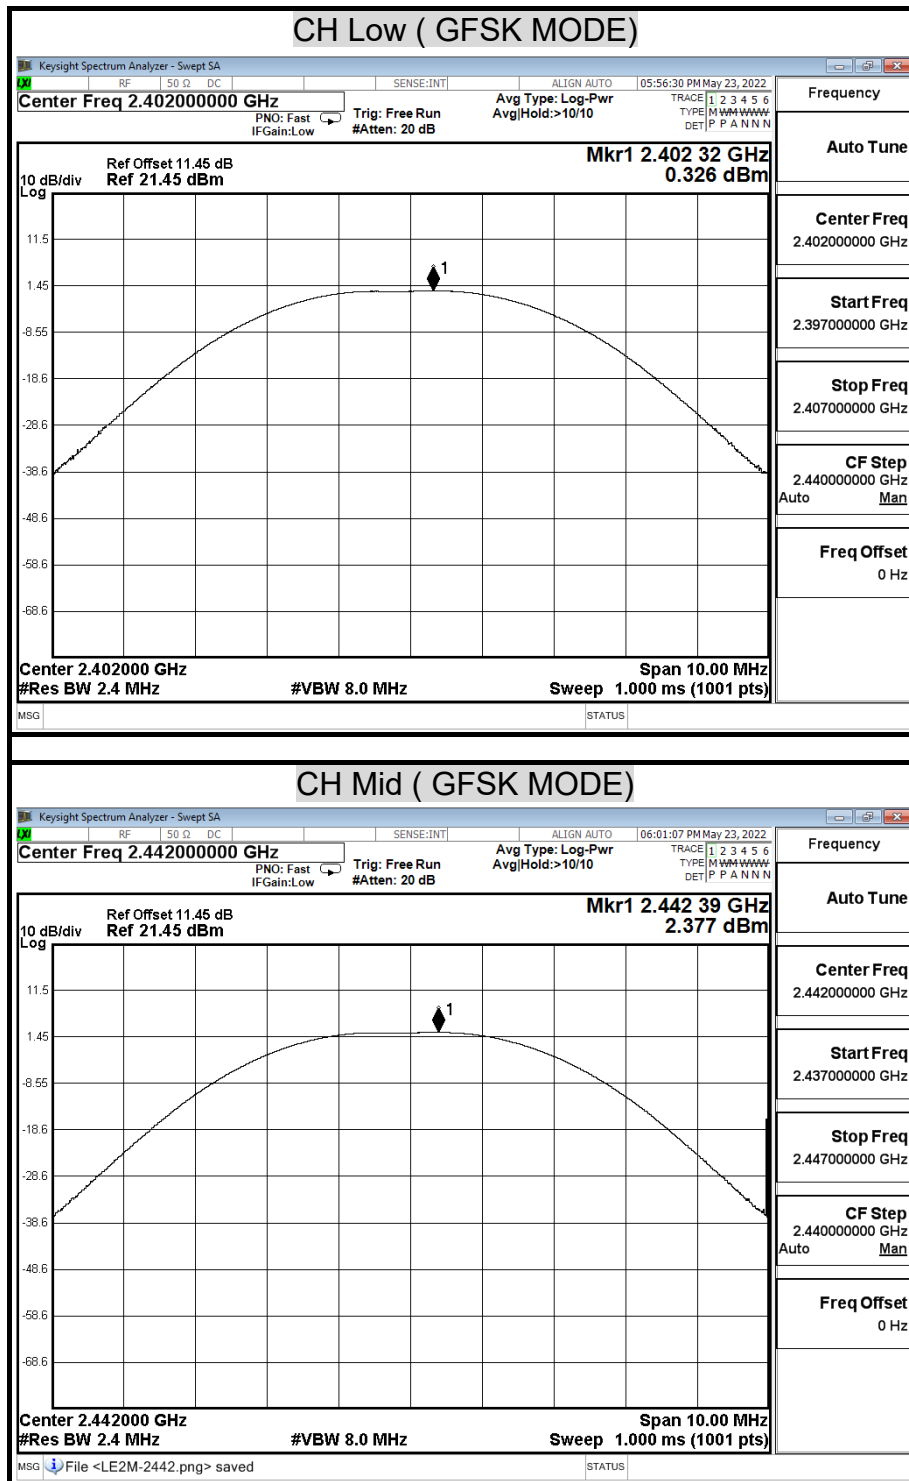

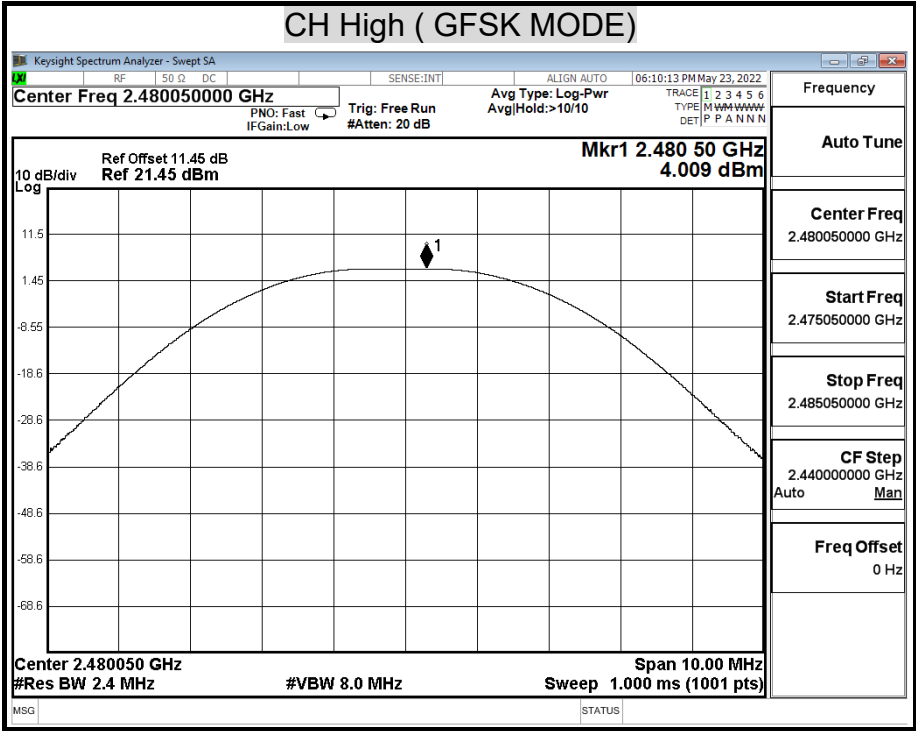

8.3 DUTY CYCLE

LIMIT

Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENTS

Chamber Room #966					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/22/2021	07/21/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2022
Power Sensor	Anritsu	MA2491A	033265	05/18/2021	05/17/2022
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)



Report No.: TMTN2203000452NR

Page: 46 / 146

Rev.: 00

TEST RESULTS

No non-compliance noted.

TEST DATA

WIFI



Model Name	JP21	Test By	Peter Chu
Temp & Humidity	27.4°C, 55%	Test Date	2022/04/26

	us	Times	Ton	Total Ton time(ms)
Ton1	100000.000	1	100000	
Ton2		0	0	
Ton3			0	100
TP				100

Ton	100
TP(Ton+Toff)	100
Duty Cycle	1
$10 * \log(1/x) =$	0

TEST PLOT

Plot

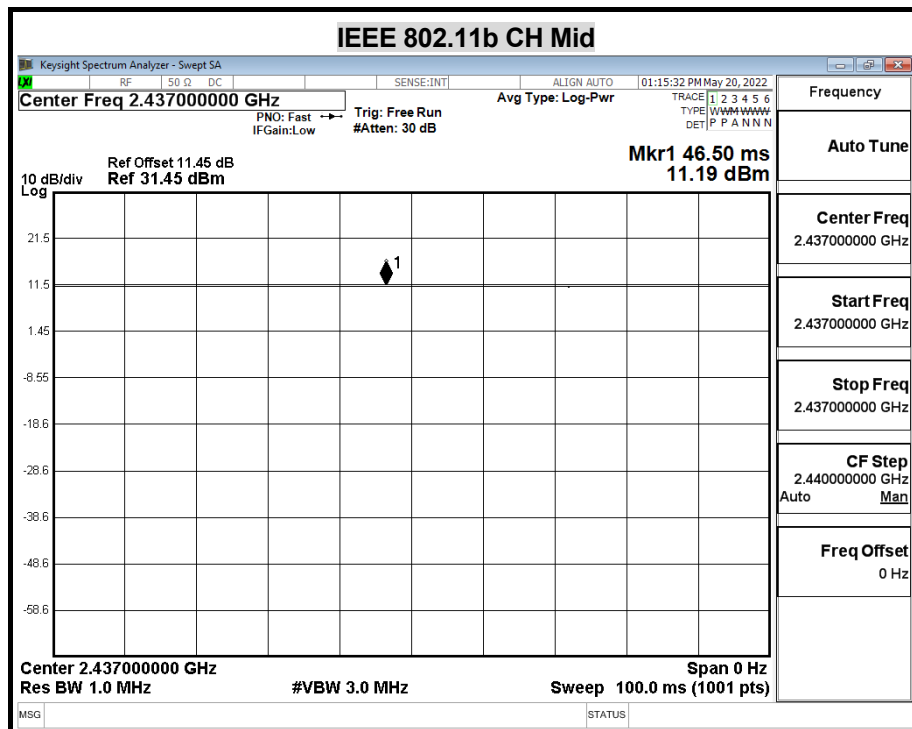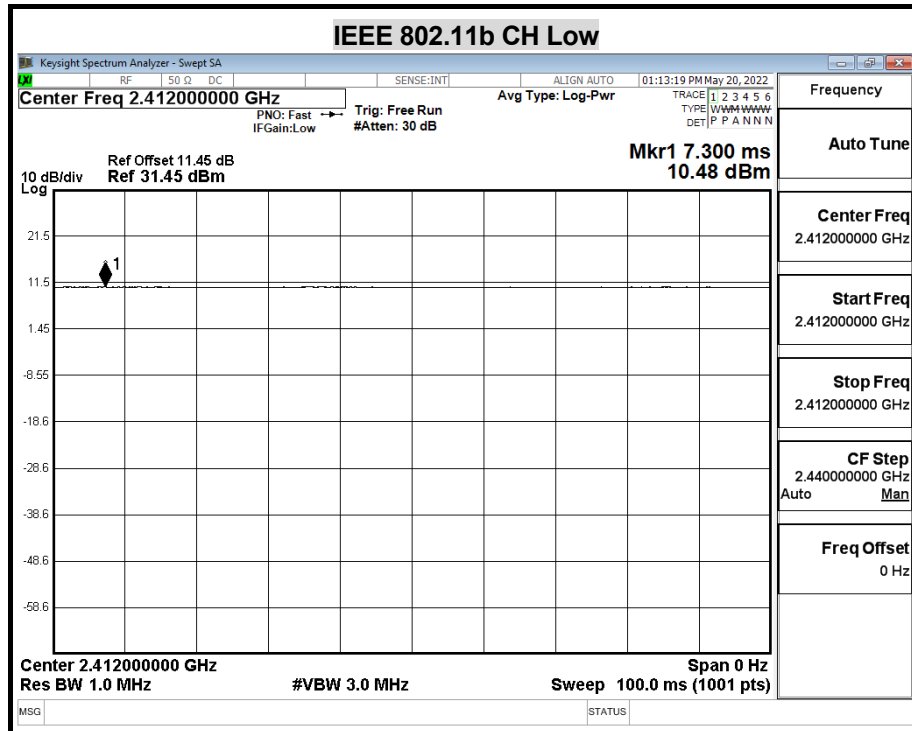






Report No.: TMTN2203000452NR

Page: 48 / 146

Rev.: 00

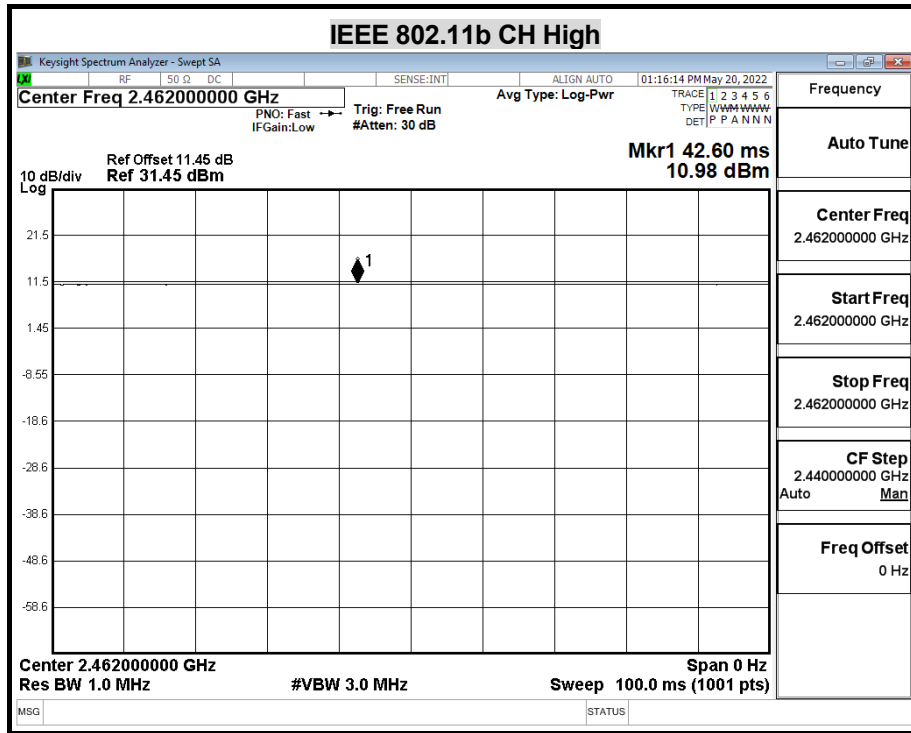

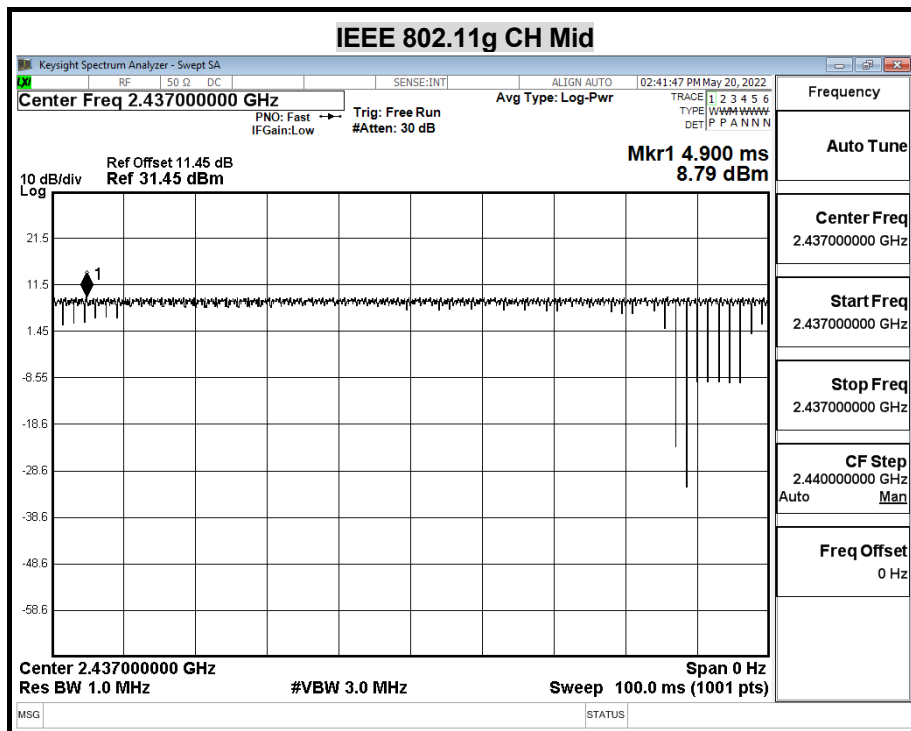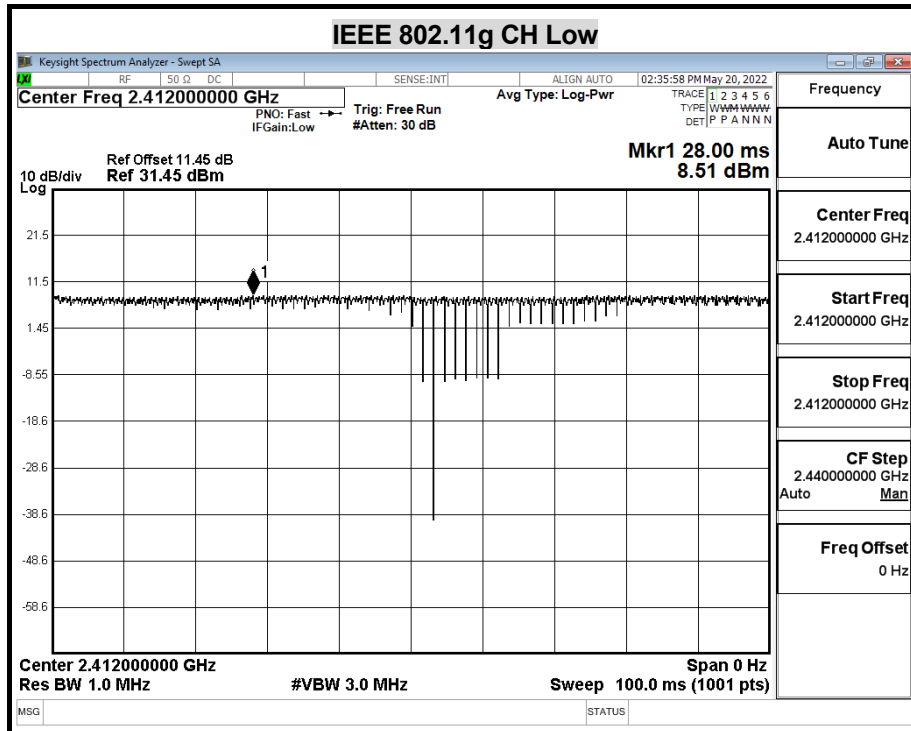







Report No.: TMTN2203000452NR

Page: 50 / 146

Rev.: 00

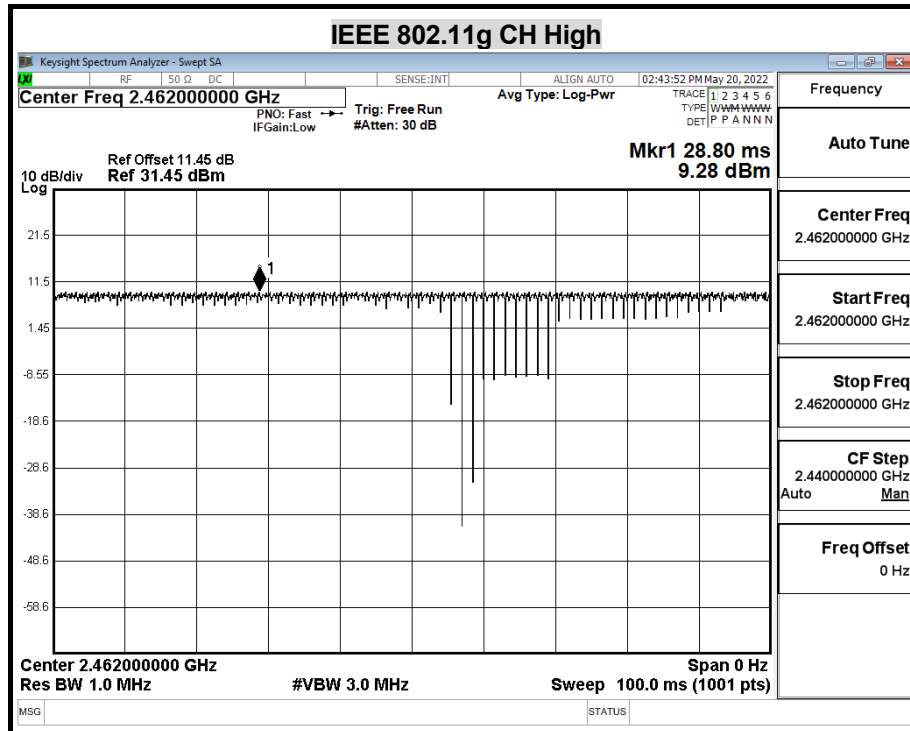

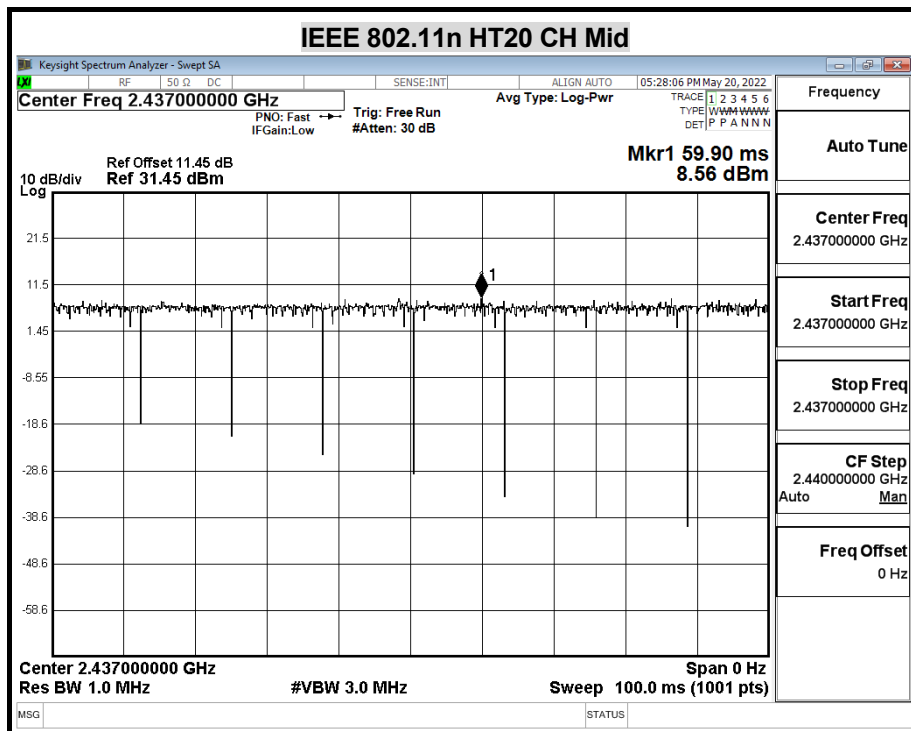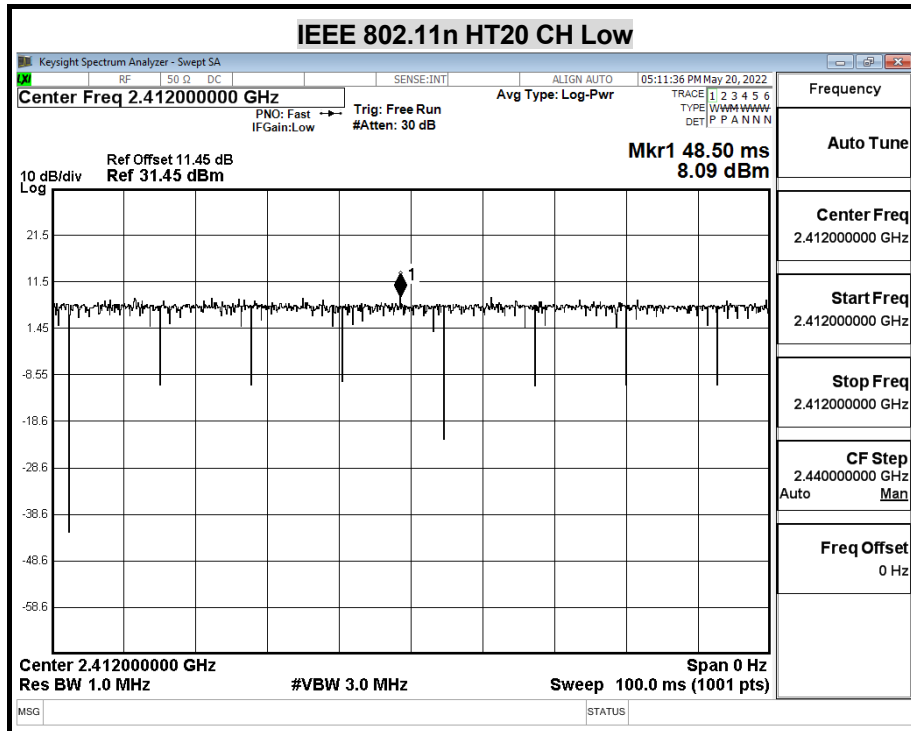

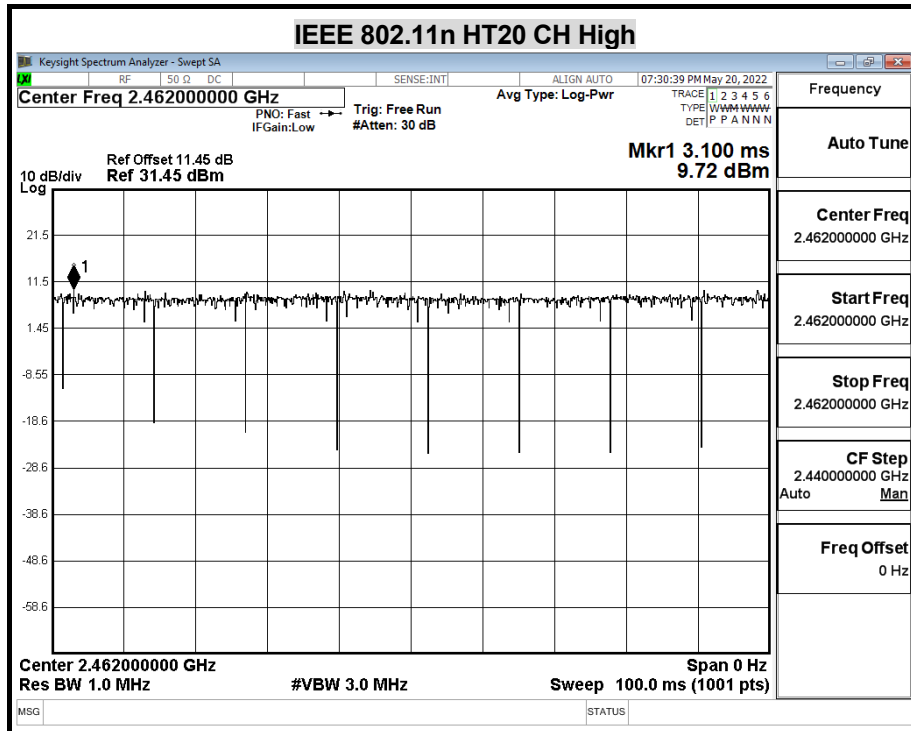

Bluetooth 4.0:

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26

	us	Times	Ton	Total Ton time(ms)
Ton1	400	1	400	
Ton2		0	0	
Ton3			0	0.4
Tp				0.625

Ton	0.4
Tp(Ton+Toff)	0.625
Duty Cycle	0.64
10 * log (1/x) =	1.94



Bluetooth 5.0:


Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26

	us	Times	Ton	Total Ton time(ms)
Ton1	205	1	205	
Ton2		0	0	
Ton3			0	0.205
Tp				0.625

Ton	0.625
Tp(Ton+Toff)	0.328
Duty Cycle	4.84
10 * log (1/x) =	0.625


Plot

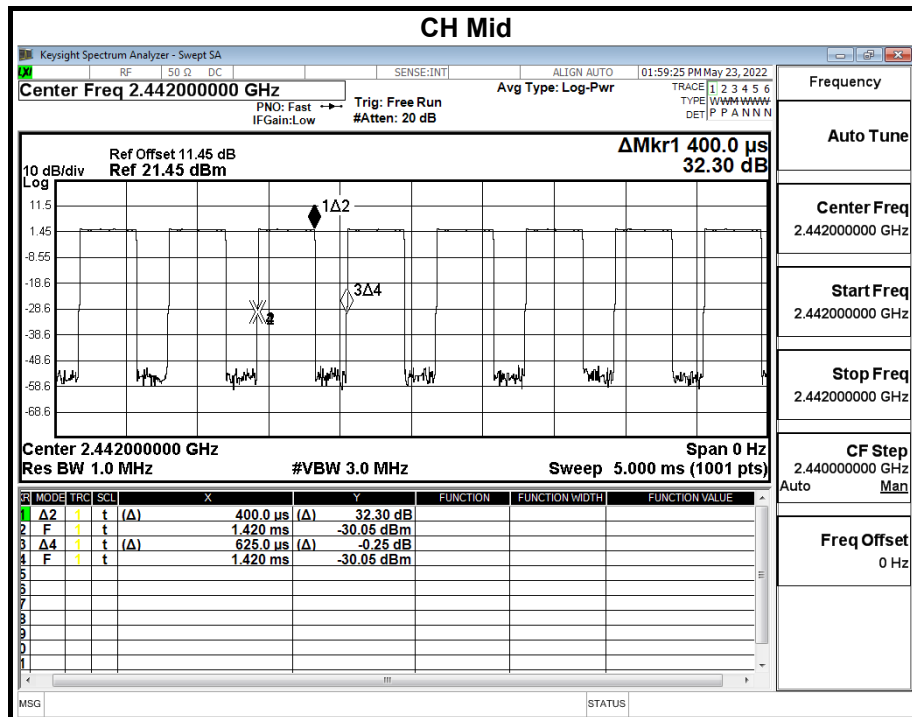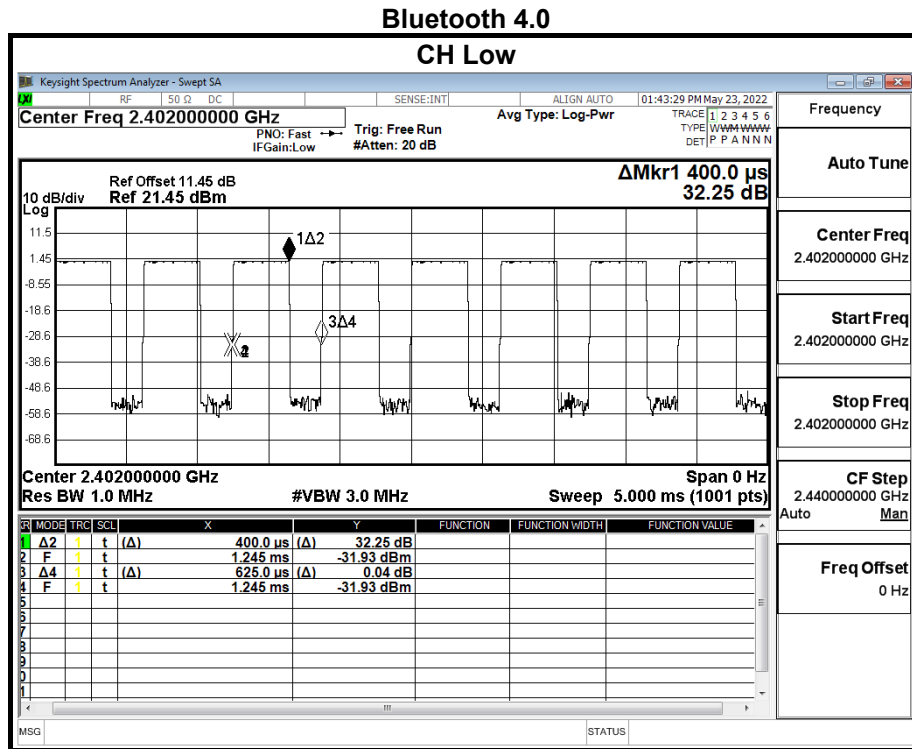

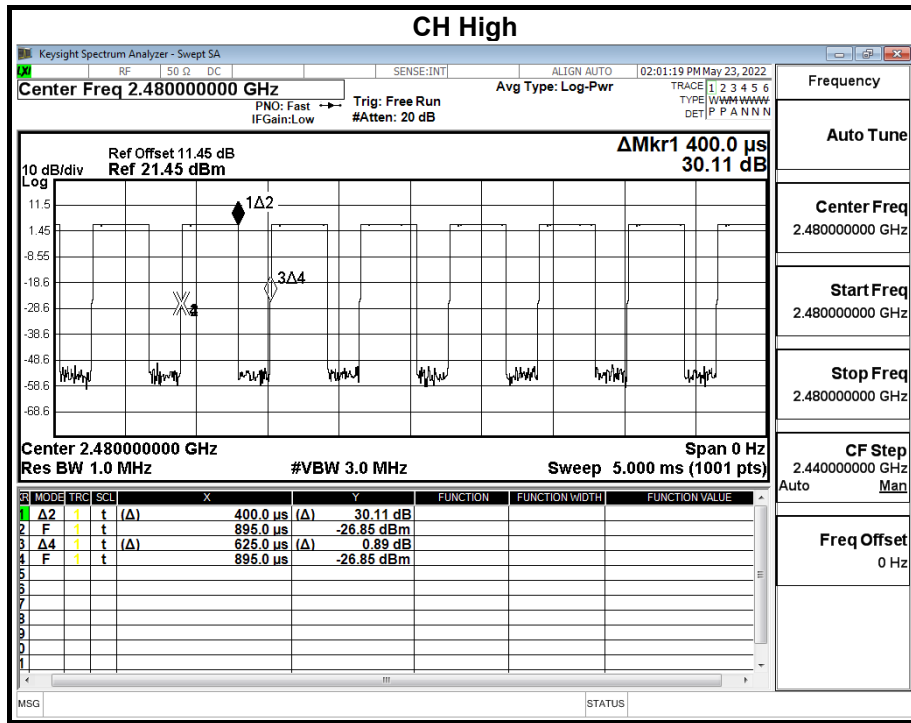



Bluetooth 5.0

CH Low

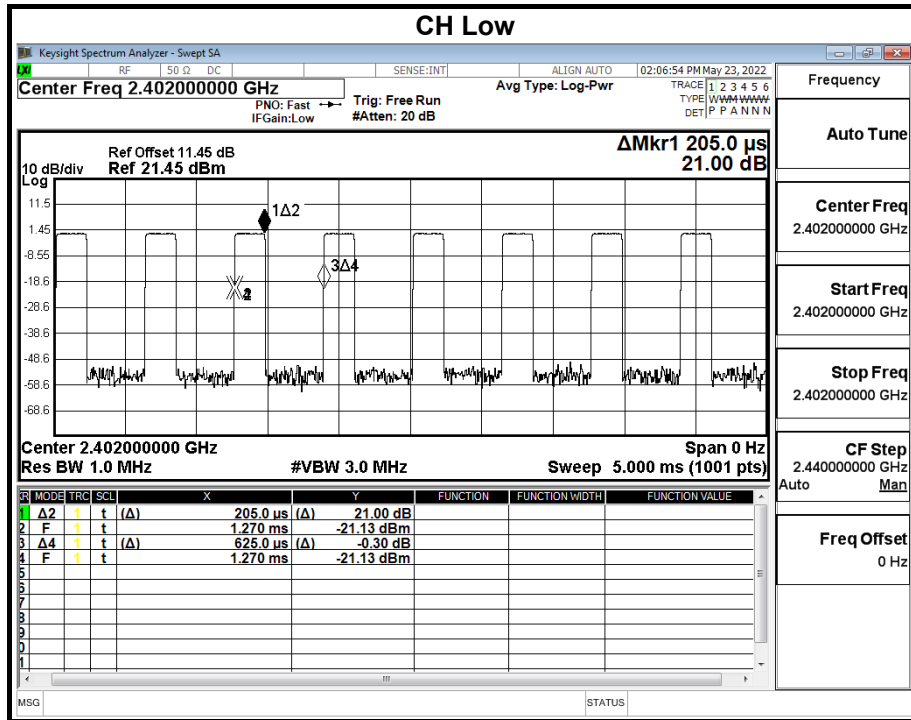

CH Mid

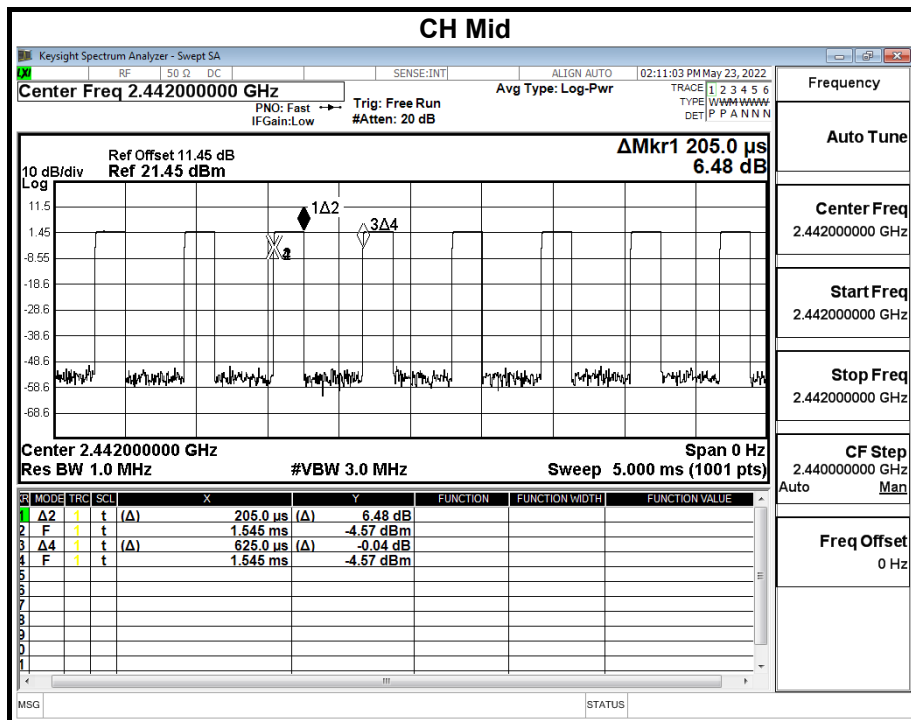

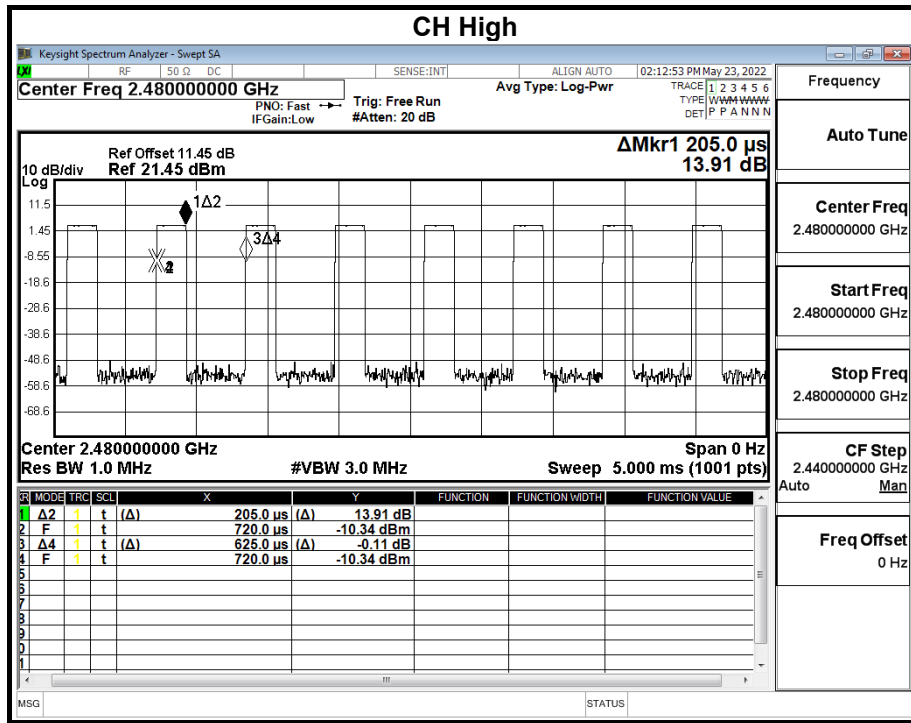

8.4 POWER SPECTRAL DENSITY

LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Chamber Room #966					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/22/2021	07/21/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2022
Power Sensor	Anritsu	MA2491A	033265	05/18/2021	05/17/2022
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP



TEST PROCEDURE

The tests were performed in accordance with KDB 558074 5.3.1.

5.3.1 Measurement Procedure PKPSD:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	27.4°C, 55%	Test Date	2022/04/26

IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-5.10	8.00	-13.10	PASS
Middle	2437	-5.84	8.00	-13.84	PASS
High	2462	-5.48	8.00	-13.48	PASS

NOTE : 1. At final test to get the worst-case emission at 1long Mbps long.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-11.60	8.00	-19.60	PASS
Middle	2437	-11.73	8.00	-19.73	PASS
High	2462	-10.93	8.00	-18.93	PASS

NOTE : 1. At final test to get the worst-case emission at 6long Mbps long.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2412	-14.08	8.00	-22.08	PASS
Middle	2437	-13.40	8.00	-21.40	PASS
High	2462	-11.39	8.00	-19.39	PASS

NOTE : 1. At final test to get the worst-case emission at 6.5long Mbps long.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26

Bluetooth 4.0 (GFSK) mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2402	-14.07	8.00	-22.07	PASS
Middle	2442	-10.04	8.00	-18.04	PASS
High	2480	-10.19	8.00	-18.19	PASS


NOTE : 1. At final test to get the worst-case emission at 1long Mbps long.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


Bluetooth 5.0 (GFSK) mode

Channel	Frequency (MHz)	PPSD/3kHz (dBm)	Limit (dBm)	Margin (dB)	Pass / Fail
Low	2402	-16.46	8.00	-24.46	PASS
Middle	2442	-14.47	8.00	-22.47	PASS
High	2480	-12.70	8.00	-20.70	PASS


NOTE : 1. At final test to get the worst-case emission at 2long Mbps long.
2. The cable assembly insertion loss of 11.45dB (including 10 dB pad and 1.45 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


POWER SPECTRAL DENSITY (IEEE 802.11b MODE)

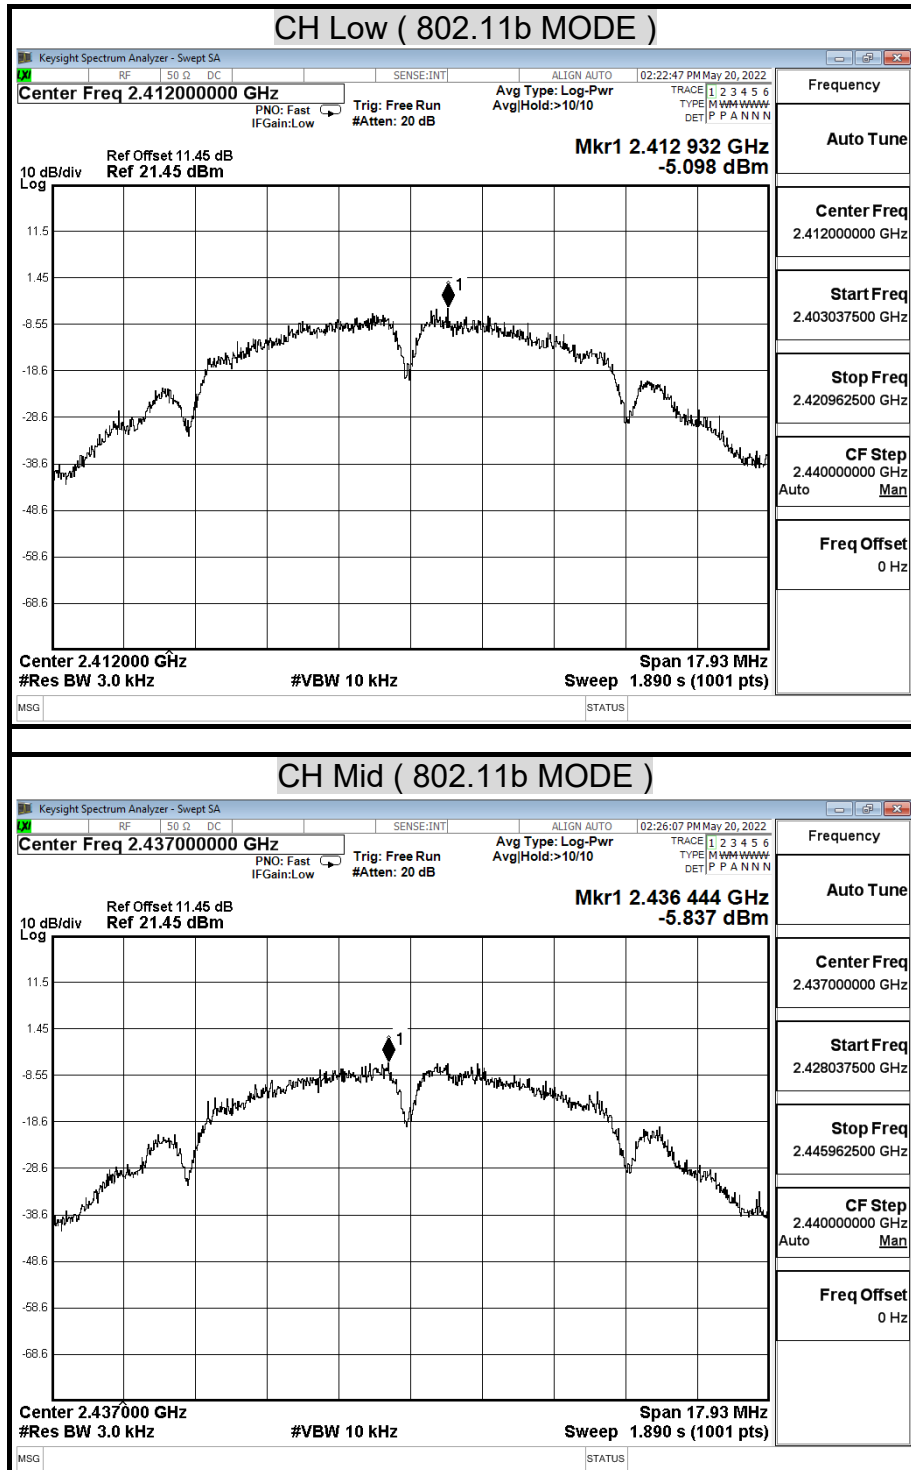

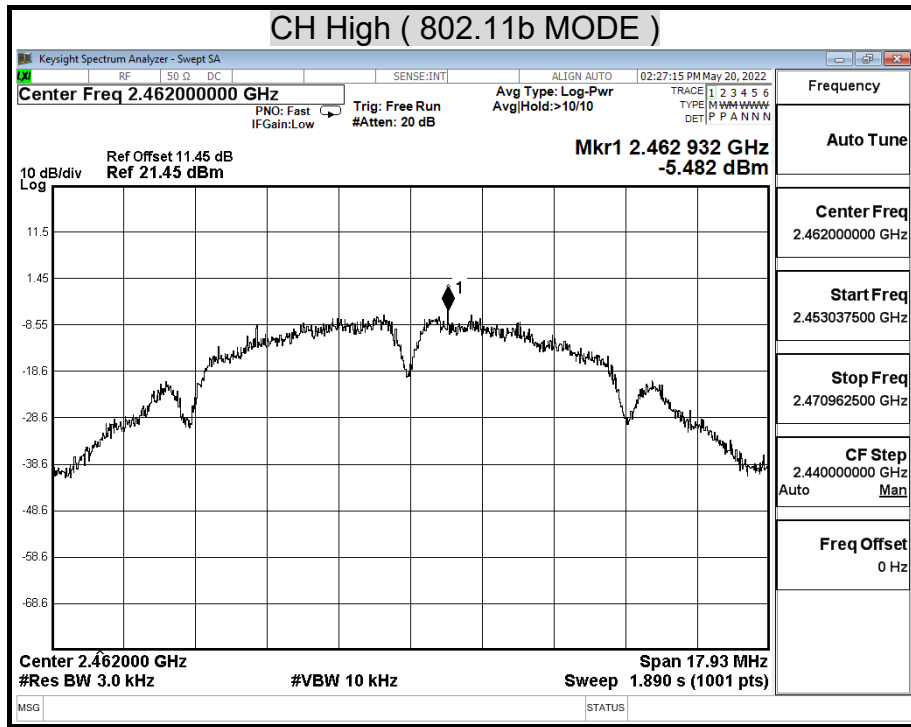



POWER SPECTRAL DENSITY (IEEE 802.11g MODE)

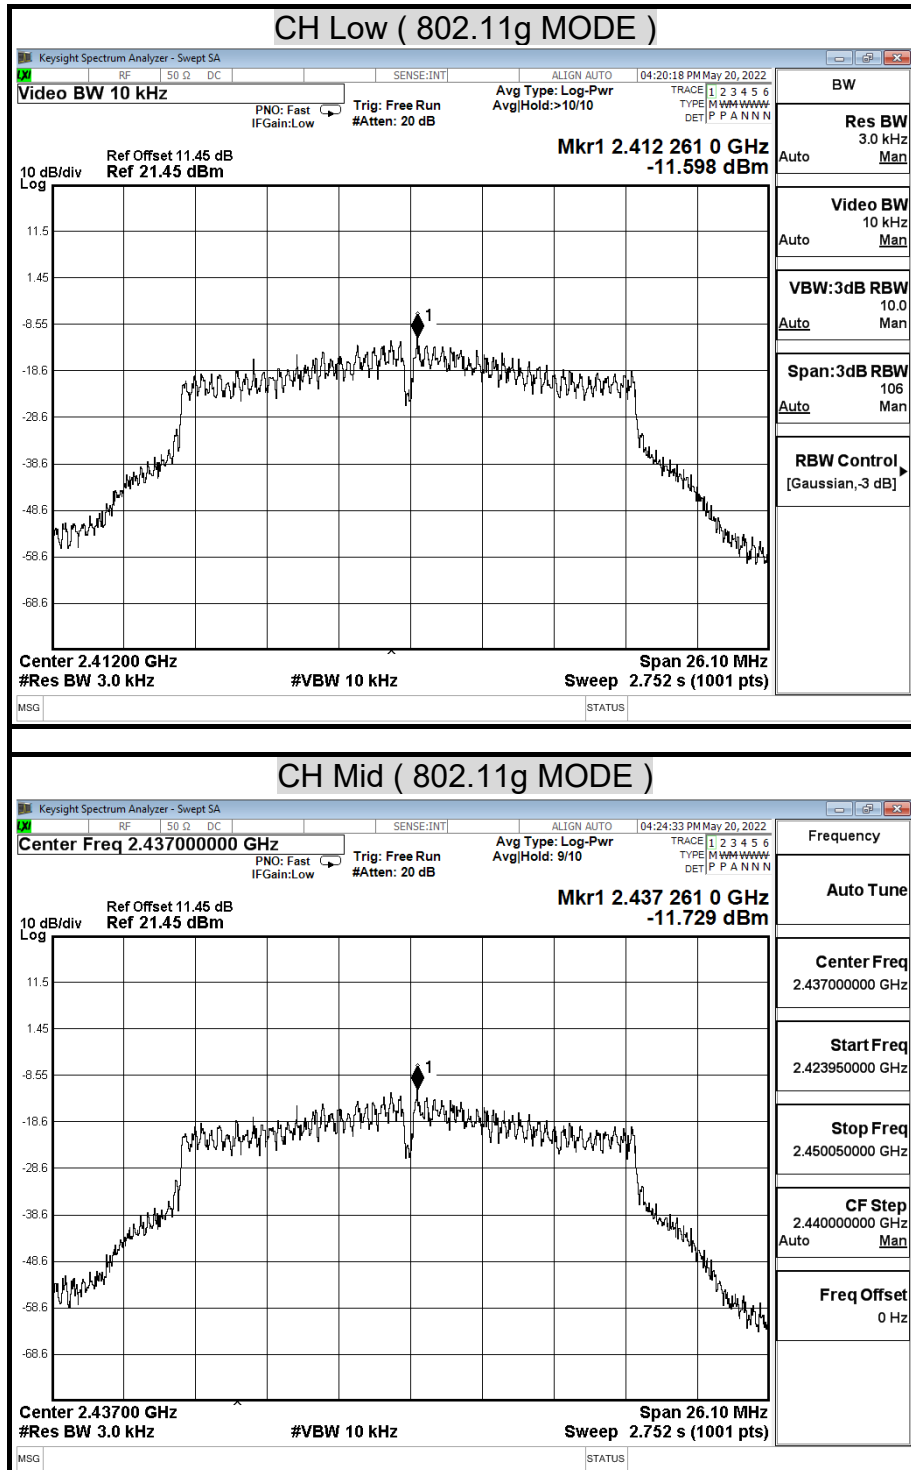

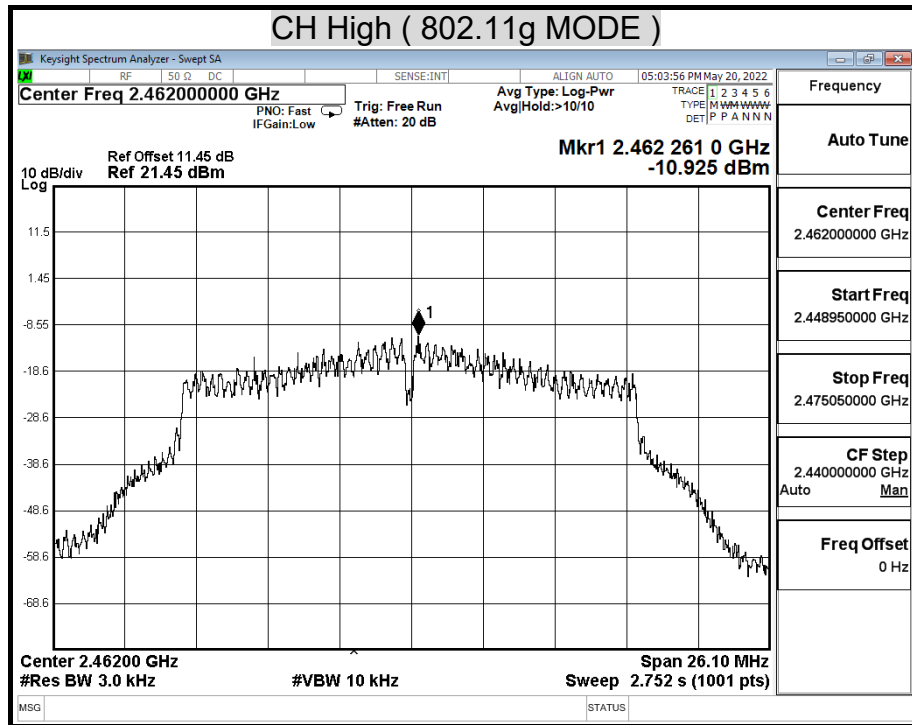



POWER SPECTRAL DENSITY (802.11n HT20 MODE)

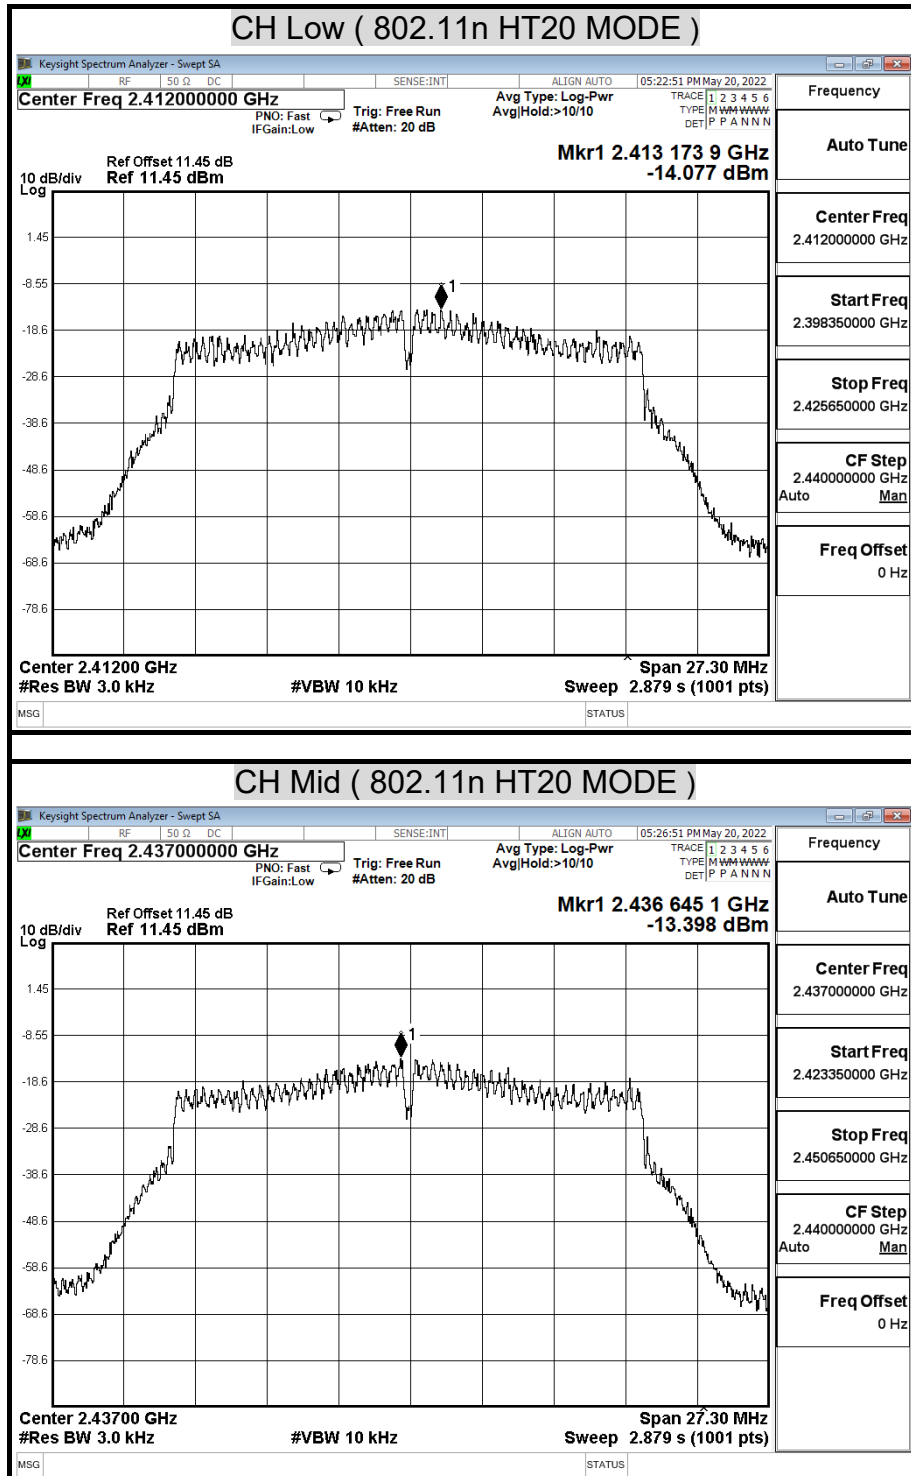


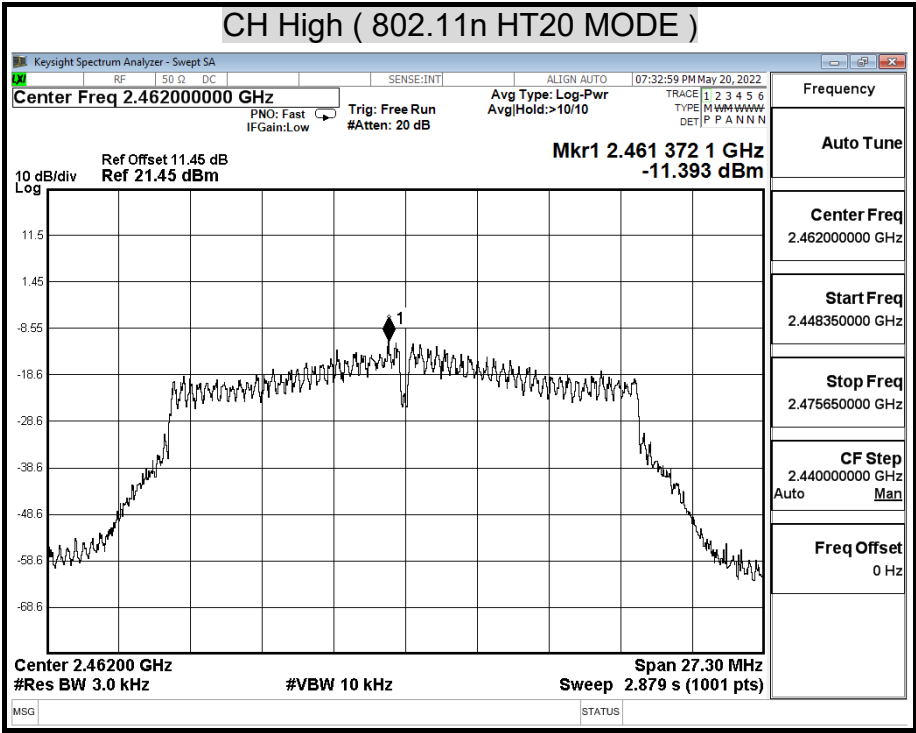


POWER SPECTRAL DENSITY (Bluetooth 4.0 (GFSK) MODE)

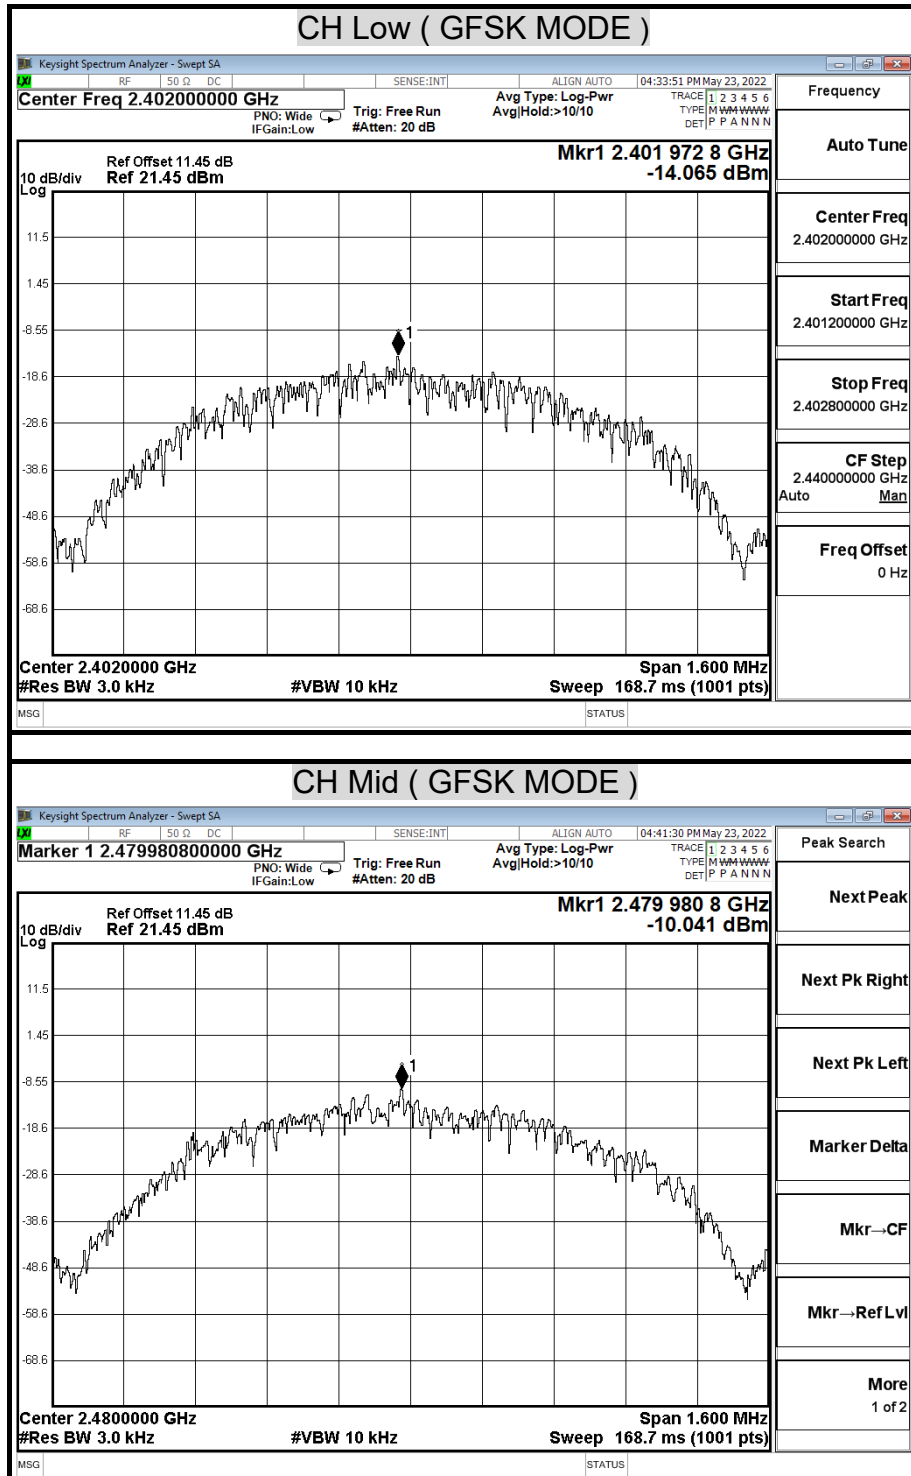

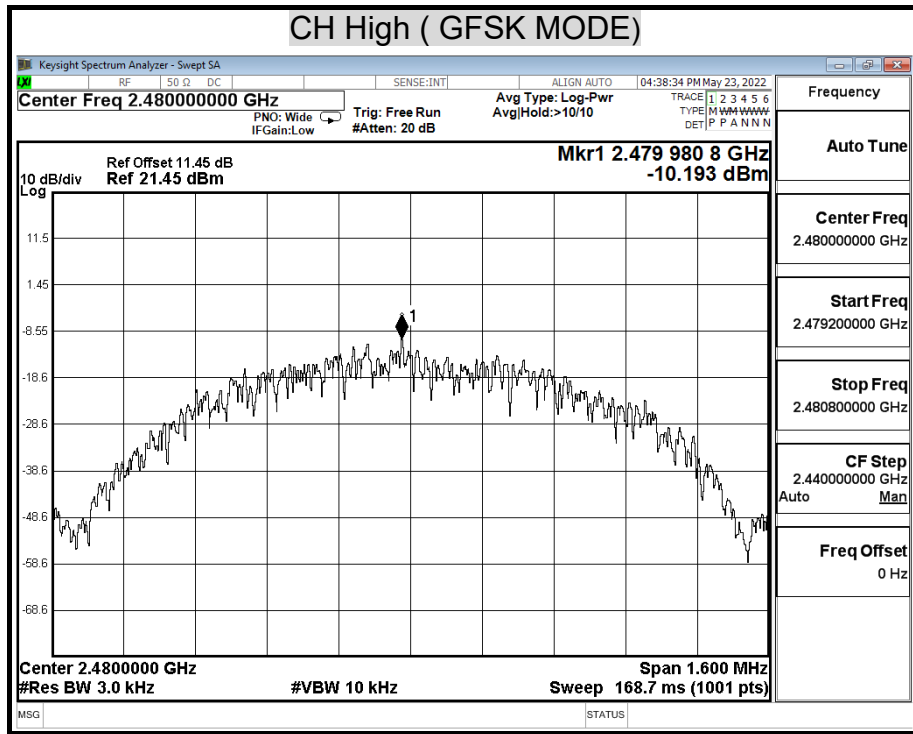

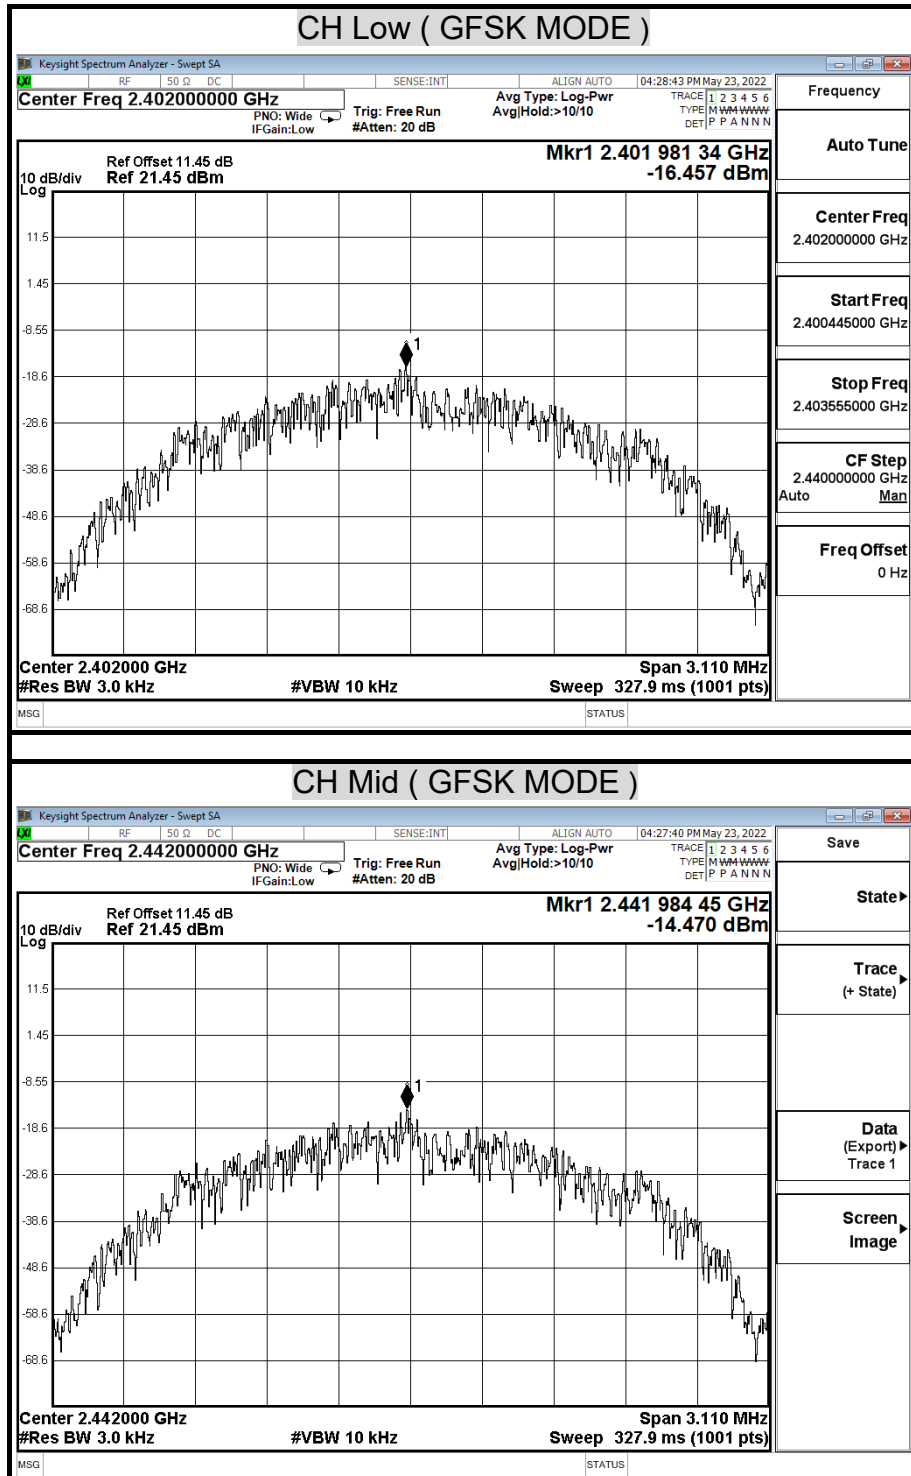POWER SPECTRAL DENSITY (Bluetooth 5.0 (GFSK) MODE)

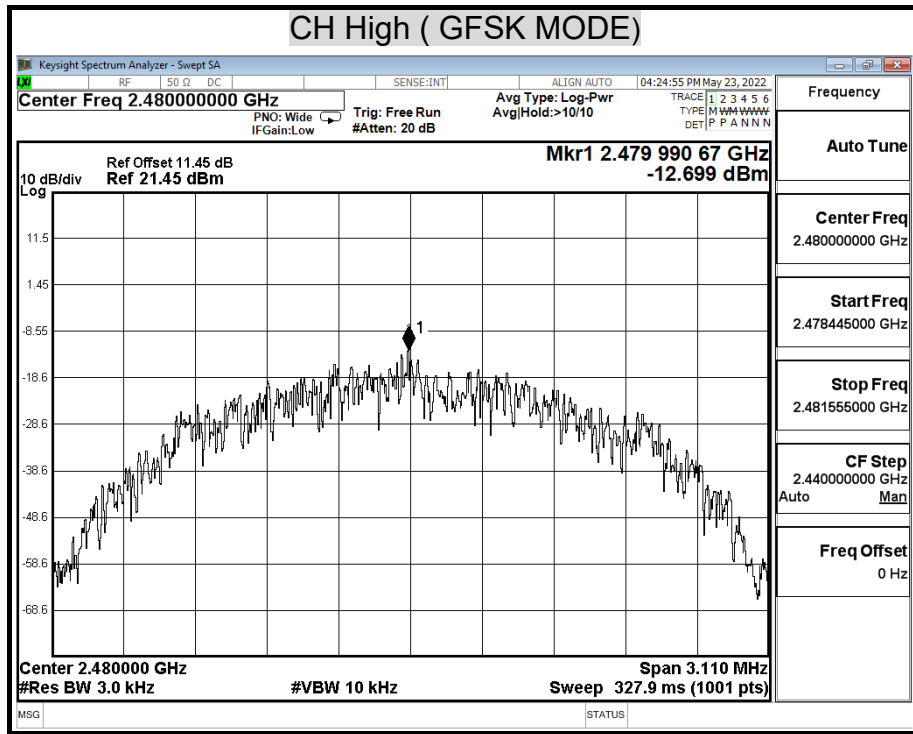

8.5 CONDUCTED SPURIOUS EMISSION

LIMITS

§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENTS

Chamber Room #966					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/22/2021	07/21/2022
Power Meter	Anritsu	ML2487A	6K00003888	05/18/2021	05/17/2022
Power Sensor	Anritsu	MA2491A	033265	05/18/2021	05/17/2022
SMA Cable+10dB Attenuator	CCS	SMA+10dB ATT	SMA/10dB	01/28/2022	01/27/2023
Software	Excel(ccs-o6-2020 v1.1)				

TEST SETUP**TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


Report No.: TMTN2203000452NR
TEST RESULTS


Page: 74 / 146
 Rev.: 00


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


Model Name	JP21	Test By	Peter Chu
Temp & Humidity	27.4°C, 55%	Test Date	2022/04/26

(IEEE 802.11b MODE)

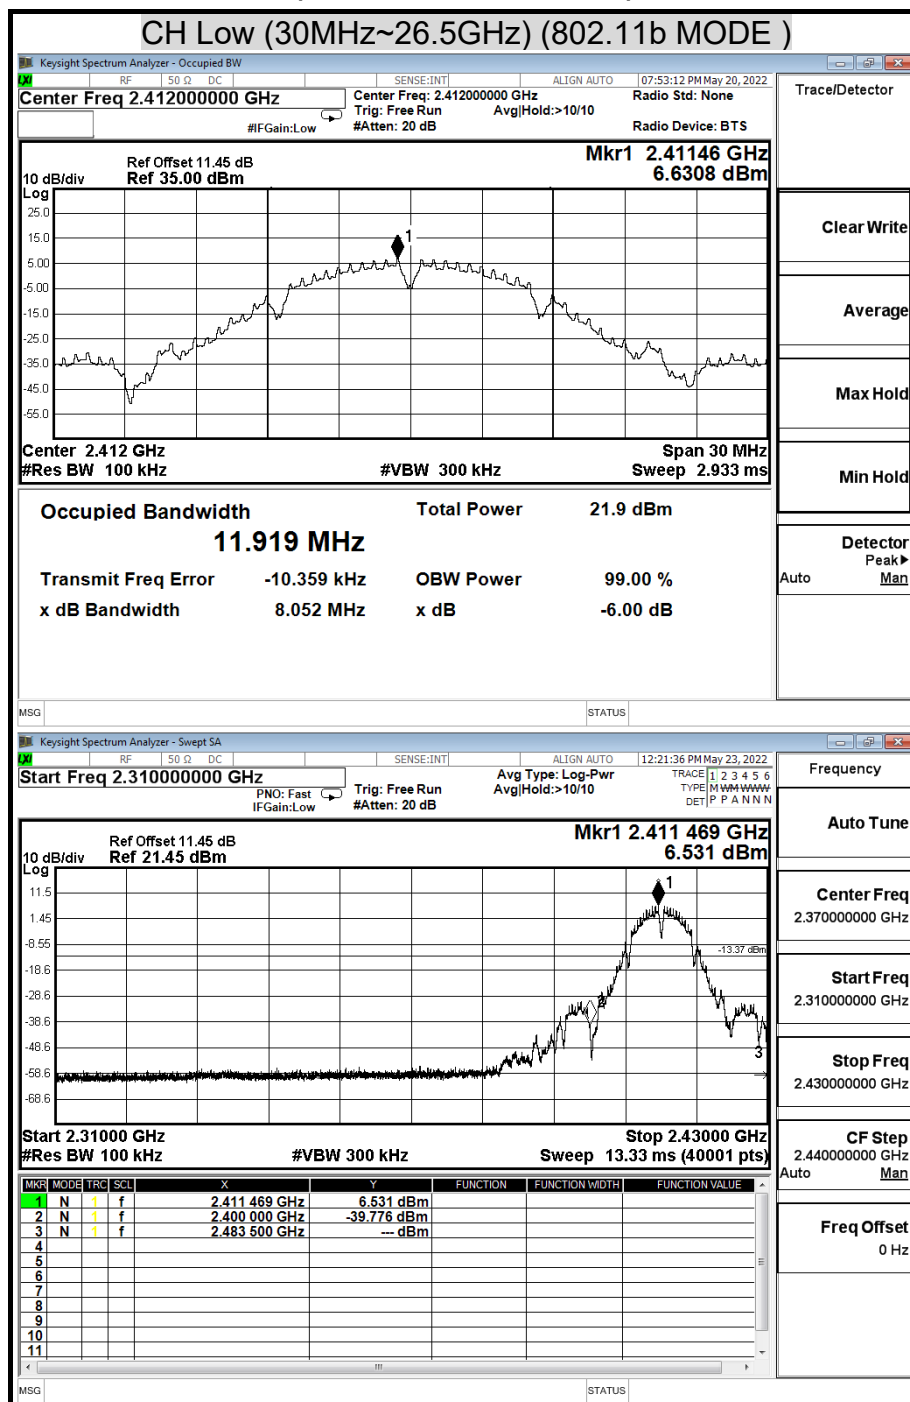

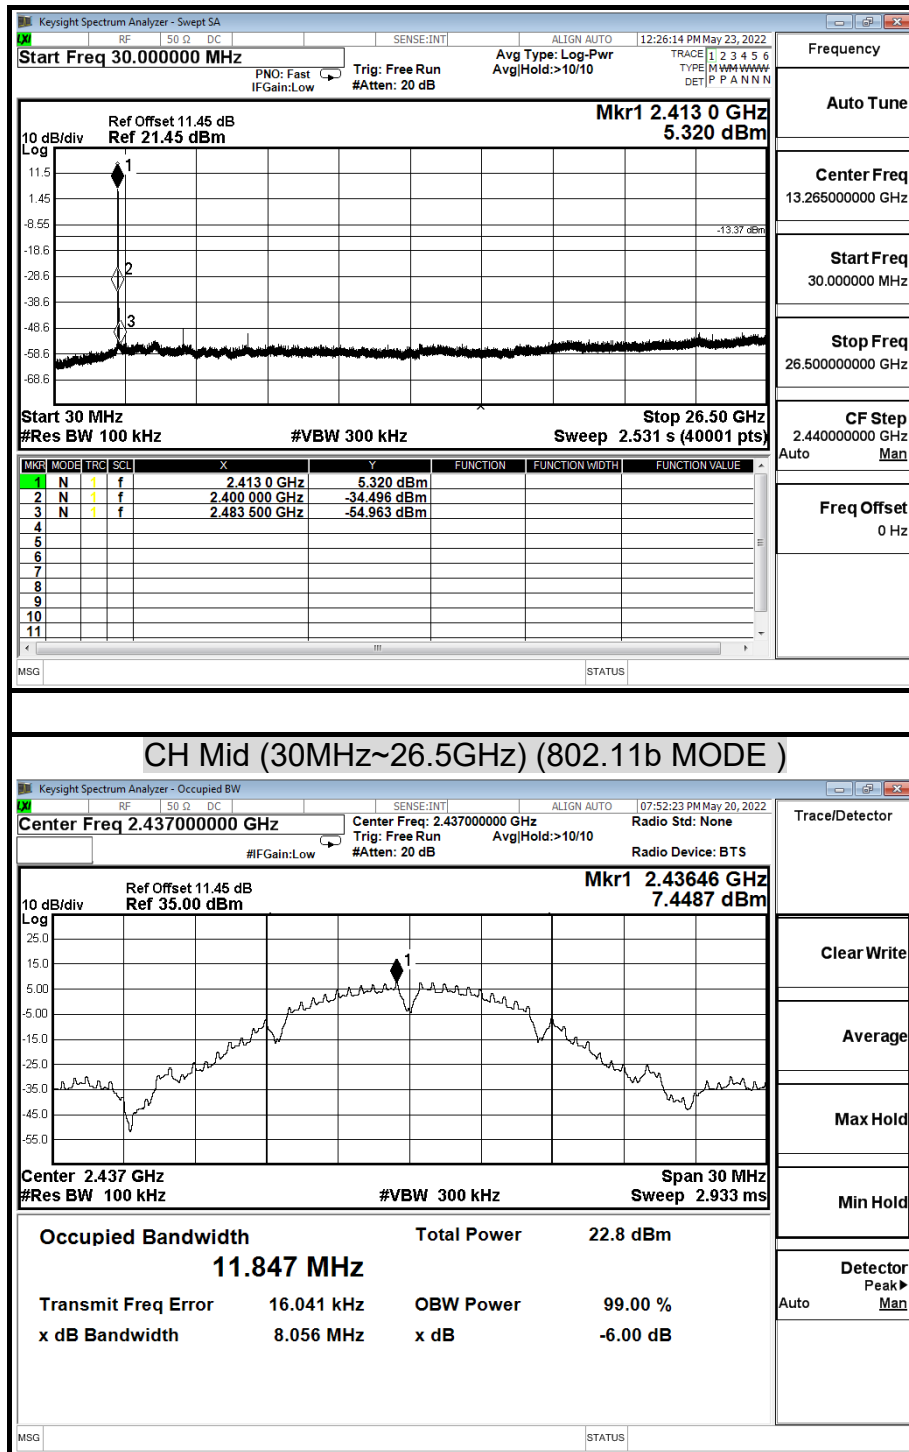


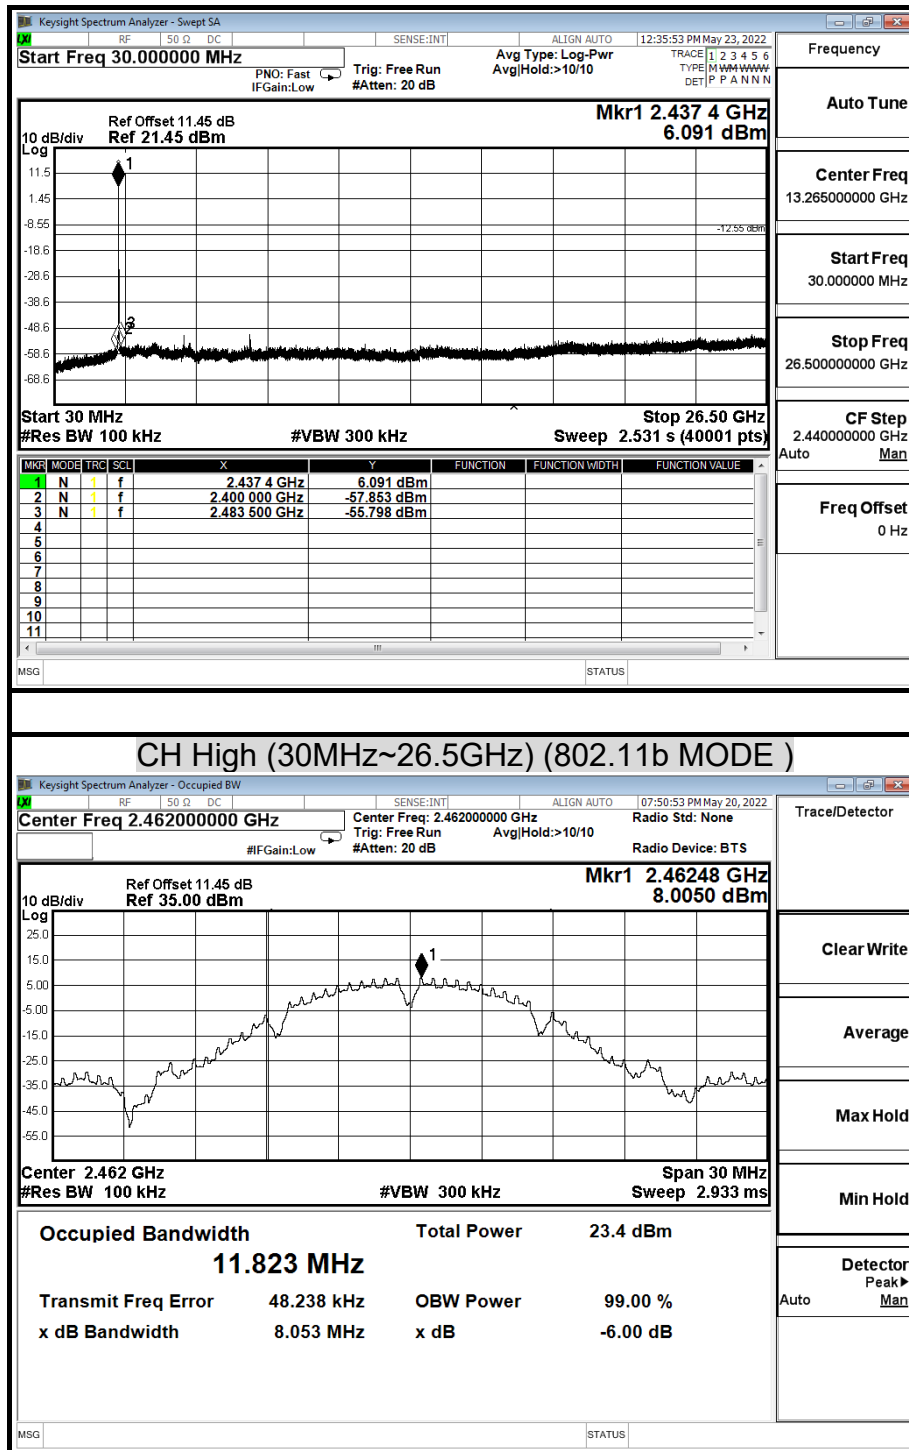


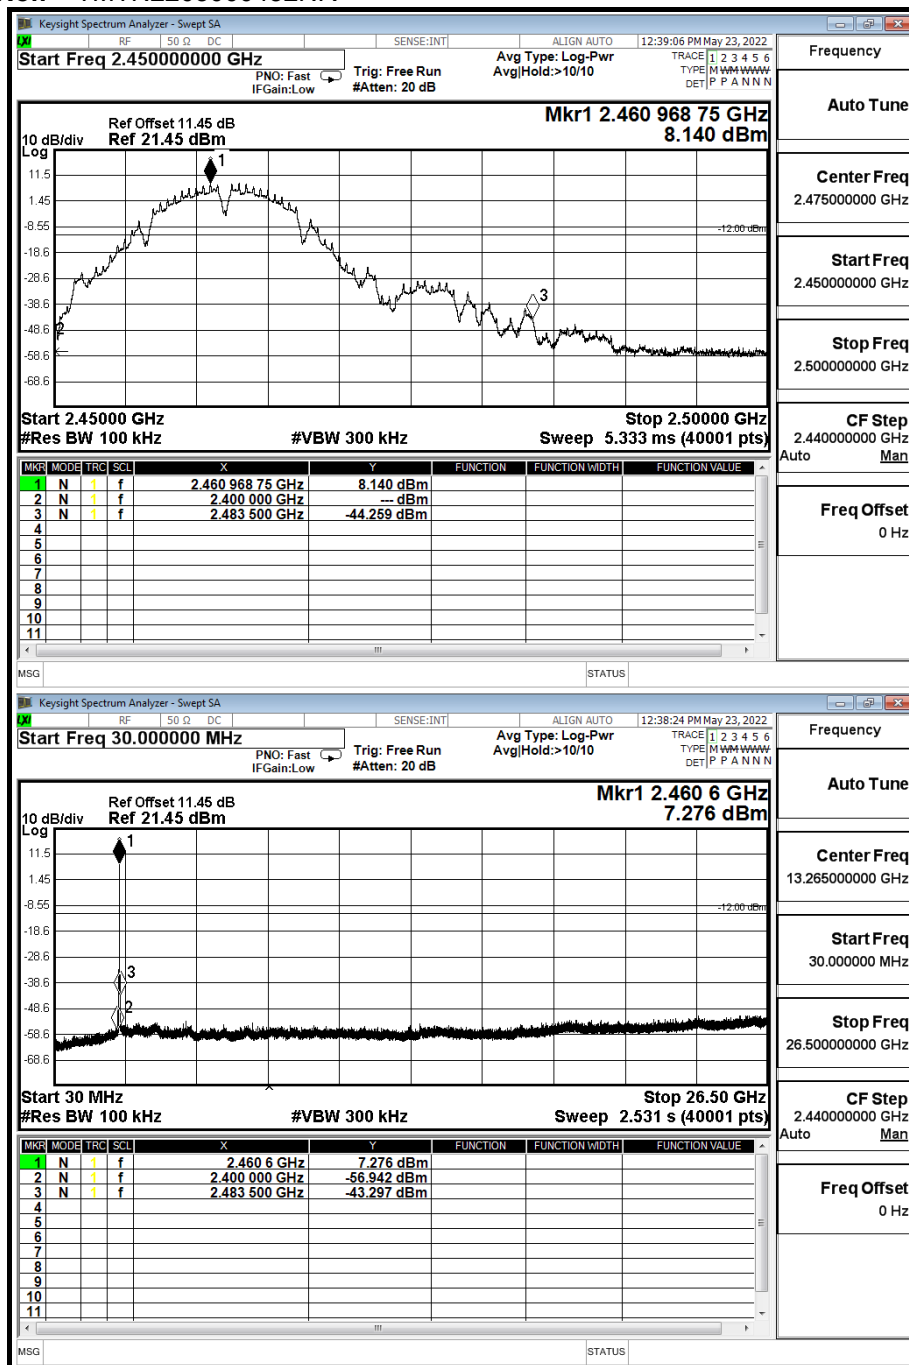



OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

(802.11g MODE)

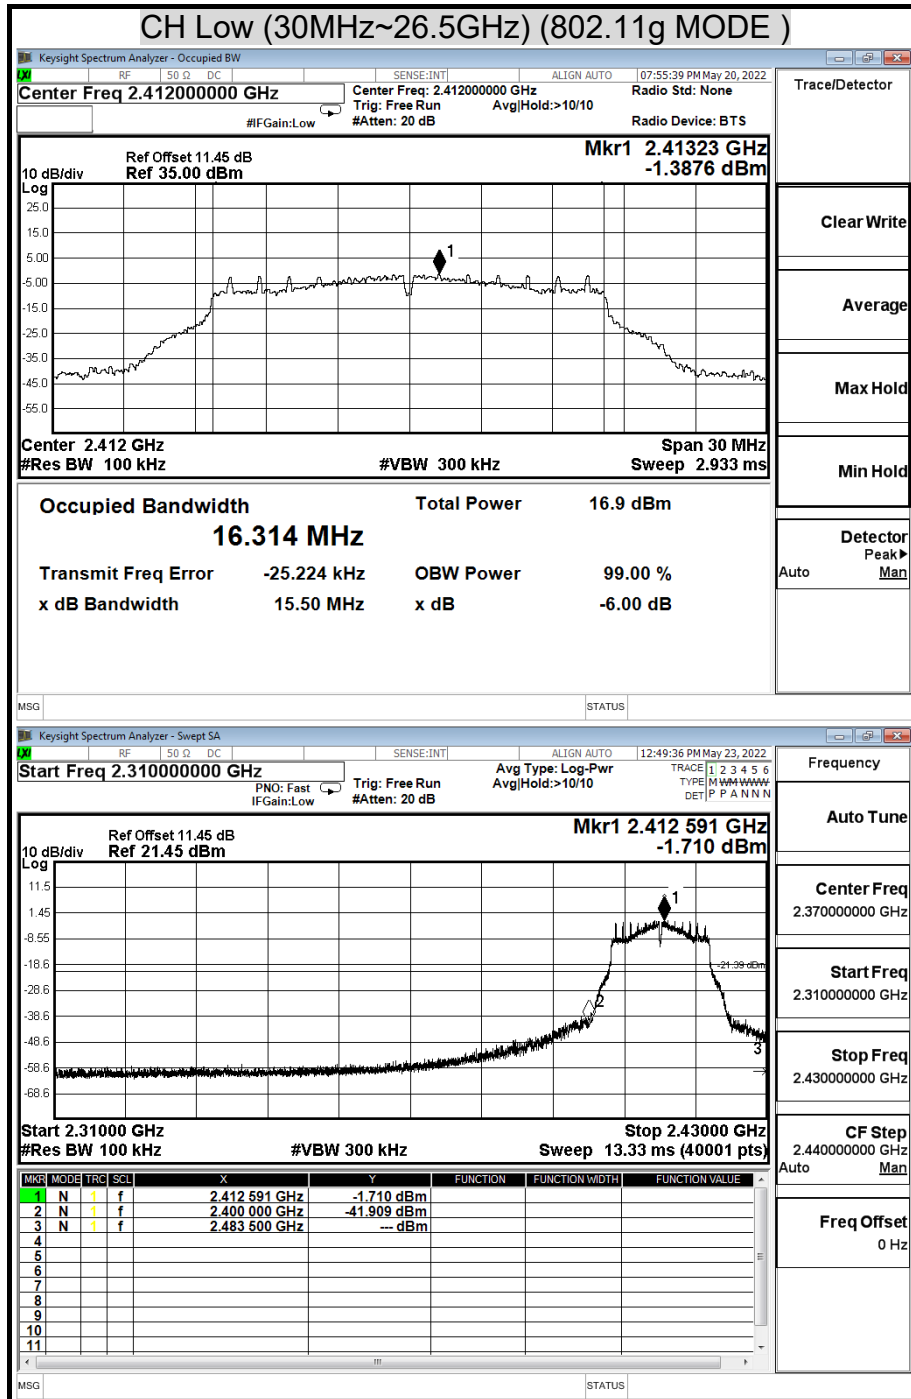

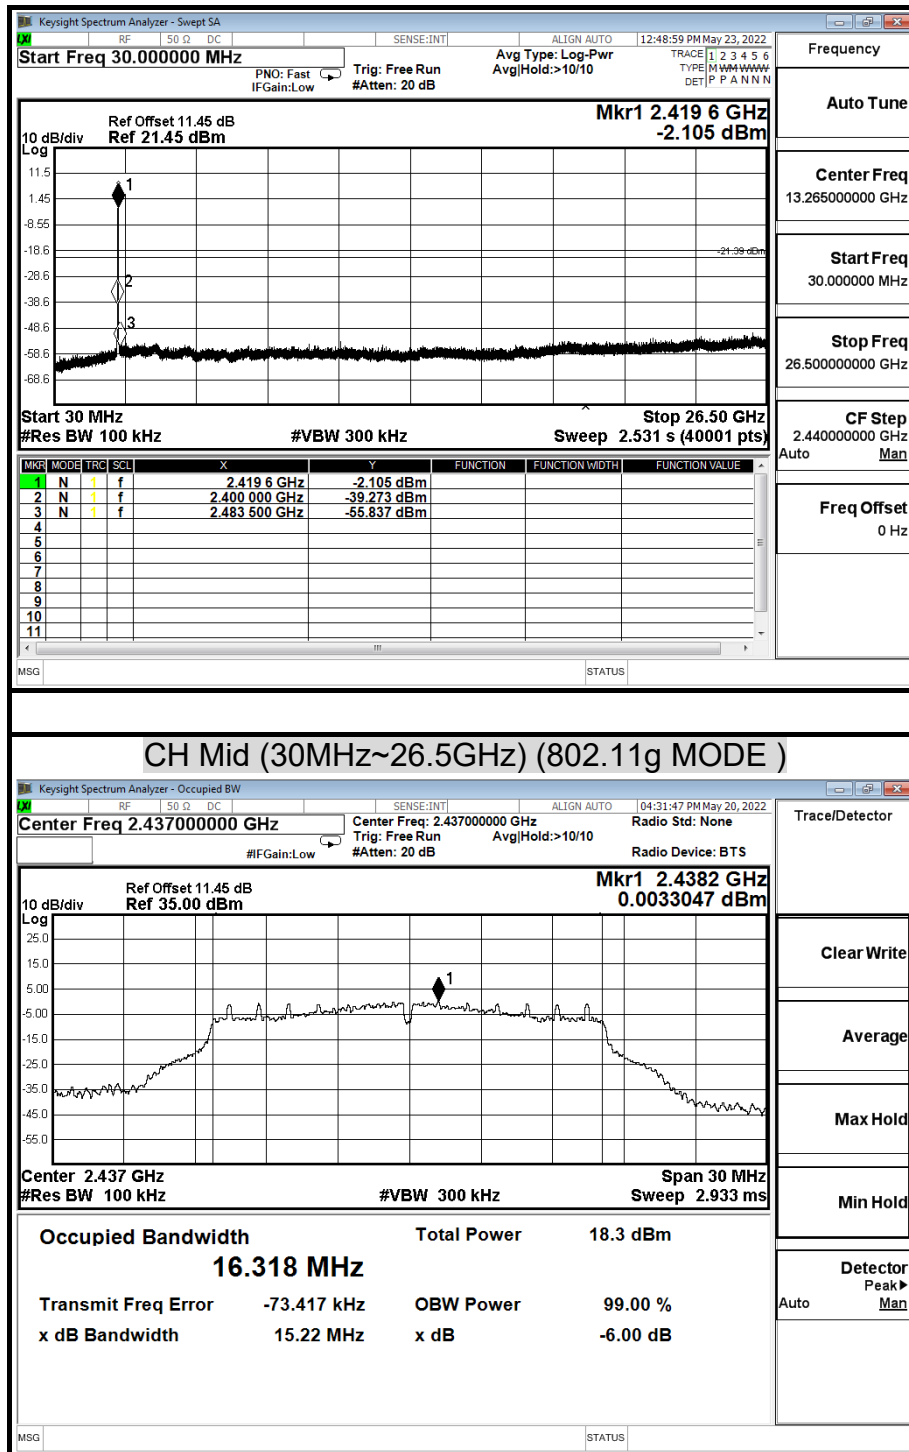


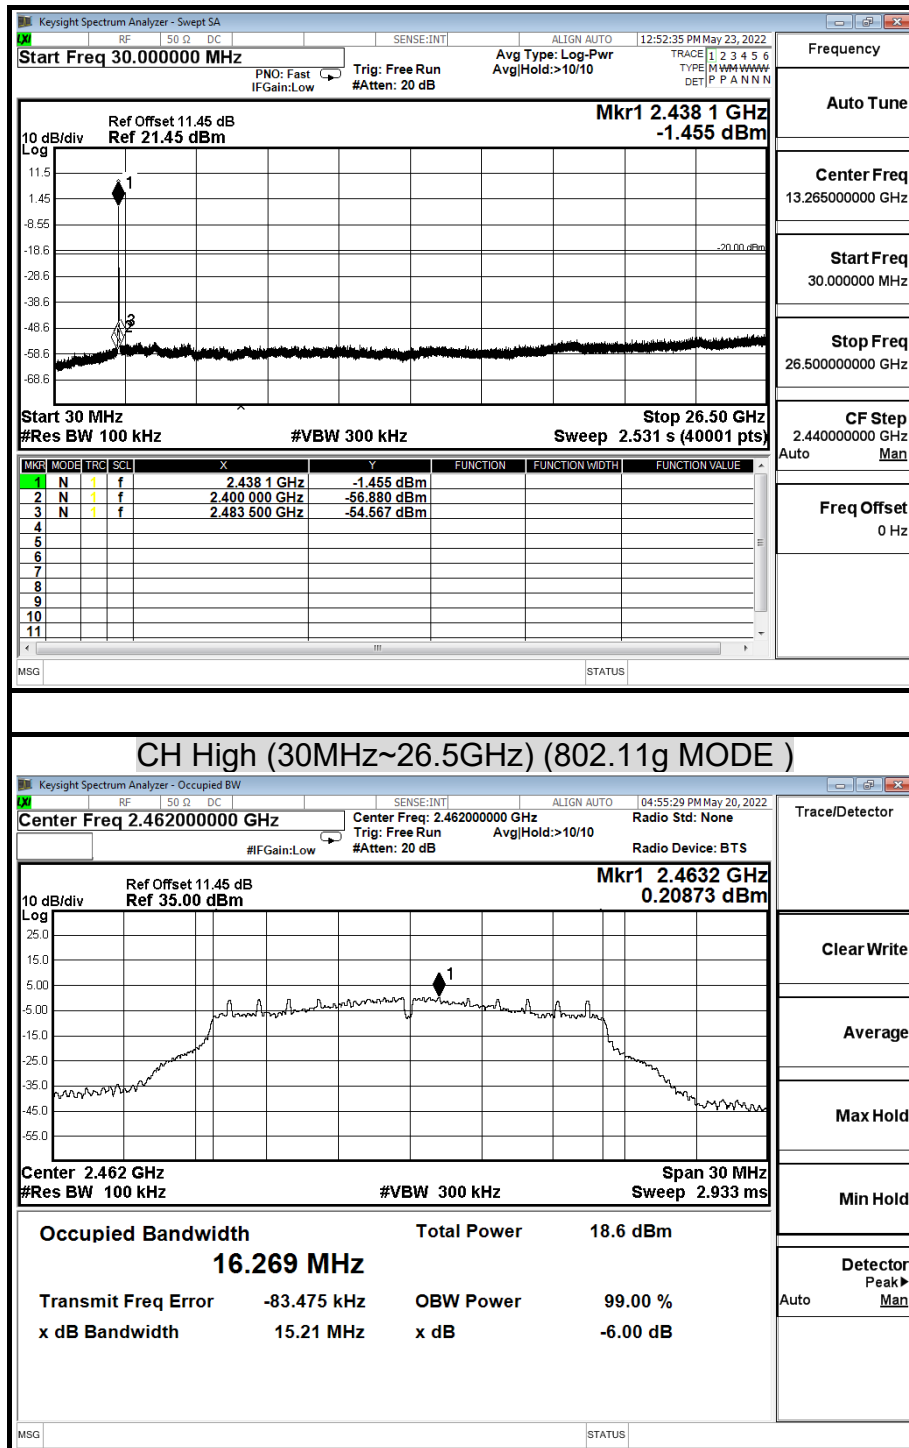


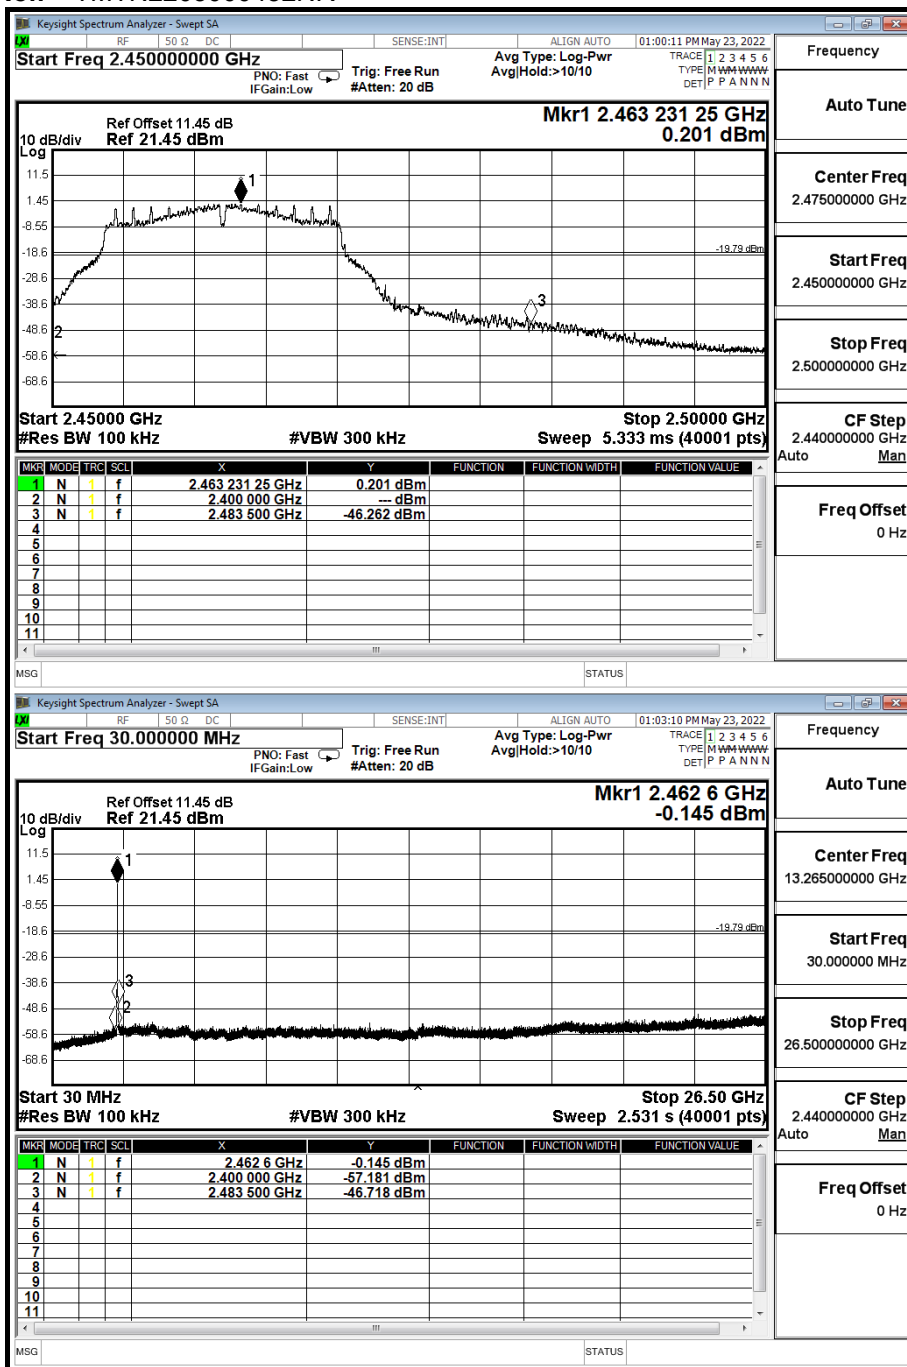


OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


(802.11n HT20 MODE)

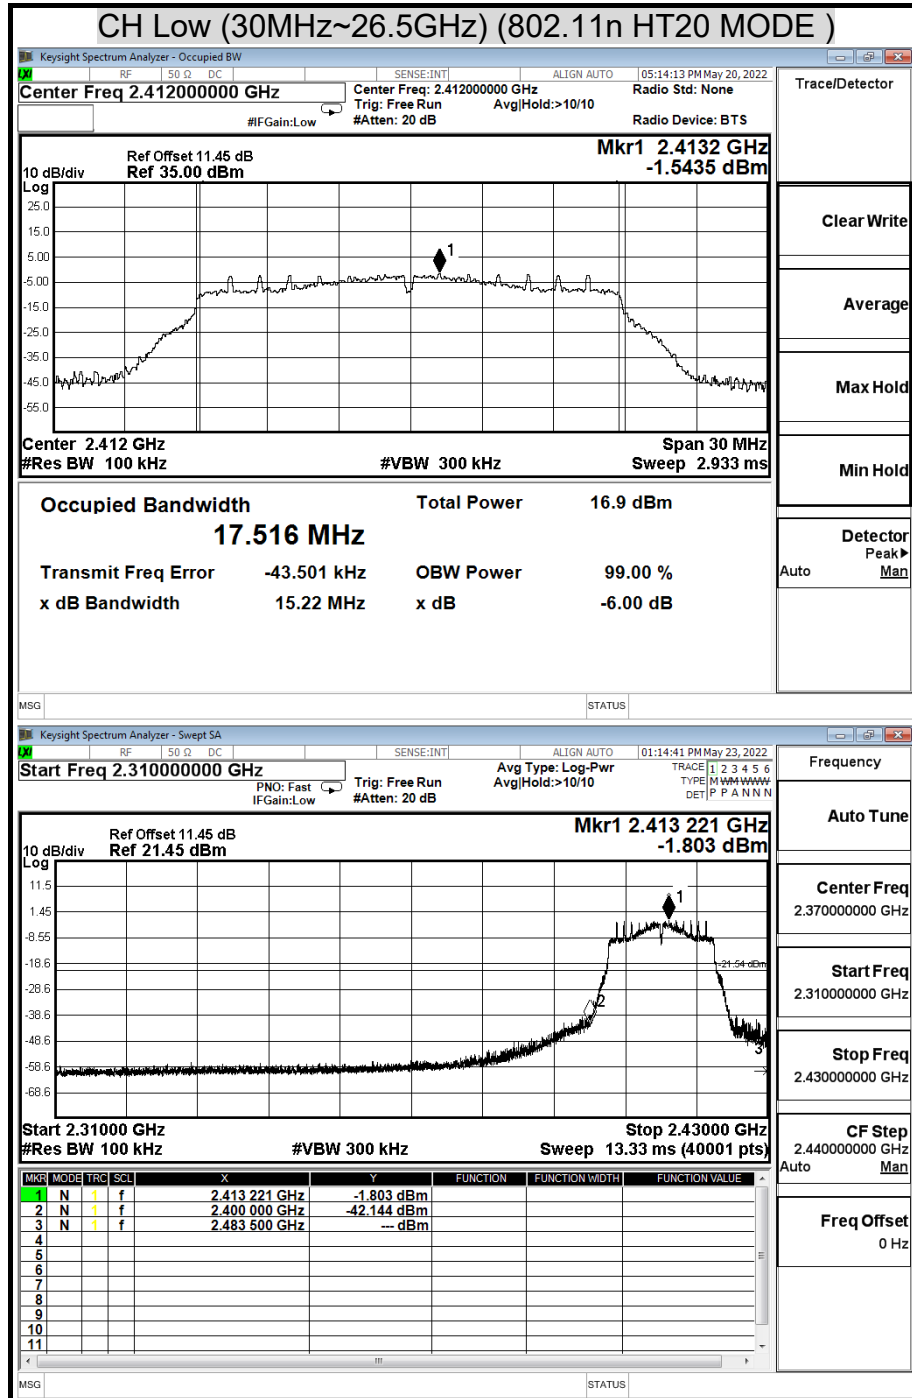

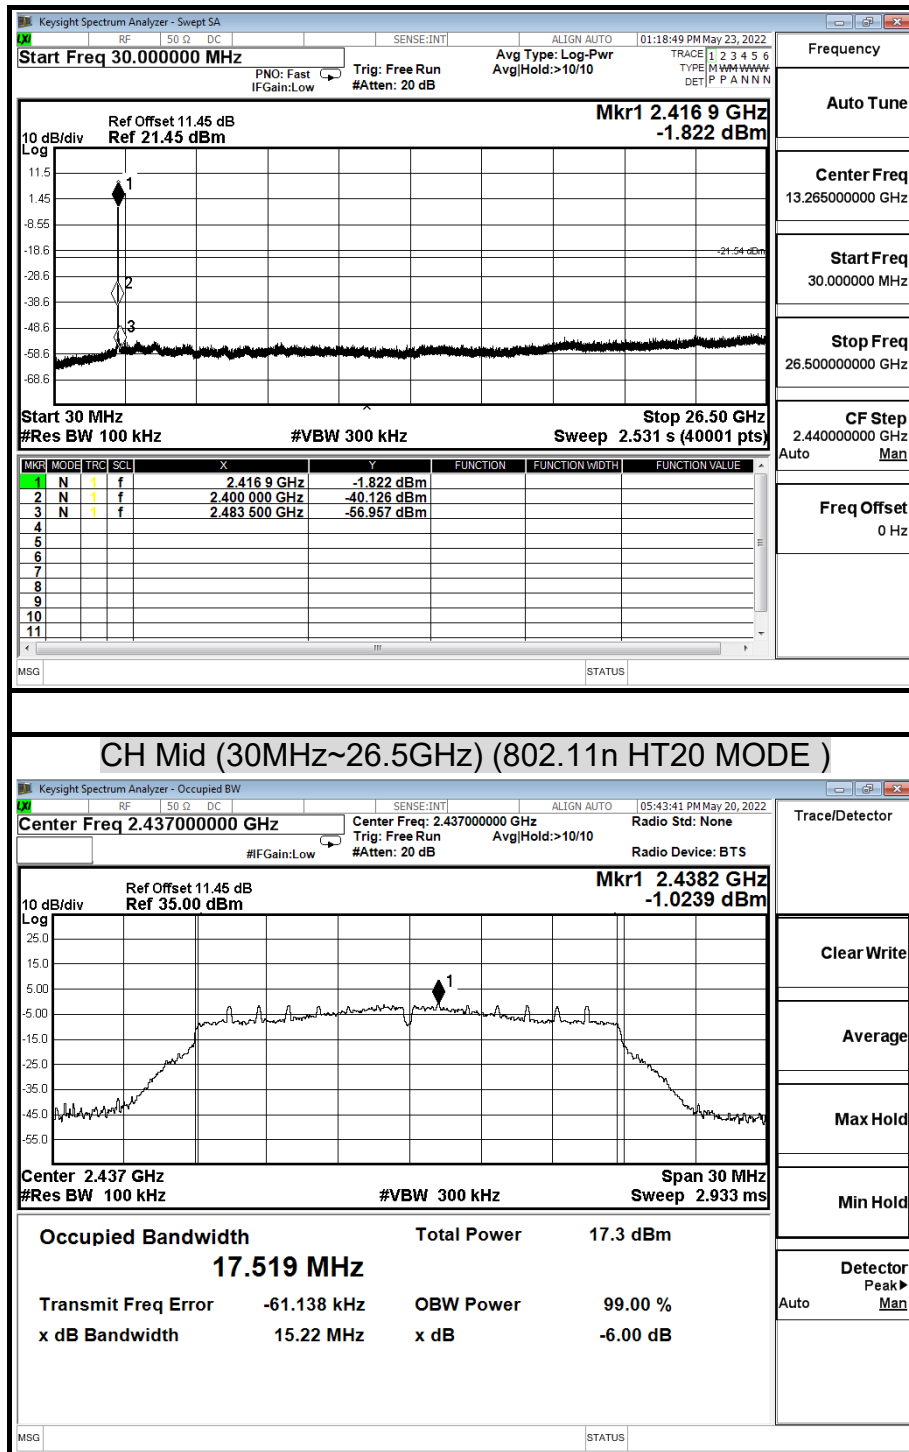

Report No.: TMTN2203000452NR

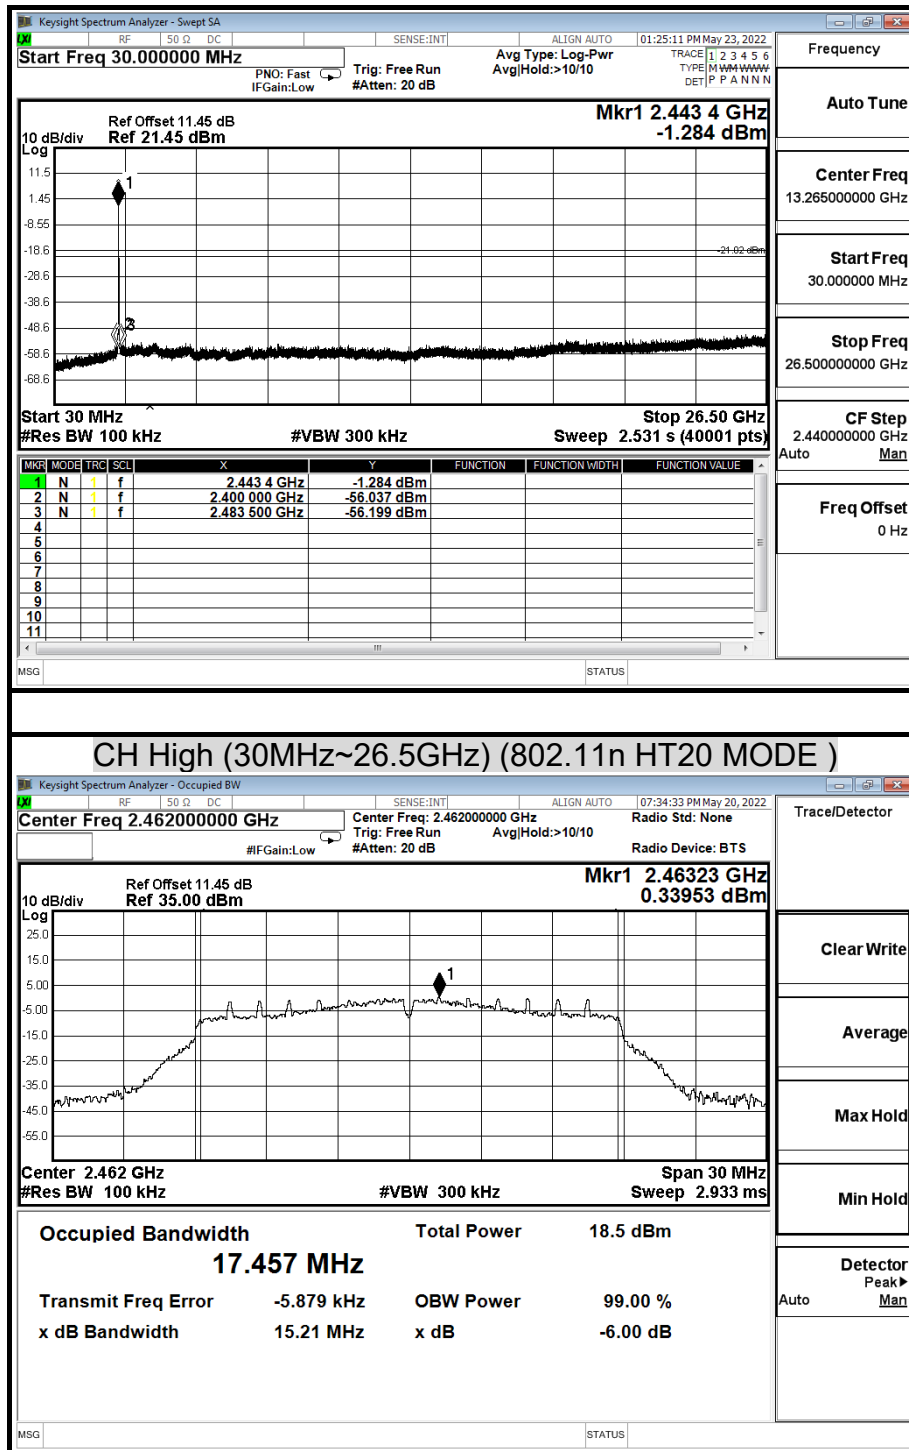


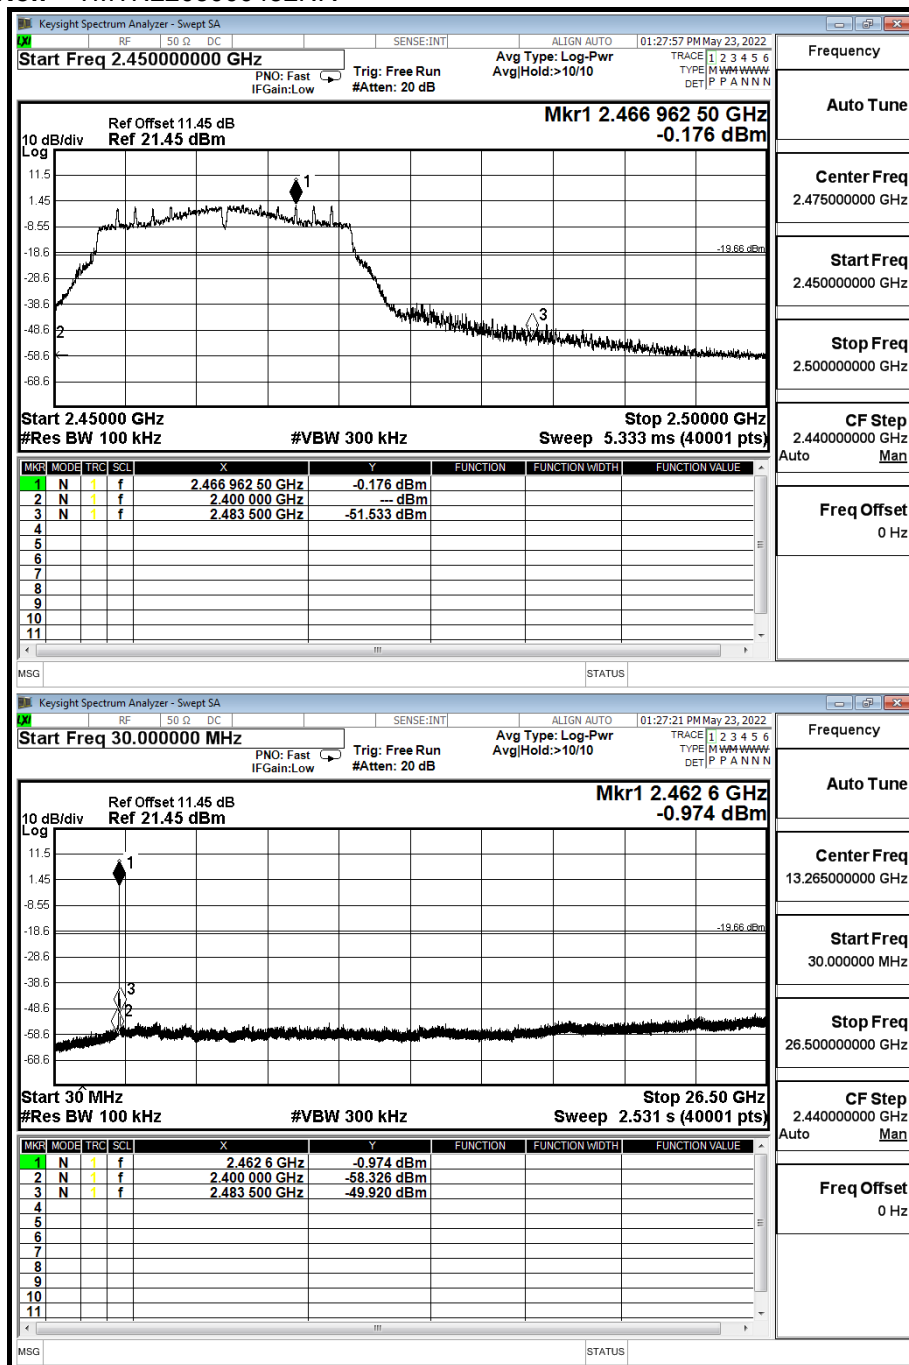




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26

(Bluetooth 4.0 (GFSK) MODE)

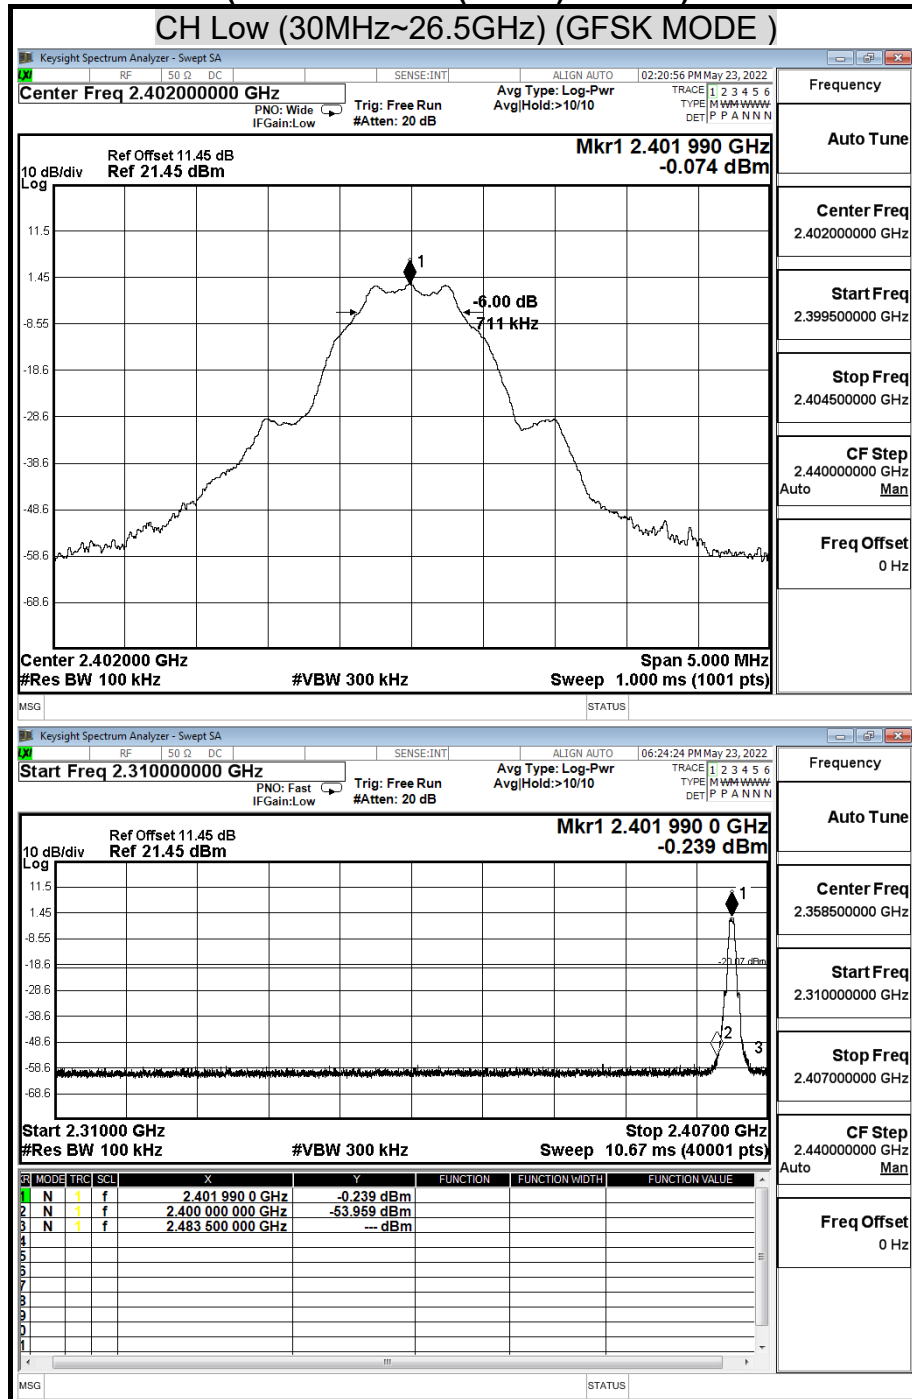

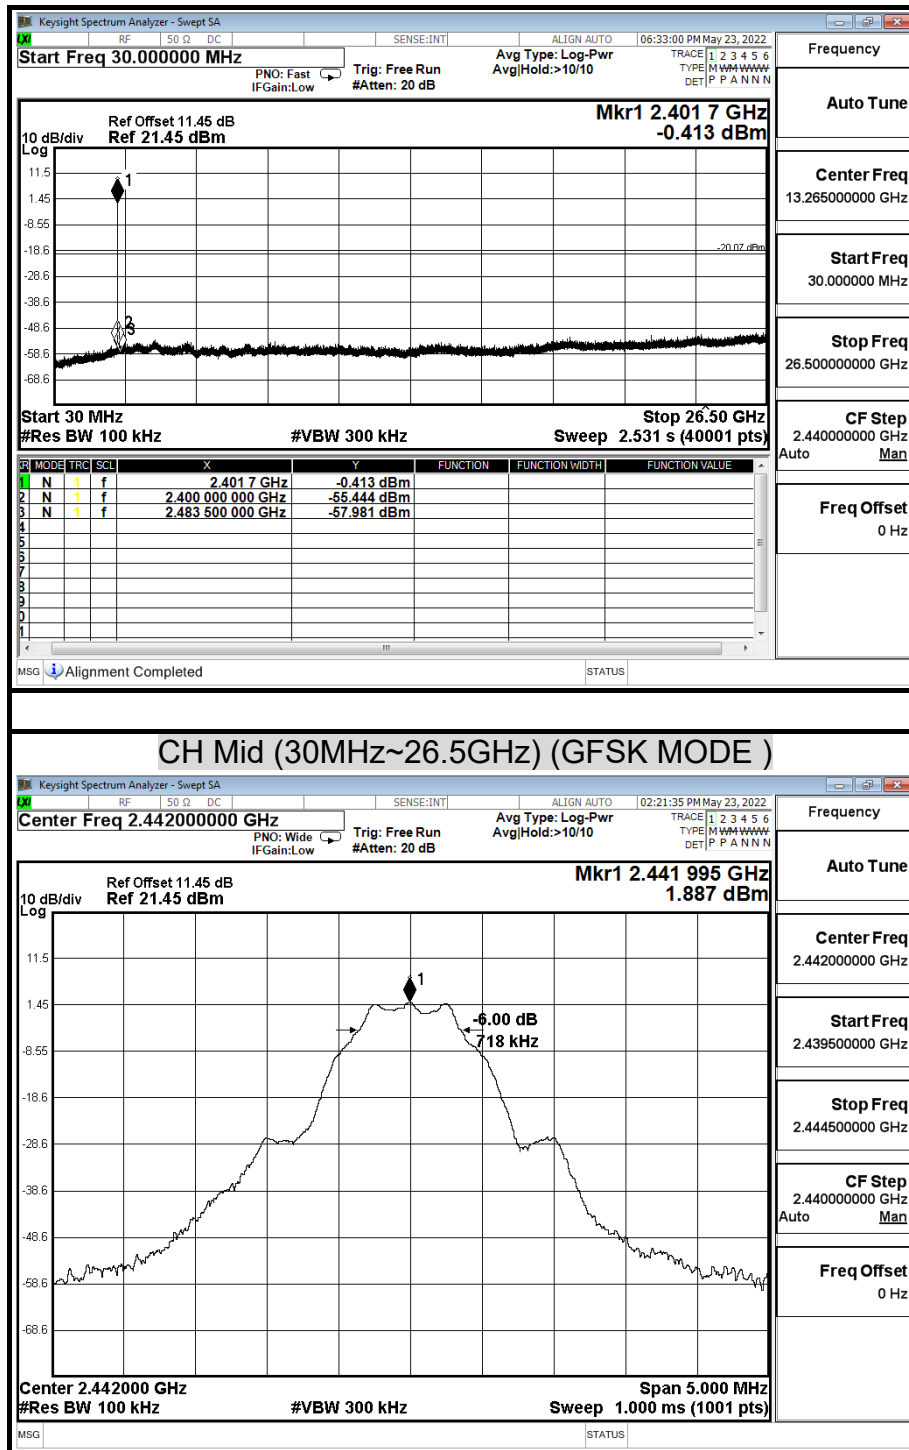


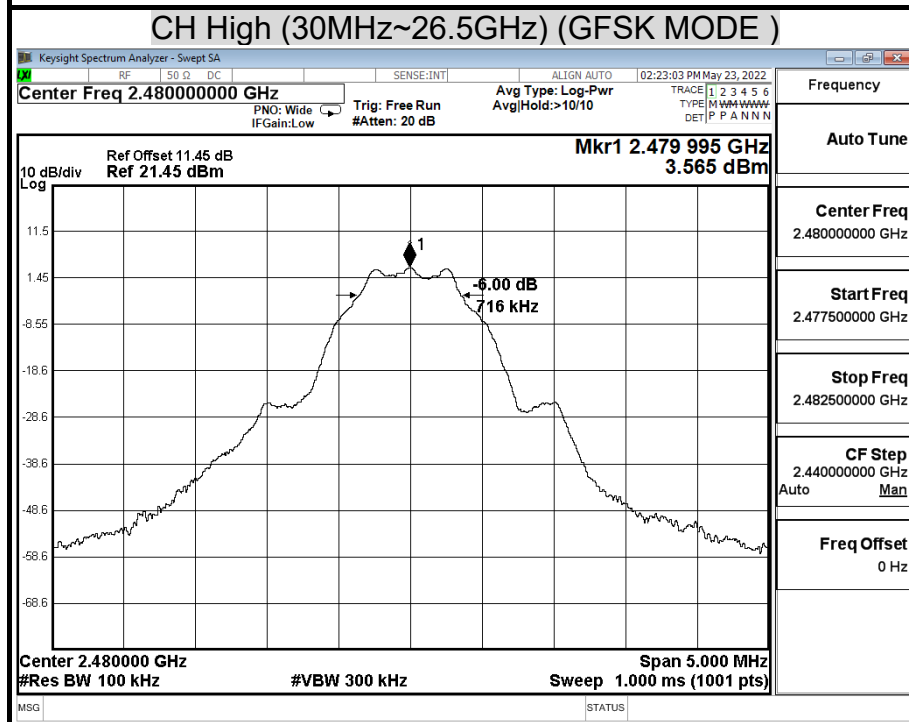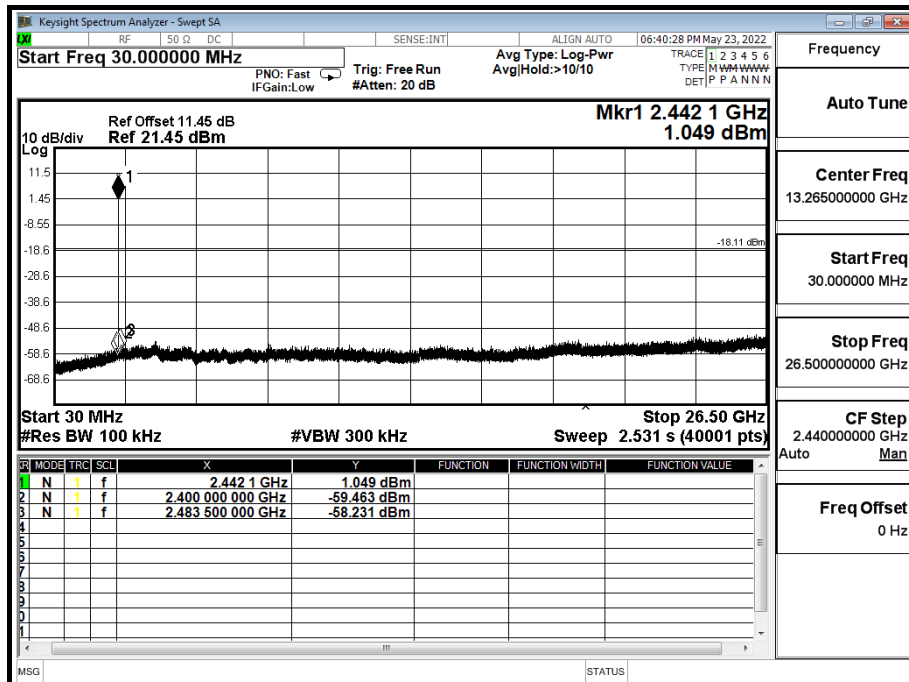

Report No.: TMTN2203000452NR

Page: 89 / 146


Rev.: 00

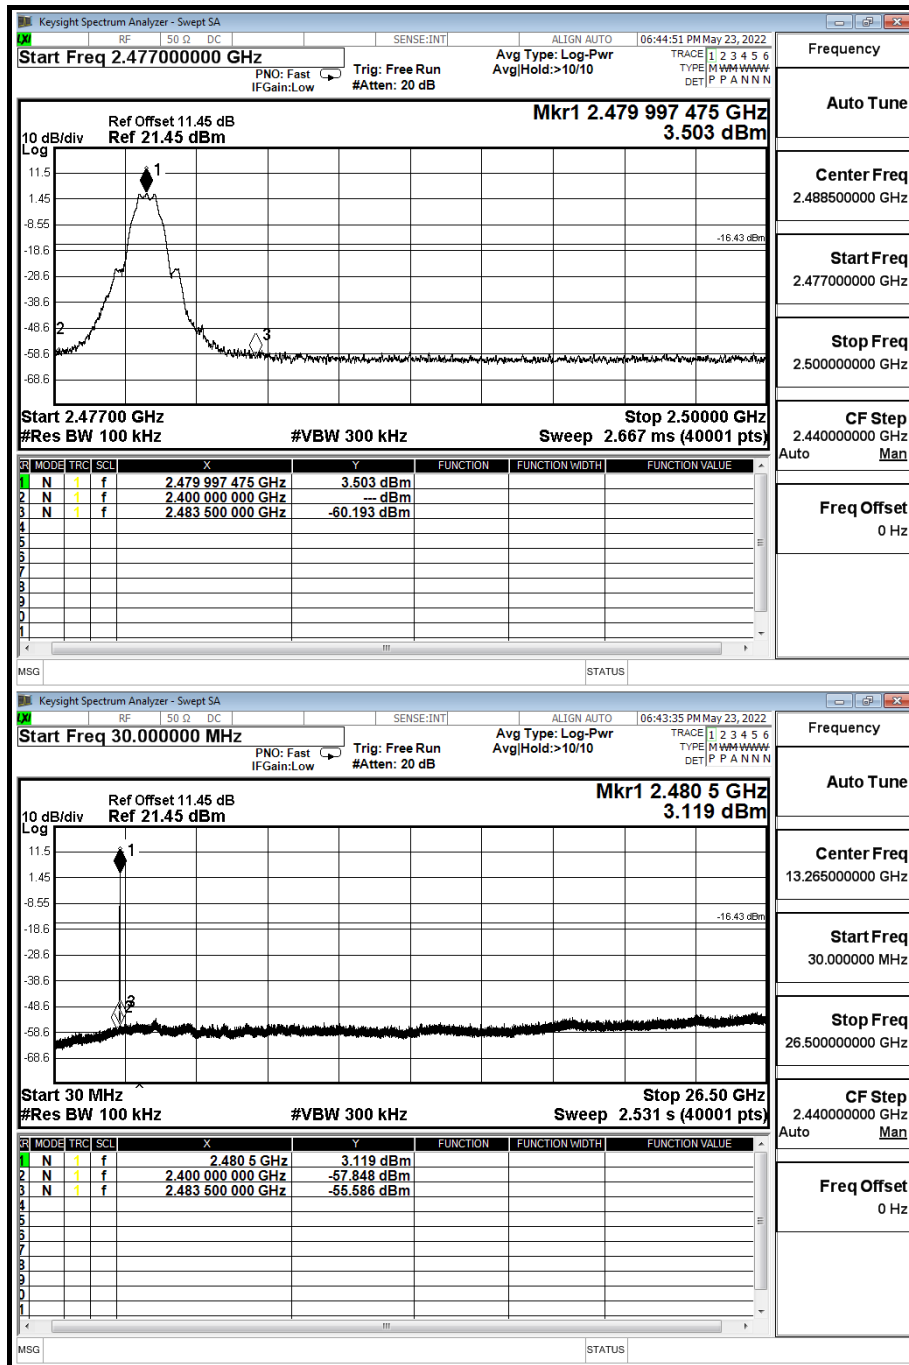




OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT


Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26

(Bluetooth 5.0 (GFSK) MODE)

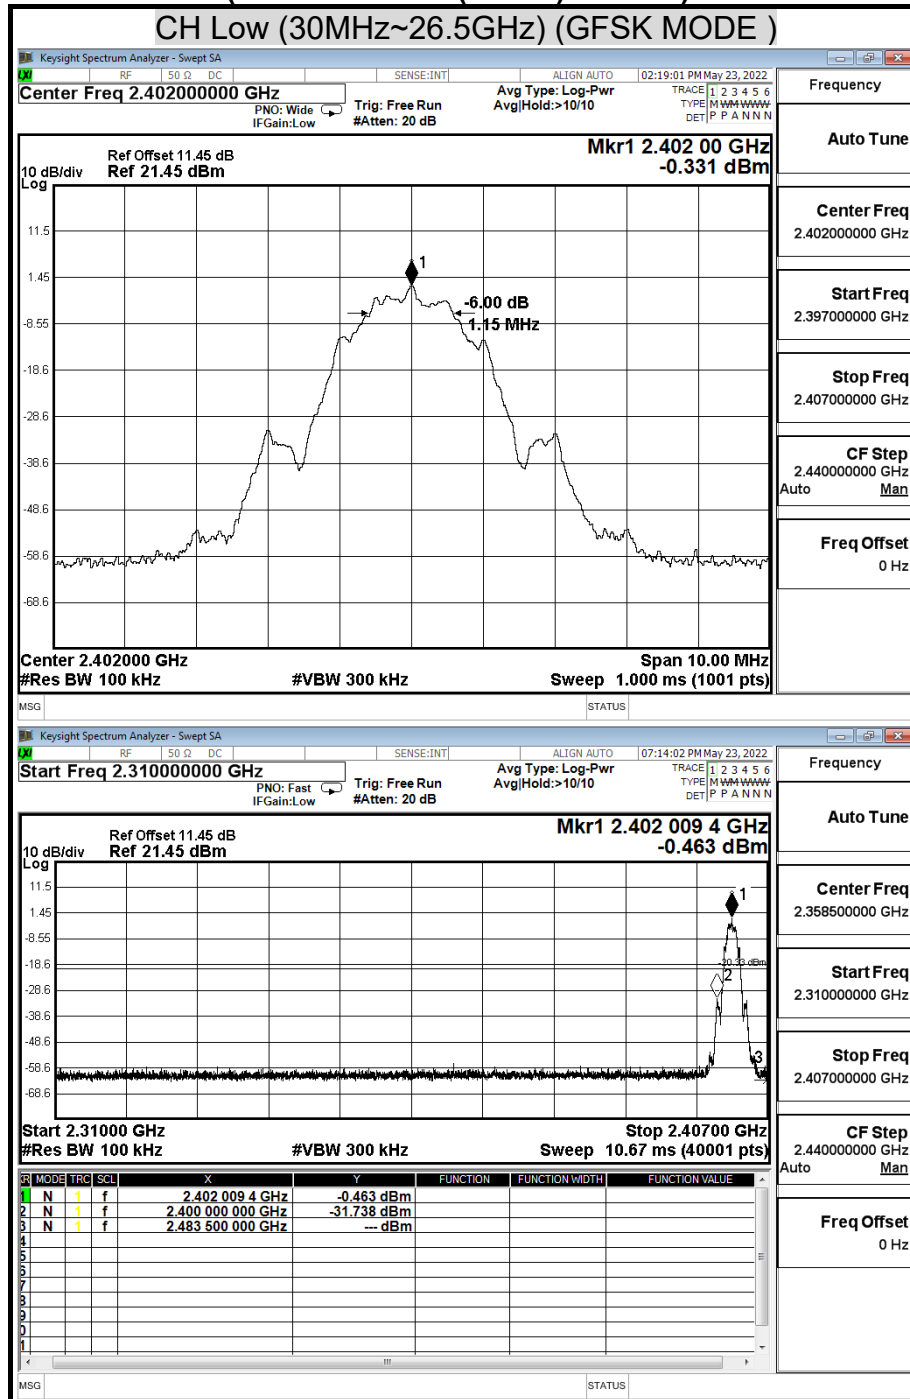

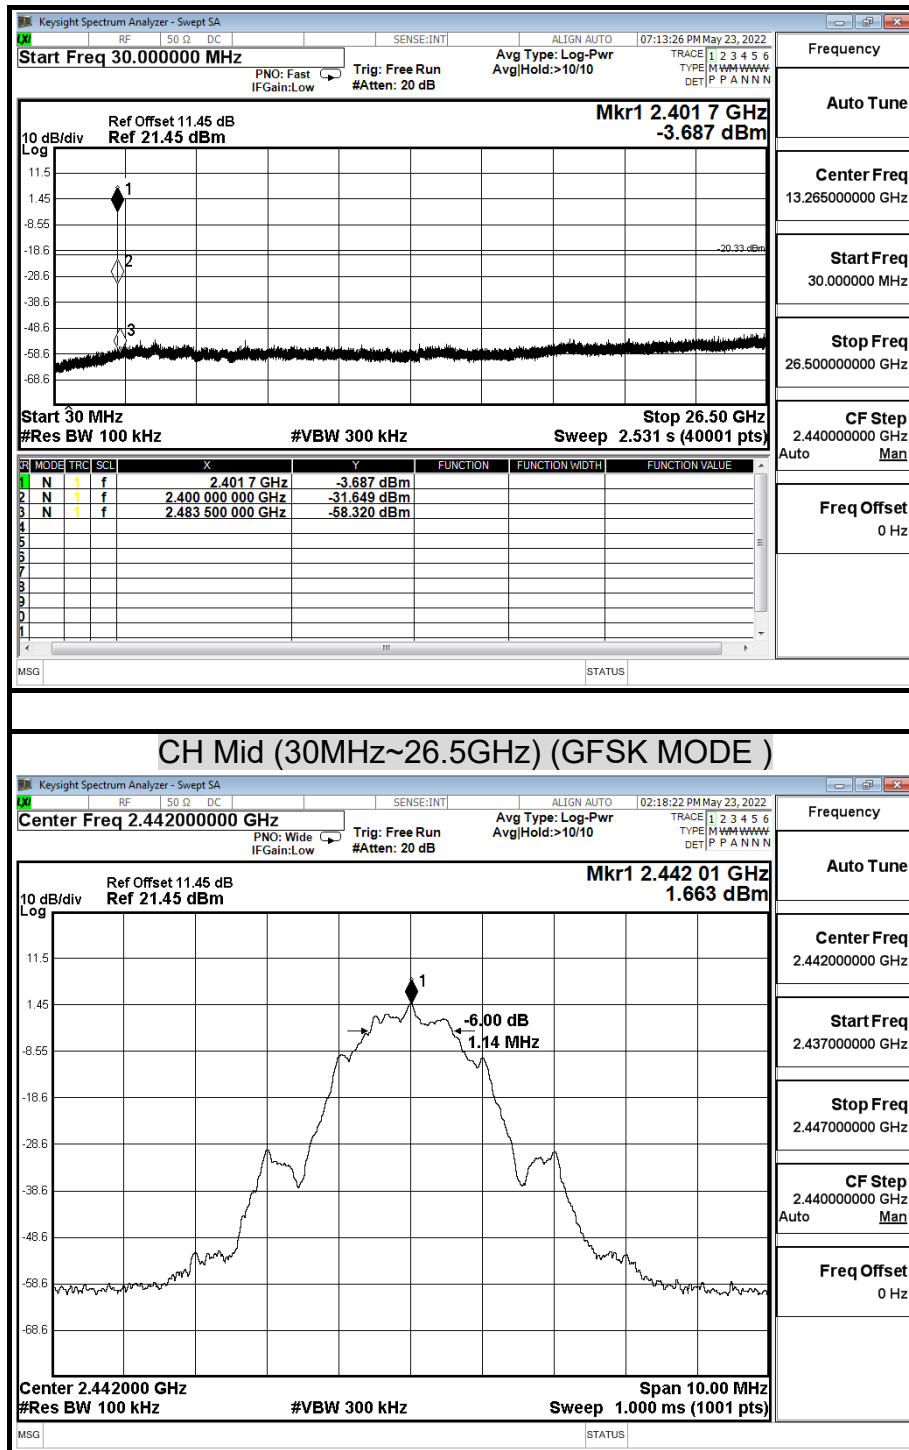

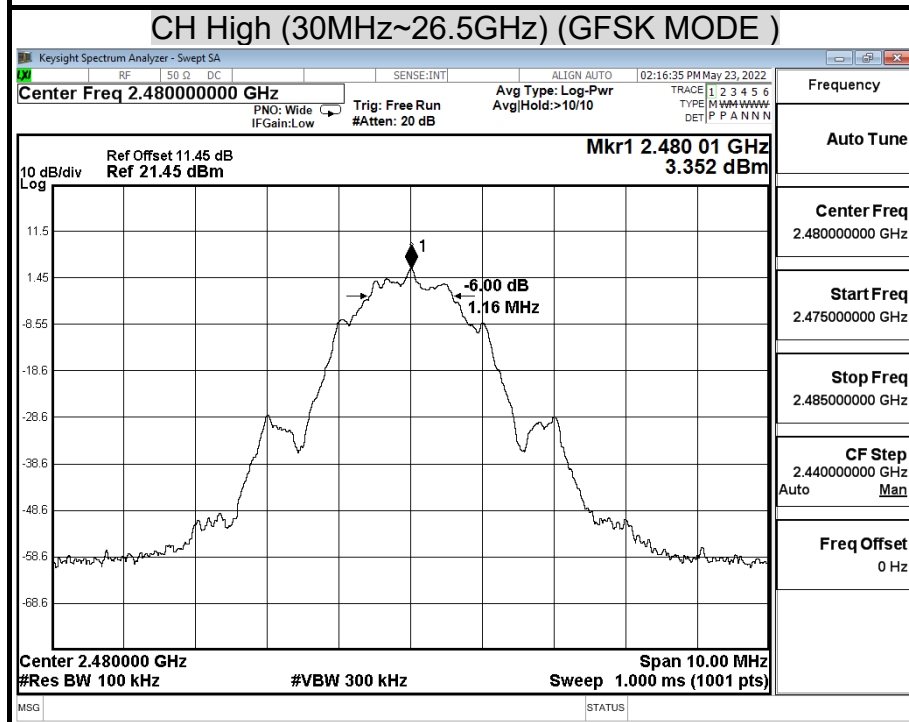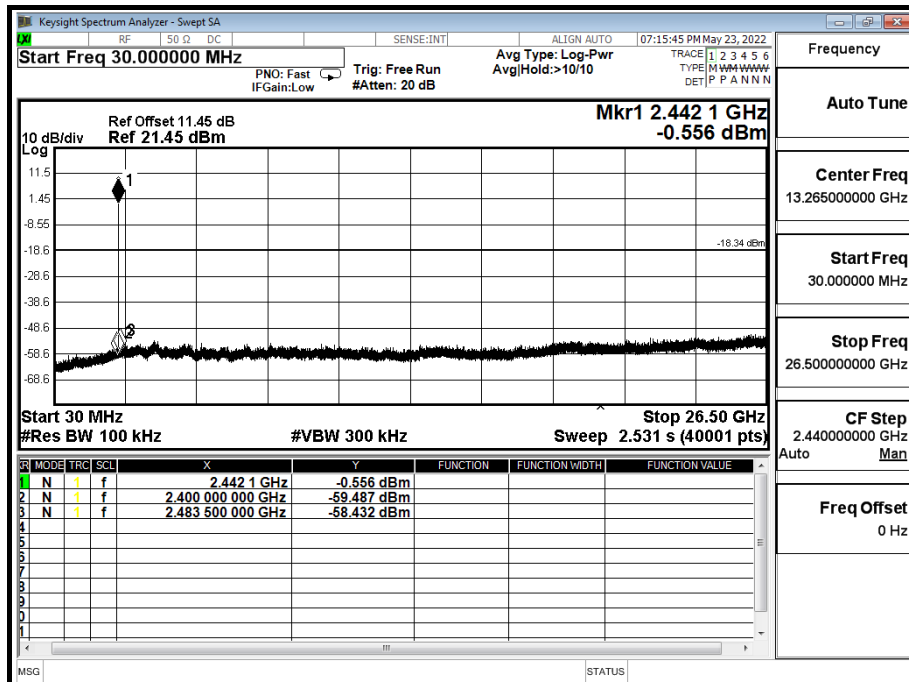

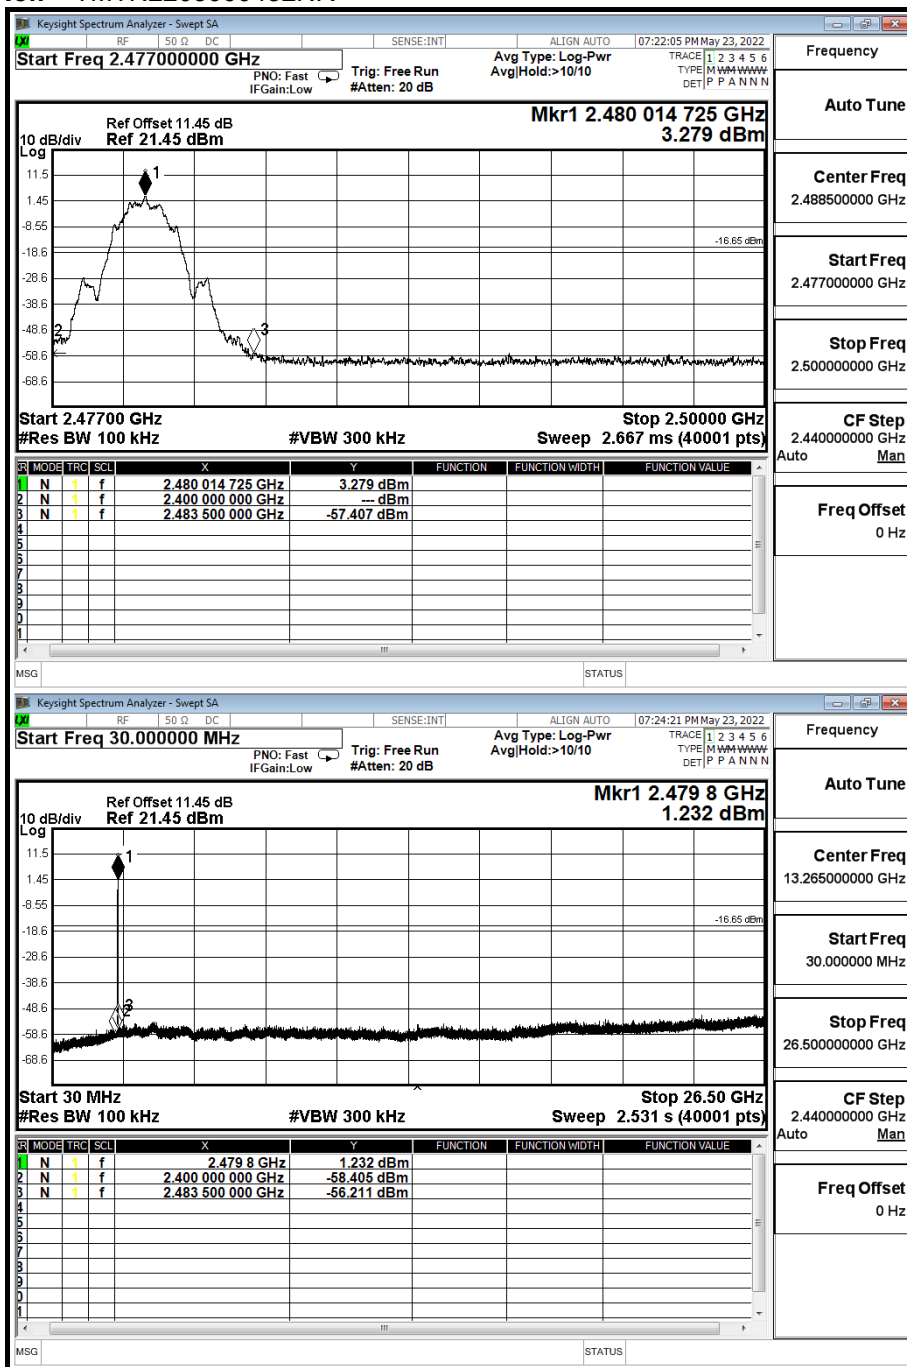

8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Report No.: TMTN2203000452NR

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.


TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.


Chamber Room #966					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Active Loop Antenna	ETS-LINDREN	6502	8905-2356	09/06/2021	09/05/2023
Attenuator	MCL	BW-S15W5	0535	01/28/2022	01/27/2023
Band Reject Filter	MICRO-TRONICS	HPM13525	006	01/28/2022	01/27/2023
Band Reject Filter	MICRO-TRONICS	HP50107-01	001	01/28/2022	01/27/2023
Bilog Antenna With 6dB Attenuator	SUNOL SCIENCES & EMCI	JB1 & N-6-06	A070506-1 & AT-N0681	10/07/2021	10/06/2022
Cable	Suhner	SUCOFLEX104PEA	20520/4PEA&O6	01/28/2022	01/27/2023
Double Ridged Guide Horn Antenna	ETS-LINDGREN	3116	00078900	03/18/2022	03/17/2023
EMI Test Receiver	R&S	ESCI 7	100856	07/01/2021	06/30/2022
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY54430216	07/22/2021	07/21/2022
Horn Antenna	Com-Power	AH-118	071032	05/04/2021	05/03/2022
Notch Filter	MICRO-TRONICS	BRM50702-01	018	01/28/2022	01/27/2023
Pre-Amplifier	EMCI	EMC012645	980098	01/28/2022	01/27/2023
Pre-Amplifier	HP	8447F	2443A01683	01/18/2022	01/17/2023
Pre-Amplifier	Com-Power	PAM-840A	461378	07/05/2021	07/04/2022
Type N coaxial cable	Suhner	CHA9513	6	01/18/2022	01/17/2023
Software	Excel(ccs-o6-2020 v1.1) , e3(v6.101222)				

TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

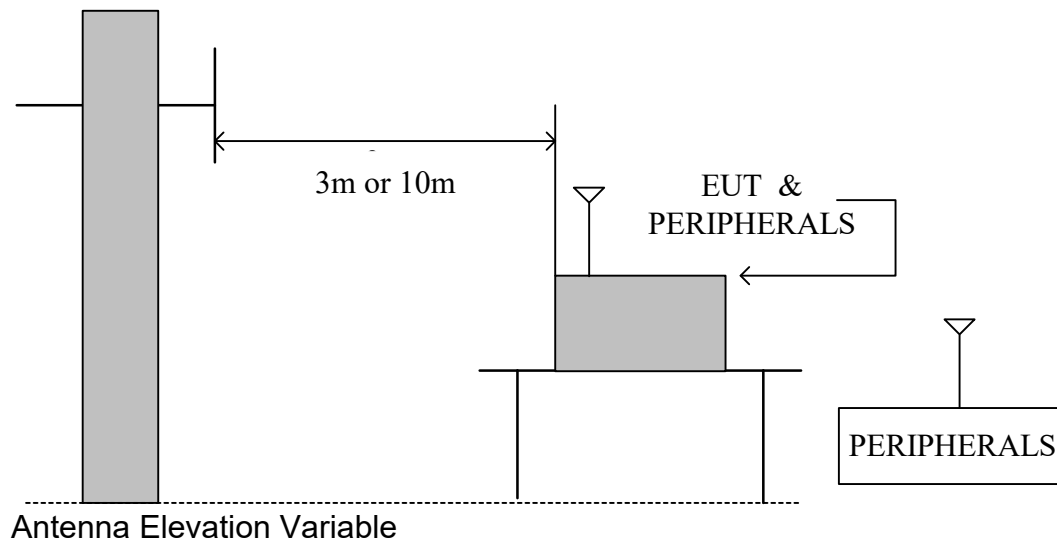

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

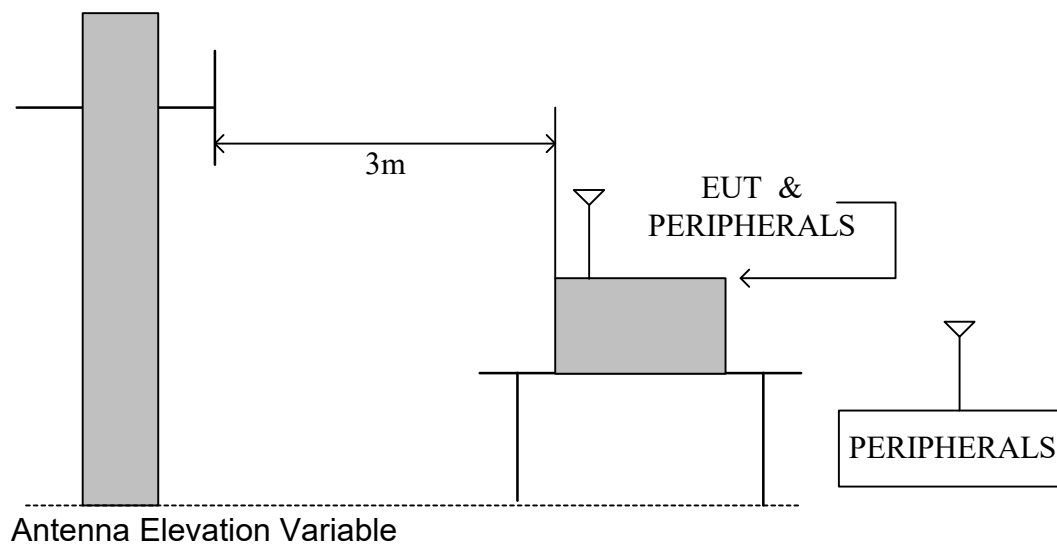

Report No.: TMTN2203000452NR

TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8/1.5 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The tests were performed in accordance with 558074 D01 DTS Meas Guidance v03r03.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)

TEST RESULTS


No non-compliance noted.

8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	Audio Device	Test Date	2022/04/19
Model	JP21	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	26.5°C/60%

Horizontal

(The chart below shows the highest readings taken from the final data.)

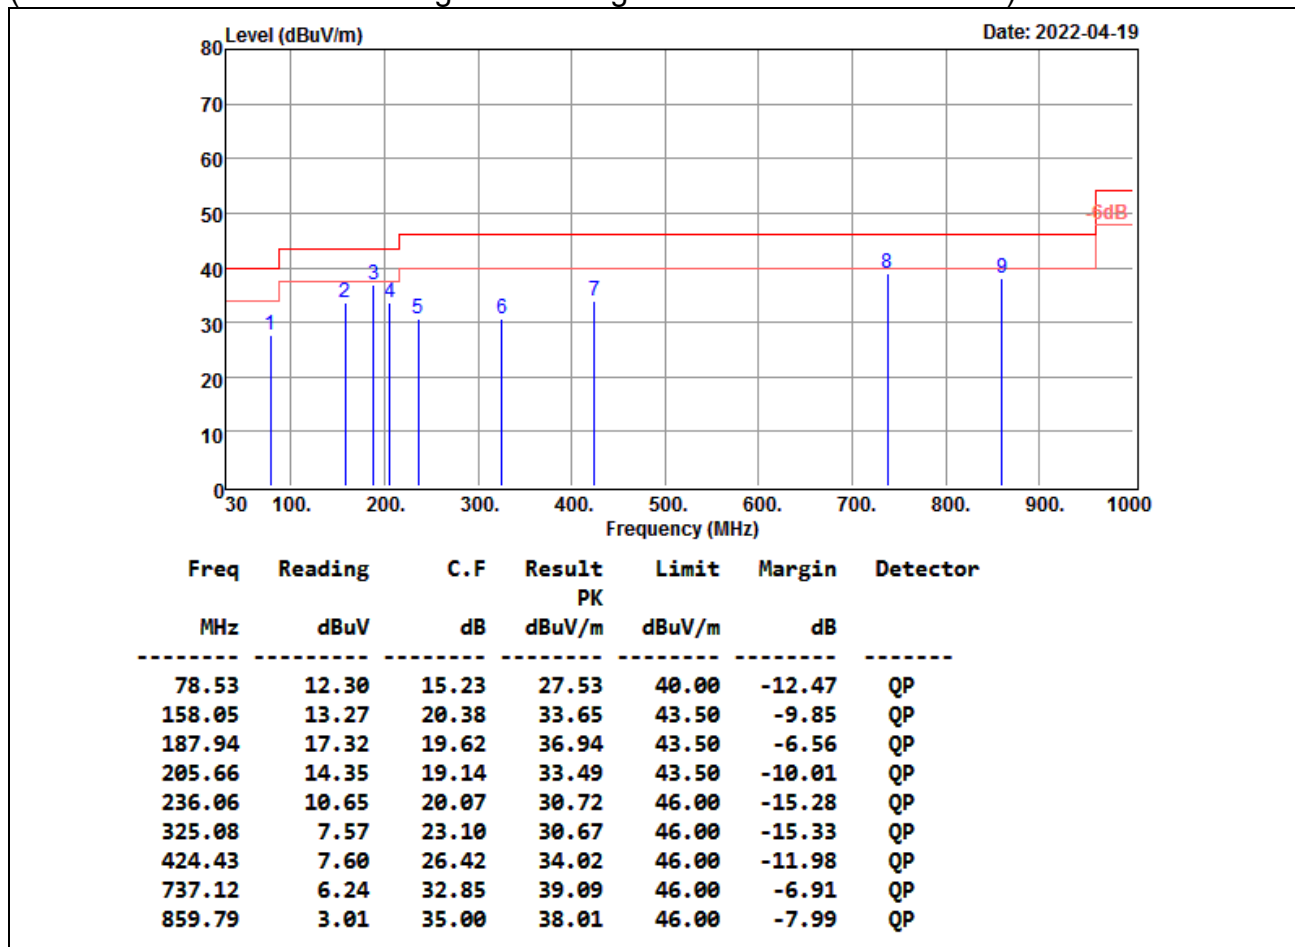


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Emission at 3m Level=Meter Reading +Antenna Factor +Cable Loss
Margin= Emission at 3m Level -Limits
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

Product Name	Audio Device	Test Date	2022/04/19
Model	JP21	Test By	Ted Huang
Test Mode	TX	TEMP& Humidity	26.5°C/60%

Vertical

(The chart below shows the highest readings taken from the final data.)

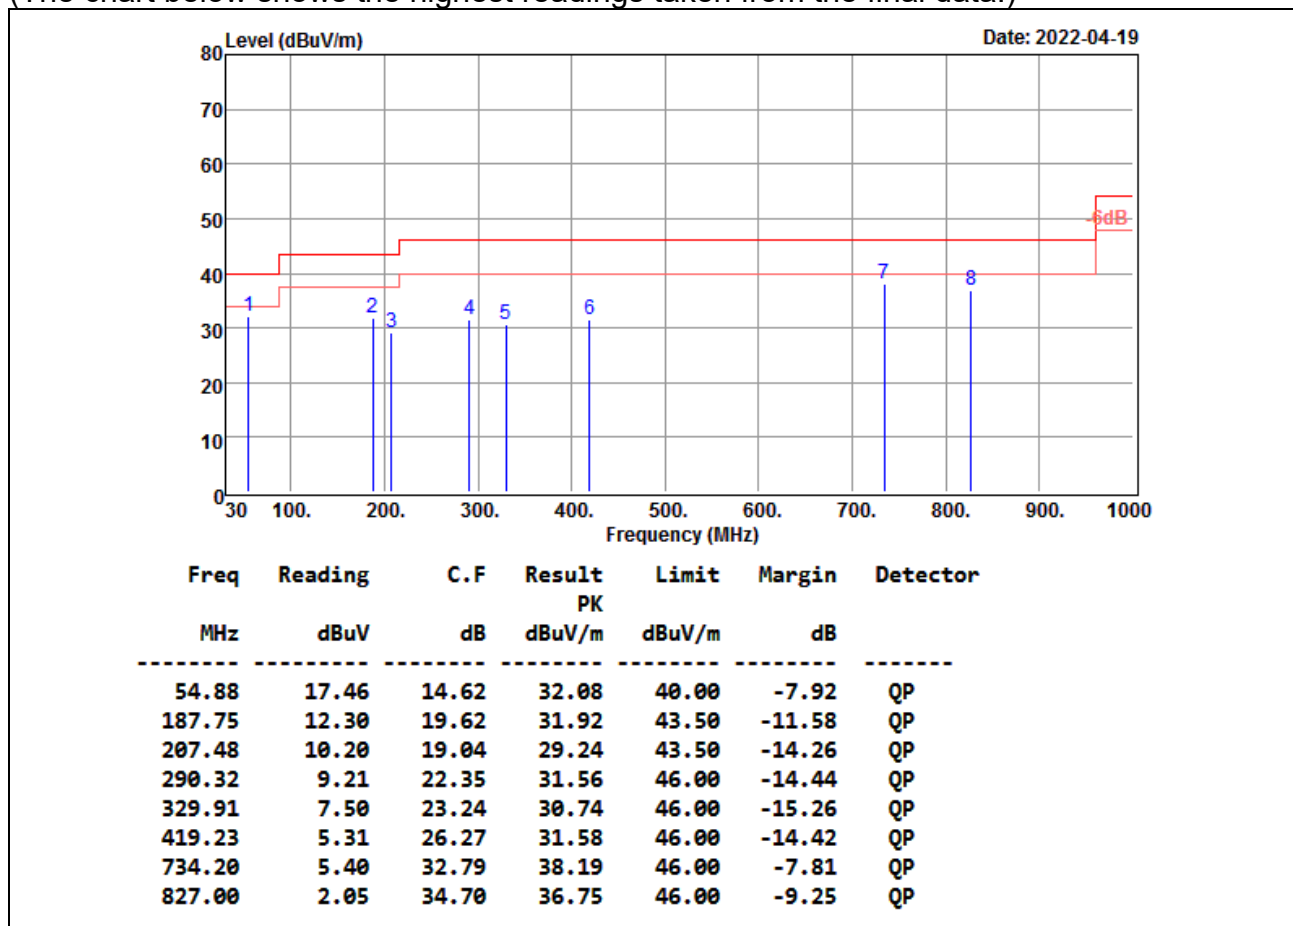**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Emission at 3m Level=Meter Reading +Antenna Factor +Cable Loss
Margin= Emission at 3m Level -Limits
6. That the limit for signals below 1GHz is a QP limit and peak readings are below the QP limit.
7. The fundamental signal is not shown in the test data because measurements at fundamental frequency are shown separately and were ignored during the 30 – 1000 MHz scan.

8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1773.52	57.52	28.79	2.81	44.24	1.02	45.91	74.00	-28.09	P
1773.52	49.35	28.79	2.81	44.24	1.02	37.74	54.00	-16.26	A
*4824.26	58.11	33.14	4.40	42.50	0.57	53.71	74.00	-20.29	P
*4824.26	47.93	33.14	4.40	42.50	0.57	43.53	54.00	-10.47	A
7238.24	56.25	38.81	5.48	42.32	0.42	58.64	74.00	-15.36	P
7238.24	45.82	38.81	5.48	42.32	0.42	48.21	54.00	-5.79	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
*1601.56	58.29	27.41	2.79	44.50	0.81	44.80	74.00	-29.20	P
*1601.56	47.82	27.41	2.79	44.50	0.81	34.33	54.00	-19.67	A
*4823.92	58.02	33.14	4.39	42.50	0.57	53.62	74.00	-20.38	P
*4823.92	47.22	33.14	4.39	42.50	0.57	42.82	54.00	-11.18	A
7235.48	56.23	38.79	5.48	42.32	0.42	58.60	74.00	-15.40	P
7235.48	46.83	38.79	5.48	42.32	0.42	49.20	54.00	-4.80	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1772.36	59.25	28.78	2.81	44.24	1.02	47.62	74.00	-26.38	P
1772.36	49.63	28.78	2.81	44.24	1.02	38.00	54.00	-16.00	A
* 4875.63	57.05	33.30	4.42	42.50	0.57	52.84	74.00	-21.16	P
* 4875.63	47.92	33.30	4.42	42.50	0.57	43.71	54.00	-10.29	A
* 7314.02	58.22	39.09	5.52	42.22	0.43	61.04	74.00	-12.96	P
* 7314.02	47.36	39.09	5.52	42.22	0.43	50.18	54.00	-3.82	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1602.04	59.40	27.42	2.79	44.50	0.81	45.92	74.00	-28.08	P
* 1602.04	48.26	27.42	2.79	44.50	0.81	34.78	54.00	-19.22	A
* 4876.80	56.82	33.31	4.42	42.50	0.57	52.62	74.00	-21.38	P
* 4876.80	47.69	33.31	4.42	42.50	0.57	43.49	54.00	-10.51	A
* 7310.36	56.71	39.08	5.52	42.22	0.42	59.51	74.00	-14.49	P
* 7310.36	47.23	39.08	5.52	42.22	0.42	50.03	54.00	-3.97	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1773.05	60.22	28.78	2.81	44.24	1.02	48.60	74.00	-25.40	P
1773.05	52.24	28.78	2.81	44.24	1.02	40.62	54.00	-13.38	A
* 4924.47	57.50	33.46	4.45	42.50	0.56	53.48	74.00	-20.52	P
* 4924.47	47.83	33.46	4.45	42.50	0.56	43.81	54.00	-10.19	A
* 7390.25	57.47	39.38	5.56	42.12	0.43	60.73	74.00	-13.27	P
* 7390.25	48.88	39.38	5.56	42.12	0.43	52.14	54.00	-1.86	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1601.57	58.63	27.41	2.79	44.50	0.81	45.15	74.00	-28.85	P
* 1601.57	48.59	27.41	2.79	44.50	0.81	35.11	54.00	-18.89	A
* 4923.74	56.30	33.46	4.45	42.50	0.56	52.27	74.00	-21.73	P
* 4923.74	46.76	33.46	4.45	42.50	0.56	42.73	54.00	-11.27	A
* 7384.06	57.37	39.36	5.56	42.13	0.43	60.59	74.00	-13.41	P
* 7384.06	47.03	39.36	5.56	42.13	0.43	50.25	54.00	-3.75	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1773.22	60.02	28.79	2.81	44.24	1.02	48.40	74.00	-25.60	P
1773.22	49.25	28.79	2.81	44.24	1.02	37.63	54.00	-16.37	A
* 4824.52	59.56	33.14	4.40	42.50	0.57	55.16	74.00	-18.84	P
* 4824.52	52.04	33.14	4.40	42.50	0.57	47.64	54.00	-6.36	A
7237.77	56.25	38.80	5.48	42.32	0.42	58.63	74.00	-15.37	P
7237.77	45.83	38.80	5.48	42.32	0.42	48.21	54.00	-5.79	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1601.52	59.52	27.41	2.79	44.50	0.81	46.03	74.00	-27.97	P
* 1601.52	48.86	27.41	2.79	44.50	0.81	35.37	54.00	-18.63	A
* 4824.71	57.63	33.14	4.40	42.50	0.57	53.23	74.00	-20.77	P
* 4824.71	46.98	33.14	4.40	42.50	0.57	42.58	54.00	-11.42	A
7238.29	55.71	38.81	5.48	42.32	0.42	58.10	74.00	-15.90	P
7238.29	46.69	38.81	5.48	42.32	0.42	49.08	54.00	-4.92	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1773.55	58.69	28.79	2.81	44.24	1.02	47.08	74.00	-26.92	P
1773.55	51.61	28.79	2.81	44.24	1.02	40.00	54.00	-14.00	A
* 4872.74	56.48	33.29	4.42	42.50	0.57	52.26	74.00	-21.74	P
* 4872.74	45.19	33.29	4.42	42.50	0.57	40.97	54.00	-13.03	A
* 7312.38	55.72	39.09	5.52	42.22	0.42	58.53	74.00	-15.47	P
* 7312.38	44.69	39.09	5.52	42.22	0.42	47.50	54.00	-6.50	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1601.53	59.22	27.41	2.79	44.50	0.81	45.73	74.00	-28.27	P
* 1601.53	48.98	27.41	2.79	44.50	0.81	35.49	54.00	-18.51	A
* 4875.45	55.39	33.30	4.42	42.50	0.57	51.18	74.00	-22.82	P
* 4875.45	45.48	33.30	4.42	42.50	0.57	41.27	54.00	-12.73	A
* 7313.29	57.15	39.09	5.52	42.22	0.43	59.97	74.00	-14.03	P
* 7313.29	45.95	39.09	5.52	42.22	0.43	48.77	54.00	-5.23	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1772.88	59.82	28.78	2.81	44.24	1.02	48.20	74.00	-25.80	P
1772.88	49.58	28.78	2.81	44.24	1.02	37.96	54.00	-16.04	A
* 4923.45	57.59	33.46	4.45	42.50	0.56	53.56	74.00	-20.44	P
* 4923.45	46.92	33.46	4.45	42.50	0.56	42.89	54.00	-11.11	A
* 7386.28	55.29	39.37	5.56	42.12	0.43	58.53	74.00	-15.47	P
* 7386.28	45.31	39.37	5.56	42.12	0.43	48.55	54.00	-5.45	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1601.22	59.63	27.41	2.79	44.50	0.81	46.14	74.00	-27.86	P
* 1601.22	48.44	27.41	2.79	44.50	0.81	34.95	54.00	-19.05	A
* 4921.29	56.46	33.45	4.45	42.50	0.56	52.42	74.00	-21.58	P
* 4921.29	45.83	33.45	4.45	42.50	0.56	41.79	54.00	-12.21	A
* 7357.74	55.49	39.26	5.55	42.16	0.43	58.56	74.00	-15.44	P
* 7357.74	44.63	39.26	5.55	42.16	0.43	47.70	54.00	-6.30	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1773.25	59.48	28.79	2.81	44.24	1.02	47.86	74.00	-26.14	P
1773.25	48.36	28.79	2.81	44.24	1.02	36.74	54.00	-17.26	A
* 4824.41	58.05	33.14	4.40	42.50	0.57	53.65	74.00	-20.35	P
* 4824.41	48.66	33.14	4.40	42.50	0.57	44.26	54.00	-9.74	A
7235.31	57.67	38.79	5.48	42.32	0.42	60.04	74.00	-13.96	P
7235.31	47.18	38.79	5.48	42.32	0.42	49.55	54.00	-4.45	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1601.23	58.43	27.41	2.79	44.50	0.81	44.94	74.00	-29.06	P
* 1601.23	47.63	27.41	2.79	44.50	0.81	34.14	54.00	-19.86	A
* 4823.62	58.92	33.14	4.39	42.50	0.57	54.52	74.00	-19.48	P
* 4823.62	52.49	33.14	4.39	42.50	0.57	48.09	54.00	-5.91	A
7235.72	54.69	38.80	5.48	42.32	0.42	57.06	74.00	-16.94	P
7235.72	45.67	38.80	5.48	42.32	0.42	48.04	54.00	-5.96	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1773.14	58.05	28.79	2.81	44.24	1.02	46.43	74.00	-27.57	P
1773.14	49.55	28.79	2.81	44.24	1.02	37.93	54.00	-16.07	A
* 4873.58	59.64	33.30	4.42	42.50	0.57	55.42	74.00	-18.58	P
* 4873.58	51.58	33.30	4.42	42.50	0.57	47.37	54.00	-6.63	A
* 7310.64	56.31	39.08	5.52	42.22	0.42	59.11	74.00	-14.89	P
* 7310.64	45.78	39.08	5.52	42.22	0.42	48.58	54.00	-5.42	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1061.08	58.45	24.76	2.53	44.75	0.65	41.64	74.00	-32.36	P
* 1061.08	48.46	24.76	2.53	44.75	0.65	31.65	54.00	-22.35	A
* 4874.23	59.54	33.30	4.42	42.50	0.57	55.33	74.00	-18.67	P
* 4874.23	48.49	33.30	4.42	42.50	0.57	44.28	54.00	-9.72	A
* 7312.58	55.45	39.09	5.52	42.22	0.43	58.26	74.00	-15.74	P
* 7312.58	44.93	39.09	5.52	42.22	0.43	47.74	54.00	-6.26	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	27.4°C, 55%

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
1773.22	59.46	28.79	2.81	44.24	1.02	47.84	74.00	-26.16	P
1773.22	51.29	28.79	2.81	44.24	1.02	39.67	54.00	-14.33	A
* 4921.49	56.52	33.45	4.45	42.50	0.56	52.49	74.00	-21.51	P
* 4921.49	45.85	33.45	4.45	42.50	0.56	41.81	54.00	-12.19	A
* 7385.88	55.44	39.37	5.56	42.12	0.43	58.67	74.00	-15.33	P
* 7385.88	46.32	39.37	5.56	42.12	0.43	49.55	54.00	-4.45	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1601.19	59.43	27.41	2.79	44.50	0.81	45.94	74.00	-28.06	P
* 1601.19	48.47	27.41	2.79	44.50	0.81	34.98	54.00	-19.02	A
* 4920.27	56.23	33.44	4.45	42.50	0.56	52.19	74.00	-21.81	P
* 4920.27	45.80	33.44	4.45	42.50	0.56	41.76	54.00	-12.24	A
* 7390.45	55.53	39.38	5.56	42.12	0.43	58.79	74.00	-15.21	P
* 7390.45	44.65	39.38	5.56	42.12	0.43	47.91	54.00	-6.09	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	Bluetooth 4.0 TX (CH Low)	TEMP& Humidity	23.4°C, 65%

TX / Bluetooth 4.0 (GFSK) mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1026.25	59.82	24.61	2.51	44.75	0.64	42.83	74.00	-31.17	P	
* 1026.25	50.69	24.61	2.51	44.75	0.64	33.70	54.00	-20.30	A	
1773.26	57.05	28.79	2.81	44.24	1.02	45.43	74.00	-28.57	P	
1773.26	51.24	28.79	2.81	44.24	1.02	39.62	54.00	-14.38	A	
* 4804.21	57.36	33.07	4.38	42.51	0.57	52.88	74.00	-21.12	P	
* 4804.21	48.21	33.07	4.38	42.51	0.57	43.73	54.00	-10.27	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / Bluetooth 4.0 (GFSK) mode / CH Low				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1028.30	61.18	24.62	2.52	44.75	0.64	44.20	74.00	-29.80	P	
* 1028.30	50.63	24.62	2.52	44.75	0.64	33.65	54.00	-20.35	A	
* 1610.38	60.34	27.48	2.79	44.48	0.82	46.95	74.00	-27.05	P	
* 1610.38	52.14	27.48	2.79	44.48	0.82	38.75	54.00	-15.25	A	
* 4804.13	57.24	33.07	4.38	42.51	0.57	52.76	74.00	-21.24	P	
* 4804.13	47.05	33.07	4.38	42.51	0.57	42.57	54.00	-11.43	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	Bluetooth 4.0 TX (CH Middle)	TEMP& Humidity	27.4°C, 55%

TX / Bluetooth 4.0 (GFSK) mode / CH Middle					Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1026.34	60.05	24.61	2.51	44.75	0.64	43.06	74.00	-30.94	P	
* 1026.34	49.58	24.61	2.51	44.75	0.64	32.59	54.00	-21.41	A	
1773.48	58.26	28.79	2.81	44.24	1.02	46.65	74.00	-27.35	P	
1773.48	49.37	28.79	2.81	44.24	1.02	37.76	54.00	-16.24	A	
* 4884.20	58.02	33.33	4.43	42.50	0.57	53.84	74.00	-20.16	P	
* 4884.20	47.72	33.33	4.43	42.50	0.57	43.54	54.00	-10.46	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / Bluetooth 4.0 (GFSK) mode / CH Middle					Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1028.21	60.85	24.62	2.52	44.75	0.64	43.87	74.00	-30.13	P	
* 1028.21	50.47	24.62	2.52	44.75	0.64	33.49	54.00	-20.51	A	
* 1610.47	60.52	27.48	2.79	44.48	0.82	47.13	74.00	-26.87	P	
* 1610.47	52.29	27.48	2.79	44.48	0.82	38.90	54.00	-15.10	A	
* 4884.23	58.31	33.33	4.43	42.50	0.57	54.13	74.00	-19.87	P	
* 4884.23	47.15	33.33	4.43	42.50	0.57	42.97	54.00	-11.03	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	Bluetooth 4.0 TX (CH High)	TEMP& Humidity	27.4°C, 55%

TX / Bluetooth 4.0 (GFSK) mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1026.41	59.80	24.61	2.51	44.75	0.64	42.81	74.00	-31.19	P
* 1026.41	50.43	24.61	2.51	44.75	0.64	33.44	54.00	-20.56	A
1773.46	57.25	28.79	2.81	44.24	1.02	45.64	74.00	-28.36	P
1773.46	51.57	28.79	2.81	44.24	1.02	39.95	54.00	-14.05	A
* 4959.50	59.48	33.57	4.47	42.49	0.56	55.59	74.00	-18.41	P
* 4959.50	48.47	33.57	4.47	42.49	0.56	44.58	54.00	-9.42	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / Bluetooth 4.0 (GFSK) mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1028.27	60.84	24.62	2.52	44.75	0.64	43.86	74.00	-30.14	P
* 1028.27	50.43	24.62	2.52	44.75	0.64	33.45	54.00	-20.55	A
* 1610.47	60.24	27.48	2.79	44.48	0.82	46.85	74.00	-27.15	P
* 1610.47	52.59	27.48	2.79	44.48	0.82	39.20	54.00	-14.80	A
* 4959.48	57.72	33.57	4.47	42.49	0.56	53.83	74.00	-20.17	P
* 4959.48	47.59	33.57	4.47	42.49	0.56	43.70	54.00	-10.30	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	Bluetooth 5.0 TX (CH Low)	TEMP& Humidity	23.4°C, 65%

TX / Bluetooth 5.0 (GFSK) mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1026.16	57.69	24.61	2.51	44.75	0.64	40.70	74.00	-33.30	P	
* 1026.16	49.67	24.61	2.51	44.75	0.64	32.68	54.00	-21.32	A	
1773.43	58.05	28.79	2.81	44.24	1.02	46.43	74.00	-27.57	P	
1773.43	52.17	28.79	2.81	44.24	1.02	40.55	54.00	-13.45	A	
* 4803.68	56.59	33.07	4.38	42.51	0.57	52.11	74.00	-21.89	P	
* 4803.68	46.90	33.07	4.38	42.51	0.57	42.42	54.00	-11.58	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / Bluetooth 5.0 (GFSK) mode / CH Low				Measurement Distance at 3m				Vertical polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1028.19	60.71	24.62	2.52	44.75	0.64	43.73	74.00	-30.27	P	
* 1028.19	50.62	24.62	2.52	44.75	0.64	33.64	54.00	-20.36	A	
* 1610.46	60.38	27.48	2.79	44.48	0.82	46.99	74.00	-27.01	P	
* 1610.46	52.49	27.48	2.79	44.48	0.82	39.10	54.00	-14.90	A	
* 4804.35	56.47	33.07	4.38	42.51	0.57	51.99	74.00	-22.01	P	
* 4804.35	45.35	33.07	4.38	42.51	0.57	40.87	54.00	-13.13	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter , Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	Bluetooth 5.0 TX (CH Middle)	TEMP& Humidity	27.4°C, 55%

TX / Bluetooth 5.0 (GFSK) mode / CH Middle					Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1026.50	59.48	24.61	2.51	44.75	0.64	42.49	74.00	-31.51	P	
* 1026.50	50.92	24.61	2.51	44.75	0.64	33.93	54.00	-20.07	A	
1773.33	57.81	28.79	2.81	44.24	1.02	46.19	74.00	-27.81	P	
1773.33	51.48	28.79	2.81	44.24	1.02	39.86	54.00	-14.14	A	
* 4884.11	56.69	33.33	4.43	42.50	0.57	52.51	74.00	-21.49	P	
* 4884.11	45.47	33.33	4.43	42.50	0.57	41.29	54.00	-12.71	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

TX / Bluetooth 5.0 (GFSK) mode / CH Middle					Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)	
* 1028.59	60.25	24.62	2.52	44.75	0.64	43.27	74.00	-30.73	P	
* 1028.59	50.70	24.62	2.52	44.75	0.64	33.72	54.00	-20.28	A	
* 1610.55	60.36	27.48	2.79	44.48	0.82	46.97	74.00	-27.03	P	
* 1610.55	52.54	27.48	2.79	44.48	0.82	39.15	54.00	-14.85	A	
* 4883.75	58.02	33.33	4.43	42.50	0.57	53.84	74.00	-20.16	P	
* 4883.75	46.18	33.33	4.43	42.50	0.57	42.00	54.00	-12.00	A	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P	
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A	

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	Bluetooth 5.0 TX (CH High)	TEMP& Humidity	27.4°C, 55%

TX / Bluetooth 5.0 (GFSK) mode / CH High				Measurement Distance at 3m				Horizontal polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1026.54	59.43	24.61	2.51	44.75	0.64	42.44	74.00	-31.56	P
* 1026.54	50.80	24.61	2.51	44.75	0.64	33.81	54.00	-20.19	A
1773.17	57.39	28.79	2.81	44.24	1.02	45.77	74.00	-28.23	P
1773.17	51.53	28.79	2.81	44.24	1.02	39.91	54.00	-14.09	A
* 4959.62	57.48	33.57	4.47	42.49	0.56	53.59	74.00	-20.41	P
* 4959.62	46.54	33.57	4.47	42.49	0.56	42.65	54.00	-11.35	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

TX / Bluetooth 5.0 (GFSK) mode / CH High				Measurement Distance at 3m				Vertical polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
* 1027.95	59.67	24.62	2.52	44.75	0.64	42.69	74.00	-31.31	P
* 1027.95	49.37	24.62	2.52	44.75	0.64	32.39	54.00	-21.61	A
* 1610.55	60.26	27.48	2.79	44.48	0.82	46.87	74.00	-27.13	P
* 1610.55	53.02	27.48	2.79	44.48	0.82	39.63	54.00	-14.37	A
* 4959.48	57.59	33.57	4.47	42.49	0.56	53.70	74.00	-20.30	P
* 4959.48	46.47	33.57	4.47	42.49	0.56	42.58	54.00	-11.42	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:


1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: 2.4GHz~2.5GHz Filter Insertion Loss
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter, Margin = Level-Limit
4. The other emission levels were 10dB below the limit
5. The test limit distance is 3M limit.
6. *=Restricted bands of operation

8.6.4 RESTRICTED BAND EDGES

Product Name	Audio Device	Test Date	2022/04/26
Model	JP21	Test By	Peter Chu
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	27.4°C, 55%


Detector mode : Peak

Polarity : Horizontal

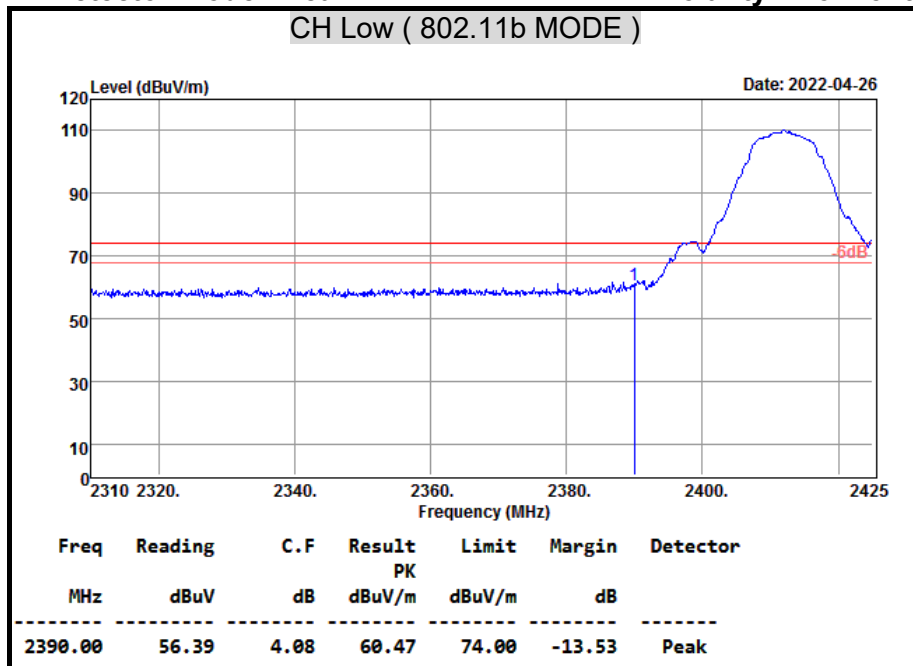

Detector mode : Average


Polarity : Horizontal

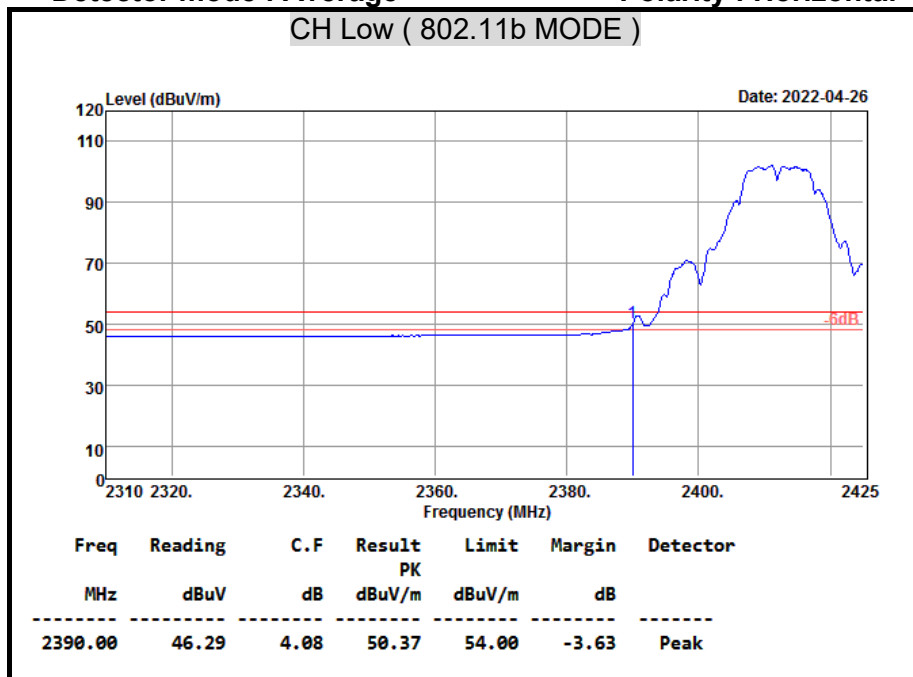

Detector mode : Peak

Polarity : Vertical


CH Low (802.11b MODE)

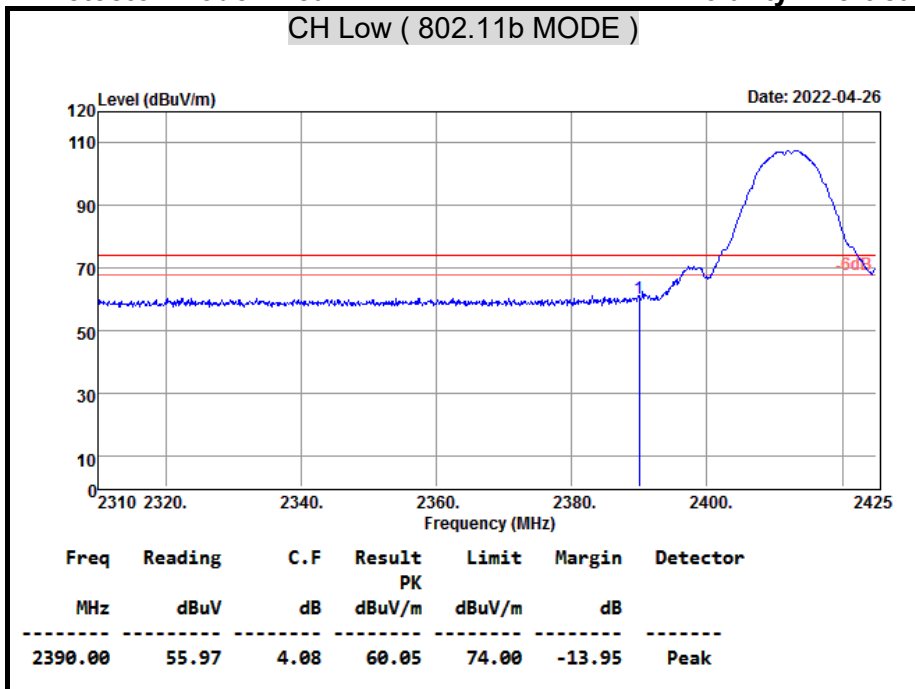

Detector mode : Average


Polarity : Vertical

CH Low (802.11b MODE)

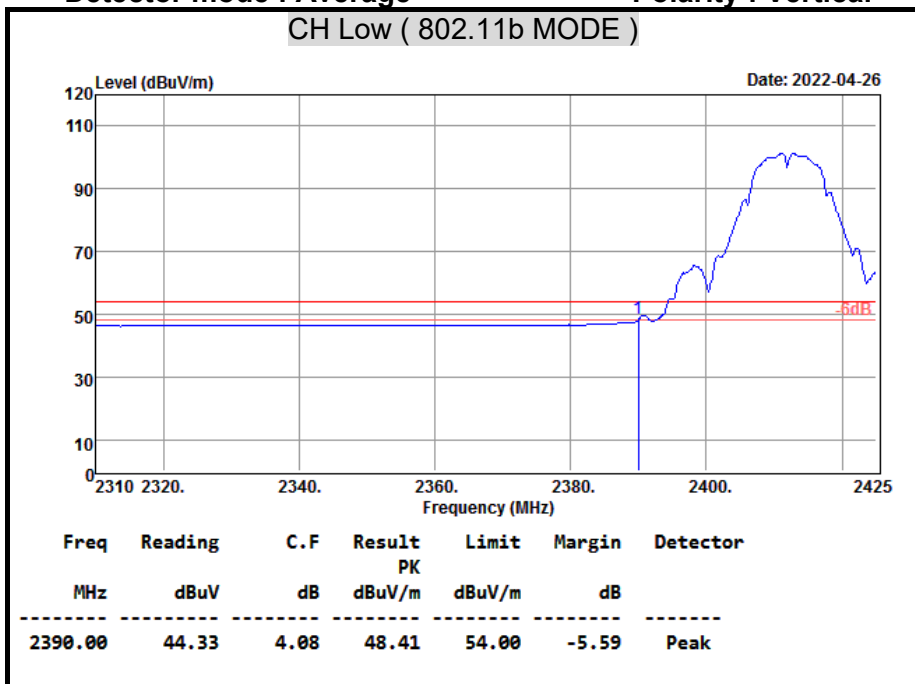


Detector mode : Peak

Polarity : Horizontal

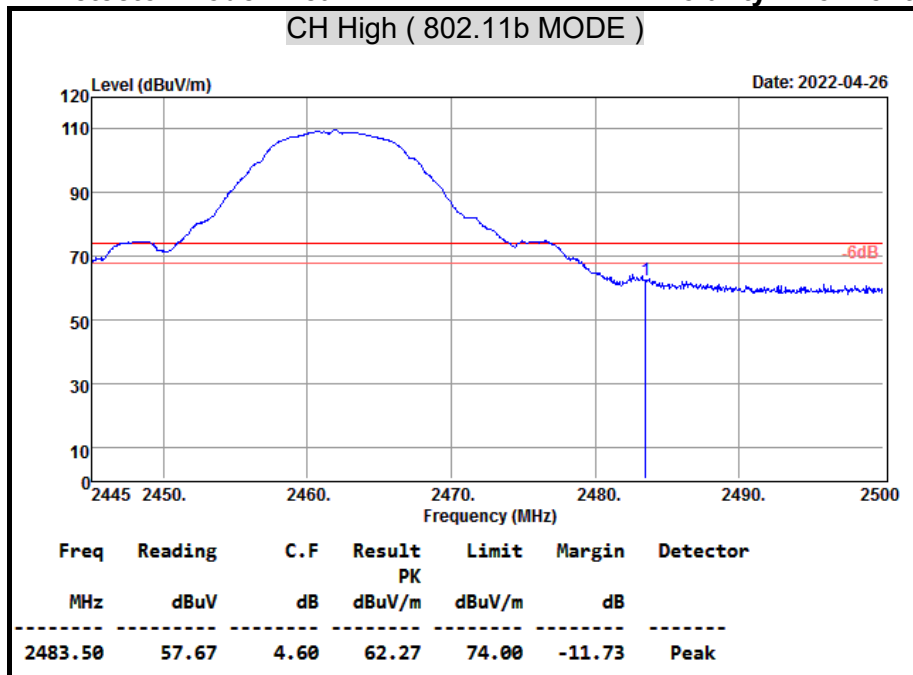


Detector mode : Average

Polarity : Horizontal

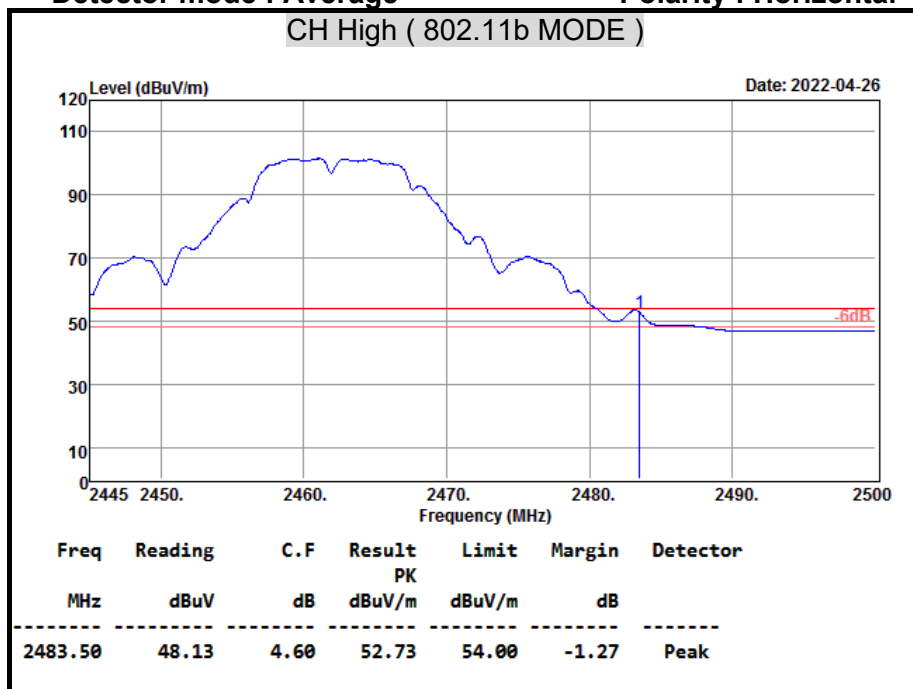


Detector mode : Peak

Polarity : Vertical

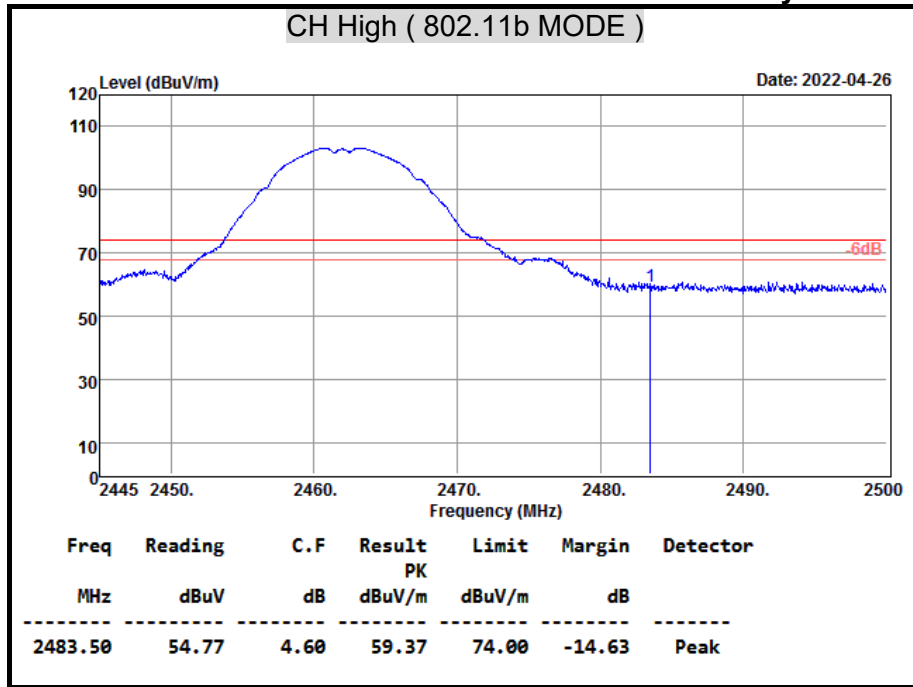


Detector mode : Average

Polarity : Vertical

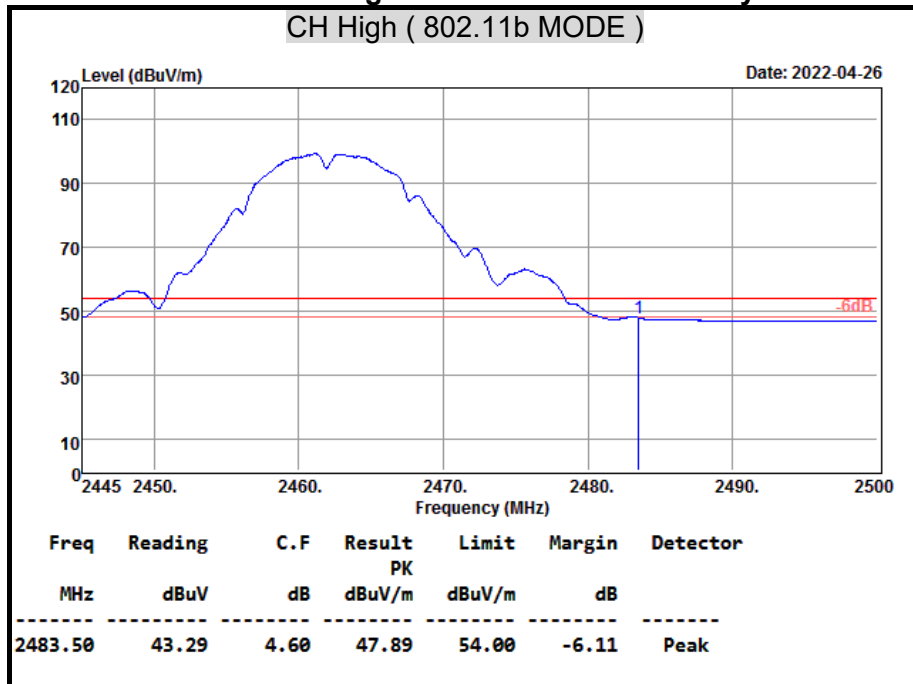


Detector mode : Peak

Polarity : Horizontal

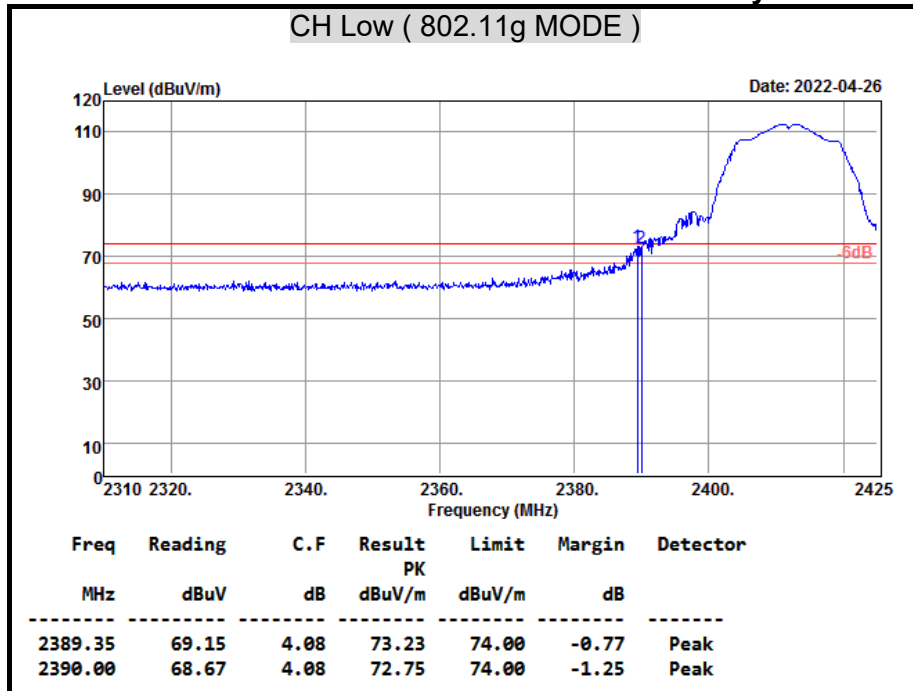


Detector mode : Average

Polarity : Horizontal

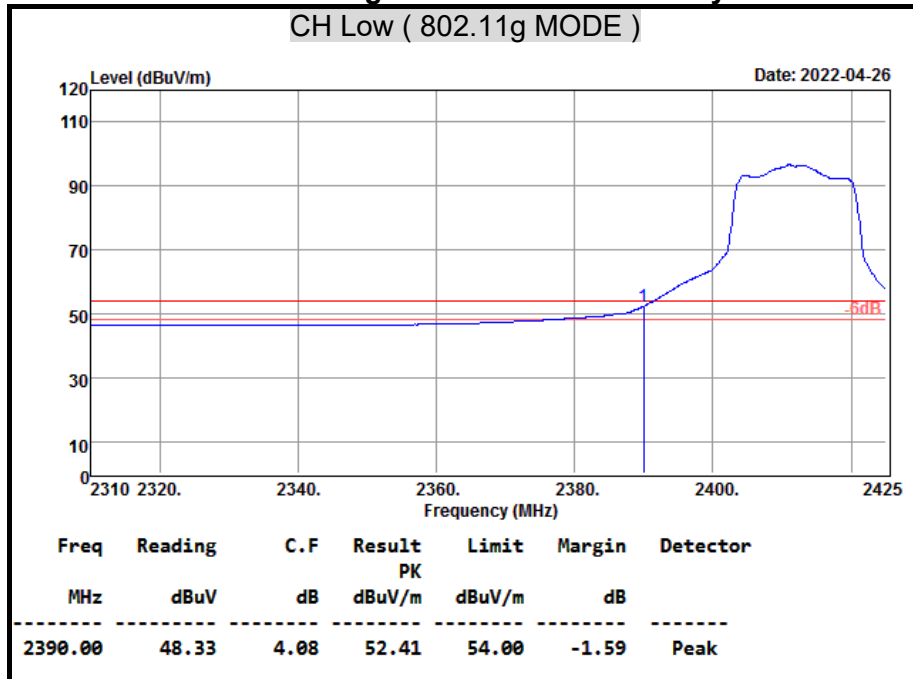


Detector mode : Peak

Polarity : Vertical

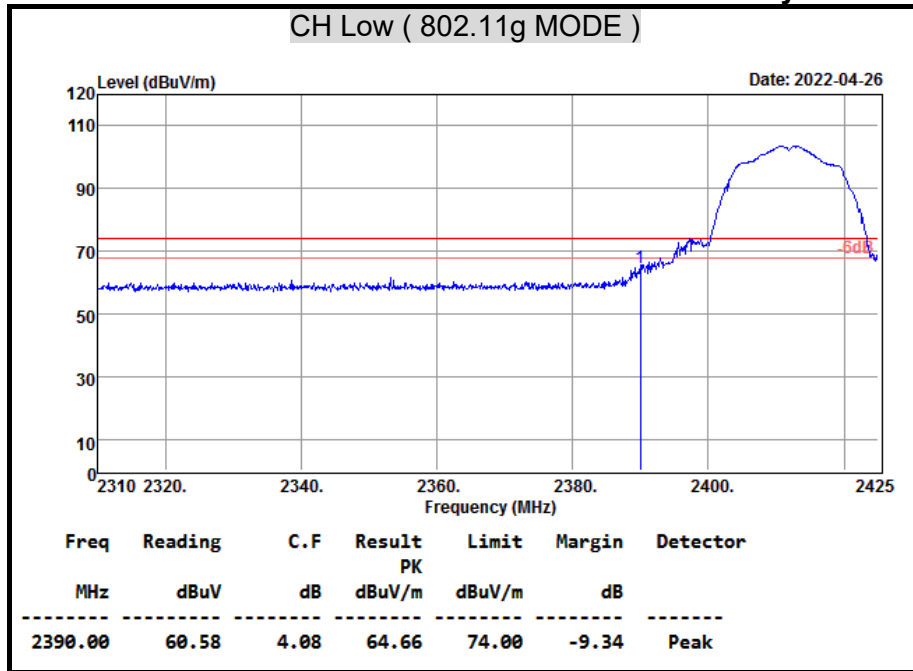


Detector mode : Average

Polarity : Vertical

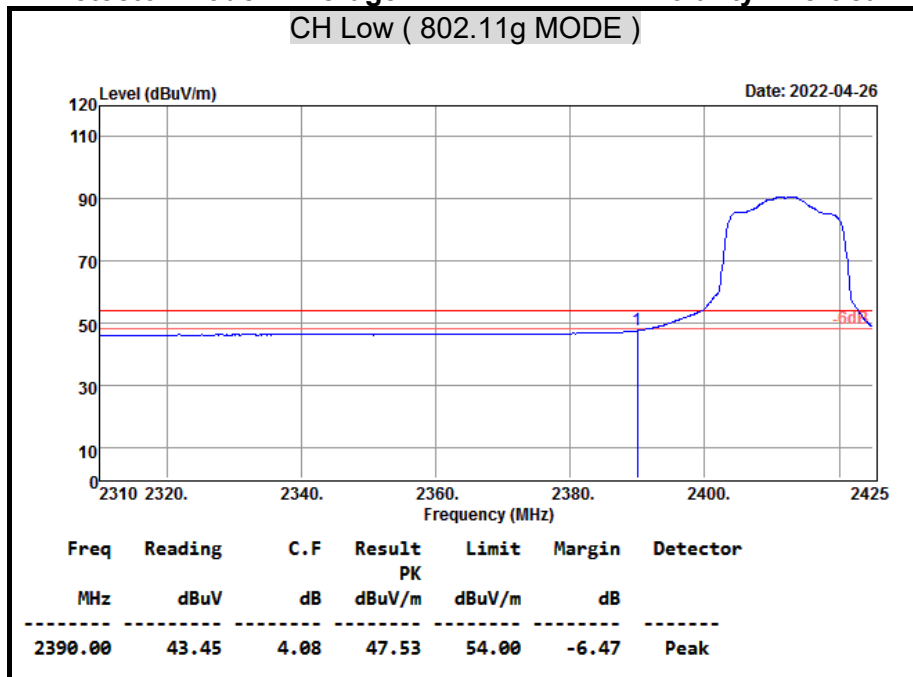


Detector mode : Peak

Polarity : Horizontal

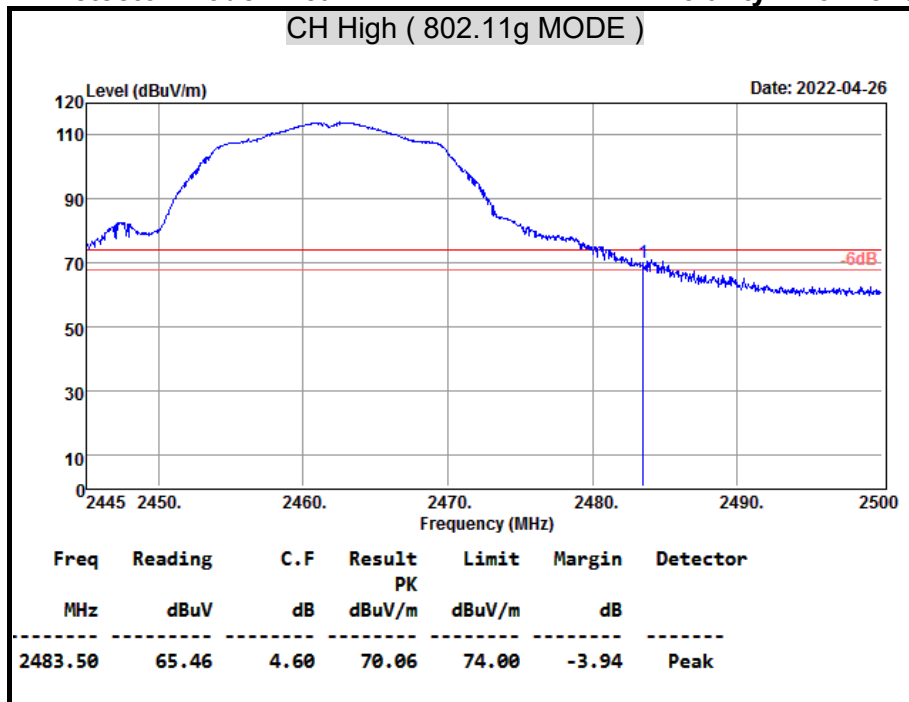


Detector mode : Average

Polarity : Horizontal

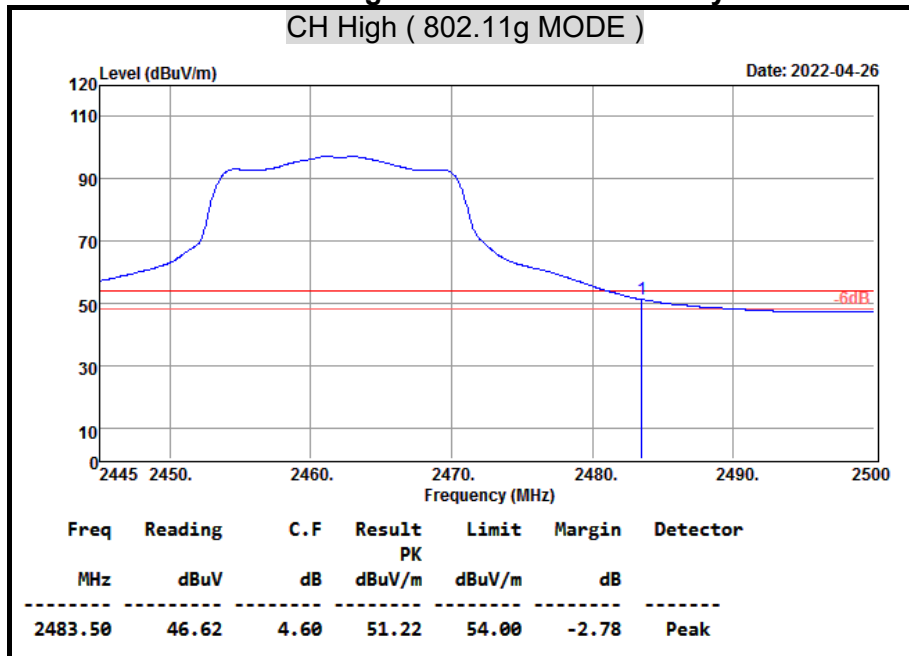


Detector mode : Peak

Polarity : Vertical

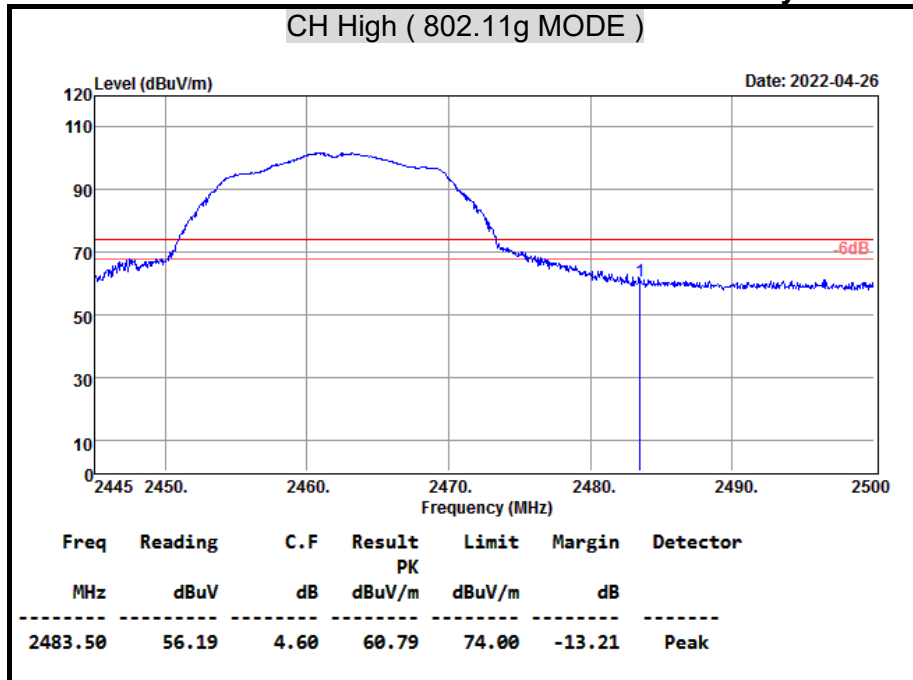


Detector mode : Average

Polarity : Vertical

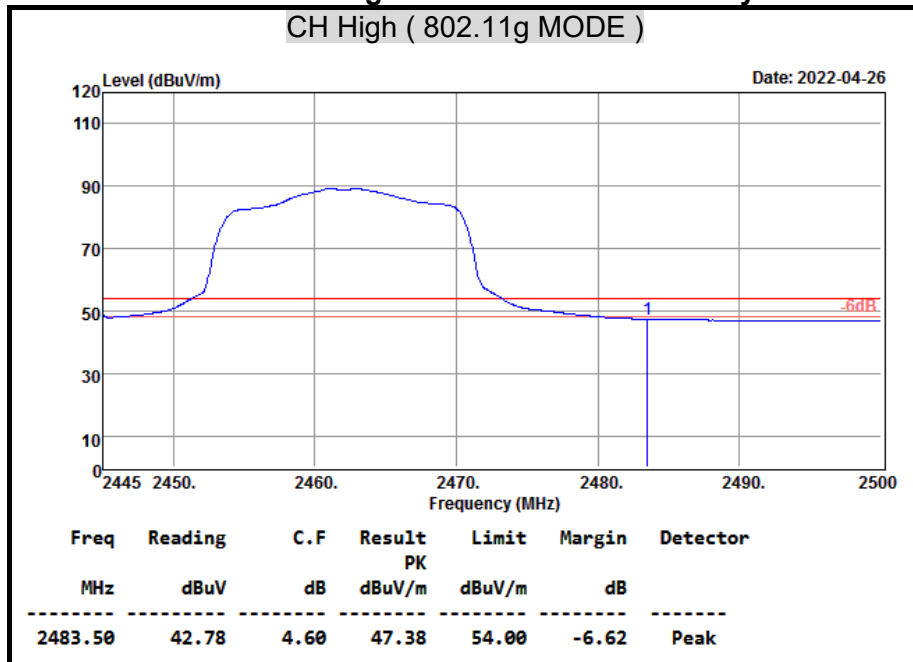


Detector mode : Peak

Polarity : Horizontal

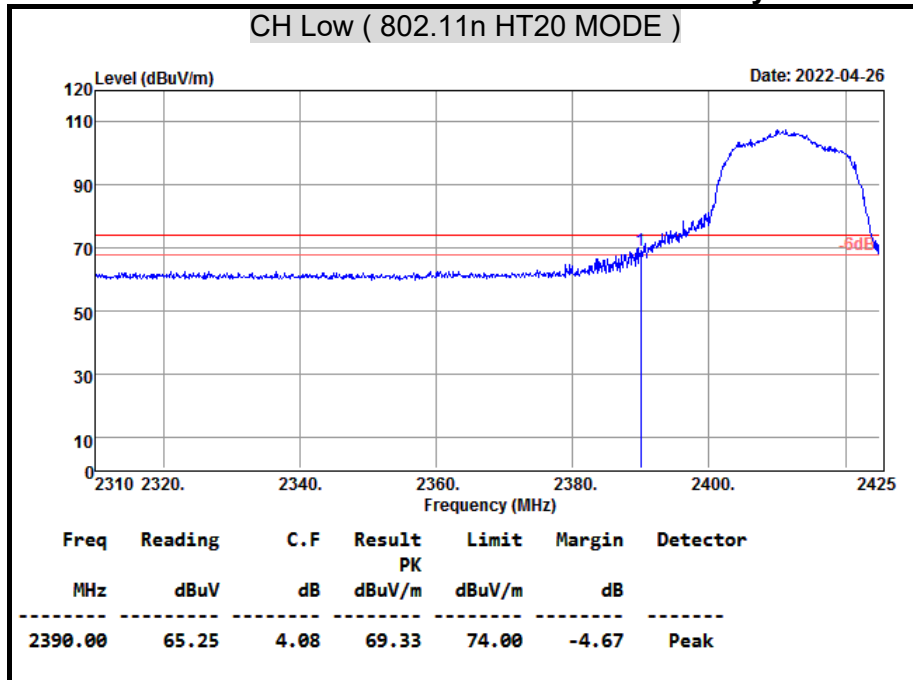

Detector mode : Average


Polarity : Horizontal

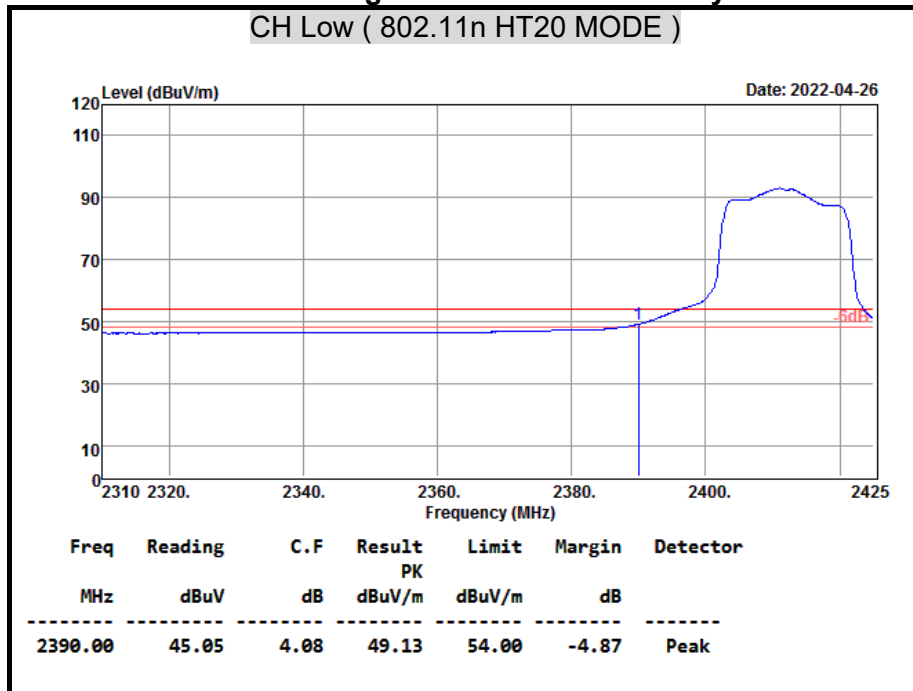

Detector mode : Peak

Polarity : Vertical


CH Low (802.11n HT20 MODE)

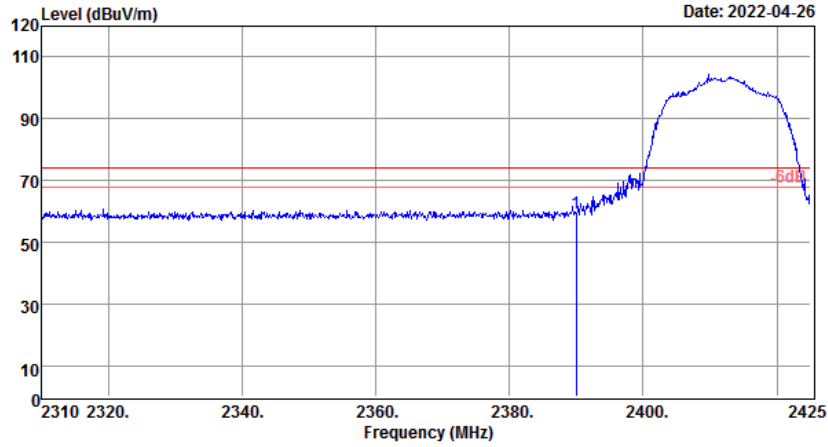

Detector mode : Average

Polarity : Vertical


CH Low (802.11n HT20 MODE)

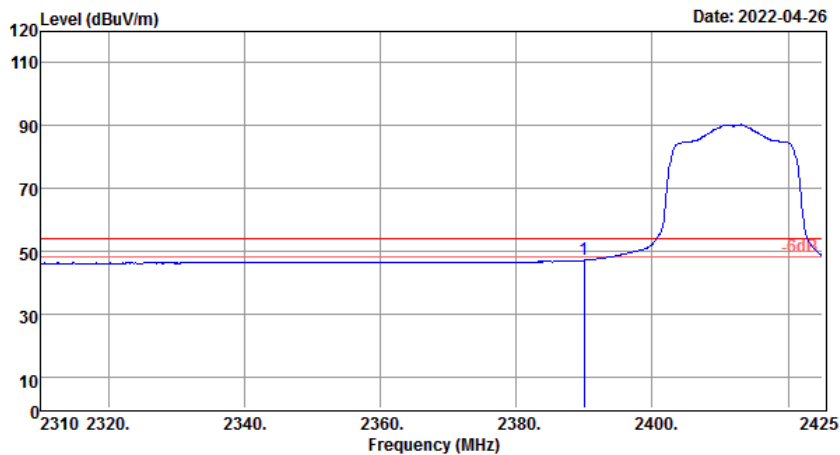

Detector mode : Peak

Polarity : Horizontal


CH High (802.11n HT20 MODE)

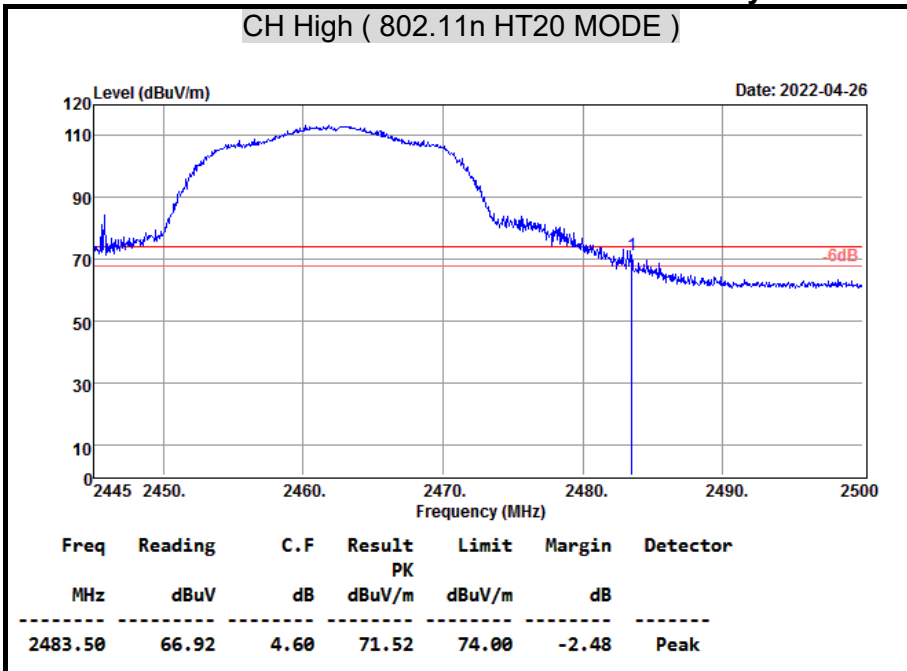

Detector mode : Average

Polarity : Horizontal


CH High (802.11n HT20 MODE)

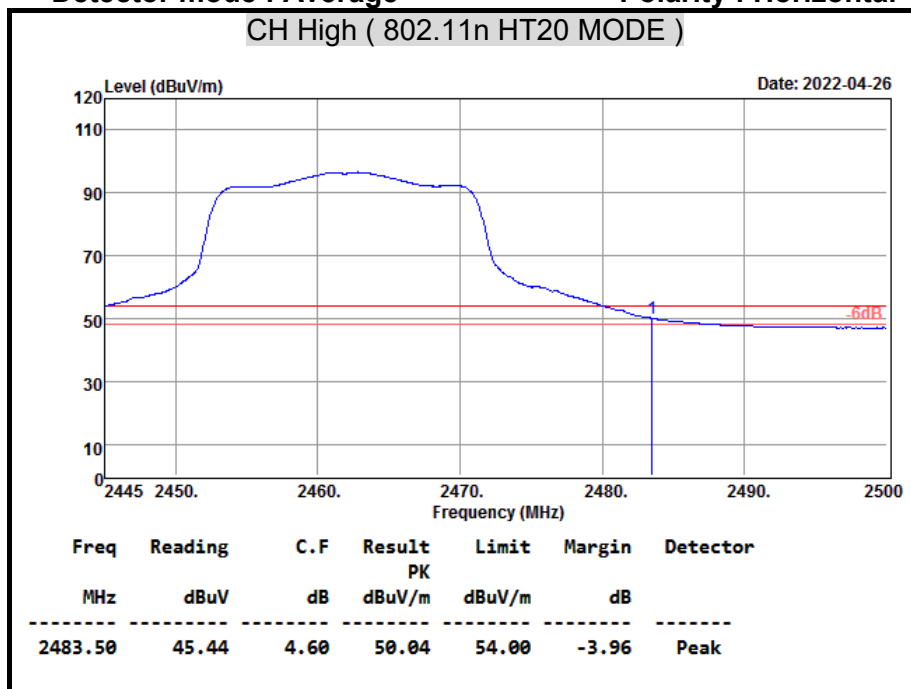

Detector mode : Peak

Polarity : Vertical


CH High (802.11n HT20 MODE)

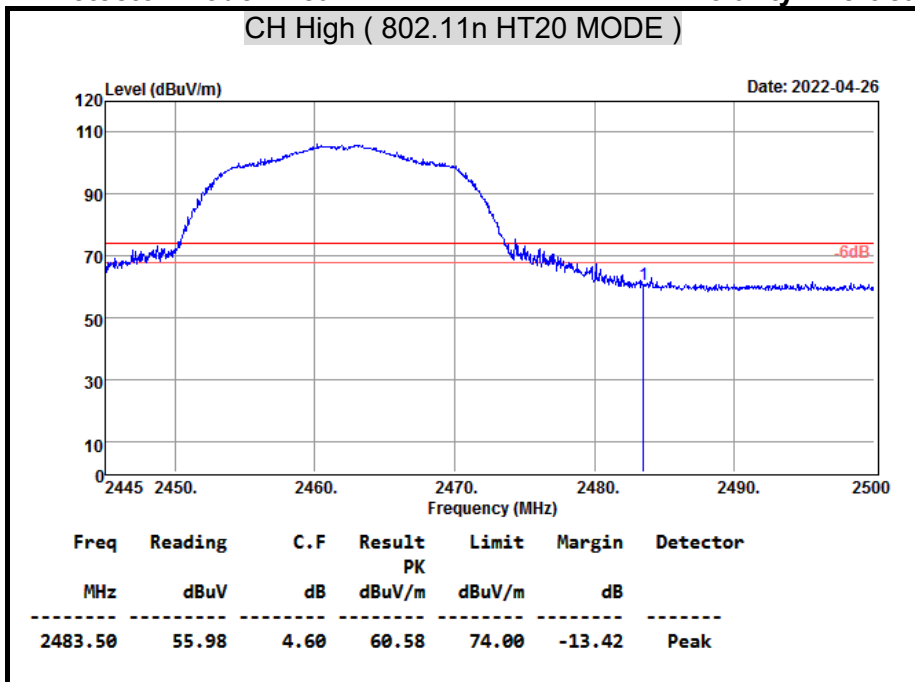

Detector mode : Average

Polarity : Vertical

CH High (802.11n HT20 MODE)

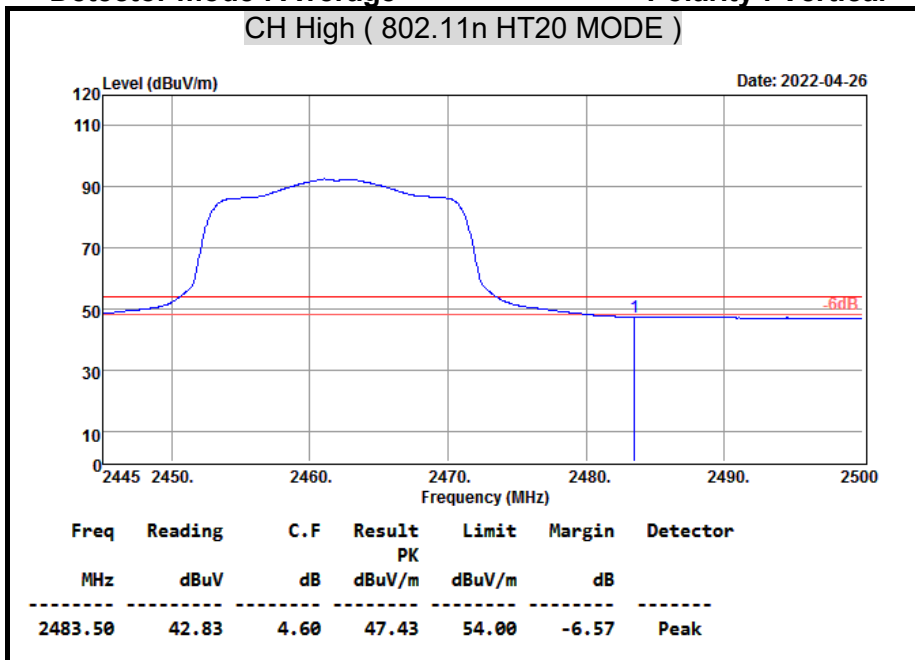


Bluetooth 4.0

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26


Detector mode : Peak

Polarity : Horizontal

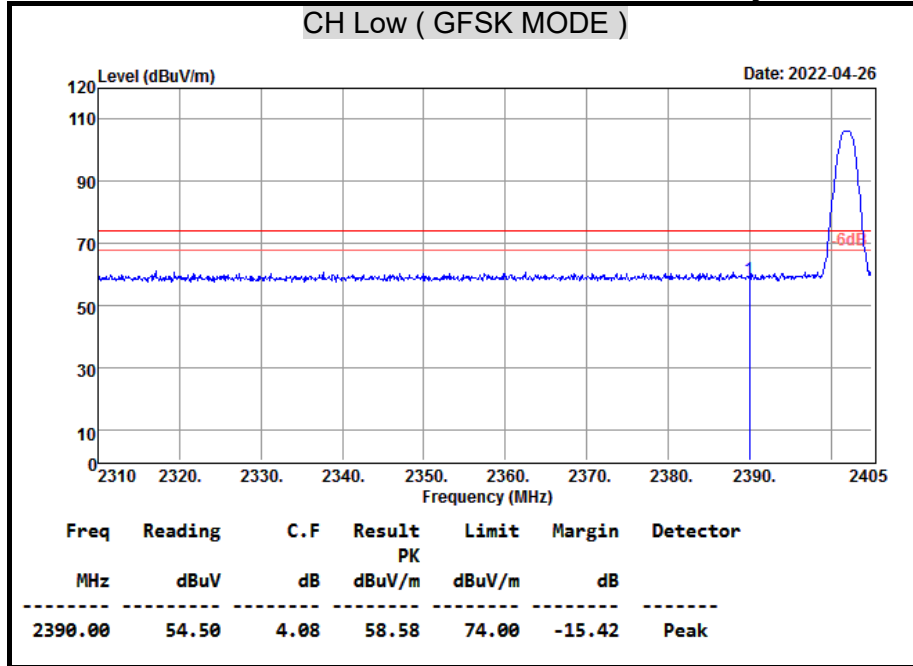


Detector mode : Average

Polarity : Horizontal

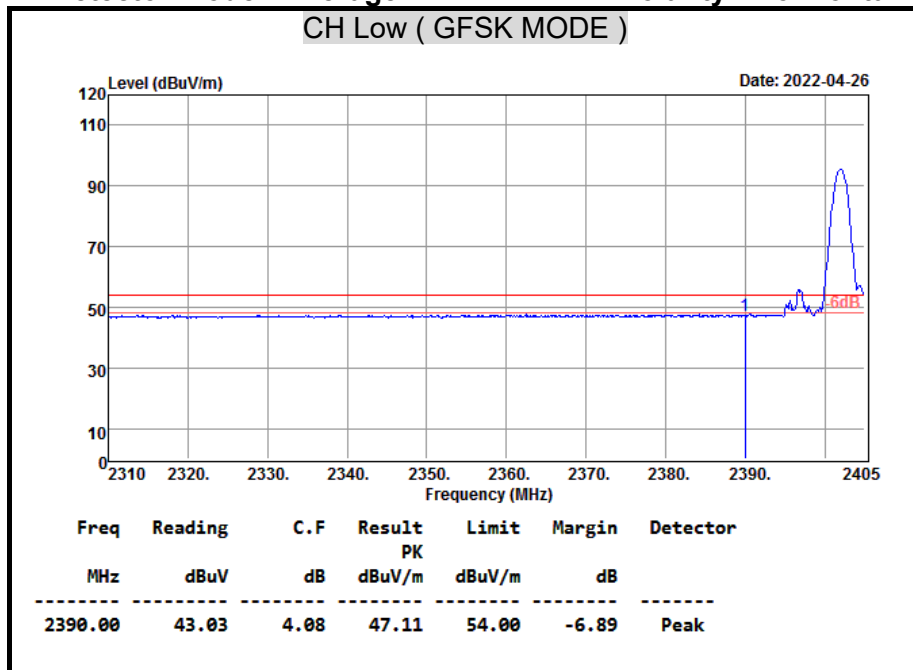


Detector mode : Peak

Polarity : Vertical

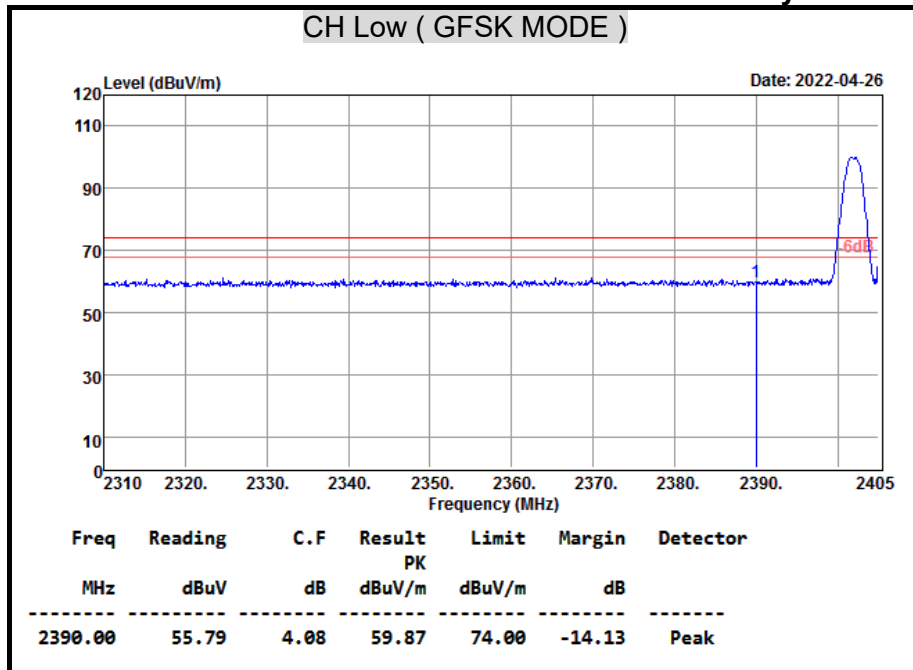


Detector mode : Average

Polarity : Vertical

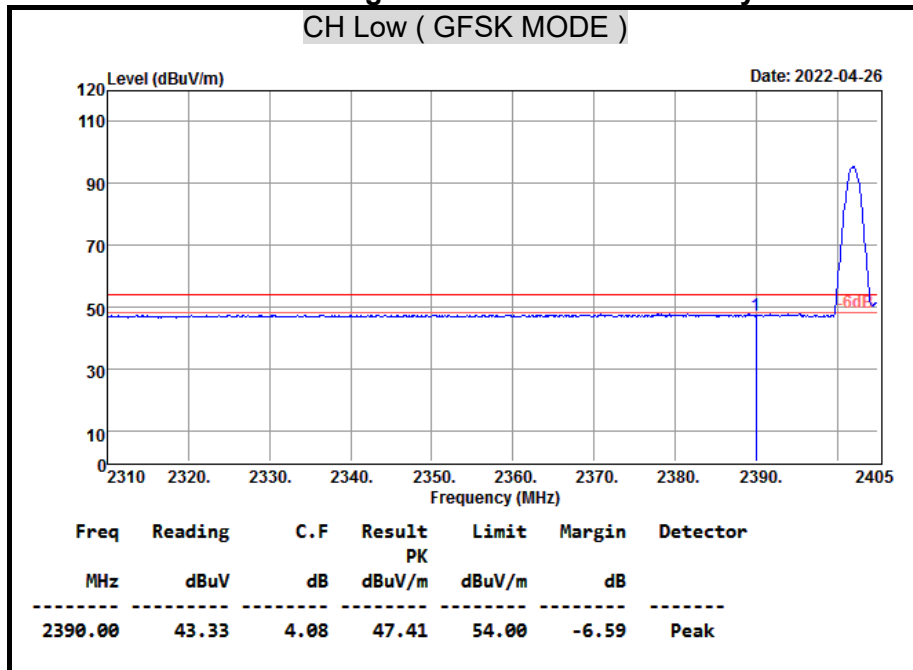


Detector mode : Peak

Polarity : Horizontal

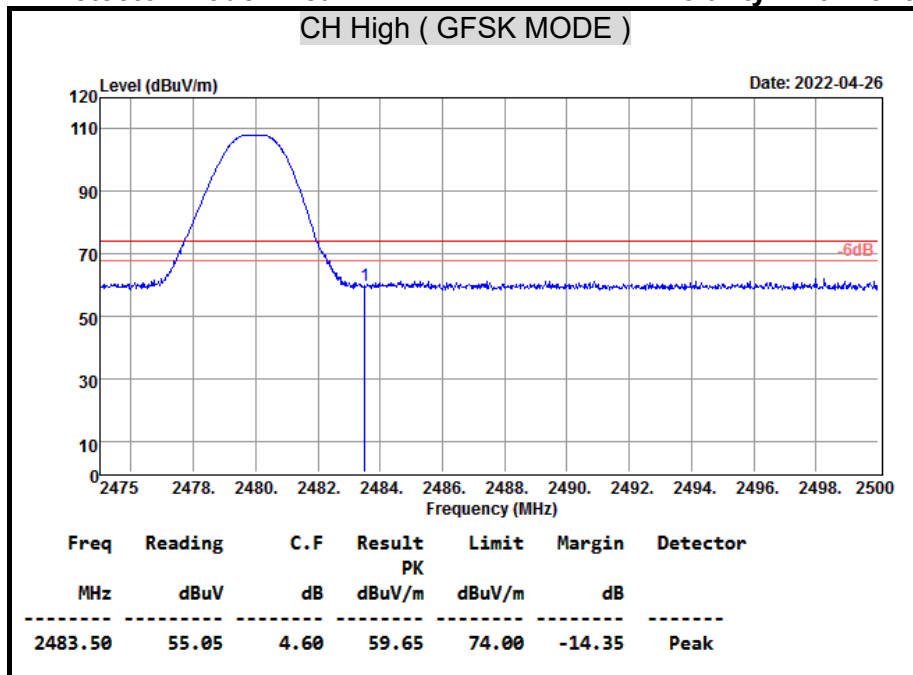


Detector mode : Average

Polarity : Horizontal

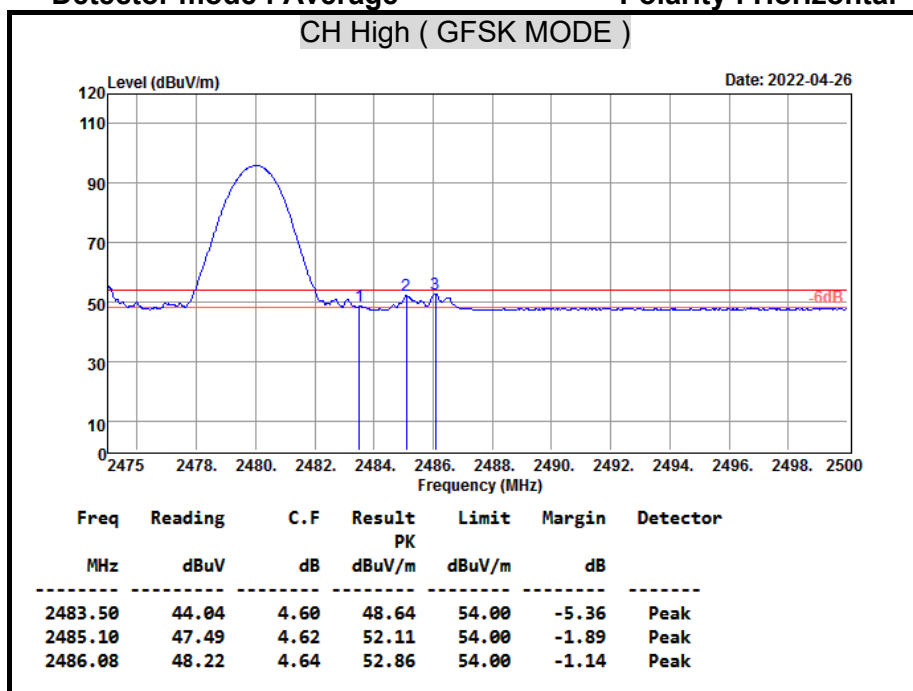


Detector mode : Peak

Polarity : Vertical

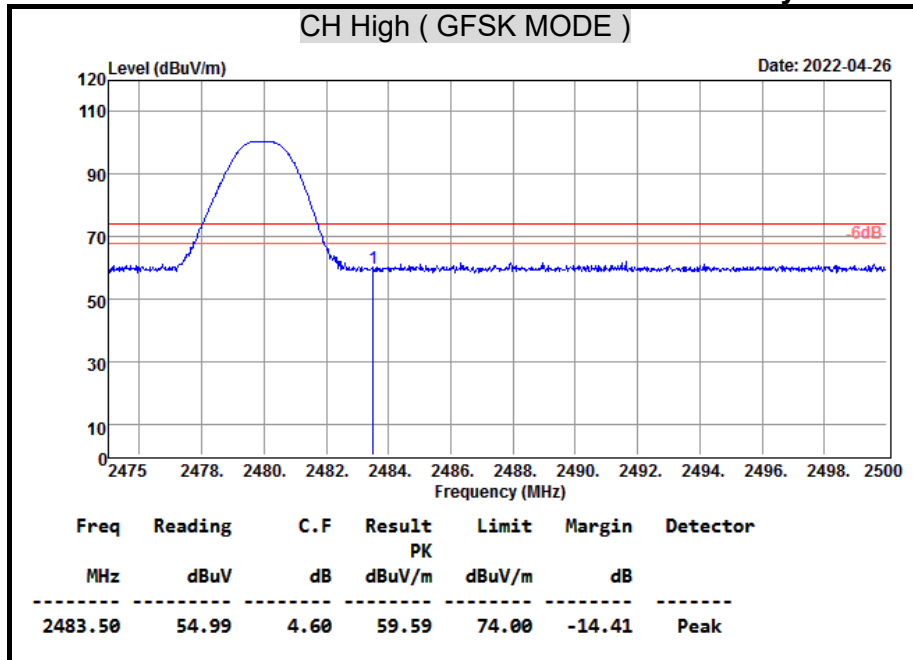

Detector mode : Average

Polarity : Vertical

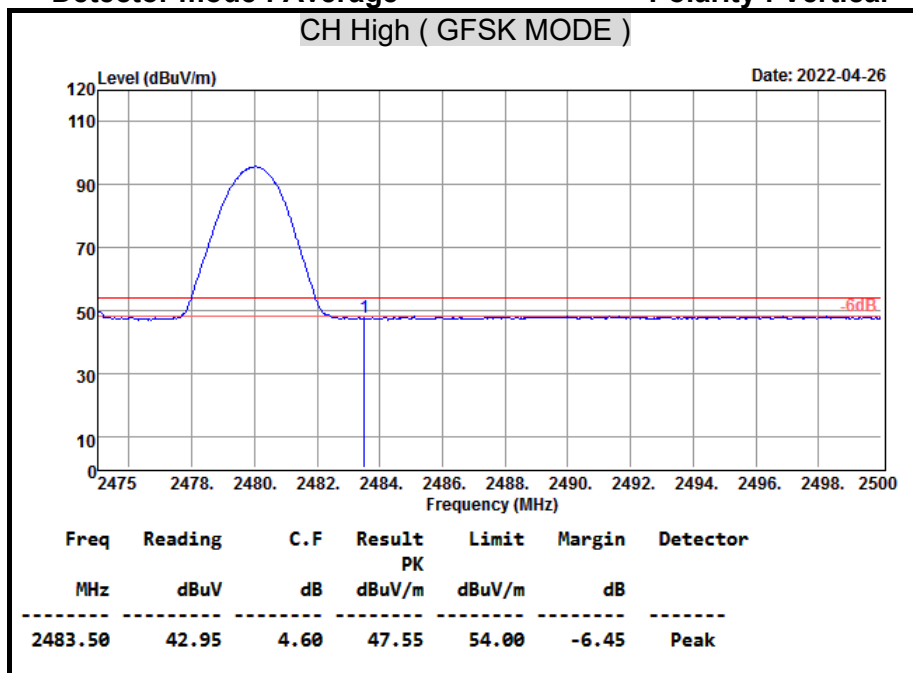


Bluetooth 5.0

Model Name	JP21	Test By	Peter Chu
Temp & Humidity	23.4°C, 65%	Test Date	2022/04/26


Detector mode : Peak

Polarity : Horizontal

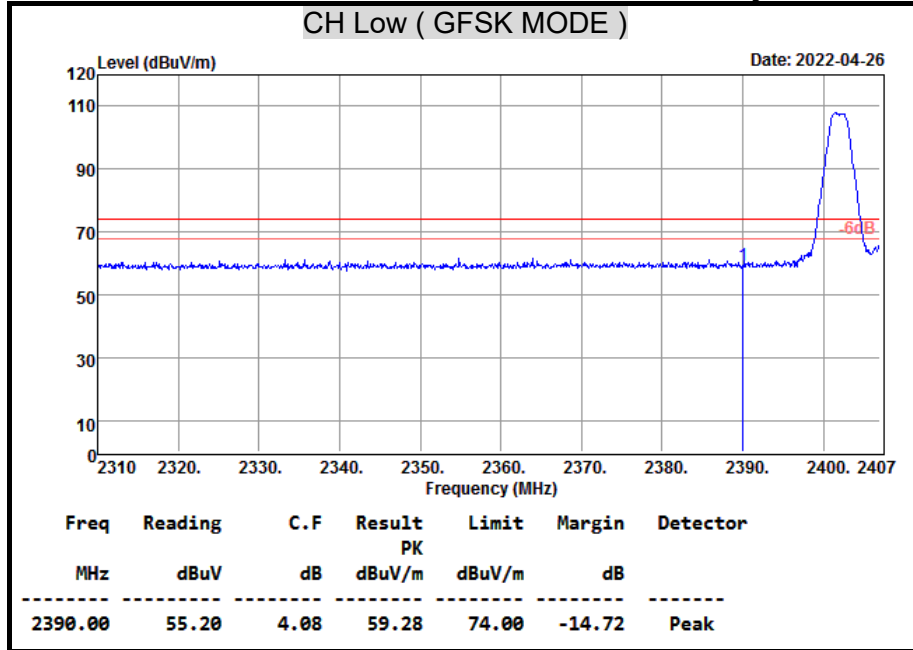


Detector mode : Average

Polarity : Horizontal

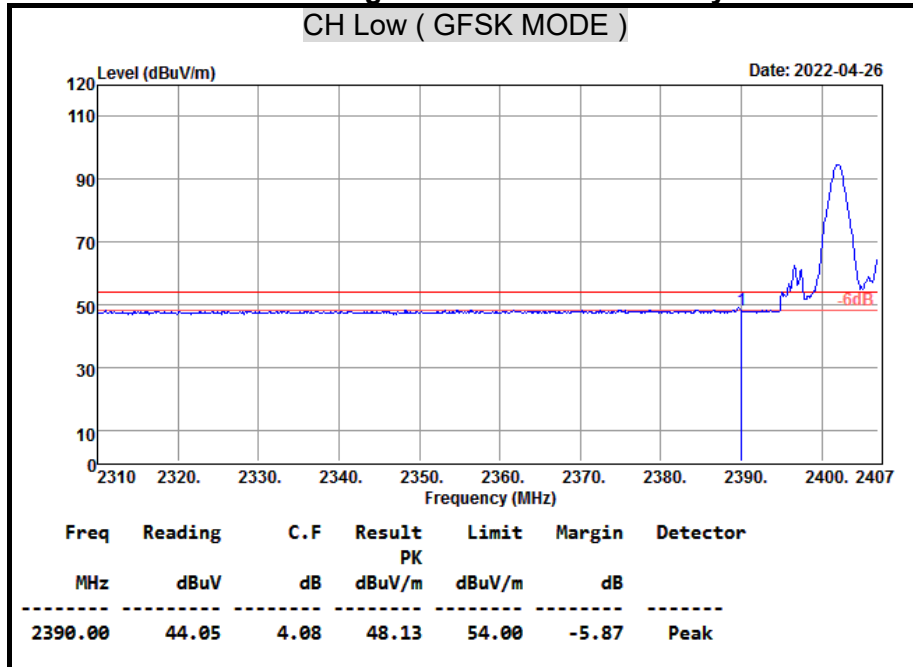


Detector mode : Peak

Polarity : Vertical

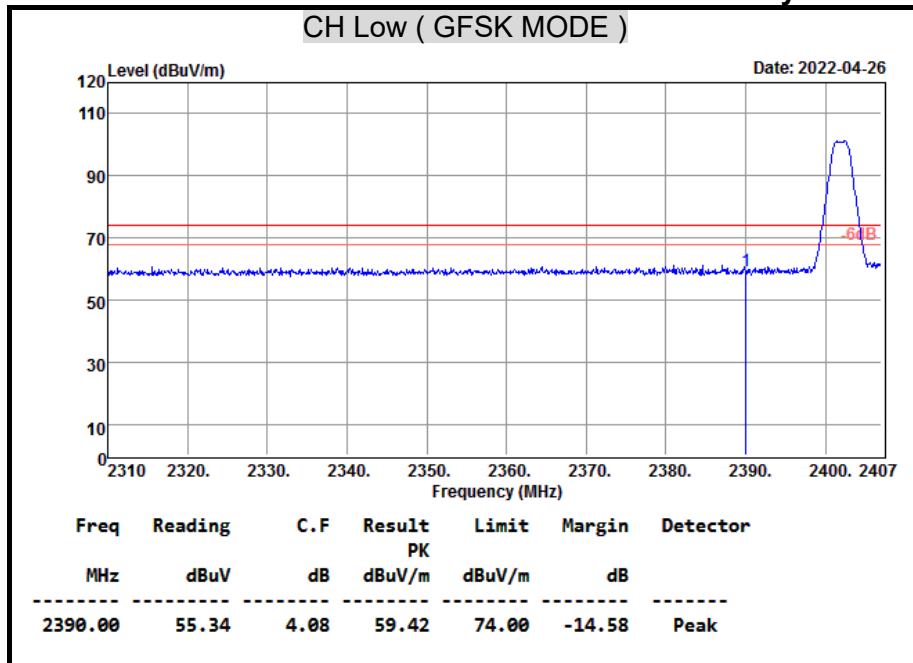


Detector mode : Average

Polarity : Vertical

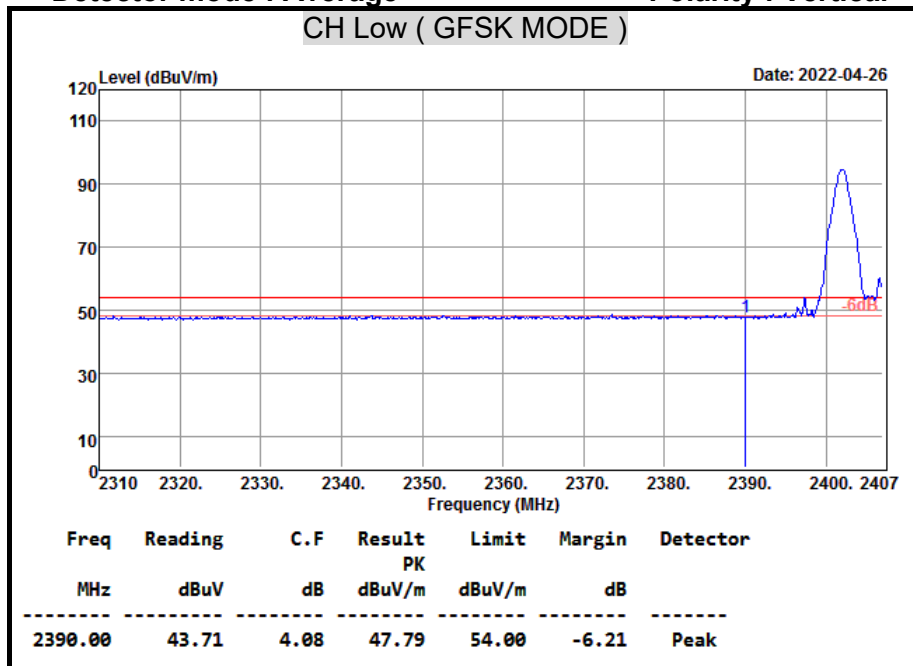


Detector mode : Peak

Polarity : Horizontal

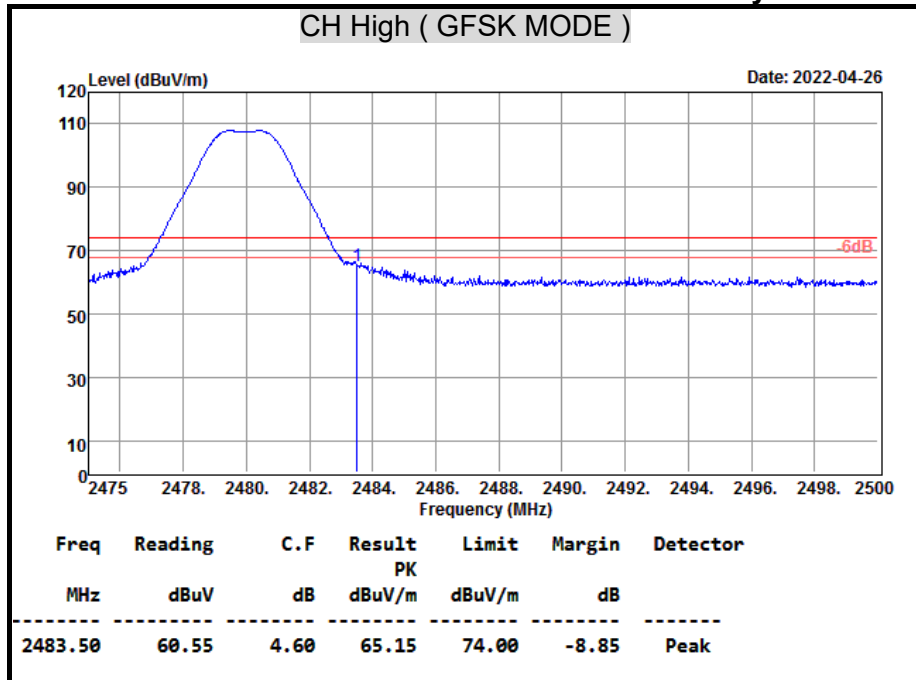


Detector mode : Average

Polarity : Horizontal

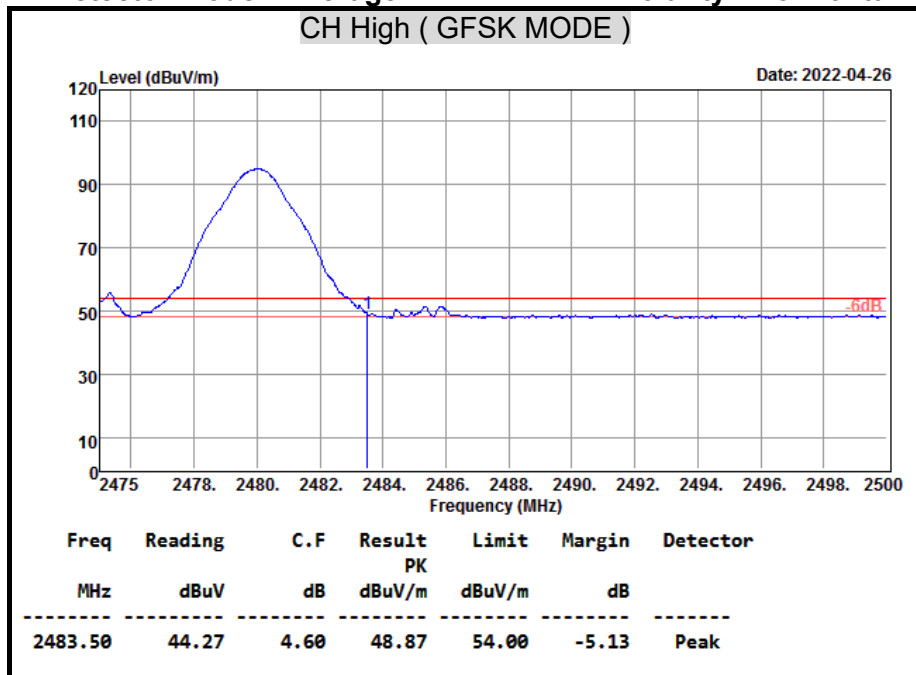


Detector mode : Peak

Polarity : Vertical

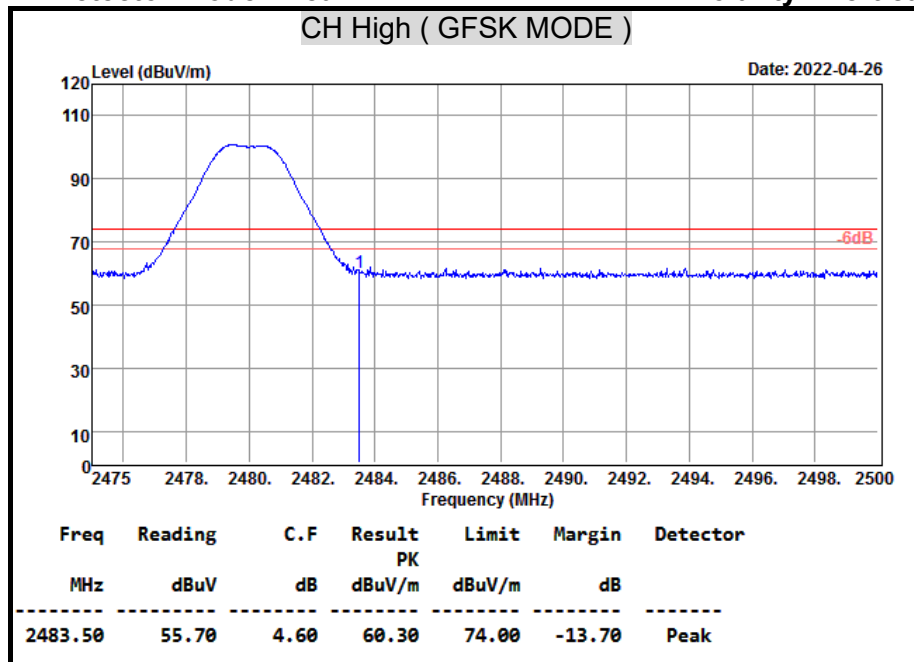

Detector mode : Average

Polarity : Vertical

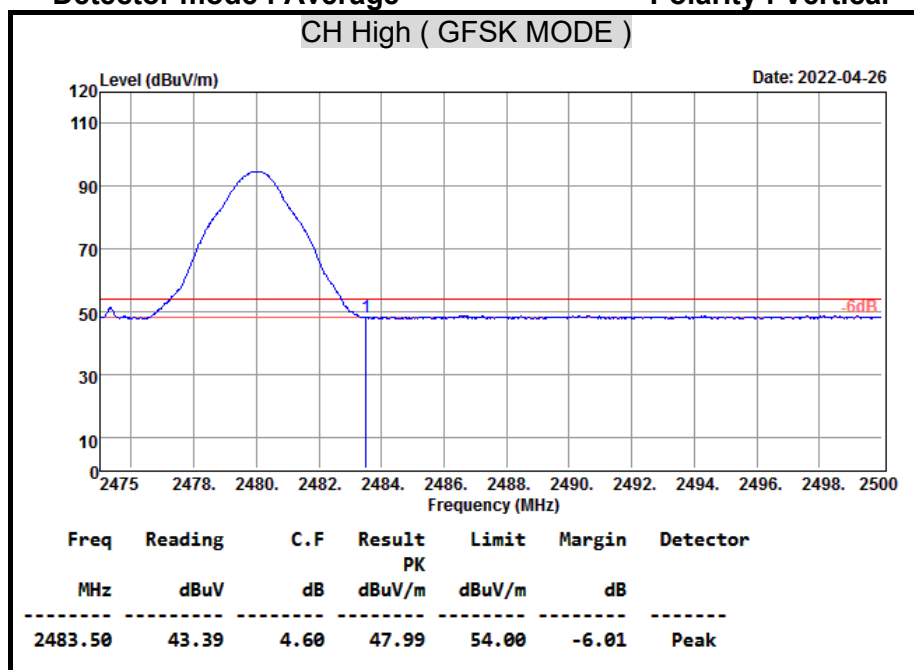

8.7 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.


The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ v)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests :

Conducted Emission room #1					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
BNC Coaxial Cable	CCS	BNC50	11	01/20/2022	01/19/2023
EMI Test Receiver	R&S	ESCS 30	100348	02/24/2022	02/23/2023
LISN	FCC	FCC-LISN-50-32-2	08009	06/29/2021	06/28/2022
LISN	SCHWARZBECK	NNLK8130	8130124	01/14/2022	01/13/2023
Pulse Limiter	R&S	ESH3-Z2	100116	01/20/2022	01/19/2023
Software	e3(6.101222)				

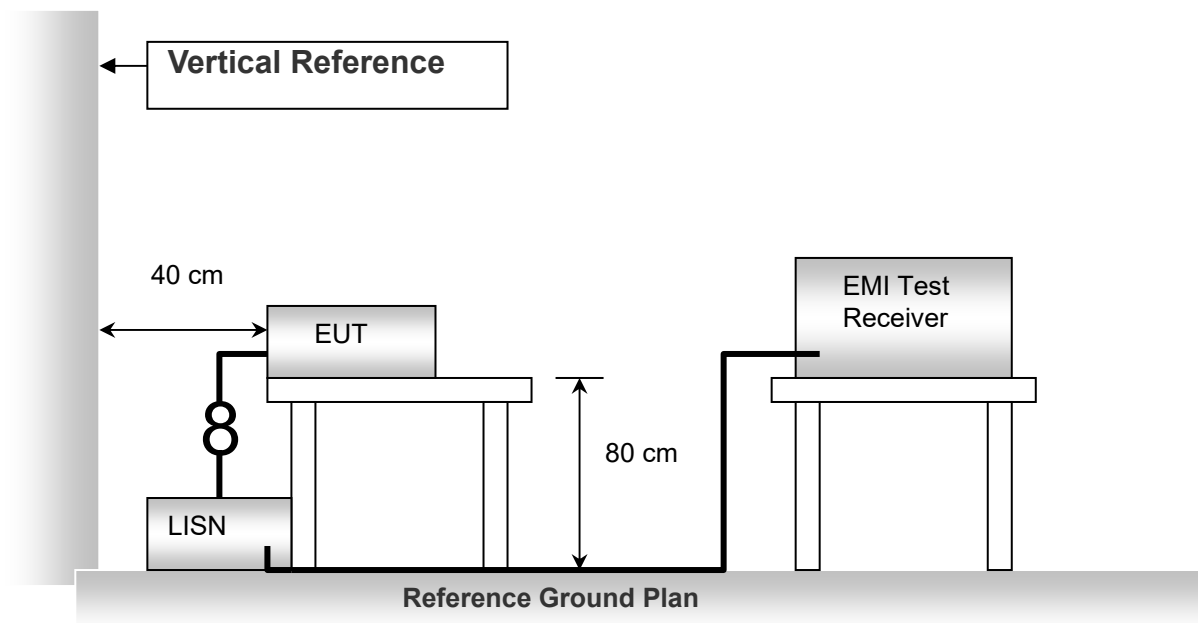TEST SETUP**TEST PROCEDURE**

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.10.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS


No non-compliance noted.

Test Voltage: AC 120V, 60Hz

Model No.	JP21	Test Mode	Normal Operation
Environmental Conditions	25.9°C, 63% RH	Resolution Bandwidth	9 kHz
Tested by	Oz Ding		

Line

(The chart below shows the highest readings taken from the final data.)

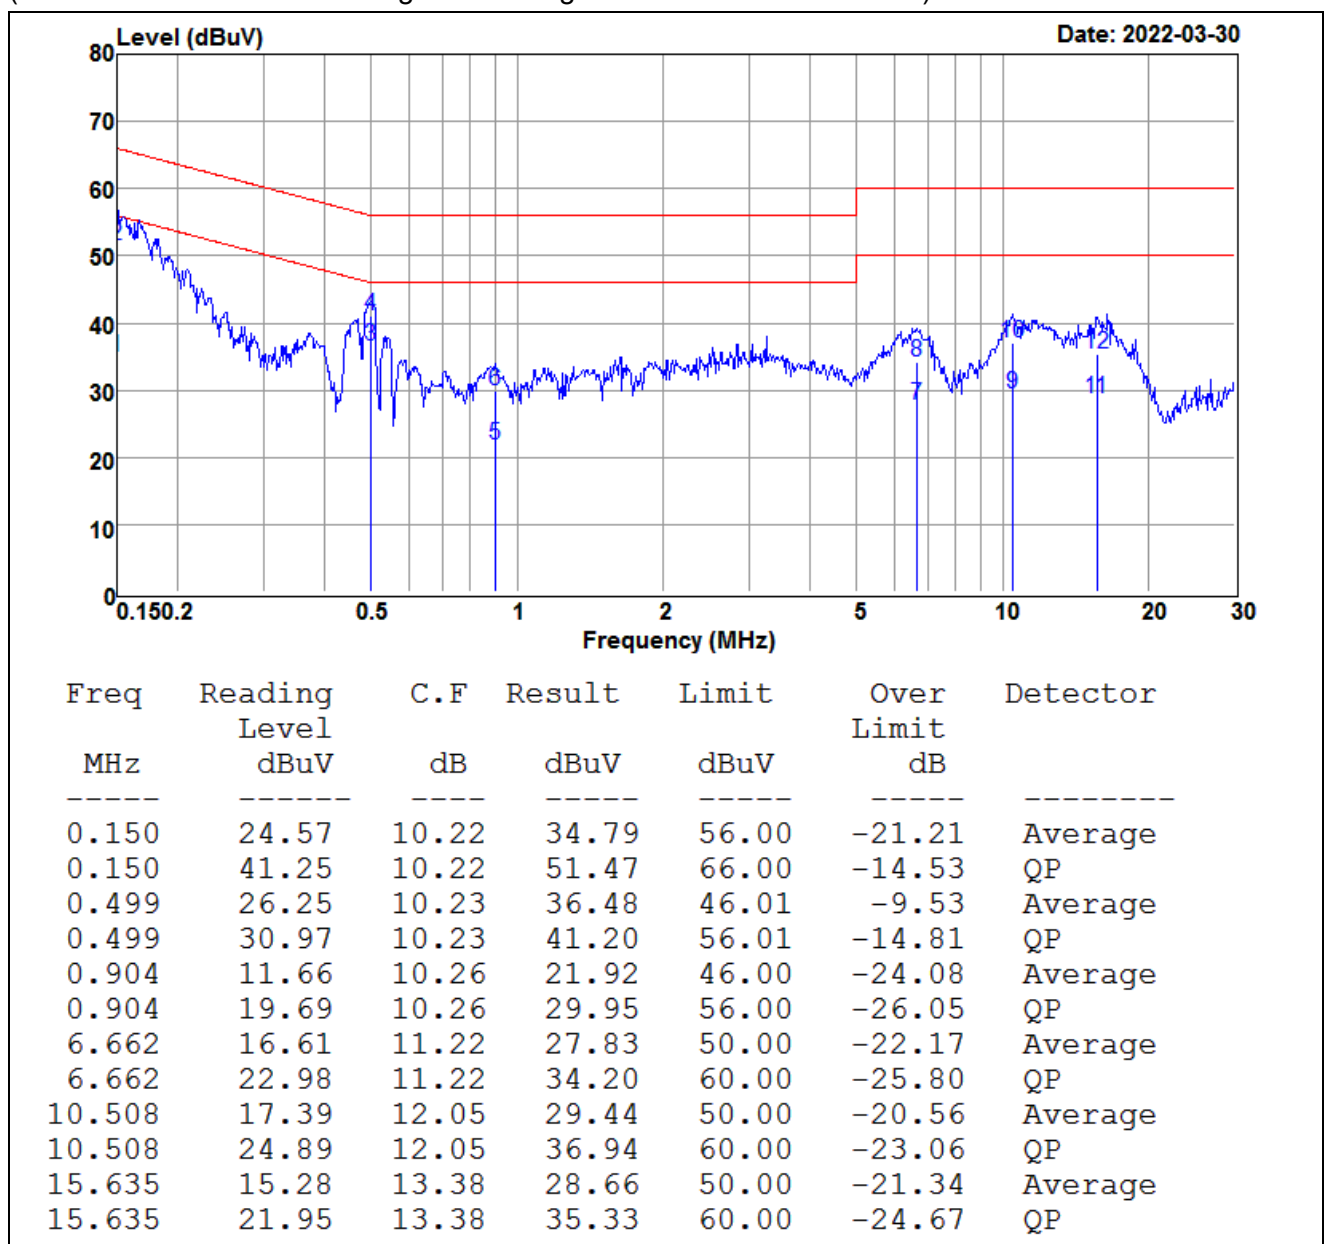
**NOTE:**

1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB) + Meter Reading (dBuV)
2. Over Limit (dBuV) = Result (dBuV) - Limits (dBuV)

Model No.	JP21	Test Mode	Normal Operation
Environmental Conditions	25.9°C, 63% RH	Resolution Bandwidth	9 kHz
Tested by	Oz Ding		

Neutral

(The chart below shows the highest readings taken from the final data.)

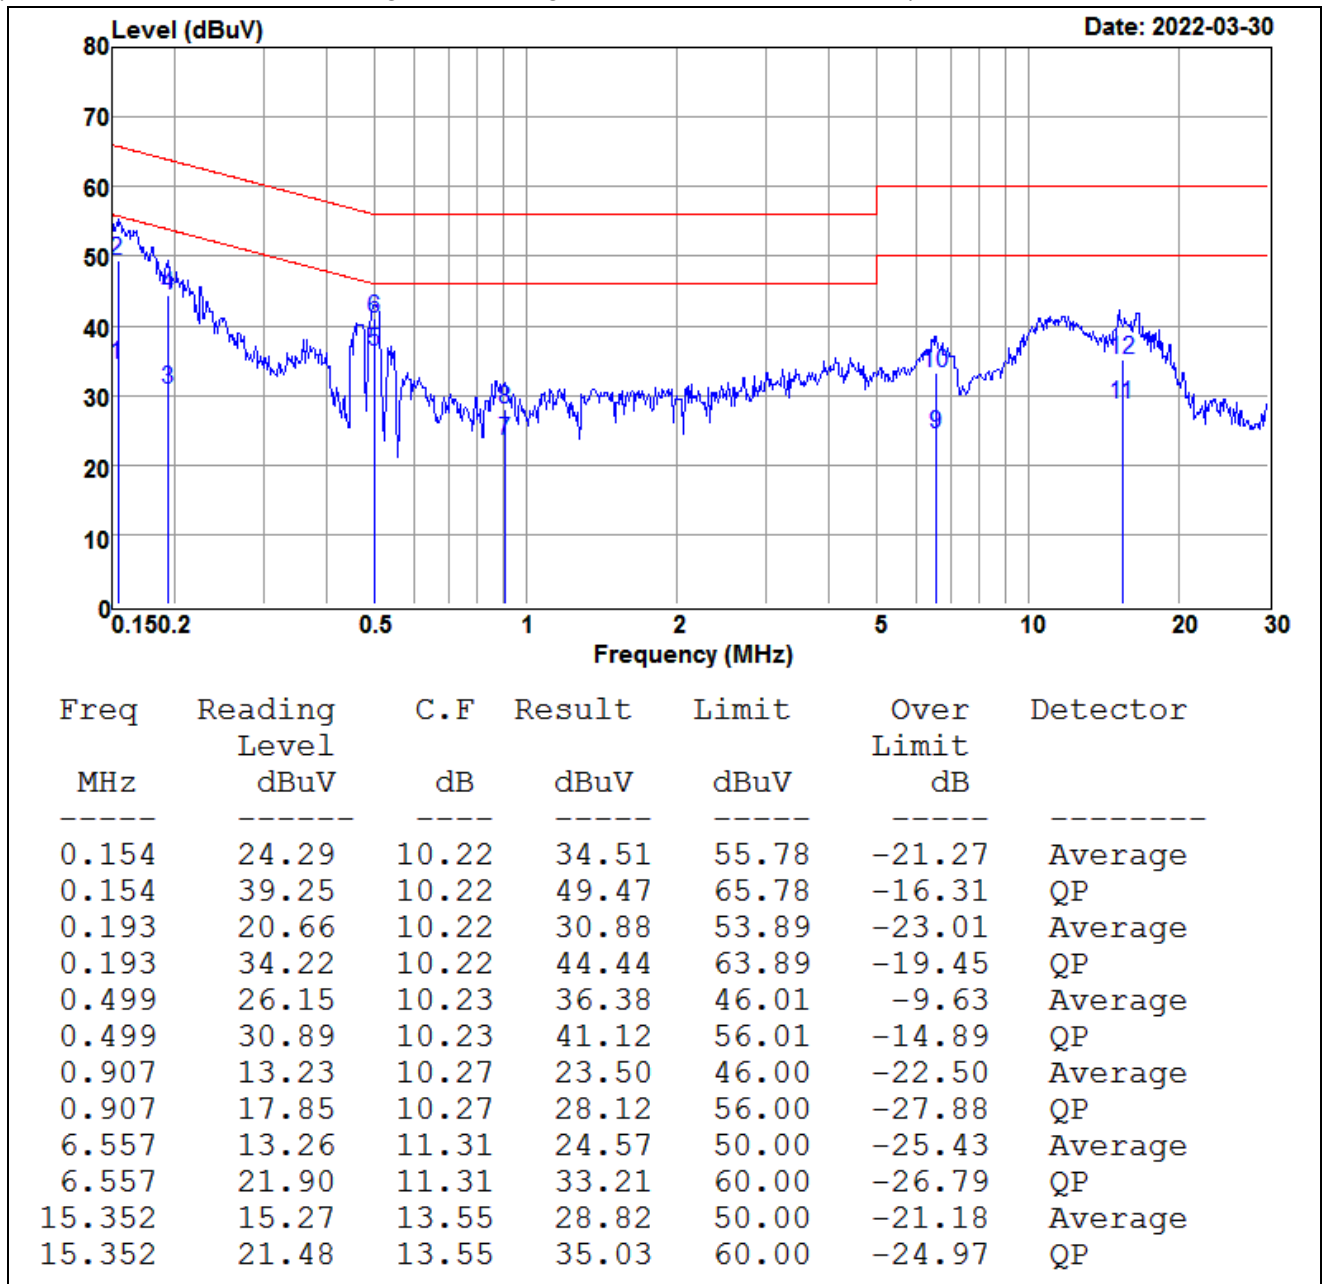**NOTE:**

1. Measured Level (dBuV) = LISN Factor (dB) + Cable Loss (dB) + Meter Reading (dBuV)
2. Over Limit (dBuV) = Result (dBuV) - Limits (dBuV)



Report No.: TMTN2203000452NR

Page: 140 / 146

Rev.: 00

9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

Type: WLAN ANTENNA
Model: DB1EM60-I0300-S
Manufacturer: BRITO
Gain: 4.6 dBi

=== END of Report ===