


TEST REPORT

Application No.: SZCR2103020124AT
Applicant: DT Research, Inc.
Address of Applicant: 3RD FL NO 36 WUQUAN 7TH RD WUGU DISTRICT, NEW TAIPEI, Taiwan
Manufacturer: DT Research, Inc.
Address of Manufacturer: 2000 Concourse Drive, San Jose, CA 95131, USA
Factory: DT Research, Inc. Taiwan Branch
Address of Factory: 6F., No.36 Wuquan 7 th Rd., Wugu Dist. New Taipei City 248 Taiwan
Equipment Under Test (EUT):
EUT Name: Rugged Tablet
Model No.: DT361xxxx(x= 0-9, A~Z, - or null) ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: DT Research, Inc.
FCC ID: YE3600-3165D2W
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2021-03-19
Date of Test: 2021-03-23 to 2021-07-23
Date of Issue: 2021-07-23

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

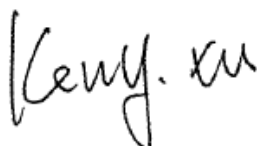

Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/terms-e-document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-07-23		Original

Authorized for issue by:				
		Edison Li		
		Edison Li/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart C 15.407 (c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & 15.407 b(8)	Pass
Radiated Emissions (Below 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	Pass
Non-occupancy period		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Move Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass
Channel Closing Transmission Time		KDB 905462 D02 Section 7.8.3	KDB 905462 D02 Section 5.1	Pass



Remark:

Model No.: DT361xxxx(x= 0-9, A~Z, - or null)

Only the model DT361AD was tested, since according to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions were identical for all the above models, with only difference on model No. and input/output ports(DT361AD has SD Card Reader, DT361AM has Smart Card Reader).

This report is prepared for FCC class II permissive change.

The modular approval by TCB, FCC ID:YE3600-3165D2W, Granted on 03/23/2020.

The module installed into host platform mentioned above is electronically and mechanically identical to the original certified module. The Original FCC testing on module under FCC ID:YE3600-3165D2W was performed with an antenna of higher gain, and the antenna was connected to the module in an open environment. The current host platform under application uses a new antenna of the different type, Lower gain and is installed inside the host platform enclosure.

Therefore in this report Conducted Emissions at AC Power Line (150kHz-30MHz), Radiated Emissions which fall in the restricted bands and Radiated Spurious Emissions were fully retested on model DT361AD and shown the data in this report.



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	5
4 GENERAL INFORMATION	7
4.1 DETAILS OF E.U.T.	7
4.2 DESCRIPTION OF SUPPORT UNITS	8
4.3 MEASUREMENT UNCERTAINTY	8
4.4 TEST LOCATION.....	9
4.5 TEST FACILITY.....	9
4.6 DEVIATION FROM STANDARDS	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	13
6.1 ANTENNA REQUIREMENT	13
6.1.1 Test Requirement:	13
6.1.2 Conclusion	13
6.2 TRANSMISSION IN THE ABSENCE OF DATA.....	14
6.2.1 Test Requirement:	14
6.2.2 Conclusion	14
7 RADIO SPECTRUM MATTER TEST RESULTS.....	15
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz).....	15
7.1.1 E.U.T. Operation	15
7.1.2 Test Mode Description	15
7.1.3 Test Setup Diagram	16
7.1.4 Measurement Procedure and Data.....	16
7.2 RADIATED EMISSIONS (BELOW 1GHz).....	19
7.2.1 E.U.T. Operation	19
7.2.2 Test Mode Description	19
7.2.3 Test Setup Diagram	21
7.2.4 Measurement Procedure and Data.....	22
7.3 RADIATED EMISSIONS (ABOVE 1GHz)	25
7.3.1 E.U.T. Operation	25
7.3.2 Test Mode Description	26
7.3.3 Test Setup Diagram	27
7.3.4 Measurement Procedure and Data.....	28
7.4 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	147
7.4.1 E.U.T. Operation	147
7.4.2 Test Mode Description	148
7.4.3 Test Setup Diagram	149
7.4.4 Measurement Procedure and Data.....	150



7.5	NON-OCCUPANCY PERIOD.....	297
7.5.1	E.U.T. Operation.....	297
7.5.2	Test Setup Diagram.....	298
7.5.3	Measurement Procedure and Data.....	299
7.6	CHANNEL MOVE TIME.....	300
7.6.1	E.U.T. Operation.....	300
7.6.2	Test Setup Diagram.....	301
7.6.3	Measurement Procedure and Data.....	302
7.7	CHANNEL CLOSING TRANSMISSION TIME.....	303
7.7.1	E.U.T. Operation.....	303
7.7.2	Test Setup Diagram.....	304
7.7.3	Measurement Procedure and Data.....	305
8	APPENDIX.....	306
9	TEST SETUP PHOTO.....	308
10	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS).....	309



4 General Information

4.1 Details of E.U.T.

Power supply:	AC Adapter Model: A17-065N1A Input: AC 100-240V, 50/60Hz, 1.8A Output: DC 20V, 3.25A/ DC 15V, 3A/ DC 9V, 2A/ DC 5V, 2A Rechargeable Lithium-Ion Battery Model: ACC-006-362G Rated Capacity: 3100mAh Voltage: 7.6V Watt-Hour: 23.56Wh Max Charge Voltage: 8.7V			
Cable(s):	AC cable:174cm unshielded DC cable:175cm unshielded			
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	UNII Band I	802.11a/n (HT20)	5180-5240	4
		802.11n (HT40)	5190-5230	2
		802.11ac (HT80)	5210	1
	UNII Band II-A	802.11a/n (HT20)	5260-5320	4
		802.11n (HT40)	5270-5310	2
		802.11ac (HT80)	5290	1
	UNII Band II-C	802.11a/n (HT20)	5500-5720	12
		802.11n (HT40)	5510-5710	6
		802.11ac (HT80)	5530-5690	3
	UNII Band III	802.11a/n (HT20)	5745-5825	5
		802.11n (HT40)	5755-5795	2
		802.11ac (HT80)	5775	1
Modulation Type:	802.11a: OFDM (64QAM,16QAM, QPSK, BPSK) 802.11ac/n: OFDM (256QAM, 64QAM,16QAM, QPSK, BPSK)			
DFS Function:	Slave without radar detection			
TPC Function:	Not support			
Antenna Type:	PIFA Antenna			
Antenna Gain:	Antenna1: 3.1dBi, Antenna2: 3.4dBi Note: The two antennas cannot simultaneous transmission.			



4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Router	ASUS	AX6000	/
Router	NETGEAR	DGN2200	REF. No.SEA2200
Laptop	Lenovo	T430u	REF. No.SEA1800
Network Cable	SGS	N/A	REF. No.SEA1100
iPhone 6	Apple	MG472ZP/A	C34NHTMFG5MN

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 3\%$
Maximum Conducted output power	$\pm 0.75\text{dB}$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Radiated Emissions (Above 1GHz)	$\pm 4.8\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 4.5\text{dB}$ (below 1GHz); $\pm 4.8\text{dB}$ (above 1GHz);
Frequency Stability	$\pm 7.25 \times 10^{-8}$
Radiated Emissions (Below 1GHz)	$\pm 4.5\text{dB}$



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2019-06-13	2022-06-12
EMI Test Receiver	Rohde&Schwarz	ESCI	SEM004-02	2020-03-26	2021-03-25
				2021-03-24	2022-03-23
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2020-07-10	2021-07-09
LISN	Rohde&Schwarz	ENV216	SEM007-01	2020-09-23	2021-09-22
LISN	ETS-LINDGREN	3816/2	SEM007-02	2020-03-26	2021-03-25
				2021-03-24	2022-03-23

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2020-07-19	2023-07-18
MXE EMI receiver(3Hz-3.6GHz)	KEYSIGHT	N9038A	SEM004-15	2020-11-02	2021-11-01
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-02	2019-05-24	2022-05-23
Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2020-03-26	2021-03-25
				2021-03-24	2022-03-23
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2020-07-10	2021-07-09

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-28	2021-03-27
				2021-03-26	2024-03-25
EXA Signal Analyzer	Agilent Technologies Inc	N9010A	SEM004-12	2020-04-09	2021-04-08
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2020-09-23	2021-09-22
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020-07-10	2021-07-09
Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2020-11-14	2023-11-13
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2020-03-26	2021-03-25
				2021-03-24	2022-03-23



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

DFS					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	SAEMC	MSR433	SEM001-11	2019-06-13	2022-06-12
EXA Signal Analyzer (10Hz-26.5GHz)	KEYSIGHT	N9010A	SEM004-09	2021-04-08	2022-04-07
Signal Generator(9kHz-3GHz)	KEYSIGHT	N5171B	SEM006-13	2021-03-24	2022-03-23
MXG Vector Signal Generator	KEYSIGHT	N5182A	SEM006-14	2021-03-24	2022-03-23
ESG Vector Signal Generator	KEYSIGHT	E4438C	SEM006-15	2020-09-23	2021-09-22
Manual Step Attenuator	KEYSIGHT	8494B	SEM021-05	2020-04-10	2021-04-09
				2021-04-08	2022-04-07
Manual Step Attenuator	KEYSIGHT	8496B	SEM021-06	2020-04-10	2021-04-09
				2021-04-08	2022-04-07
Power Sensor	KEYSIGHT	U2021XA	SEM009-13	2020-03-26	2021-03-25
				2021-03-24	2022-03-23
Power Sensor	KEYSIGHT	U2021XA	SEM009-14	2020-03-26	2021-03-25
				2021-03-24	2022-03-23
Power Sensor	KEYSIGHT	U2021XA	SEM009-15	2020-03-26	2021-03-25
				2021-03-24	2022-03-23
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2020-03-26	2021-03-25
				2021-03-24	2022-03-23
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SEM002-15	2020-03-25	2021-03-24
				2021-03-23	2022-03-22
Measurement Software	JS Tonscend	JS1120-2 BT/WIFI V2.6	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM028-01	2020-07-10	2021-07-09

Radiated Spurious Emissions

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018-03-28	2021-03-27
				2021-03-26	2024-03-25
EXA Signal Analyzer	Agilent Technologies Inc	N9010A	SEM004-12	2020-04-09	2021-04-08
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2018-04-13	2021-04-12
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-0126	SEM004-11	2020-09-23	2021-09-22
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A



Coaxial Cable	SGS	N/A	SEM026-01	2020-07-10	2021-07-09
Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2020-11-14	2023-11-13
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2020-03-26	2021-03-25
				2021-03-24	2022-03-23

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2020-09-15	2021-09-14
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2020-09-15	2021-09-14
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2020-04-07	2021-04-06



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the Antenna1 is 3.1dBi, Antenna2 is 3.4dBi.

Antenna location: Refer to internal photo.



6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (c)

6.2.2 Conclusion

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip (3165D2W) support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & 15.407 b(8)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C

Humidity: 45.7 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	17	Charge + TX mode (U-NII-1)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	19	Charge + TX mode (U-NII-2A)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	21	Charge + TX mode (U-NII-2C)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	23	Charge + TX mode (U-NII-3)_Keep the EUT in charging and continuously




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

	transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(HT80). Only the data of worst case is recorded in the report.
--	--

7.1.3 Test Setup Diagram

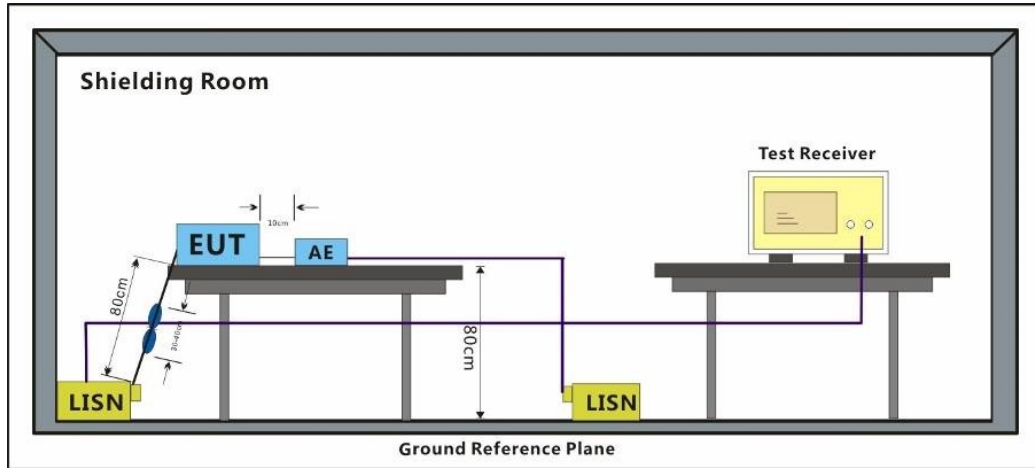


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor



Test Mode: 17; Line: Live line

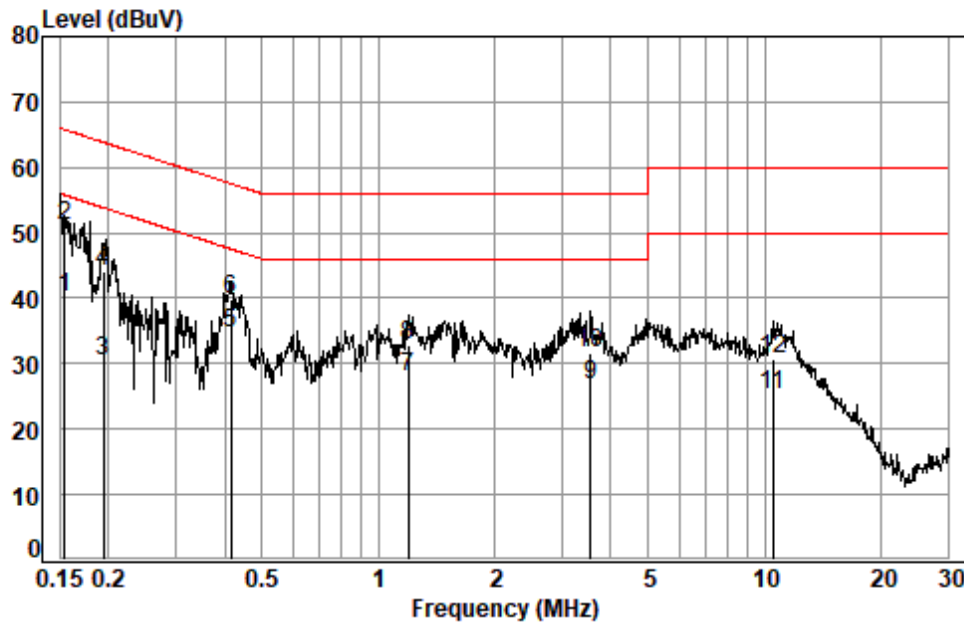

Site : Shielding Room
Condition: Line
Job No. : 20124AT
Test mode: 17
: #1


	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1540	0.03	9.62	30.35	40.00	55.78	-15.78	Average
2	0.1540	0.03	9.62	41.40	51.05	65.78	-14.73	QP
3	0.1945	0.04	9.64	20.88	30.56	53.84	-23.28	Average
4	0.1945	0.04	9.64	34.38	44.06	63.84	-19.78	QP
5	0.4148	0.07	9.67	24.83	34.57	47.55	-12.98	Average
6	0.4148	0.07	9.67	30.23	39.97	57.55	-17.58	QP
7	1.1970	0.11	9.68	18.10	27.89	46.00	-18.11	Average
8	1.1970	0.11	9.68	23.02	32.81	56.00	-23.19	QP
9	3.5466	0.15	9.73	16.81	26.69	46.00	-19.31	Average
10	3.5466	0.15	9.73	21.72	31.60	56.00	-24.40	QP
11	10.5079	0.16	9.94	15.04	25.14	50.00	-24.86	Average
12	10.5079	0.16	9.94	20.58	30.68	60.00	-29.32	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 17; Line: Neutral Line

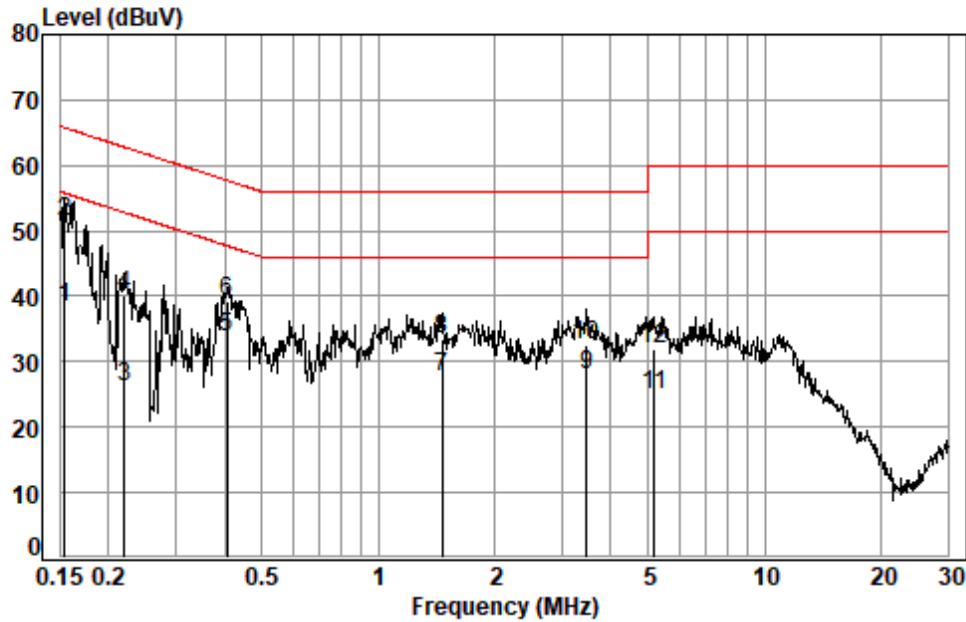

Site : Shielding Room
Condition: Neutral
Job No. : 20124AT
Test mode: 17
: #1

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.1540	0.03	9.62	28.58	38.23	55.78	-17.55	Average
2	0.1540	0.03	9.62	41.78	51.43	65.78	-14.35	QP
3	0.2197	0.04	9.64	16.62	26.30	52.83	-26.53	Average
4	0.2197	0.04	9.64	30.48	40.16	62.83	-22.67	QP
5	0.4061	0.06	9.66	24.13	33.85	47.73	-13.88	Average
6	0.4061	0.06	9.66	29.62	39.34	57.73	-18.39	QP
7	1.4640	0.11	9.67	17.99	27.77	46.00	-18.23	Average
8	1.4640	0.11	9.67	23.65	33.43	56.00	-22.57	QP
9	3.4538	0.15	9.71	18.10	27.96	46.00	-18.04	Average
10	3.4538	0.15	9.71	22.71	32.57	56.00	-23.43	QP
11	5.1937	0.16	9.77	15.15	25.08	50.00	-24.92	Average
12	5.1937	0.16	9.77	21.90	31.83	60.00	-28.17	QP



7.2 Radiated Emissions (Below 1GHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.209 & 15.407(b)
Test Method: KDB 789033 D02 II G
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 25 °C Humidity: 54 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	16	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	17	Charge + TX mode (U-NII-1)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	18	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SGS-CSTC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	19	Charge + TX mode (U-NII-2A)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	20	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	21	Charge + TX mode (U-NII-2C)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	22	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	23	Charge + TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.



7.2.3 Test Setup Diagram

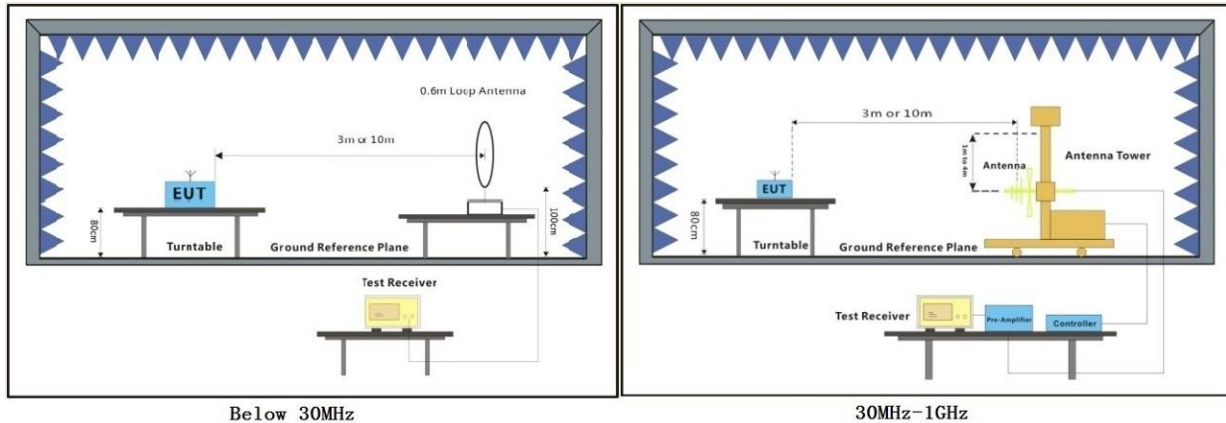

Below 30MHz

30MHz-1GHz



7.2.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

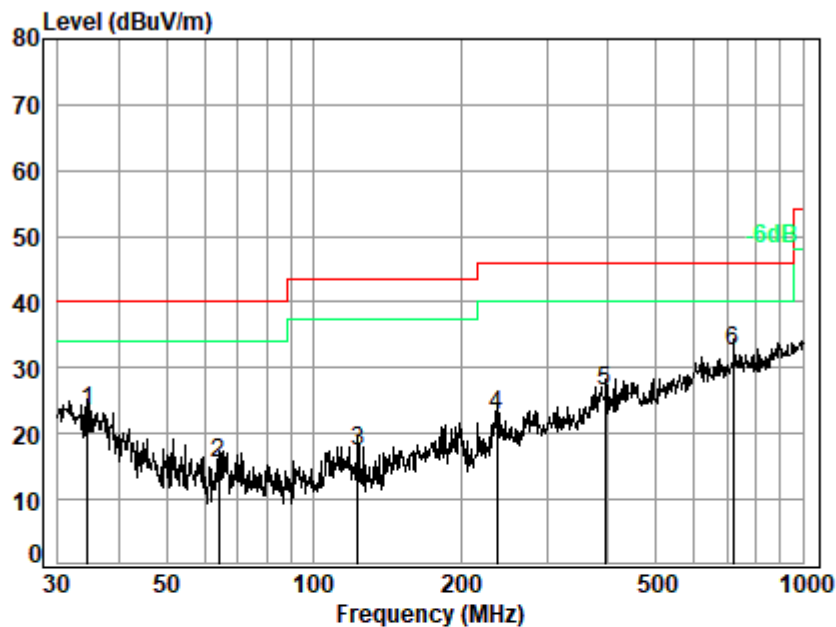


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 20124AT
Test Mode: 17

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	34.52	0.65	20.58	27.72	29.78	23.29	40.00	-16.71	QP
2	63.98	0.80	12.70	27.66	29.61	15.45	40.00	-24.55	QP
3	122.83	1.13	12.85	27.47	30.85	17.36	43.50	-26.14	QP
4	236.64	1.53	17.63	27.03	30.59	22.72	46.00	-23.28	QP
5	394.85	2.29	22.01	27.37	29.40	26.33	46.00	-19.67	QP
6 q	721.73	2.99	27.54	27.87	29.78	32.44	46.00	-13.56	QP



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

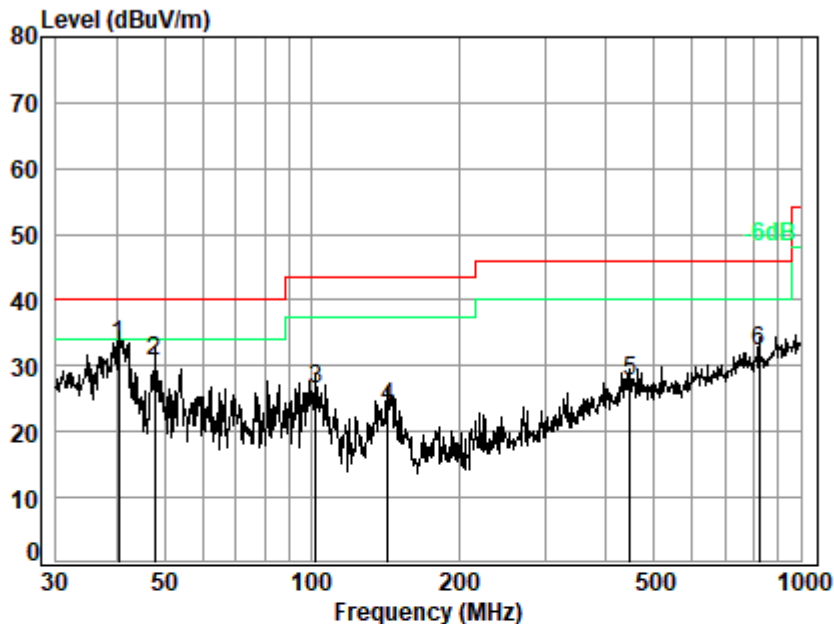

Site : chamber
Condition: 3m VERTICAL
Job No. : 20124AT
Test Mode: 17

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 q	40.28	0.70	17.92	27.70	42.32	33.24	40.00	-6.76 QP
2	47.83	0.70	14.69	27.69	43.15	30.85	40.00	-9.15 QP
3	102.00	1.10	13.94	27.60	39.17	26.61	43.50	-16.89 QP
4	143.33	1.15	13.84	27.37	36.15	23.77	43.50	-19.73 QP
5	447.98	2.40	22.70	27.60	30.08	27.58	46.00	-18.42 QP
6	821.71	3.35	27.97	27.60	28.55	32.27	46.00	-13.73 QP



7.3 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).

For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz (68.2dBuV/m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz (105.2dBuV/m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz (110.8dBuV/m) at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz (122.2dBuV/m) at the band edge.

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 1010 mbar



7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	16	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	17	Charge + TX mode (U-NII-1)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	18	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	19	Charge + TX mode (U-NII-2A)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	20	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	21	Charge + TX mode (U-NII-2C)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, 10/F, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

		802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	22	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(HT80). Only the data of worst case is recorded in the report.
Final test	23	Charge + TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(HT80). Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

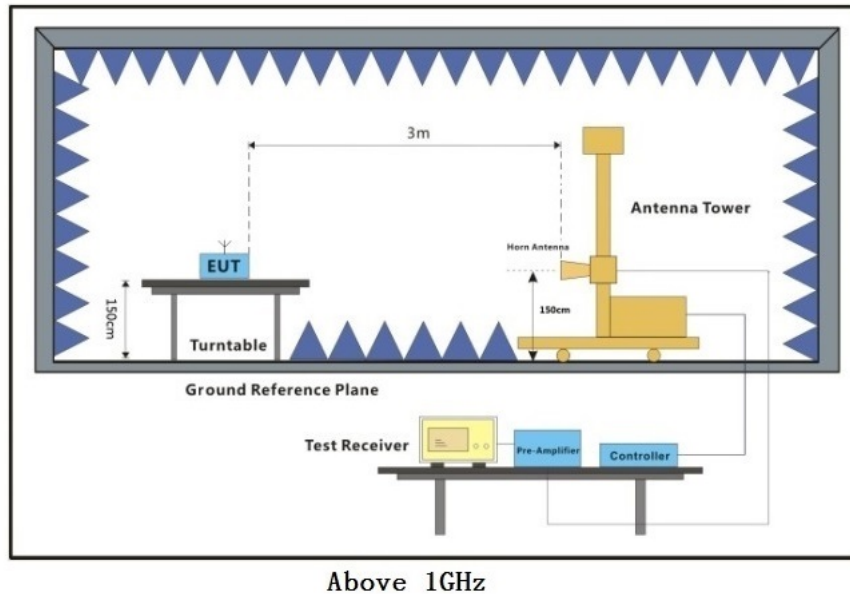

7.3.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. Pretest the EUT at antenna 1 and antenna 2, found the antenna 1 which is worst case for 802.11a/n/ac mode, only the worst test data is recorded in the report.



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

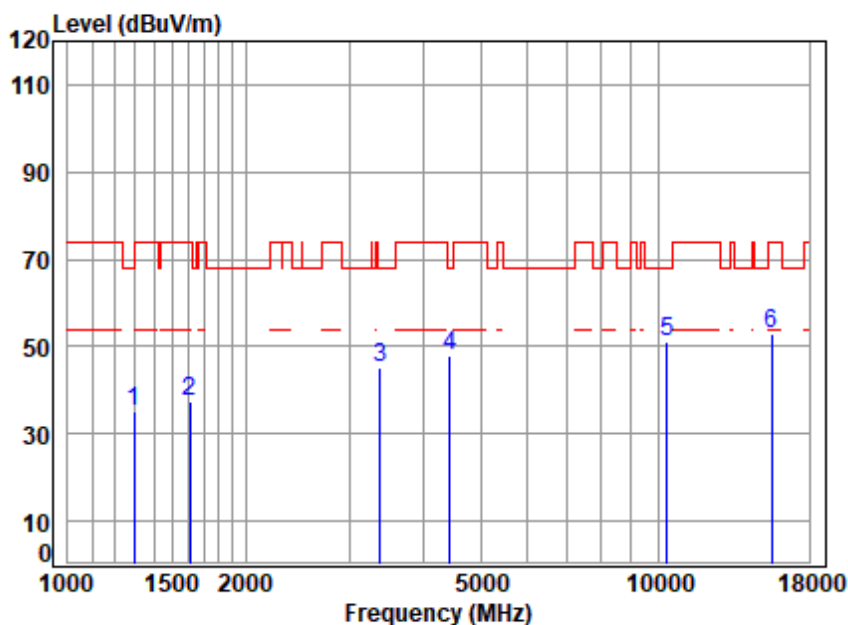


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	2.94	25.01	39.83	46.90	35.02	68.20	-33.18 peak
2	1611.091	3.36	26.30	40.01	47.92	37.57	74.00	-36.43 peak
3	3376.523	5.37	31.51	40.99	49.35	45.24	68.20	-22.96 peak
4	4443.453	6.71	33.50	41.82	49.40	47.79	68.20	-20.41 peak
5	10360.000	10.57	37.76	37.29	40.08	51.12	68.20	-17.08 peak
6	15540.000	13.97	40.72	40.38	38.78	53.09	74.00	-20.91 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

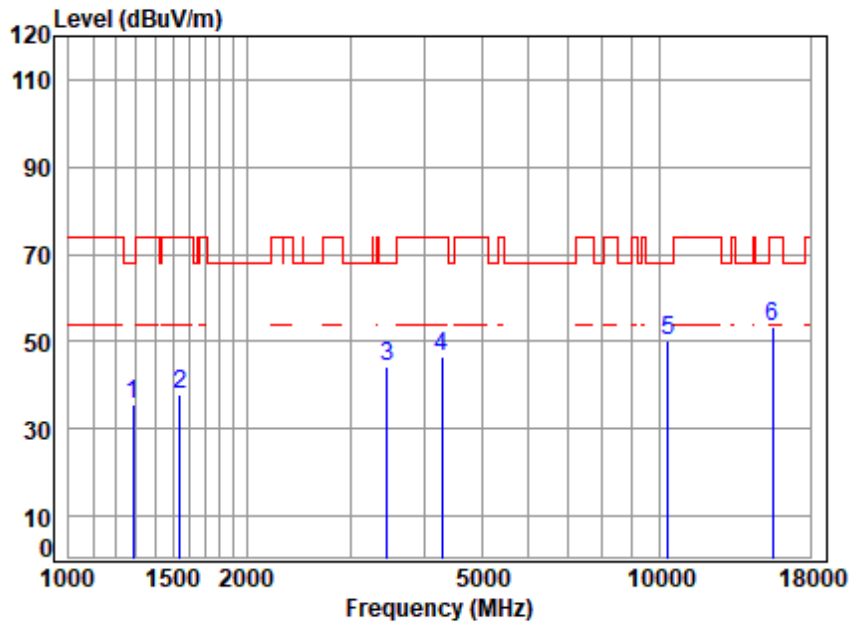


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	47.36	35.42	68.20	-32.78 peak
2 1542.733	3.30	26.00	39.98	48.48	37.80	74.00	-36.20 peak
3 3465.510	5.48	31.65	41.05	48.08	44.16	68.20	-24.04 peak
4 4291.977	6.57	33.24	41.68	48.30	46.43	74.00	-27.57 peak
5 10360.000	10.57	37.76	37.29	39.35	50.39	68.20	-17.81 peak
6 15540.000	13.97	40.72	40.38	38.93	53.24	74.00	-20.76 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

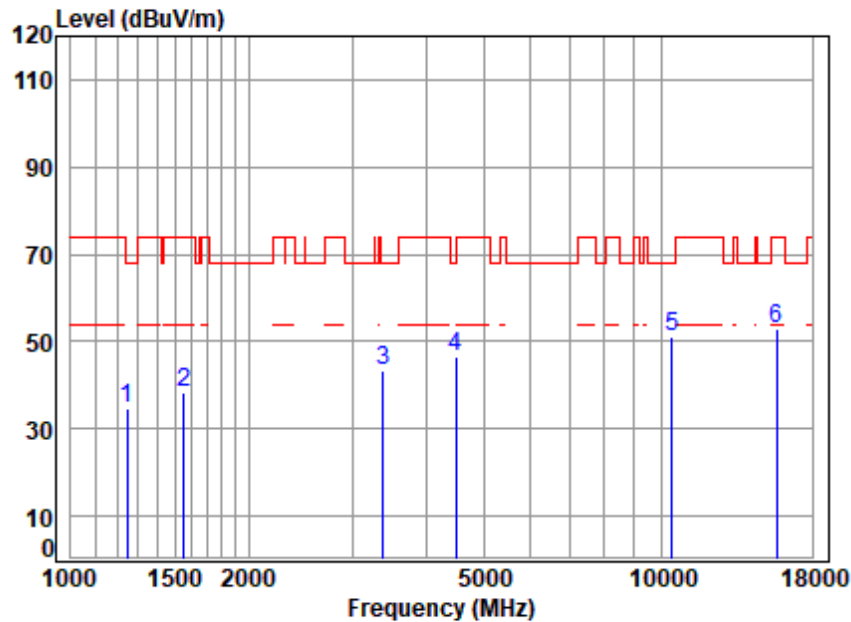


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5220 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1245.663	2.85	24.79	39.79	46.75	34.60	68.20	-33.60 peak
2	1556.169	3.31	26.06	39.98	49.01	38.40	74.00	-35.60 peak
3	3376.523	5.37	31.51	40.99	47.63	43.52	68.20	-24.68 peak
4	4482.150	6.74	33.57	41.86	48.23	46.68	68.20	-21.52 peak
5	10440.000	10.55	37.72	37.34	40.05	50.98	68.20	-17.22 peak
6	15660.000	14.02	40.80	40.44	38.65	53.03	74.00	-20.97 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

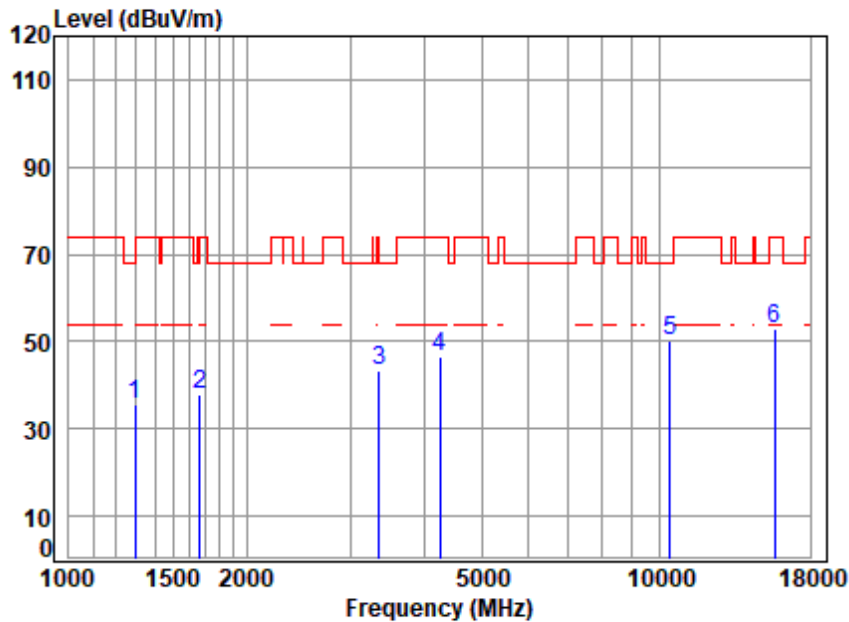


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5220 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	2.94	25.01	39.83	47.45	35.57	68.20	-32.63 peak
2	1667.951	3.40	26.54	40.04	47.99	37.89	74.00	-36.11 peak
3	3357.061	5.34	31.48	40.97	47.51	43.36	74.00	-30.64 peak
4	4254.921	6.53	33.17	41.65	48.31	46.36	74.00	-27.64 peak
5	10440.000	10.55	37.72	37.34	39.40	50.33	68.20	-17.87 peak
6	15660.000	14.02	40.80	40.44	38.72	53.10	74.00	-20.90 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

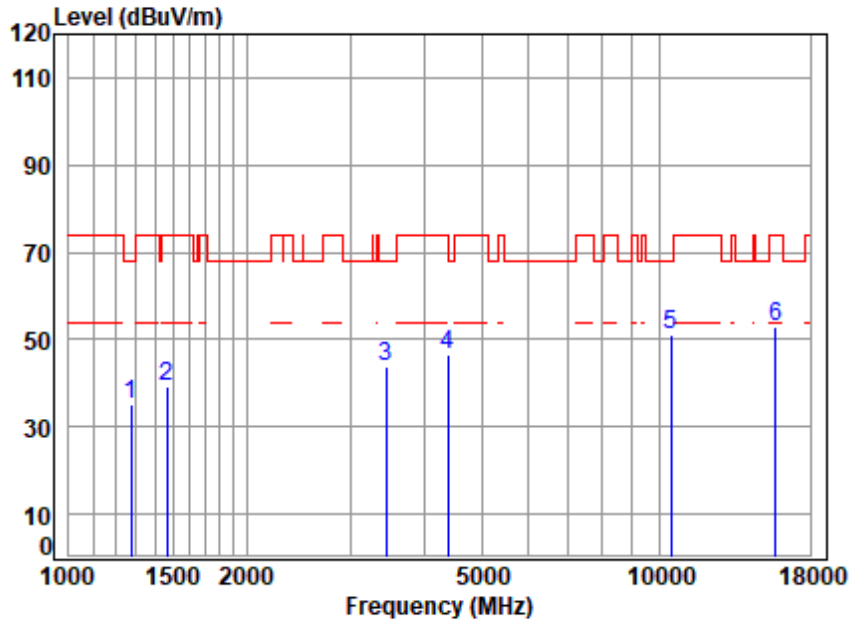


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1274.802	2.90	24.92	39.81	47.02	35.03	68.20	-33.17 peak
2	1464.522	3.21	25.67	39.93	50.31	39.26	74.00	-34.74 peak
3	3445.535	5.45	31.62	41.04	47.73	43.76	68.20	-24.44 peak
4	4392.376	6.66	33.42	41.78	48.05	46.35	74.00	-27.65 peak
5	10480.000	10.54	37.71	37.36	40.35	51.24	68.20	-16.96 peak
6	15720.000	14.04	40.83	40.47	38.55	52.95	74.00	-21.05 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

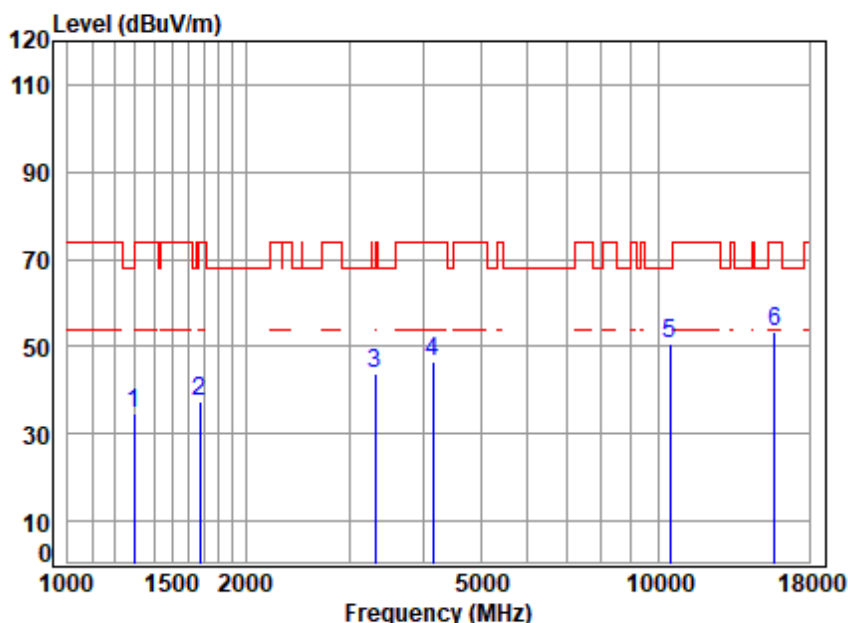


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.34	34.46	68.20	-33.74 peak
2 1672.779	3.41	26.56	40.05	47.55	37.47	74.00	-36.53 peak
3 3318.471	5.29	31.42	40.95	47.85	43.61	68.20	-24.59 peak
4 4145.664	6.43	32.97	41.54	48.83	46.69	74.00	-27.31 peak
5 10480.000	10.54	37.71	37.36	39.57	50.46	68.20	-17.74 peak
6 15720.000	14.04	40.83	40.47	38.93	53.33	74.00	-20.67 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

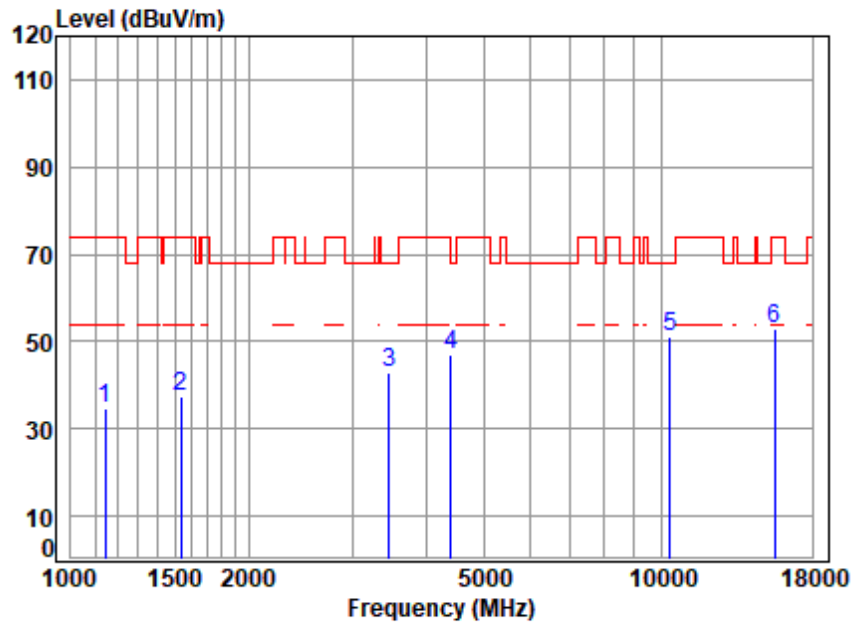


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1145.507	2.66	24.34	39.72	47.57	34.85	74.00	-39.15 peak
2 1538.281	3.29	25.98	39.97	48.28	37.58	74.00	-36.42 peak
3 3455.508	5.47	31.63	41.04	47.03	43.09	68.20	-25.11 peak
4 4405.090	6.67	33.44	41.79	48.60	46.92	68.20	-21.28 peak
5 10360.000	10.57	37.76	37.29	40.17	51.21	68.20	-16.99 peak
6 15540.000	13.97	40.72	40.38	38.54	52.85	74.00	-21.15 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

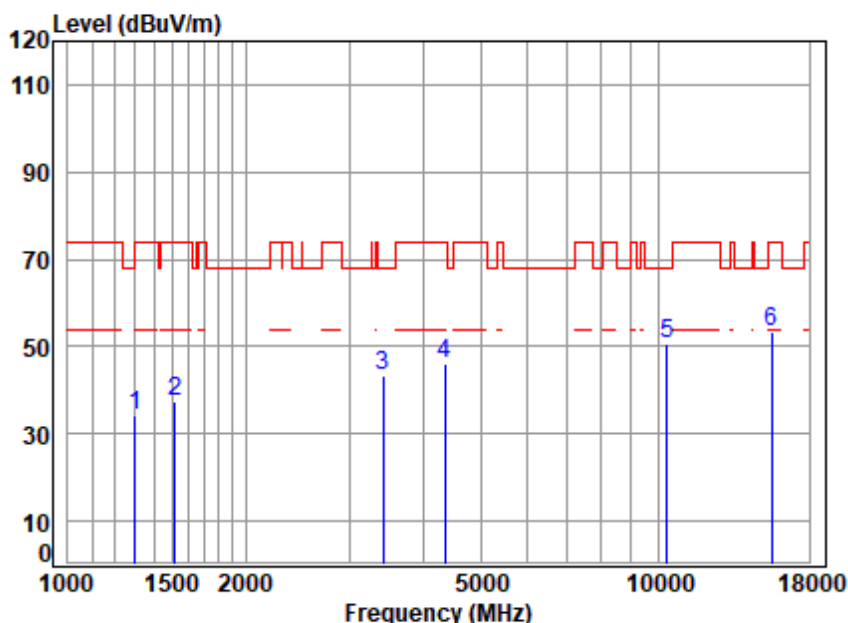


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	2.94	25.03	39.83	46.06	34.20	74.00	-39.80 peak
2 1520.598	3.28	25.89	39.96	48.37	37.58	74.00	-36.42 peak
3 3425.675	5.43	31.59	41.02	47.45	43.45	68.20	-24.75 peak
4 4354.454	6.63	33.35	41.74	48.05	46.29	74.00	-27.71 peak
5 10360.000	10.57	37.76	37.29	39.57	50.61	68.20	-17.59 peak
6 15540.000	13.97	40.72	40.38	39.29	53.60	74.00	-20.40 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

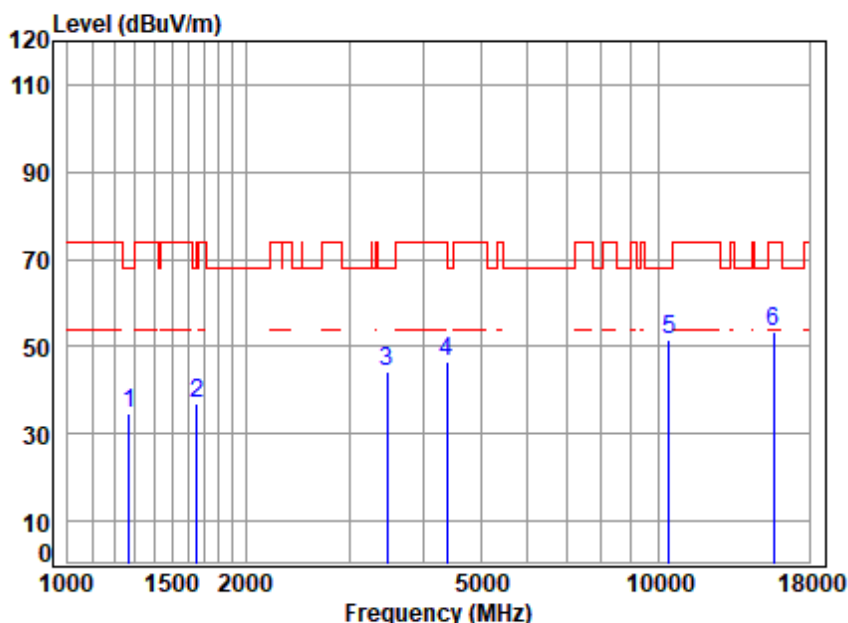


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1271.123	2.89	24.90	39.81	46.84	34.82	68.20	-33.38 peak
2 1653.550	3.39	26.48	40.04	47.33	37.16	68.20	-31.04 peak
3 3475.541	5.49	31.66	41.06	48.28	44.37	68.20	-23.83 peak
4 4392.376	6.66	33.42	41.78	48.23	46.53	74.00	-27.47 peak
5 10440.000	10.55	37.72	37.34	40.79	51.72	68.20	-16.48 peak
6 15660.000	14.02	40.80	40.44	38.80	53.18	74.00	-20.82 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

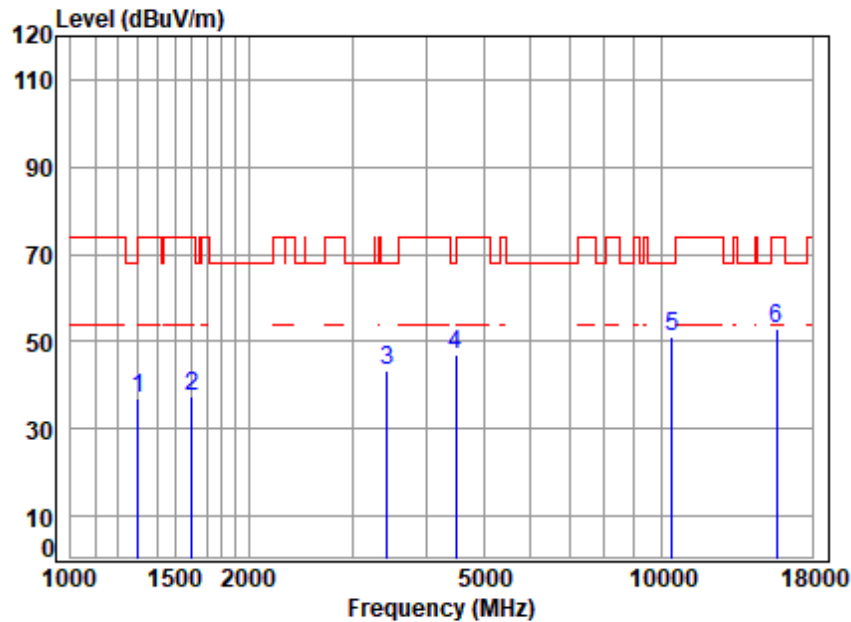


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5220 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	2.94	25.03	39.83	48.73	36.87	74.00 -37.13 peak
2	1601.804	3.35	26.26	40.01	47.99	37.59	74.00 -36.41 peak
3	3435.590	5.44	31.60	41.03	47.51	43.52	68.20 -24.68 peak
4	4482.150	6.74	33.57	41.86	48.55	47.00	68.20 -21.20 peak
5	10440.000	10.55	37.72	37.34	40.23	51.16	68.20 -17.04 peak
6	15660.000	14.02	40.80	40.44	38.45	52.83	74.00 -21.17 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

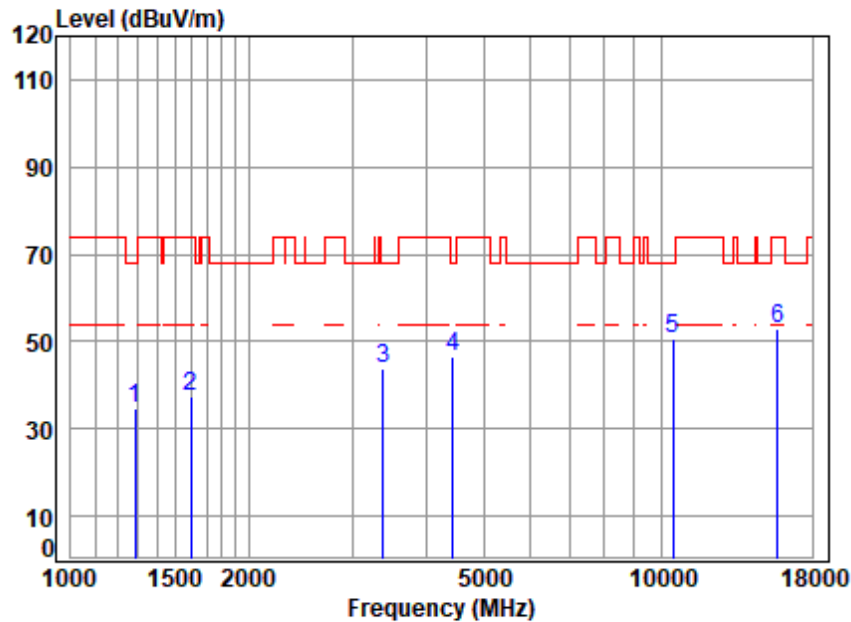


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	46.66	34.72	68.20	-33.48 peak
2 1597.181	3.35	26.24	40.01	47.64	37.22	74.00	-36.78 peak
3 3386.297	5.38	31.53	40.99	48.10	44.02	68.20	-24.18 peak
4 4443.453	6.71	33.50	41.82	48.12	46.51	68.20	-21.69 peak
5 10480.000	10.54	37.71	37.36	39.84	50.73	68.20	-17.47 peak
6 15720.000	14.04	40.83	40.47	38.68	53.08	74.00	-20.92 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

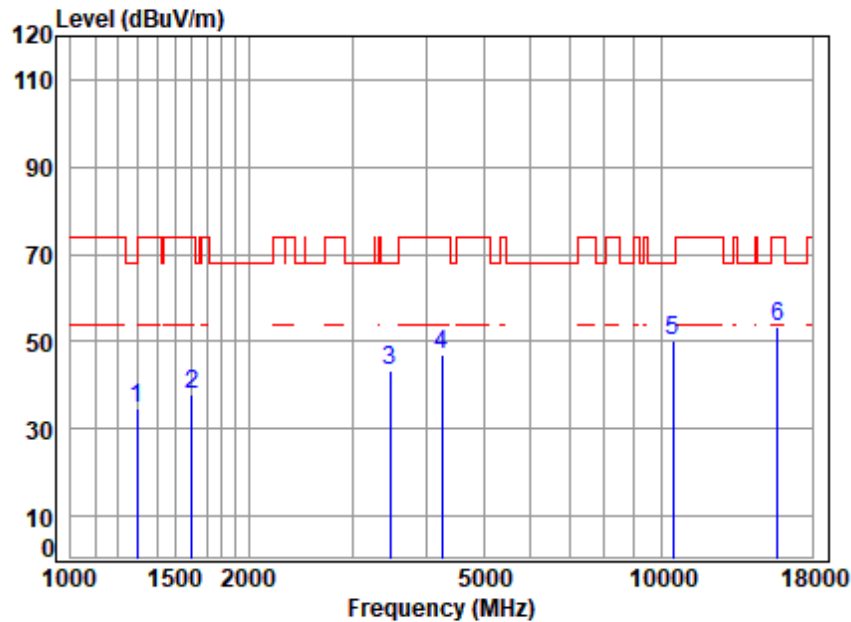


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	2.94	25.01	39.83	46.73	34.85	68.20 -33.35 peak
2	1606.441	3.35	26.28	40.01	48.28	37.90	74.00 -36.10 peak
3	3475.541	5.49	31.66	41.06	47.25	43.34	68.20 -24.86 peak
4	4254.921	6.53	33.17	41.65	48.74	46.79	74.00 -27.21 peak
5	10480.000	10.54	37.71	37.36	39.46	50.35	68.20 -17.85 peak
6	15720.000	14.04	40.83	40.47	38.99	53.39	74.00 -20.61 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

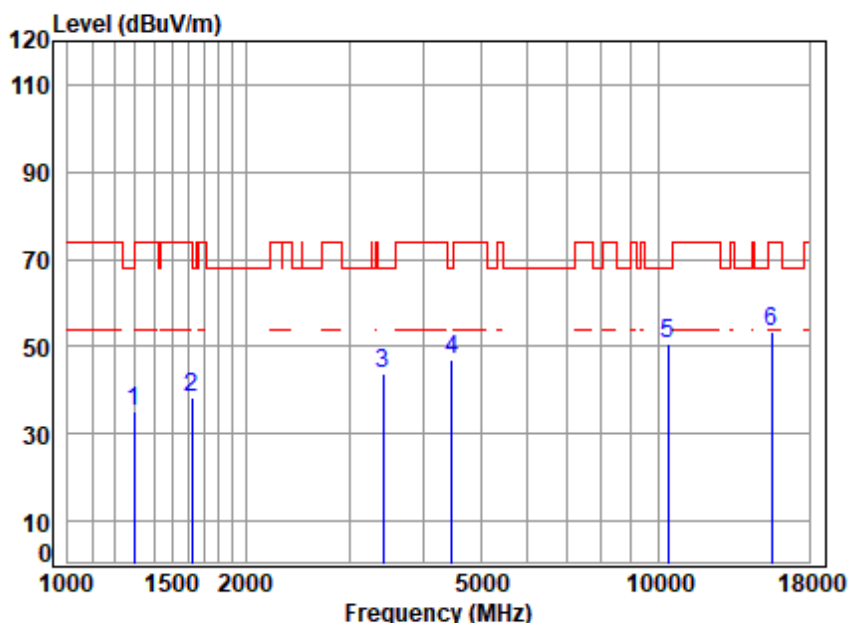


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.96	35.08	68.20	-33.12 peak
2 1625.121	3.37	26.36	40.02	48.66	38.37	74.00	-35.63 peak
3 3425.675	5.43	31.59	41.02	47.64	43.64	68.20	-24.56 peak
4 4469.214	6.73	33.55	41.85	48.46	46.89	68.20	-21.31 peak
5 10380.000	10.57	37.75	37.30	39.76	50.78	68.20	-17.42 peak
6 15570.000	13.98	40.74	40.40	39.04	53.36	74.00	-20.64 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

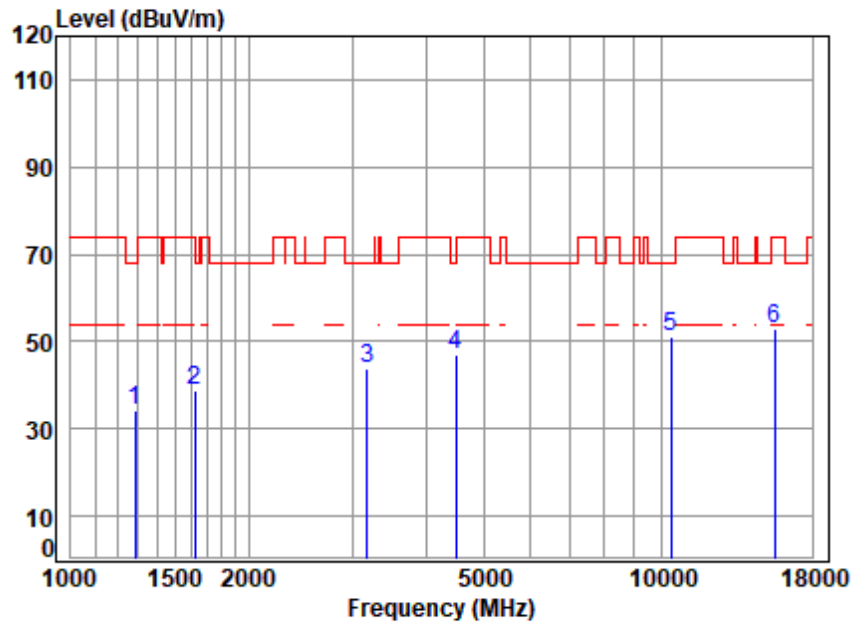


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5190 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	46.09	34.15	68.20	-34.05 peak
2 1625.121	3.37	26.36	40.02	49.18	38.89	74.00	-35.11 peak
3 3177.672	5.11	31.20	40.84	48.45	43.92	68.20	-24.28 peak
4 4495.125	6.76	33.59	41.87	48.49	46.97	68.20	-21.23 peak
5 10380.000	10.57	37.75	37.30	40.22	51.24	68.20	-16.96 peak
6 15570.000	13.98	40.74	40.40	38.61	52.93	74.00	-21.07 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

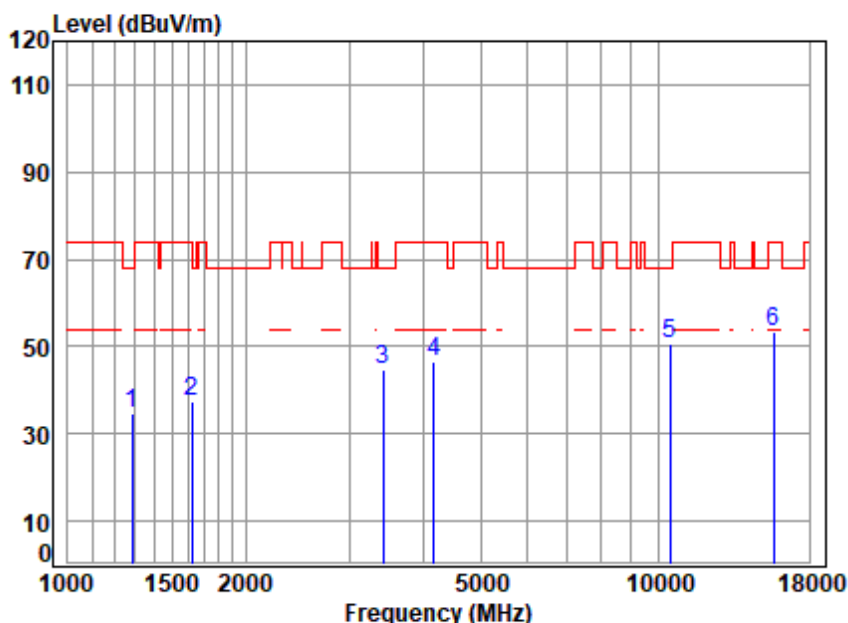


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1285.904	2.92	24.96	39.82	46.77	34.83	68.20	-33.37 peak
2	1620.431	3.36	26.34	40.02	47.62	37.30	74.00	-36.70 peak
3	3415.787	5.42	31.57	41.02	48.52	44.49	68.20	-23.71 peak
4	4169.698	6.45	33.02	41.57	48.87	46.77	74.00	-27.23 peak
5	10460.000	10.54	37.72	37.35	39.86	50.77	68.20	-17.43 peak
6	15690.000	14.03	40.82	40.45	39.08	53.48	74.00	-20.52 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

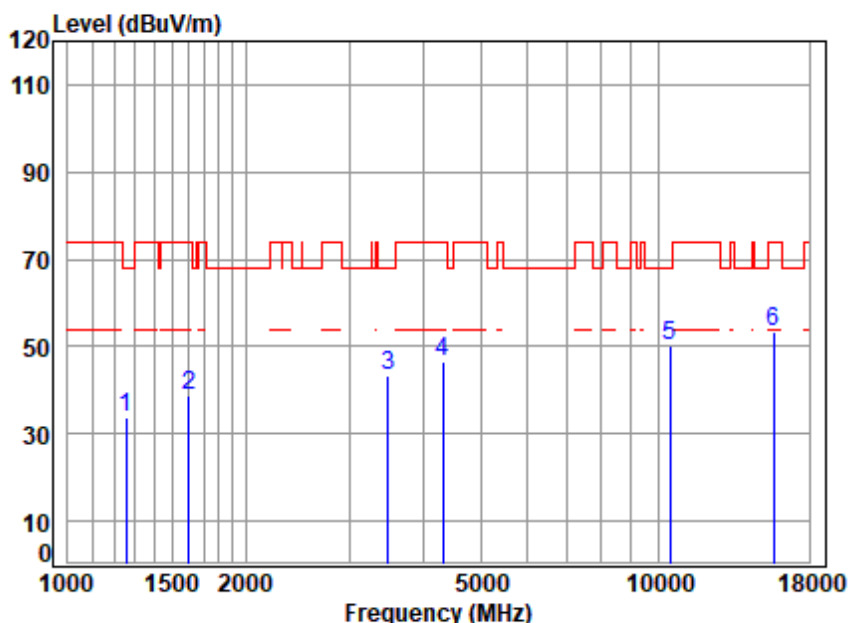


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5230 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1256.512	2.87	24.84	39.80	46.05	33.96	68.20	-34.24 peak
2	1606.441	3.35	26.28	40.01	49.27	38.89	74.00	-35.11 peak
3	3485.601	5.50	31.68	41.07	47.20	43.31	68.20	-24.89 peak
4	4316.859	6.59	33.28	41.71	48.37	46.53	74.00	-27.47 peak
5	10460.000	10.54	37.72	37.35	39.31	50.22	68.20	-17.98 peak
6	15690.000	14.03	40.82	40.45	39.10	53.50	74.00	-20.50 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

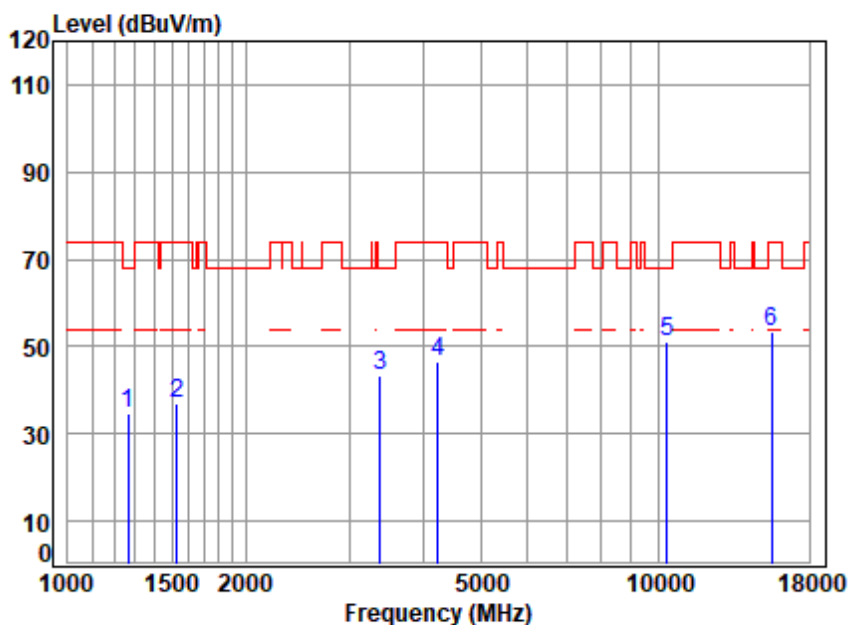


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1267.454	2.89	24.89	39.81	46.52	34.49	68.20	-33.71 peak
2 1529.414	3.29	25.94	39.97	47.83	37.09	74.00	-36.91 peak
3 3376.523	5.37	31.51	40.99	47.40	43.29	68.20	-24.91 peak
4 4230.396	6.51	33.13	41.63	48.56	46.57	74.00	-27.43 peak
5 10360.000	10.57	37.76	37.29	40.09	51.13	68.20	-17.07 peak
6 15540.000	13.97	40.72	40.38	39.30	53.61	74.00	-20.39 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

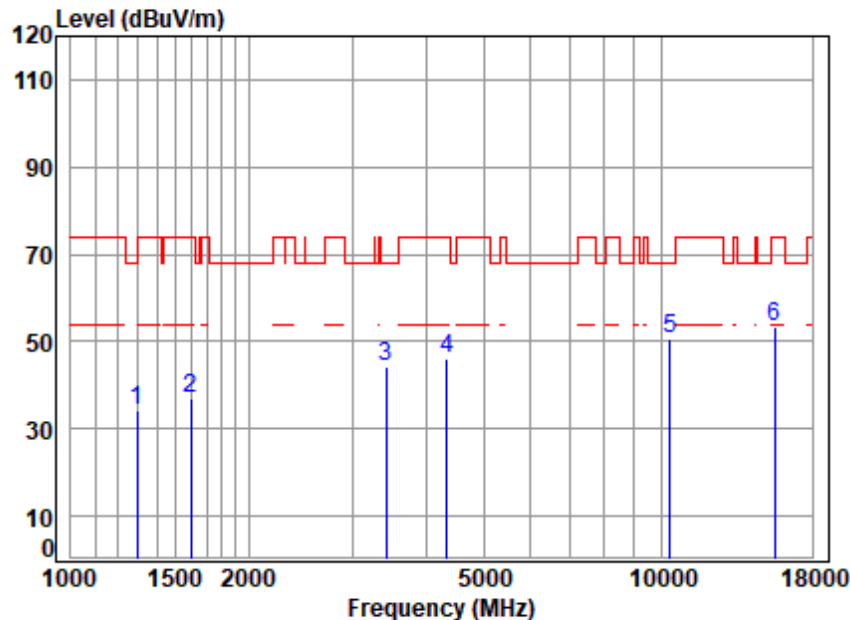


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1293.359	2.93	25.00	39.82	46.15	34.26	68.20	-33.94 peak
2 1597.181	3.35	26.24	40.01	47.37	36.95	74.00	-37.05 peak
3 3425.675	5.43	31.59	41.02	48.08	44.08	68.20	-24.12 peak
4 4341.886	6.61	33.33	41.73	48.05	46.26	74.00	-27.74 peak
5 10360.000	10.57	37.76	37.29	39.69	50.73	68.20	-17.47 peak
6 15540.000	13.97	40.72	40.38	39.01	53.32	74.00	-20.68 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

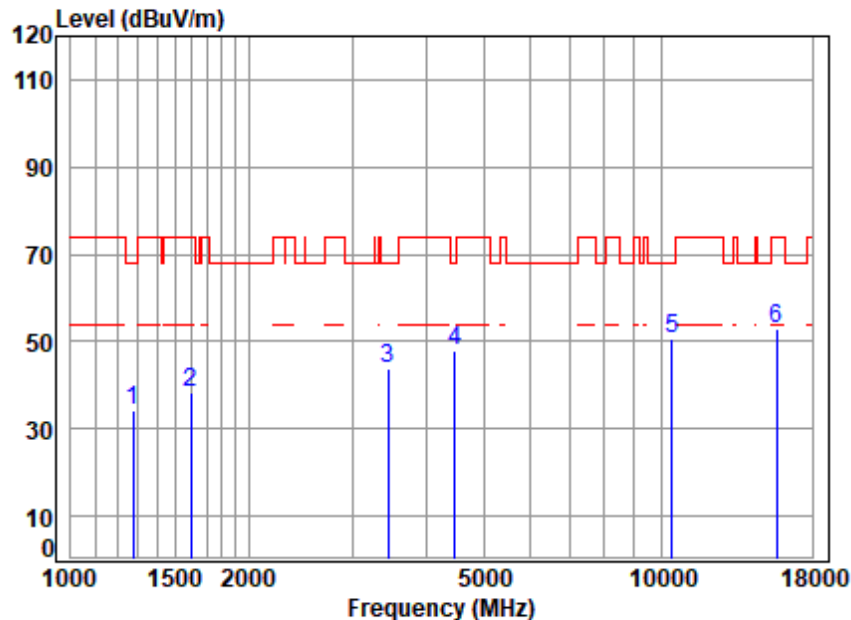


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1274.802	2.90	24.92	39.81	46.10	34.11	68.20	-34.09 peak
2 1597.181	3.35	26.24	40.01	48.59	38.17	74.00	-35.83 peak
3 3445.535	5.45	31.62	41.04	47.62	43.65	68.20	-24.55 peak
4 4469.214	6.73	33.55	41.85	49.46	47.89	68.20	-20.31 peak
5 10440.000	10.55	37.72	37.34	39.68	50.61	68.20	-17.59 peak
6 15660.000	14.02	40.80	40.44	38.74	53.12	74.00	-20.88 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

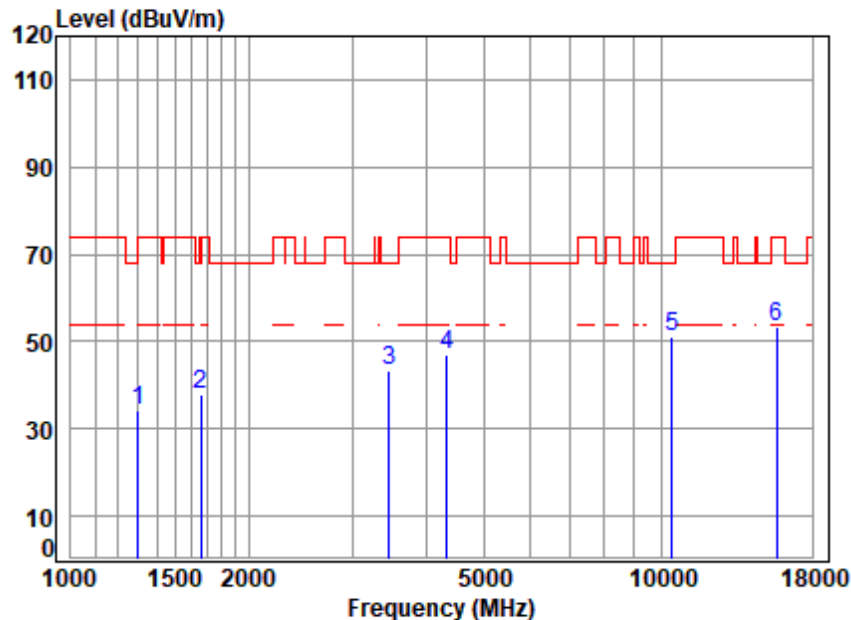


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5220 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	2.94	25.03	39.83	45.92	34.06	74.00 -39.94 peak
2	1663.137	3.40	26.52	40.04	48.20	38.08	74.00 -35.92 peak
3	3455.508	5.47	31.63	41.04	47.33	43.39	68.20 -24.81 peak
4	4329.354	6.60	33.30	41.72	48.91	47.09	74.00 -26.91 peak
5	10440.000	10.55	37.72	37.34	40.12	51.05	68.20 -17.15 peak
6	15660.000	14.02	40.80	40.44	39.16	53.54	74.00 -20.46 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

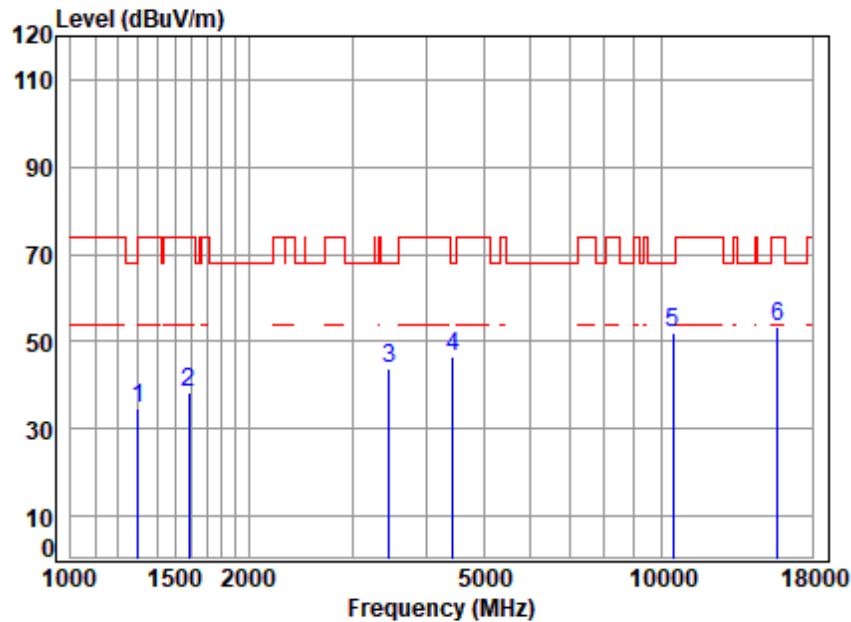


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	2.94	25.03	39.83	46.53	34.67	74.00	-39.33 peak
2 1587.975	3.34	26.20	40.00	48.56	38.10	74.00	-35.90 peak
3 3455.508	5.47	31.63	41.04	47.87	43.93	68.20	-24.27 peak
4 4443.453	6.71	33.50	41.82	48.09	46.48	68.20	-21.72 peak
5 10480.000	10.54	37.71	37.36	40.95	51.84	68.20	-16.36 peak
6 15720.000	14.04	40.83	40.47	39.04	53.44	74.00	-20.56 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

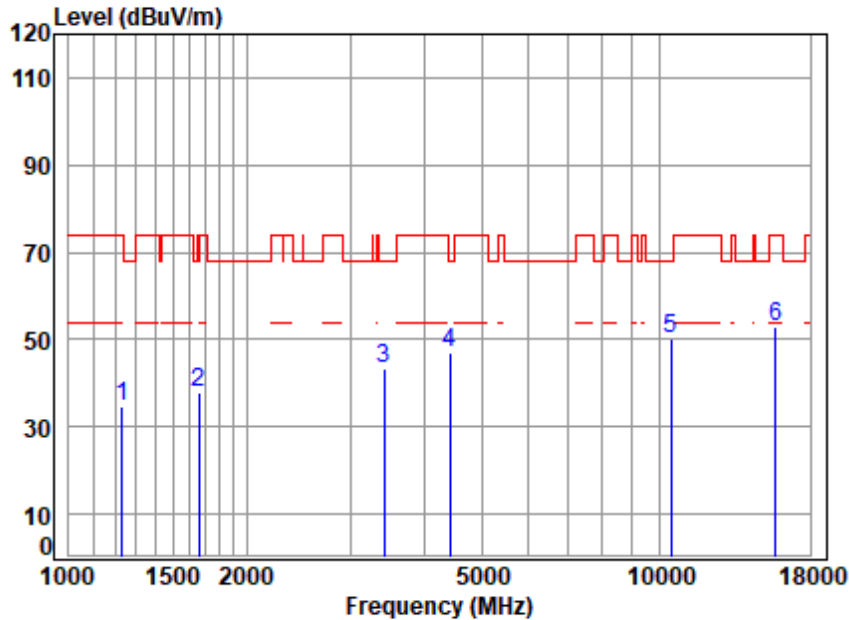


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1231.345	2.82	24.73	39.78	46.94	34.71	74.00	-39.29 peak
2 1663.137	3.40	26.52	40.04	48.00	37.88	74.00	-36.12 peak
3 3415.787	5.42	31.57	41.02	47.33	43.30	68.20	-24.90 peak
4 4417.841	6.68	33.46	41.80	48.47	46.81	68.20	-21.39 peak
5 10480.000	10.54	37.71	37.36	39.20	50.09	68.20	-18.11 peak
6 15720.000	14.04	40.83	40.47	38.47	52.87	74.00	-21.13 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

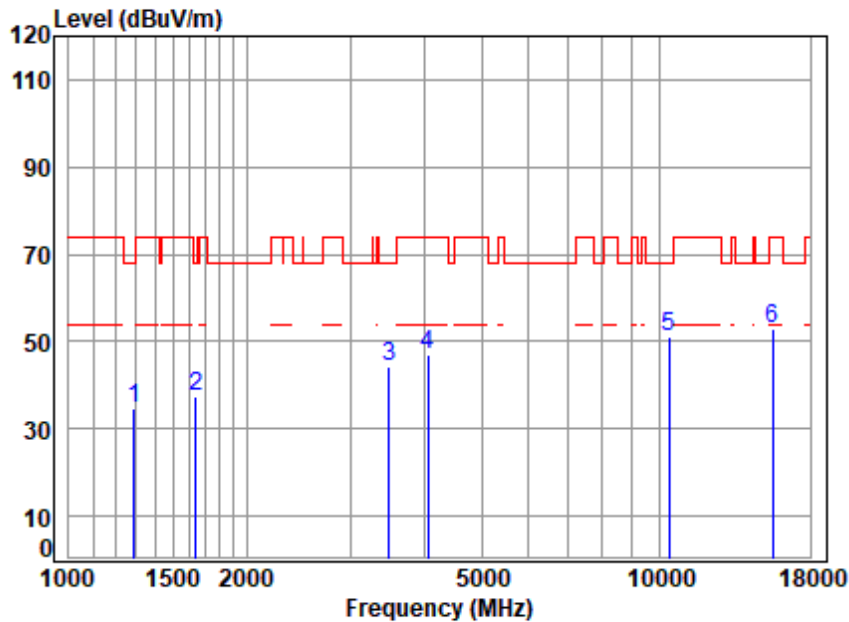


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1289.627	2.92	24.98	39.82	46.45	34.53	68.20	-33.67 peak
2 1644.019	3.38	26.44	40.03	47.65	37.44	68.20	-30.76 peak
3 3485.601	5.50	31.68	41.07	47.99	44.10	68.20	-24.10 peak
4 4062.629	6.34	32.82	41.46	49.08	46.78	74.00	-27.22 peak
5 10380.000	10.57	37.75	37.30	39.92	50.94	68.20	-17.26 peak
6 15570.000	13.98	40.74	40.40	38.49	52.81	74.00	-21.19 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

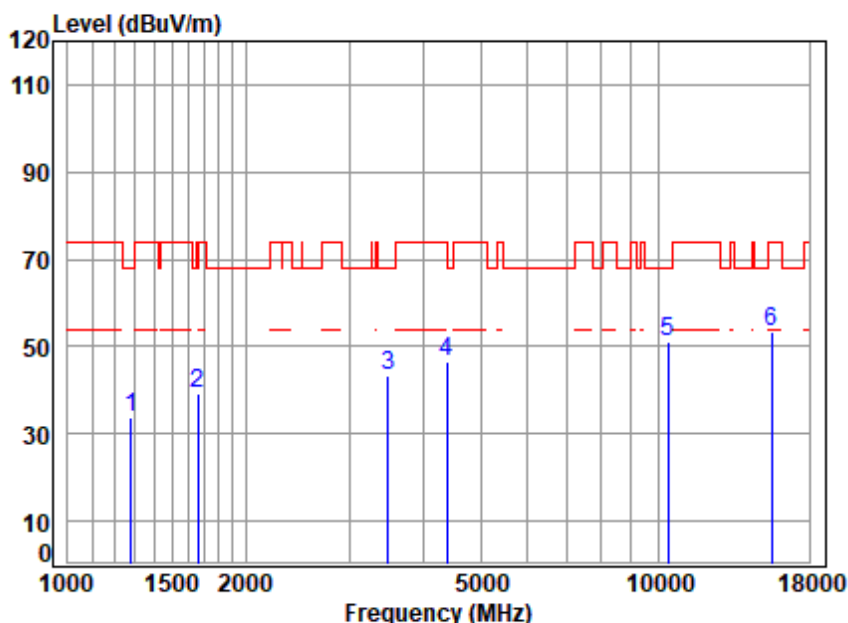


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5190 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1278.492	2.91	24.93	39.81	45.95	33.98	68.20	-34.22 peak
2 1663.137	3.40	26.52	40.04	49.41	39.29	74.00	-34.71 peak
3 3485.601	5.50	31.68	41.07	47.06	43.17	68.20	-25.03 peak
4 4392.376	6.66	33.42	41.78	48.32	46.62	74.00	-27.38 peak
5 10380.000	10.57	37.75	37.30	39.86	50.88	68.20	-17.32 peak
6 15570.000	13.98	40.74	40.40	39.17	53.49	74.00	-20.51 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

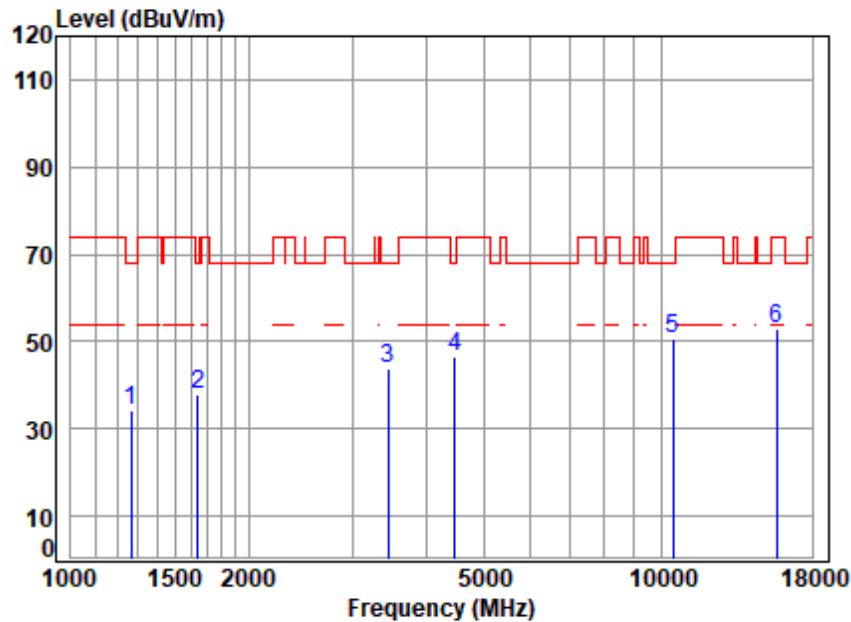


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1267.454	2.89	24.89	39.81	46.38	34.35	68.20	-33.85 peak
2 1644.019	3.38	26.44	40.03	48.05	37.84	68.20	-30.36 peak
3 3445.535	5.45	31.62	41.04	47.57	43.60	68.20	-24.60 peak
4 4469.214	6.73	33.55	41.85	48.04	46.47	68.20	-21.73 peak
5 10460.000	10.54	37.72	37.35	39.96	50.87	68.20	-17.33 peak
6 15690.000	14.03	40.82	40.45	38.59	52.99	74.00	-21.01 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

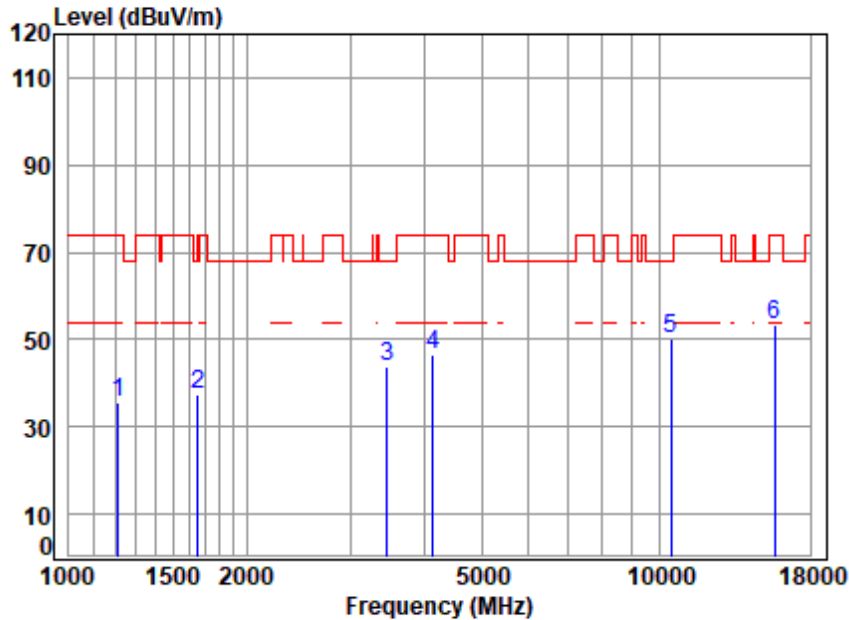


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5230 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1210.174	2.78	24.64	39.77	47.98	35.63	74.00	-38.37 peak
2 1653.550	3.39	26.48	40.04	47.36	37.19	68.20	-31.01 peak
3 3465.510	5.48	31.65	41.05	47.89	43.97	68.20	-24.23 peak
4 4133.699	6.41	32.95	41.53	48.54	46.37	74.00	-27.63 peak
5 10460.000	10.54	37.72	37.35	39.39	50.30	68.20	-17.90 peak
6 15690.000	14.03	40.82	40.45	39.09	53.49	74.00	-20.51 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

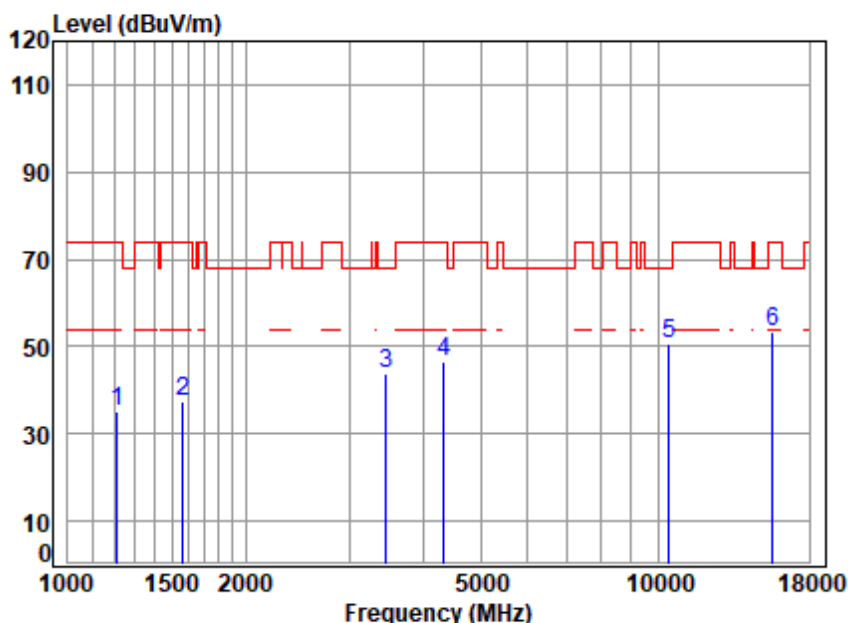


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1213.677	2.79	24.65	39.77	47.24	34.91	74.00	-39.09 peak
2 1565.191	3.32	26.10	39.99	48.18	37.61	74.00	-36.39 peak
3 3465.510	5.48	31.65	41.05	47.78	43.86	68.20	-24.34 peak
4 4329.354	6.60	33.30	41.72	48.55	46.73	74.00	-27.27 peak
5 10420.000	10.56	37.73	37.33	39.64	50.60	68.20	-17.60 peak
6 15630.000	14.01	40.78	40.42	39.00	53.37	74.00	-20.63 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

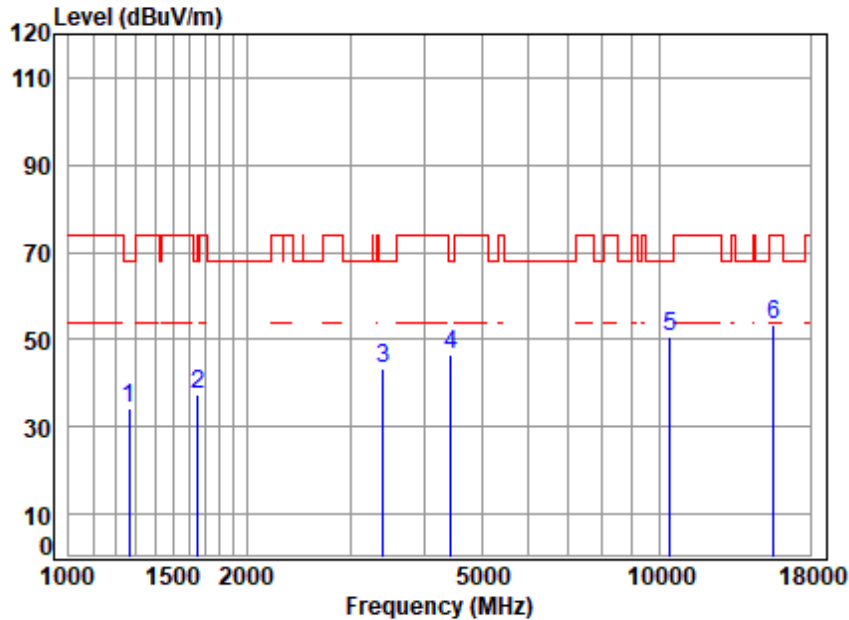


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5210 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1263.796	2.88	24.87	39.80	46.37	34.32	68.20	-33.88 peak
2 1653.550	3.39	26.48	40.04	47.53	37.36	68.20	-30.84 peak
3 3405.929	5.40	31.56	41.01	47.29	43.24	68.20	-24.96 peak
4 4443.453	6.71	33.50	41.82	48.12	46.51	68.20	-21.69 peak
5 10420.000	10.56	37.73	37.33	39.88	50.84	68.20	-17.36 peak
6 15630.000	14.01	40.78	40.42	38.88	53.25	74.00	-20.75 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

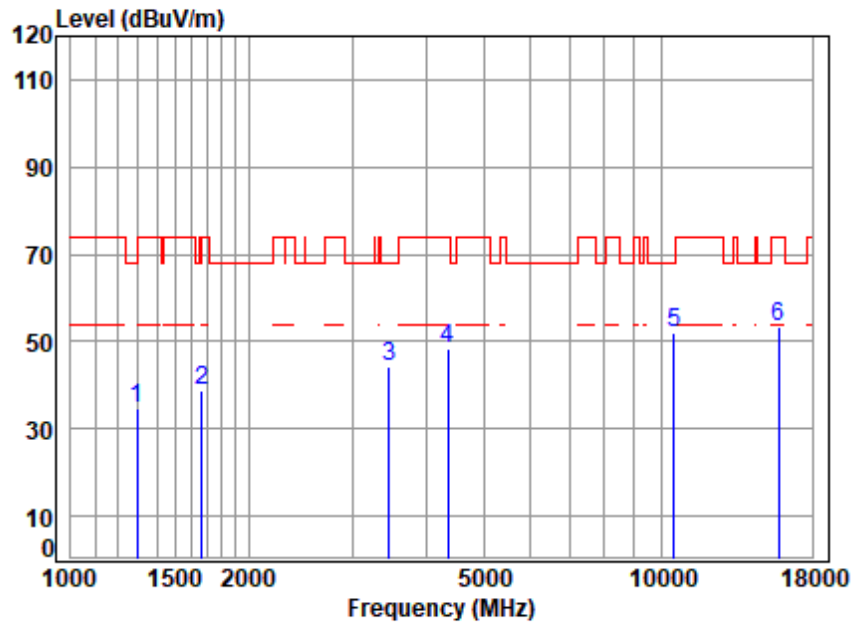


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1293.359	2.93	25.00	39.82	46.50	34.61	68.20	-33.59 peak
2 1667.951	3.40	26.54	40.04	49.09	38.99	74.00	-35.01 peak
3 3455.508	5.47	31.63	41.04	48.03	44.09	68.20	-24.11 peak
4 4354.454	6.63	33.35	41.74	49.92	48.16	74.00	-25.84 peak
5 10520.000	10.55	37.70	37.38	41.15	52.02	68.20	-16.18 peak
6 15780.000	14.07	40.87	40.50	38.72	53.16	74.00	-20.84 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

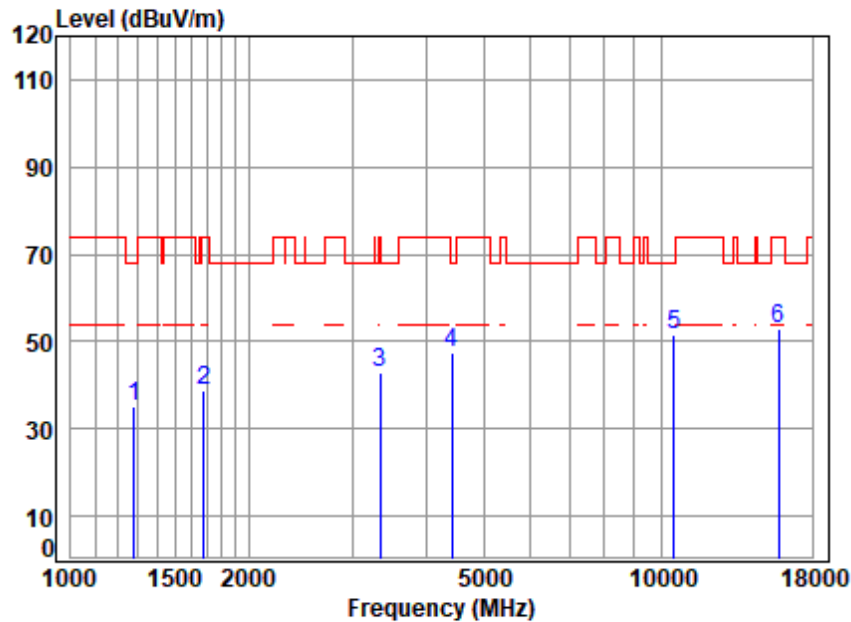


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1282.193	2.91	24.95	39.82	47.15	35.19	68.20	-33.01 peak
2 1682.477	3.42	26.60	40.05	48.83	38.80	74.00	-35.20 peak
3 3337.710	5.32	31.45	40.96	47.30	43.11	74.00	-30.89 peak
4 4417.841	6.68	33.46	41.80	48.89	47.23	68.20	-20.97 peak
5 10520.000	10.55	37.70	37.38	40.65	51.52	68.20	-16.68 peak
6 15780.000	14.07	40.87	40.50	38.44	52.88	74.00	-21.12 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

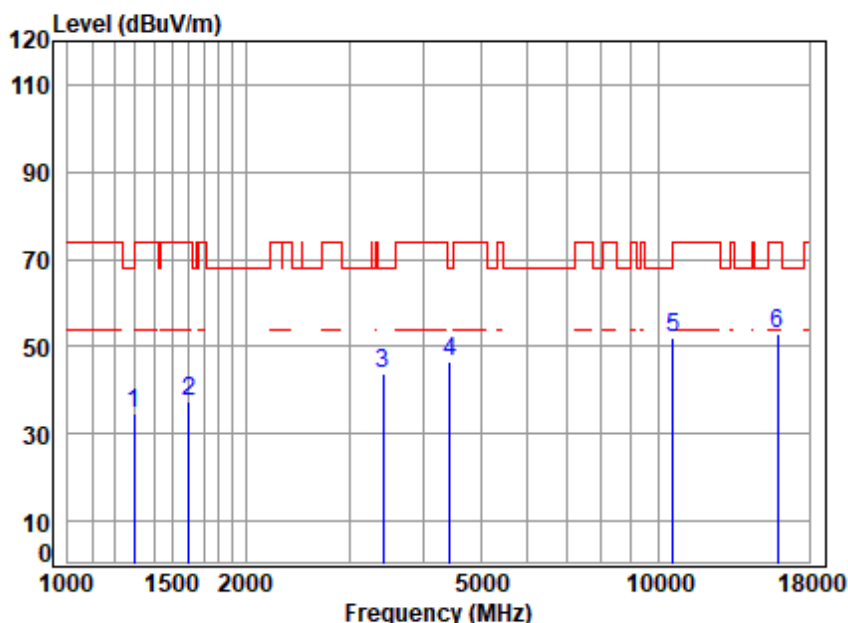


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5300 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.51	34.63	68.20	-33.57 peak
2 1606.441	3.35	26.28	40.01	47.72	37.34	74.00	-36.66 peak
3 3425.675	5.43	31.59	41.02	47.64	43.64	68.20	-24.56 peak
4 4443.453	6.71	33.50	41.82	48.25	46.64	68.20	-21.56 peak
5 10600.000	10.62	37.72	37.42	41.12	52.04	68.20	-16.16 peak
6 15900.000	14.12	40.94	40.55	38.26	52.77	74.00	-21.23 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

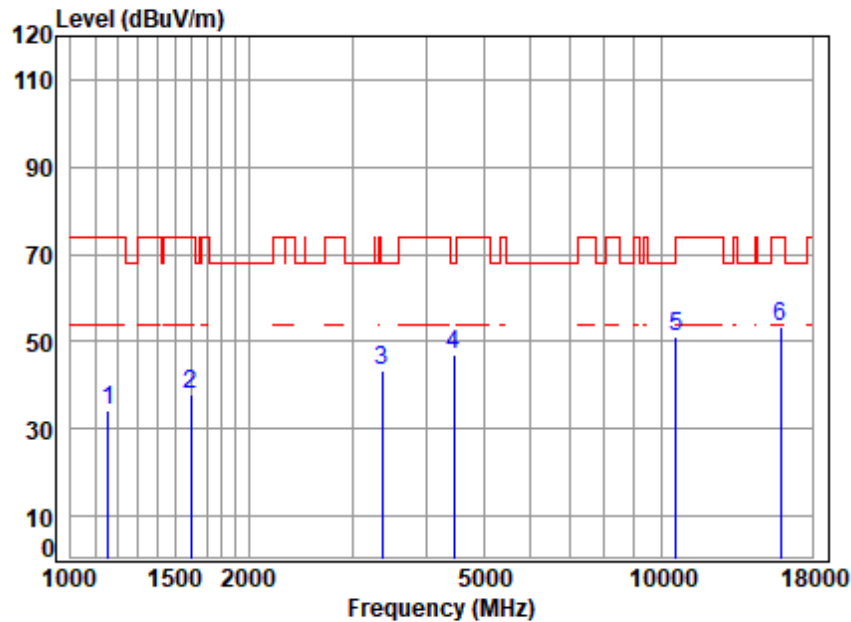


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5300 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1155.483	2.68	24.38	39.73	46.89	34.22	74.00	-39.78 peak
2	1597.181	3.35	26.24	40.01	48.50	38.08	74.00	-35.92 peak
3	3366.778	5.35	31.50	40.98	47.47	43.34	68.20	-24.86 peak
4	4456.315	6.72	33.53	41.84	48.43	46.84	68.20	-21.36 peak
5	10600.000	10.62	37.72	37.42	40.28	51.20	68.20	-17.00 peak
6	15900.000	14.12	40.94	40.55	38.79	53.30	74.00	-20.70 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

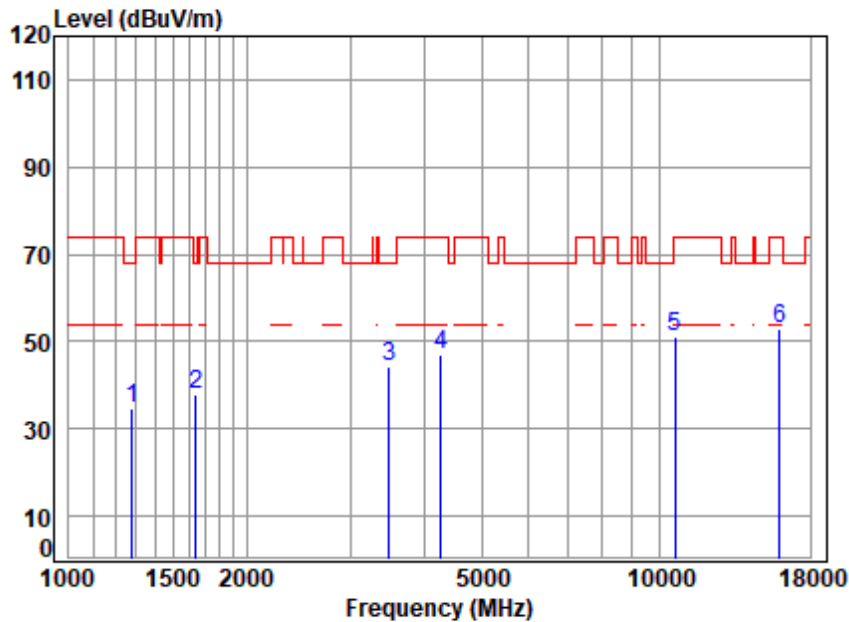


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1282.193	2.91	24.95	39.82	46.45	34.49	68.20	-33.71 peak
2 1644.019	3.38	26.44	40.03	47.94	37.73	68.20	-30.47 peak
3 3485.601	5.50	31.68	41.07	48.18	44.29	68.20	-23.91 peak
4 4267.237	6.54	33.19	41.66	48.77	46.84	74.00	-27.16 peak
5 10640.000	10.66	37.73	37.44	40.36	51.31	74.00	-22.69 peak
6 15960.000	14.14	40.98	40.58	38.28	52.82	74.00	-21.18 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

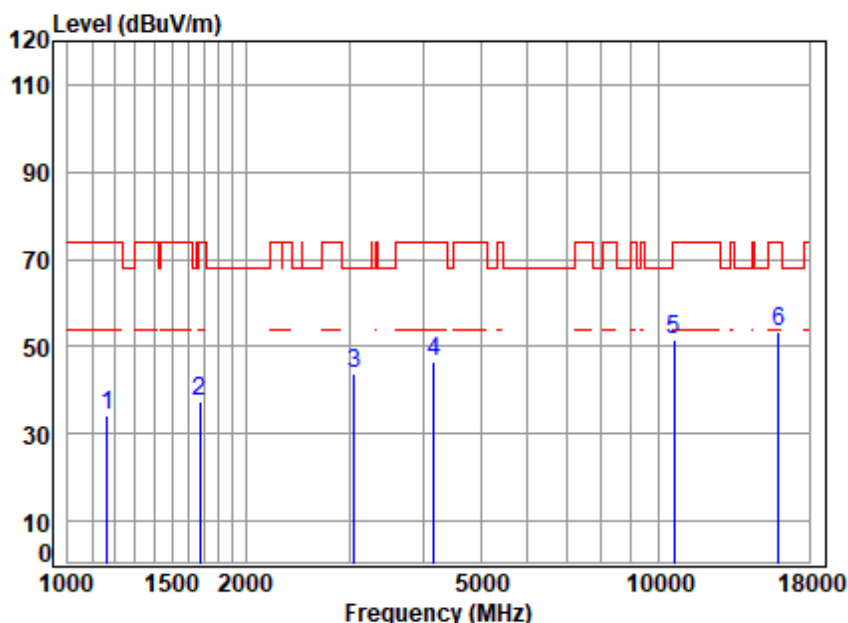


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1165.546	2.70	24.43	39.73	46.90	34.30	74.00	-39.70 peak
2 1672.779	3.41	26.56	40.05	47.29	37.21	74.00	-36.79 peak
3 3051.653	4.93	30.99	40.74	48.46	43.64	68.20	-24.56 peak
4 4169.698	6.45	33.02	41.57	48.65	46.55	74.00	-27.45 peak
5 10640.000	10.66	37.73	37.44	40.71	51.66	74.00	-22.34 peak
6 15960.000	14.14	40.98	40.58	38.90	53.44	74.00	-20.56 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

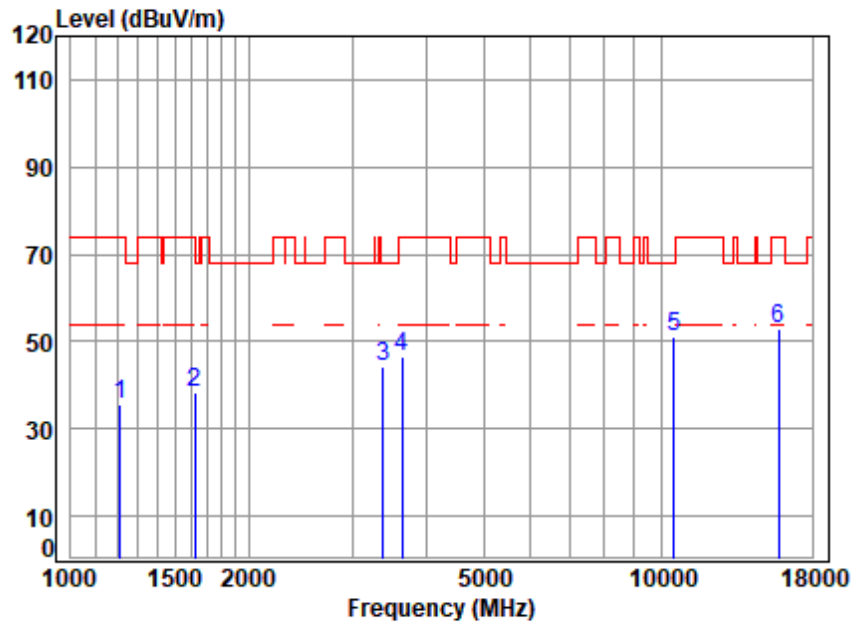


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1213.677	2.79	24.65	39.77	47.80	35.47	74.00	-38.53 peak
2 1620.431	3.36	26.34	40.02	48.74	38.42	74.00	-35.58 peak
3 3386.297	5.38	31.53	40.99	48.24	44.16	68.20	-24.04 peak
4 3640.045	5.74	31.99	41.17	49.87	46.43	74.00	-27.57 peak
5 10520.000	10.55	37.70	37.38	40.13	51.00	68.20	-17.20 peak
6 15780.000	14.07	40.87	40.50	38.32	52.76	74.00	-21.24 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

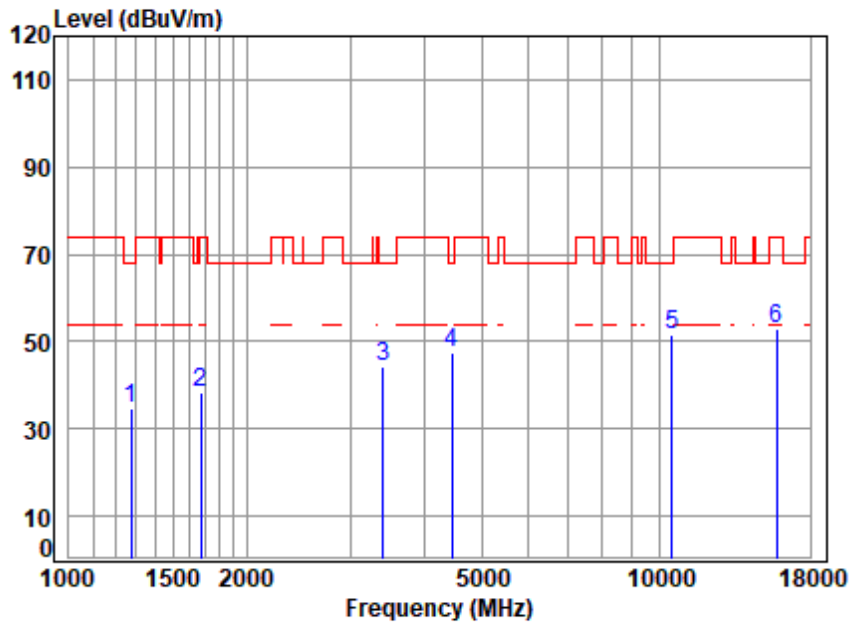


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1274.802	2.90	24.92	39.81	46.51	34.52	68.20	-33.68 peak
2 1672.779	3.41	26.56	40.05	48.48	38.40	74.00	-35.60 peak
3 3405.929	5.40	31.56	41.01	48.40	44.35	68.20	-23.85 peak
4 4456.315	6.72	33.53	41.84	49.01	47.42	68.20	-20.78 peak
5 10520.000	10.55	37.70	37.38	40.47	51.34	68.20	-16.86 peak
6 15780.000	14.07	40.87	40.50	38.55	52.99	74.00	-21.01 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

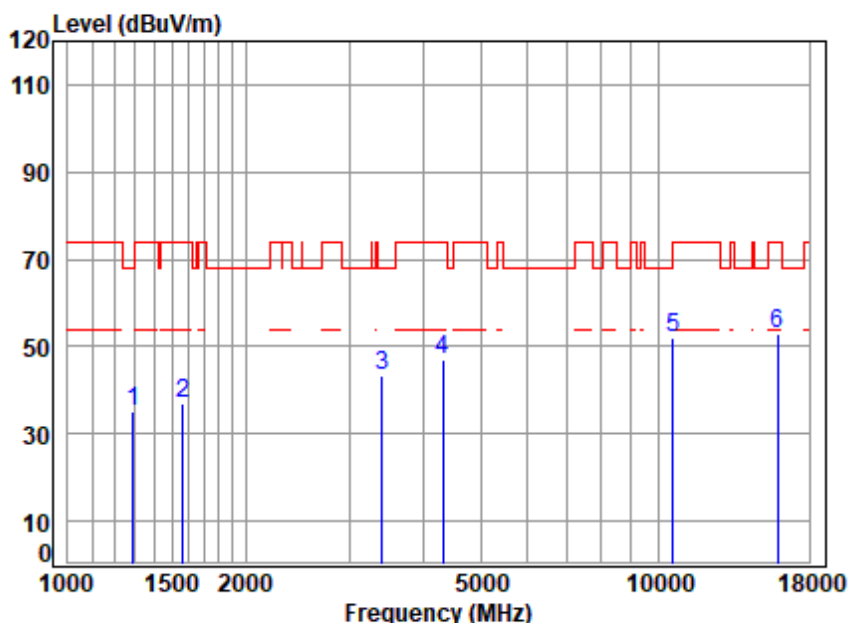


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1289.627	2.92	24.98	39.82	47.16	35.24	68.20	-32.96 peak
2 1565.191	3.32	26.10	39.99	47.45	36.88	74.00	-37.12 peak
3 3405.929	5.40	31.56	41.01	47.52	43.47	68.20	-24.73 peak
4 4316.859	6.59	33.28	41.71	48.79	46.95	74.00	-27.05 peak
5 10600.000	10.62	37.72	37.42	41.16	52.08	68.20	-16.12 peak
6 15900.000	14.12	40.94	40.55	38.28	52.79	74.00	-21.21 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

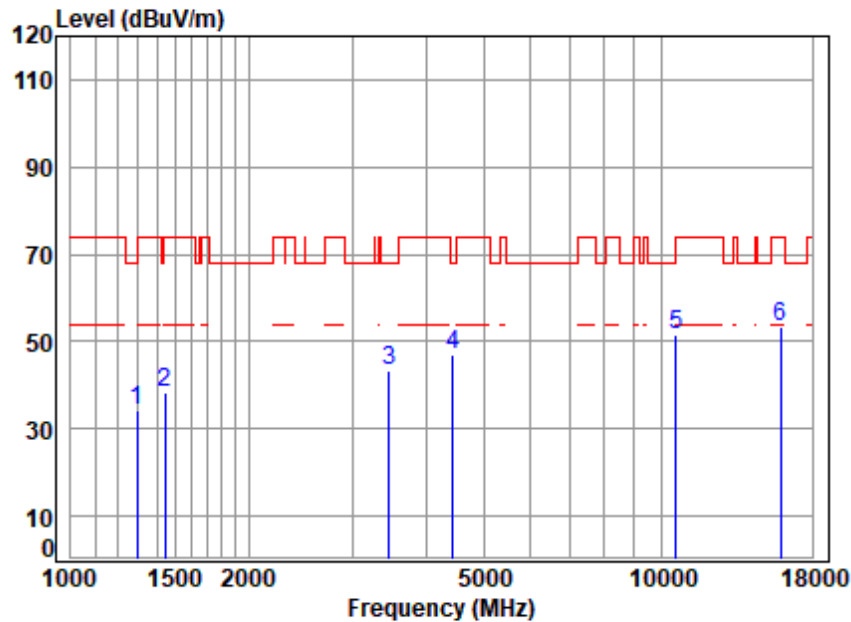


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5300 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.11	34.23	68.20	-33.97 peak
2 1443.509	3.17	25.59	39.92	49.41	38.25	74.00	-35.75 peak
3 3465.510	5.48	31.65	41.05	47.37	43.45	68.20	-24.75 peak
4 4430.628	6.70	33.48	41.81	48.83	47.20	68.20	-21.00 peak
5 10600.000	10.62	37.72	37.42	40.66	51.58	68.20	-16.62 peak
6 15900.000	14.12	40.94	40.55	38.87	53.38	74.00	-20.62 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

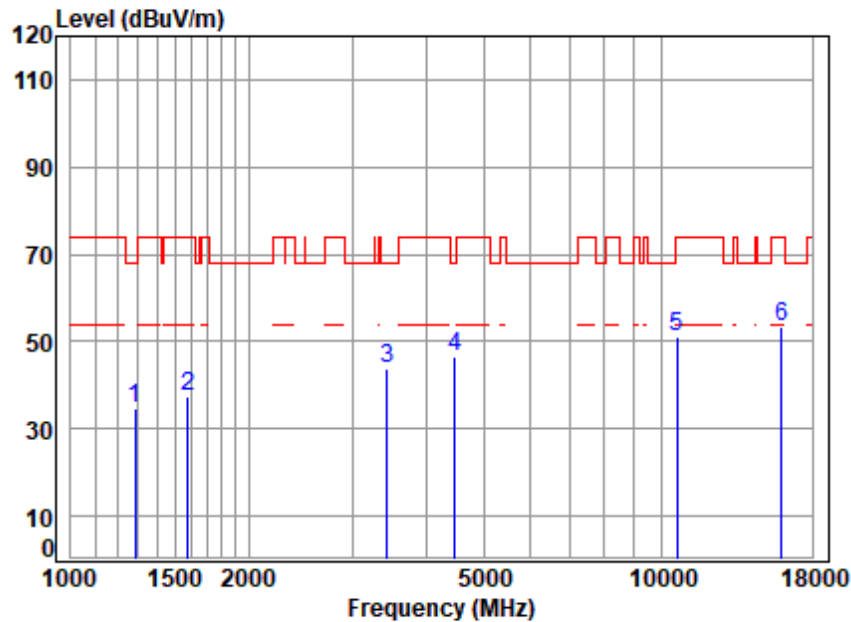


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	46.68	34.74	68.20	-33.46 peak
2 1578.822	3.33	26.16	40.00	48.13	37.62	74.00	-36.38 peak
3 3435.590	5.44	31.60	41.03	47.87	43.88	68.20	-24.32 peak
4 4469.214	6.73	33.55	41.85	48.04	46.47	68.20	-21.73 peak
5 10640.000	10.66	37.73	37.44	40.31	51.26	74.00	-22.74 peak
6 15960.000	14.14	40.98	40.58	38.66	53.20	74.00	-20.80 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

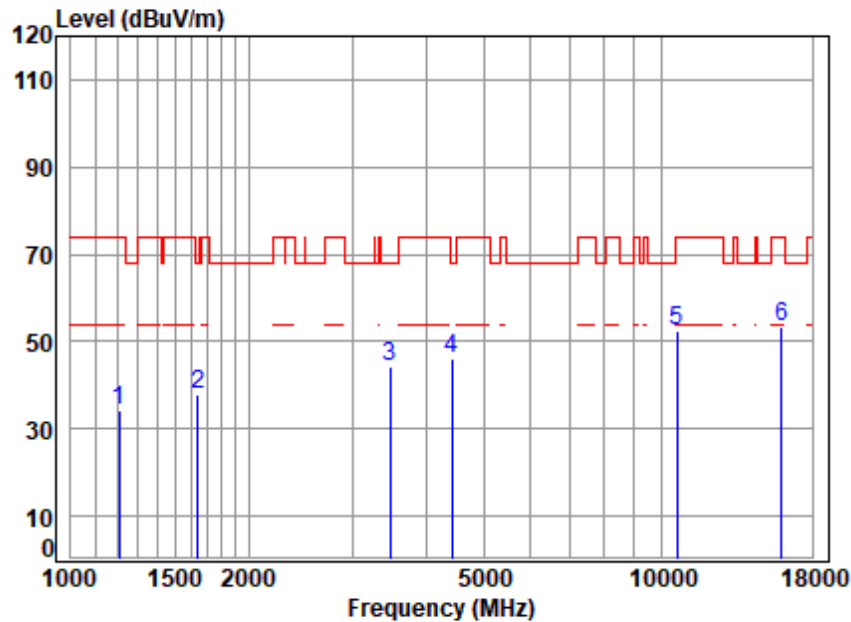


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1206.682	2.78	24.62	39.76	46.78	34.42	74.00	-39.58 peak
2 1644.019	3.38	26.44	40.03	48.22	38.01	68.20	-30.19 peak
3 3475.541	5.49	31.66	41.06	48.20	44.29	68.20	-23.91 peak
4 4417.841	6.68	33.46	41.80	47.97	46.31	68.20	-21.89 peak
5 10640.000	10.66	37.73	37.44	41.53	52.48	74.00	-21.52 peak
6 15960.000	14.14	40.98	40.58	38.80	53.34	74.00	-20.66 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

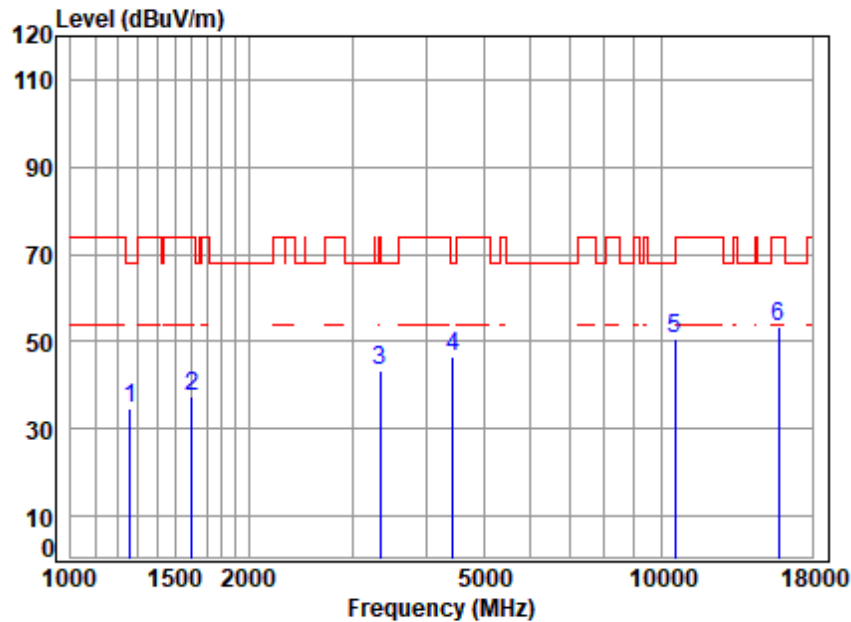


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1260.149	2.87	24.85	39.80	46.85	34.77	68.20 -33.43 peak
2	1606.441	3.35	26.28	40.01	47.70	37.32	74.00 -36.68 peak
3	3337.710	5.32	31.45	40.96	47.49	43.30	74.00 -30.70 peak
4	4443.453	6.71	33.50	41.82	48.37	46.76	68.20 -21.44 peak
5	10540.000	10.57	37.71	37.39	39.76	50.65	68.20 -17.55 peak
6	15810.000	14.08	40.89	40.51	38.82	53.28	74.00 -20.72 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

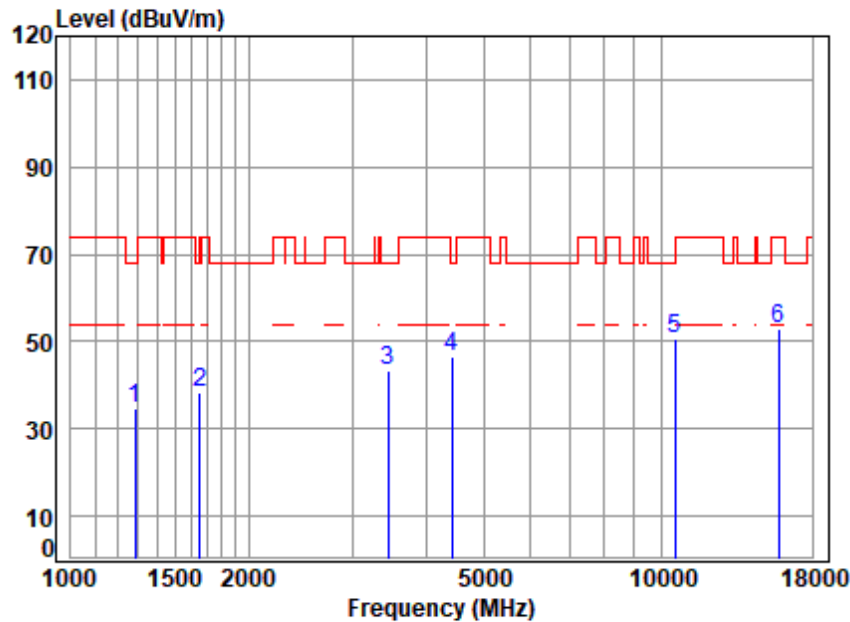


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5270 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	46.68	34.74	68.20	-33.46 peak
2 1653.550	3.39	26.48	40.04	48.29	38.12	68.20	-30.08 peak
3 3445.535	5.45	31.62	41.04	47.32	43.35	68.20	-24.85 peak
4 4417.841	6.68	33.46	41.80	48.00	46.34	68.20	-21.86 peak
5 10540.000	10.57	37.71	37.39	39.82	50.71	68.20	-17.49 peak
6 15810.000	14.08	40.89	40.51	38.67	53.13	74.00	-20.87 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

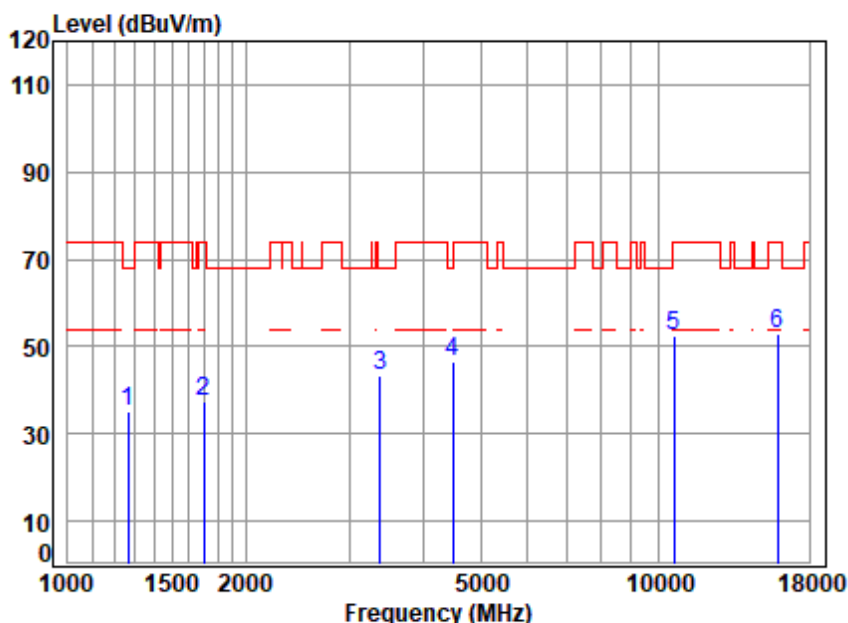


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1267.454	2.89	24.89	39.81	47.09	35.06	68.20	-33.14 peak
2 1697.129	3.43	26.66	40.06	47.20	37.23	74.00	-36.77 peak
3 3386.297	5.38	31.53	40.99	47.65	43.57	68.20	-24.63 peak
4 4482.150	6.74	33.57	41.86	48.13	46.58	68.20	-21.62 peak
5 10620.000	10.64	37.72	37.43	41.40	52.33	74.00	-21.67 peak
6 15930.000	14.13	40.96	40.57	38.33	52.85	74.00	-21.15 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

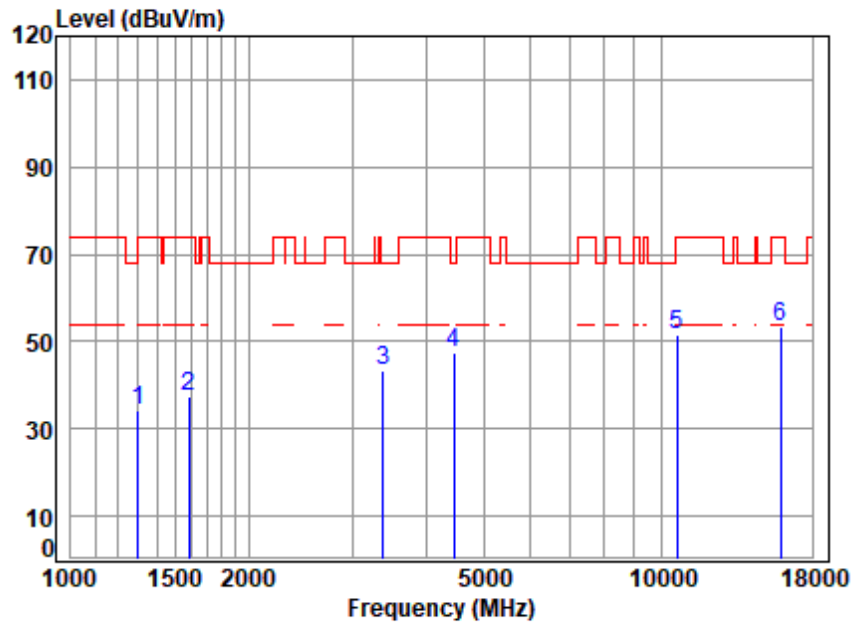


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5310 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	2.94	25.03	39.83	46.04	34.18	74.00	-39.82 peak
2 1587.975	3.34	26.20	40.00	47.89	37.43	74.00	-36.57 peak
3 3376.523	5.37	31.51	40.99	47.56	43.45	68.20	-24.75 peak
4 4456.315	6.72	33.53	41.84	48.84	47.25	68.20	-20.95 peak
5 10620.000	10.64	37.72	37.43	40.69	51.62	74.00	-22.38 peak
6 15930.000	14.13	40.96	40.57	38.75	53.27	74.00	-20.73 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

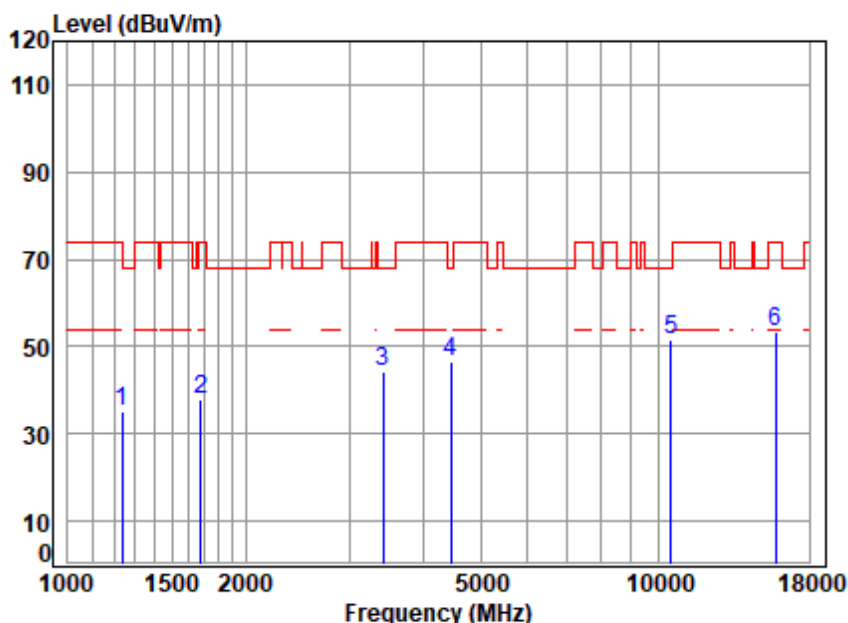


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1234.909	2.83	24.74	39.78	47.21	35.00	74.00	-39.00 peak
2 1682.477	3.42	26.60	40.05	47.82	37.79	74.00	-36.21 peak
3 3415.787	5.42	31.57	41.02	48.11	44.08	68.20	-24.12 peak
4 4456.315	6.72	33.53	41.84	48.04	46.45	68.20	-21.75 peak
5 10520.000	10.55	37.70	37.38	40.67	51.54	68.20	-16.66 peak
6 15780.000	14.07	40.87	40.50	38.96	53.40	74.00	-20.60 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

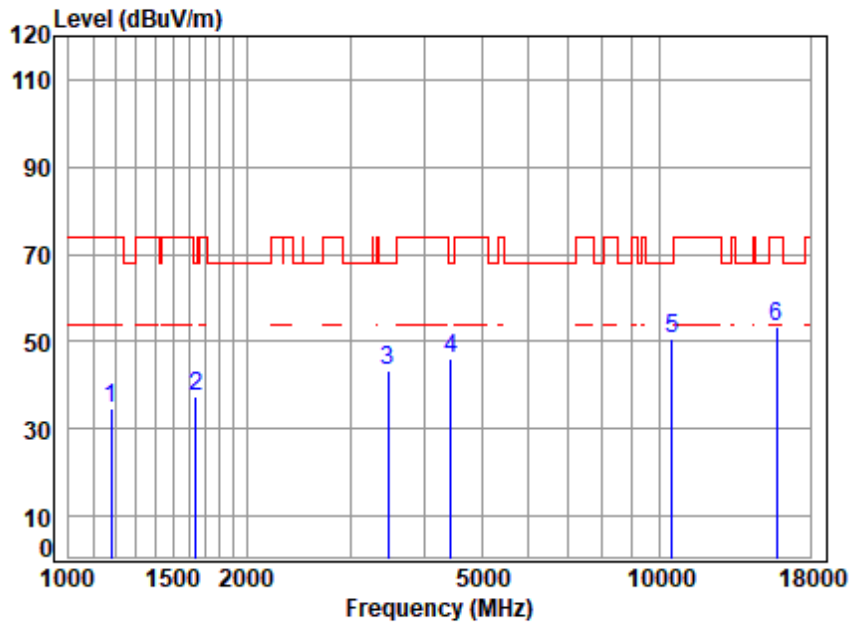


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1179.100	2.73	24.49	39.74	47.07	34.55	74.00	-39.45 peak
2 1644.019	3.38	26.44	40.03	47.50	37.29	68.20	-30.91 peak
3 3475.541	5.49	31.66	41.06	47.33	43.42	68.20	-24.78 peak
4 4430.628	6.70	33.48	41.81	47.86	46.23	68.20	-21.97 peak
5 10520.000	10.55	37.70	37.38	39.88	50.75	68.20	-17.45 peak
6 15780.000	14.07	40.87	40.50	39.10	53.54	74.00	-20.46 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

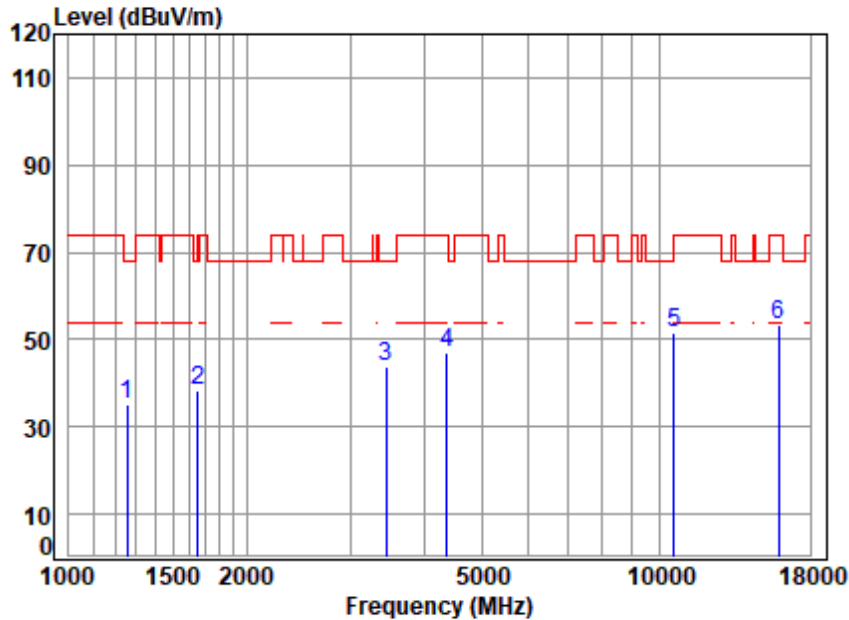


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1256.512	2.87	24.84	39.80	47.04	34.95	68.20	-33.25 peak
2 1653.550	3.39	26.48	40.04	48.29	38.12	68.20	-30.08 peak
3 3445.535	5.45	31.62	41.04	47.97	44.00	68.20	-24.20 peak
4 4367.058	6.64	33.37	41.75	48.77	47.03	74.00	-26.97 peak
5 10600.000	10.62	37.72	37.42	40.48	51.40	68.20	-16.80 peak
6 15900.000	14.12	40.94	40.55	38.89	53.40	74.00	-20.60 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

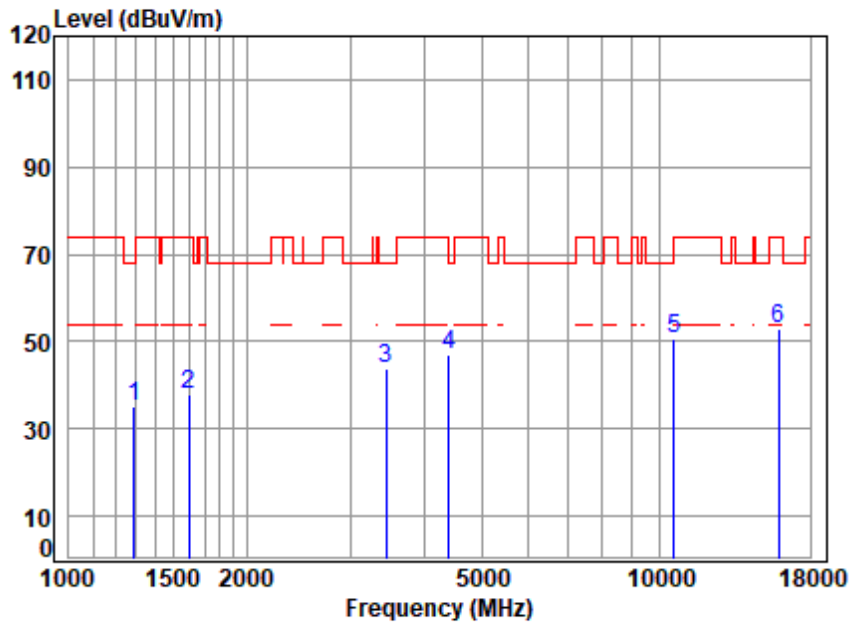


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5300 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1289.627	2.92	24.98	39.82	47.23	35.31	68.20	-32.89 peak
2 1597.181	3.35	26.24	40.01	48.40	37.98	74.00	-36.02 peak
3 3445.535	5.45	31.62	41.04	47.75	43.78	68.20	-24.42 peak
4 4405.090	6.67	33.44	41.79	48.51	46.83	68.20	-21.37 peak
5 10600.000	10.62	37.72	37.42	39.67	50.59	68.20	-17.61 peak
6 15900.000	14.12	40.94	40.55	38.22	52.73	74.00	-21.27 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

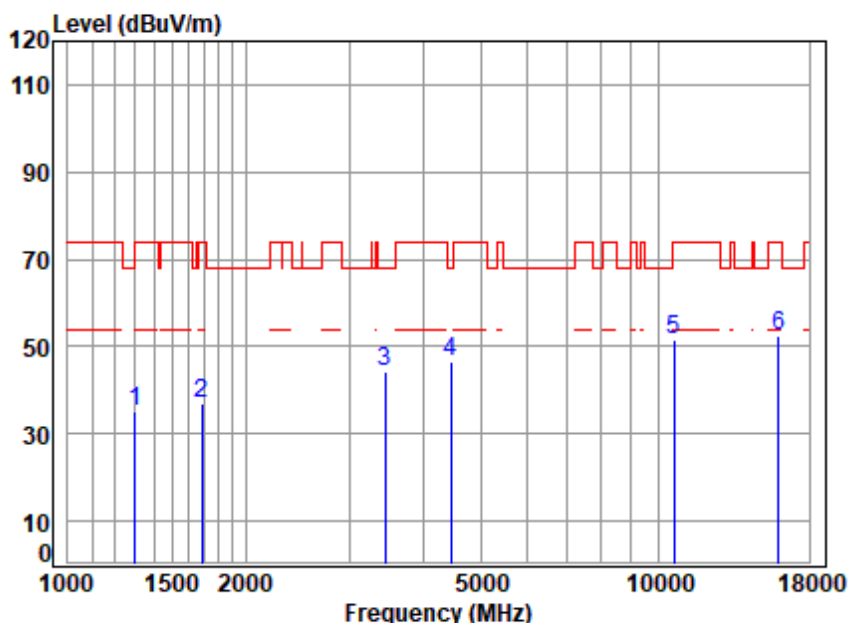


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	2.94	25.03	39.83	47.02	35.16	74.00	-38.84 peak
2 1687.347	3.42	26.62	40.05	46.80	36.79	74.00	-37.21 peak
3 3445.535	5.45	31.62	41.04	48.23	44.26	68.20	-23.94 peak
4 4456.315	6.72	33.53	41.84	48.17	46.58	68.20	-21.62 peak
5 10640.000	10.66	37.73	37.44	40.81	51.76	74.00	-22.24 peak
6 15960.000	14.14	40.98	40.58	38.12	52.66	74.00	-21.34 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

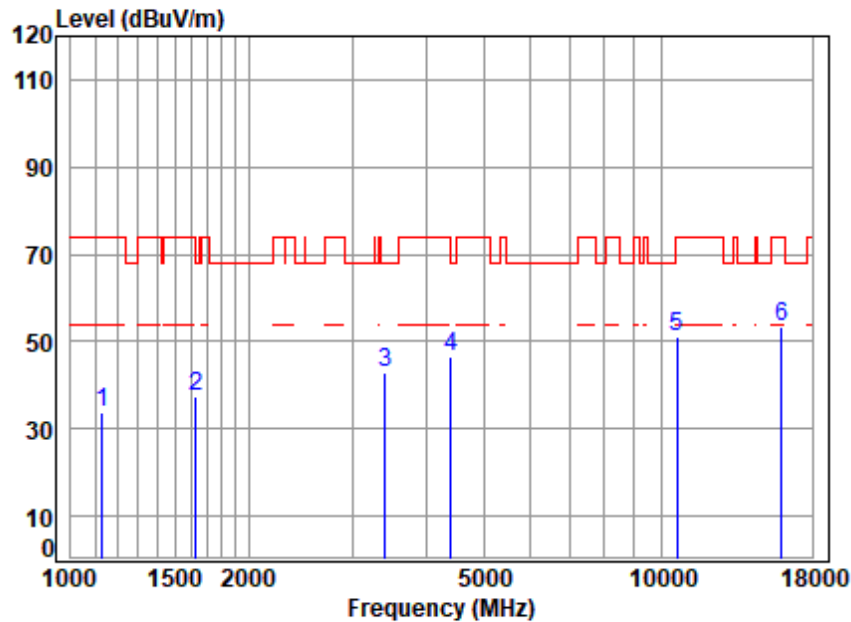


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1129.072	2.63	24.26	39.71	46.51	33.69	74.00	-40.31 peak
2 1629.825	3.37	26.38	40.02	47.81	37.54	68.20	-30.66 peak
3 3405.929	5.40	31.56	41.01	47.11	43.06	68.20	-25.14 peak
4 4405.090	6.67	33.44	41.79	48.41	46.73	68.20	-21.47 peak
5 10640.000	10.66	37.73	37.44	40.07	51.02	74.00	-22.98 peak
6 15960.000	14.14	40.98	40.58	38.89	53.43	74.00	-20.57 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

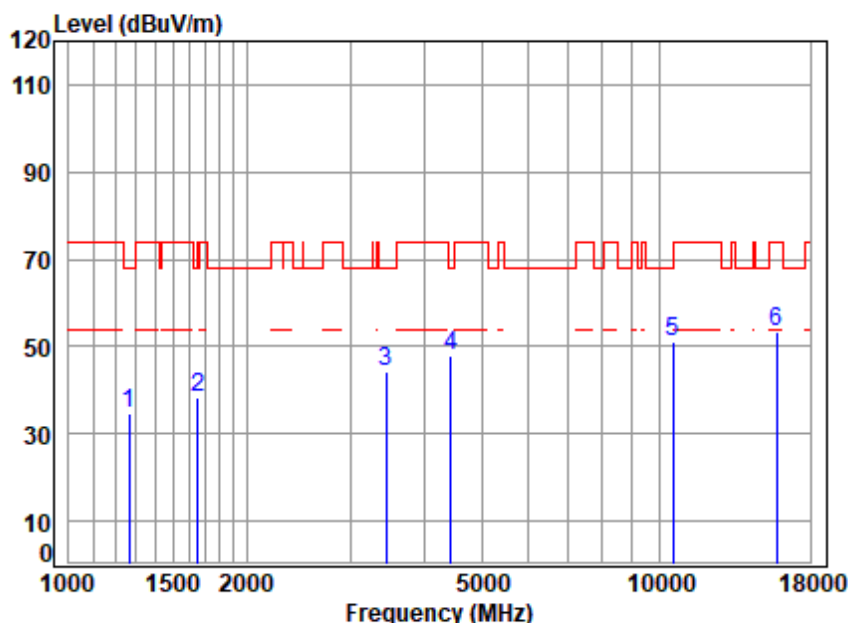


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1267.454	2.89	24.89	39.81	46.76	34.73	68.20	-33.47 peak
2 1653.550	3.39	26.48	40.04	48.62	38.45	68.20	-29.75 peak
3 3445.535	5.45	31.62	41.04	48.23	44.26	68.20	-23.94 peak
4 4443.453	6.71	33.50	41.82	49.47	47.86	68.20	-20.34 peak
5 10540.000	10.57	37.71	37.39	40.11	51.00	68.20	-17.20 peak
6 15810.000	14.08	40.89	40.51	38.94	53.40	74.00	-20.60 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

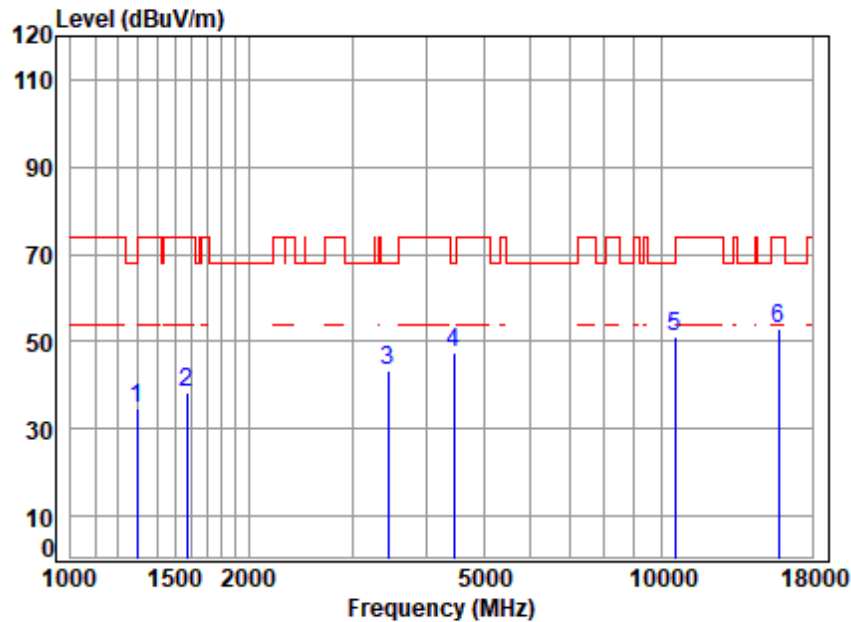


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5270 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.48	34.60	68.20	-33.60 peak
2 1574.265	3.33	26.14	39.99	49.07	38.55	74.00	-35.45 peak
3 3445.535	5.45	31.62	41.04	47.53	43.56	68.20	-24.64 peak
4 4456.315	6.72	33.53	41.84	49.20	47.61	68.20	-20.59 peak
5 10540.000	10.57	37.71	37.39	40.02	50.91	68.20	-17.29 peak
6 15810.000	14.08	40.89	40.51	38.59	53.05	74.00	-20.95 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

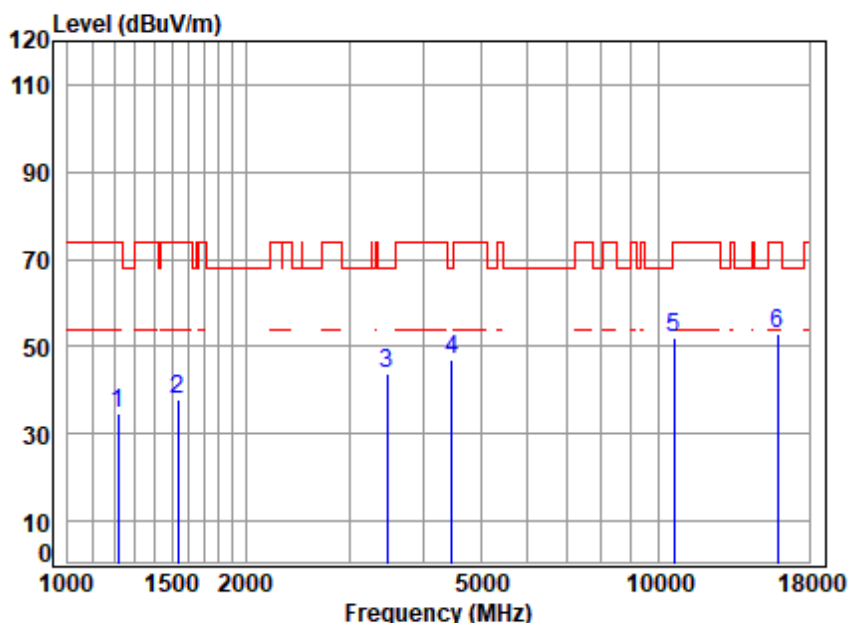


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1217.190	2.80	24.67	39.77	46.89	34.59	74.00	-39.41 peak
2 1538.281	3.29	25.98	39.97	48.72	38.02	74.00	-35.98 peak
3 3475.541	5.49	31.66	41.06	47.57	43.66	68.20	-24.54 peak
4 4469.214	6.73	33.55	41.85	48.64	47.07	68.20	-21.13 peak
5 10620.000	10.64	37.72	37.43	41.10	52.03	74.00	-21.97 peak
6 15930.000	14.13	40.96	40.57	38.43	52.95	74.00	-21.05 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

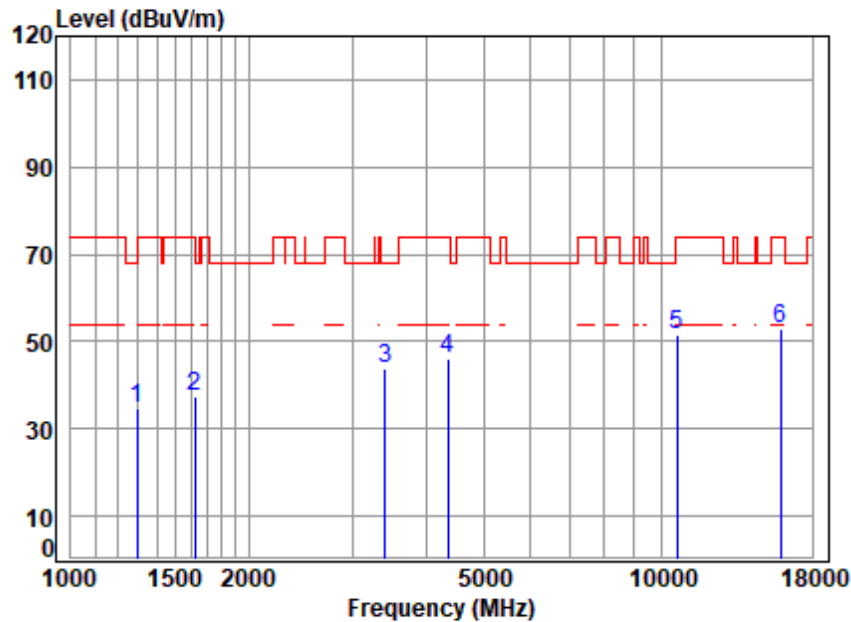


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5310 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.68	34.80	68.20	-33.40 peak
2 1625.121	3.37	26.36	40.02	47.75	37.46	74.00	-36.54 peak
3 3405.929	5.40	31.56	41.01	47.73	43.68	68.20	-24.52 peak
4 4354.454	6.63	33.35	41.74	48.03	46.27	74.00	-27.73 peak
5 10620.000	10.64	37.72	37.43	40.40	51.33	74.00	-22.67 peak
6 15930.000	14.13	40.96	40.57	38.21	52.73	74.00	-21.27 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

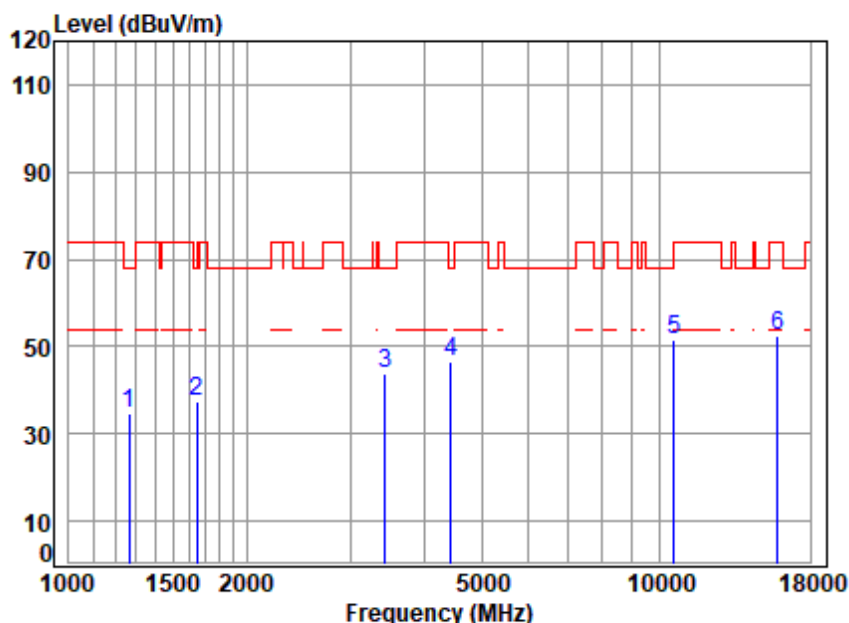


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1263.796	2.88	24.87	39.80	46.82	34.77	68.20	-33.43 peak
2 1648.778	3.39	26.46	40.03	47.73	37.55	68.20	-30.65 peak
3 3435.590	5.44	31.60	41.03	47.58	43.59	68.20	-24.61 peak
4 4443.453	6.71	33.50	41.82	48.17	46.56	68.20	-21.64 peak
5 10580.000	10.60	37.72	37.41	40.54	51.45	68.20	-16.75 peak
6 15870.000	14.11	40.92	40.54	38.19	52.68	74.00	-21.32 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

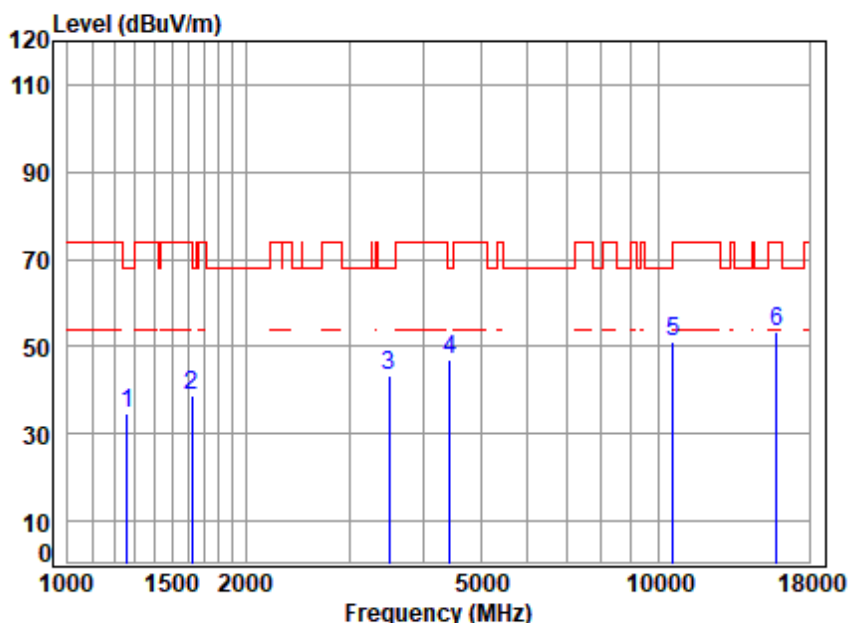


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5290 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1260.149	2.87	24.85	39.80	46.98	34.90	68.20	-33.30 peak
2 1625.121	3.37	26.36	40.02	48.97	38.68	74.00	-35.32 peak
3 3495.691	5.51	31.69	41.07	47.31	43.44	68.20	-24.76 peak
4 4443.453	6.71	33.50	41.82	48.66	47.05	68.20	-21.15 peak
5 10580.000	10.60	37.72	37.41	40.11	51.02	68.20	-17.18 peak
6 15870.000	14.11	40.92	40.54	38.92	53.41	74.00	-20.59 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

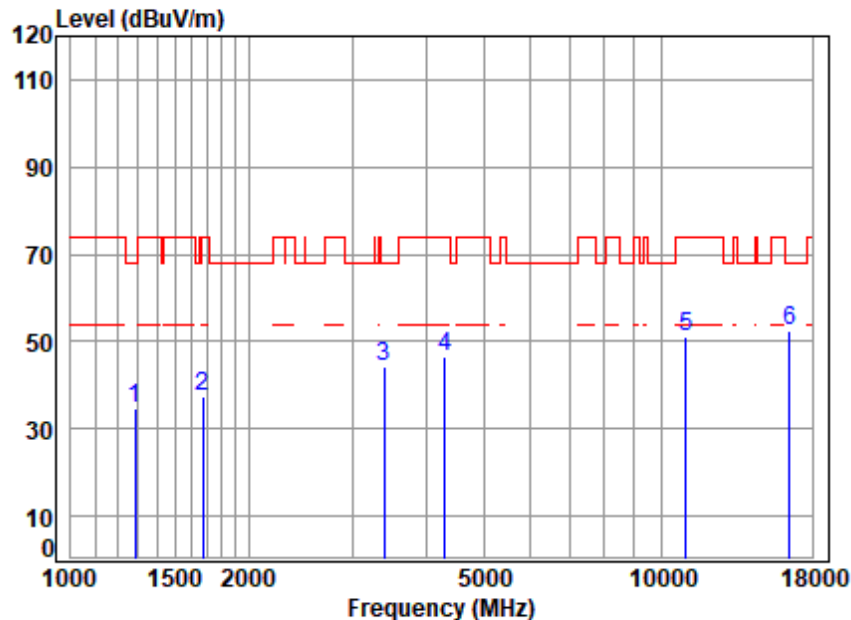


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	46.73	34.79	68.20	-33.41 peak
2 1672.779	3.41	26.56	40.05	47.58	37.50	74.00	-36.50 peak
3 3396.098	5.39	31.54	41.00	48.27	44.20	68.20	-24.00 peak
4 4304.400	6.58	33.26	41.70	48.47	46.61	74.00	-27.39 peak
5 11000.000	10.97	37.80	37.62	39.88	51.03	74.00	-22.97 peak
6 16500.000	14.82	42.20	40.47	35.88	52.43	68.20	-15.77 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

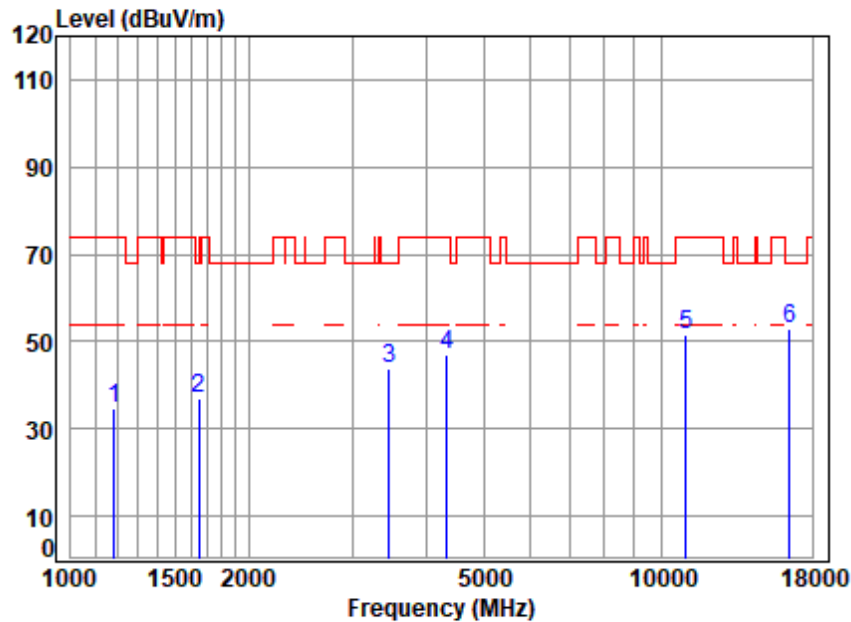


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1185.936	2.74	24.53	39.75	47.09	34.61	74.00	-39.39 peak
2 1648.778	3.39	26.46	40.03	47.31	37.13	68.20	-31.07 peak
3 3455.508	5.47	31.63	41.04	47.73	43.79	68.20	-24.41 peak
4 4341.886	6.61	33.33	41.73	48.62	46.83	74.00	-27.17 peak
5 11000.000	10.97	37.80	37.62	40.50	51.65	74.00	-22.35 peak
6 16500.000	14.82	42.20	40.47	36.54	53.09	68.20	-15.11 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

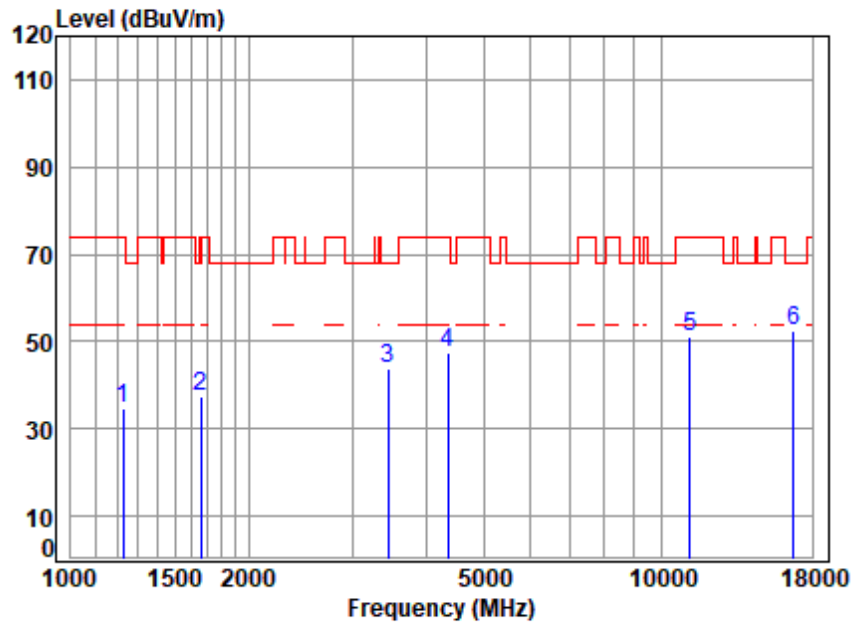


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5580 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1227.791	2.82	24.71	39.78	47.09	34.84	74.00	-39.16 peak
2 1658.337	3.40	26.50	40.04	47.59	37.45	68.20	-30.75 peak
3 3445.535	5.45	31.62	41.04	47.74	43.77	68.20	-24.43 peak
4 4354.454	6.63	33.35	41.74	49.11	47.35	74.00	-26.65 peak
5 11160.000	11.18	37.83	37.70	39.74	51.05	74.00	-22.95 peak
6 16740.000	14.51	42.39	40.41	36.20	52.69	68.20	-15.51 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

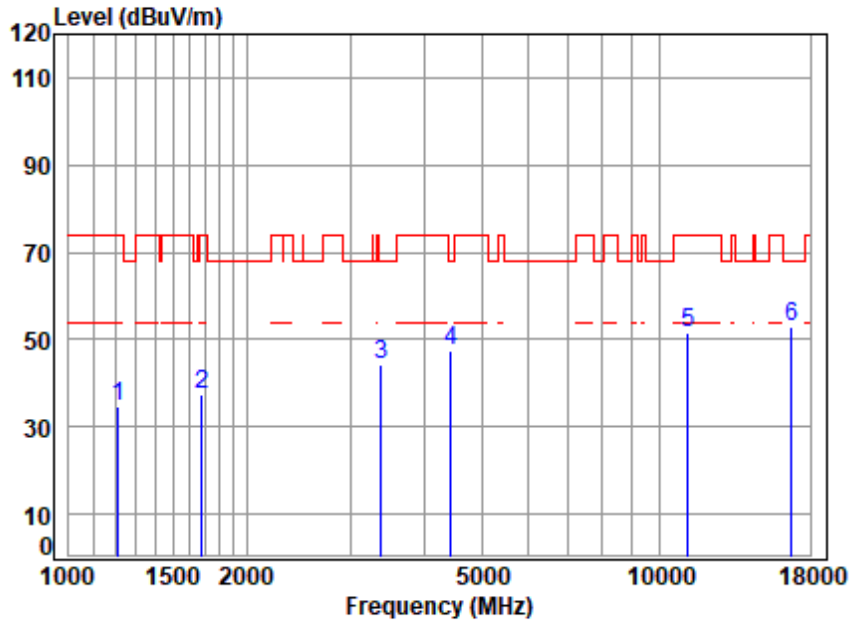


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5580 TX RSE
Note : 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1213.677	2.79	24.65	39.77	47.03	34.70	74.00	-39.30 peak
2	1682.477	3.42	26.60	40.05	47.27	37.24	74.00	-36.76 peak
3	3386.297	5.38	31.53	40.99	48.35	44.27	68.20	-23.93 peak
4	4430.628	6.70	33.48	41.81	49.19	47.56	68.20	-20.64 peak
5	11160.000	11.18	37.83	37.70	40.08	51.39	74.00	-22.61 peak
6	16740.000	14.51	42.39	40.41	36.58	53.07	68.20	-15.13 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

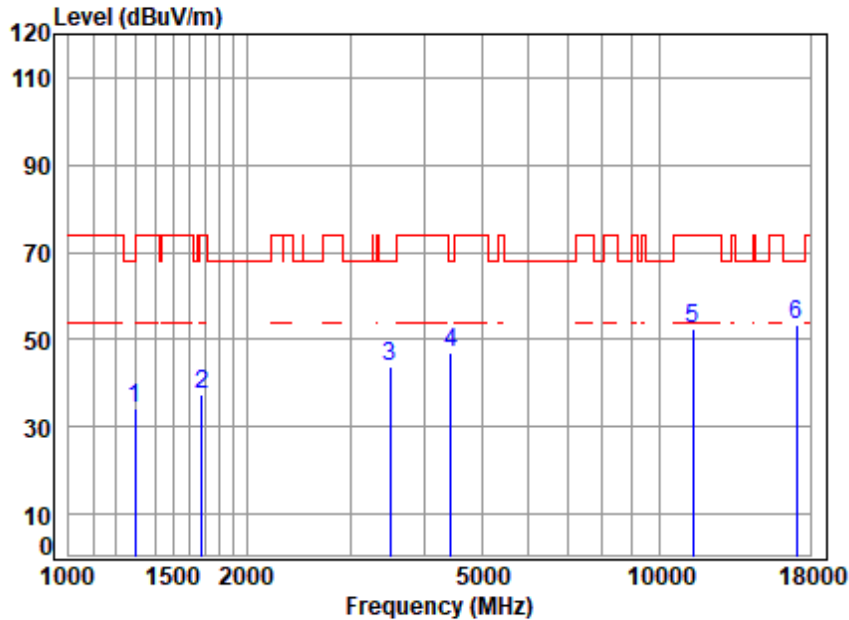


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5700 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.19	34.31	68.20	-33.89 peak
2 1682.477	3.42	26.60	40.05	47.41	37.38	74.00	-36.62 peak
3 3495.691	5.51	31.69	41.07	47.86	43.99	68.20	-24.21 peak
4 4430.628	6.70	33.48	41.81	48.68	47.05	68.20	-21.15 peak
5 11400.000	11.50	37.88	37.82	41.13	52.69	74.00	-21.31 peak
6 17100.000	14.14	42.66	40.32	36.94	53.42	68.20	-14.78 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

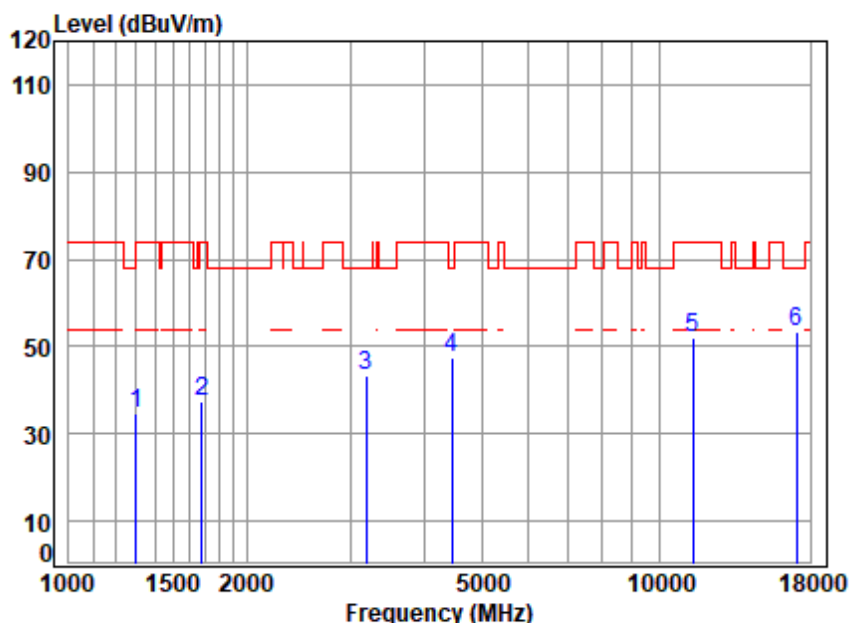


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5700 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	2.94	25.03	39.83	46.45	34.59	74.00	-39.41 peak
2 1682.477	3.42	26.60	40.05	47.65	37.62	74.00	-36.38 peak
3 3186.869	5.12	31.21	40.85	47.65	43.13	68.20	-25.07 peak
4 4456.315	6.72	33.53	41.84	49.02	47.43	68.20	-20.77 peak
5 11400.000	11.50	37.88	37.82	40.66	52.22	74.00	-21.78 peak
6 17100.000	14.14	42.66	40.32	36.76	53.24	68.20	-14.96 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

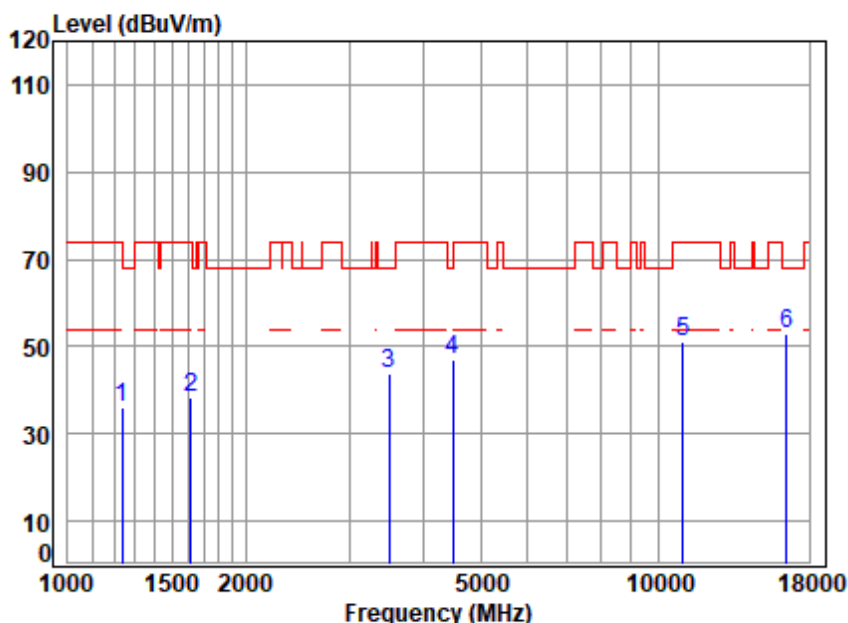


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1234.909	2.83	24.74	39.78	48.12	35.91	74.00 -38.09 peak
2	1615.754	3.36	26.32	40.02	48.76	38.42	74.00 -35.58 peak
3	3495.691	5.51	31.69	41.07	47.50	43.63	68.20 -24.57 peak
4	4495.125	6.76	33.59	41.87	48.52	47.00	68.20 -21.20 peak
5	11000.000	10.97	37.80	37.62	40.00	51.15	74.00 -22.85 peak
6	16500.000	14.82	42.20	40.47	36.18	52.73	68.20 -15.47 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

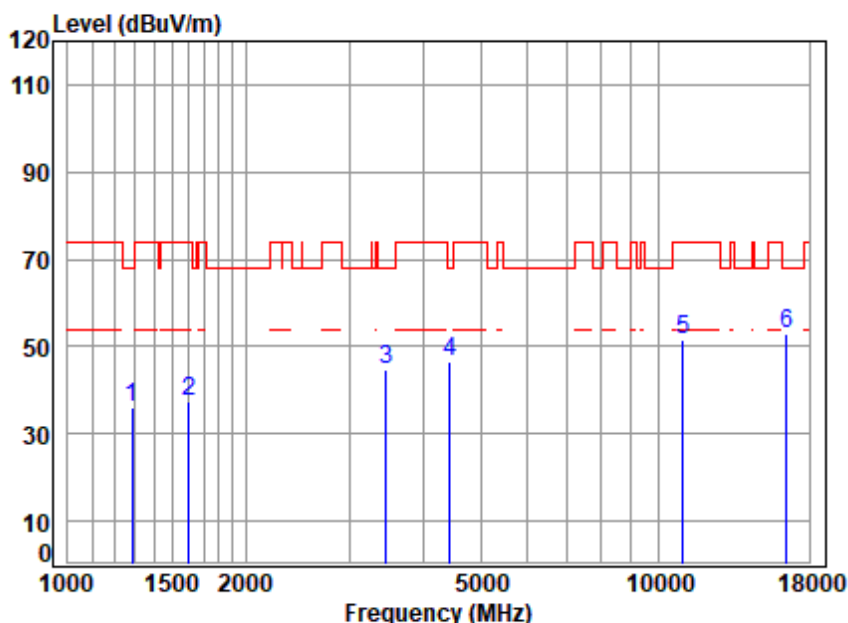


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	47.88	35.94	68.20	-32.26 peak
2 1606.441	3.35	26.28	40.01	47.93	37.55	74.00	-36.45 peak
3 3465.510	5.48	31.65	41.05	48.62	44.70	68.20	-23.50 peak
4 4430.628	6.70	33.48	41.81	48.18	46.55	68.20	-21.65 peak
5 11000.000	10.97	37.80	37.62	40.24	51.39	74.00	-22.61 peak
6 16500.000	14.82	42.20	40.47	36.39	52.94	68.20	-15.26 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

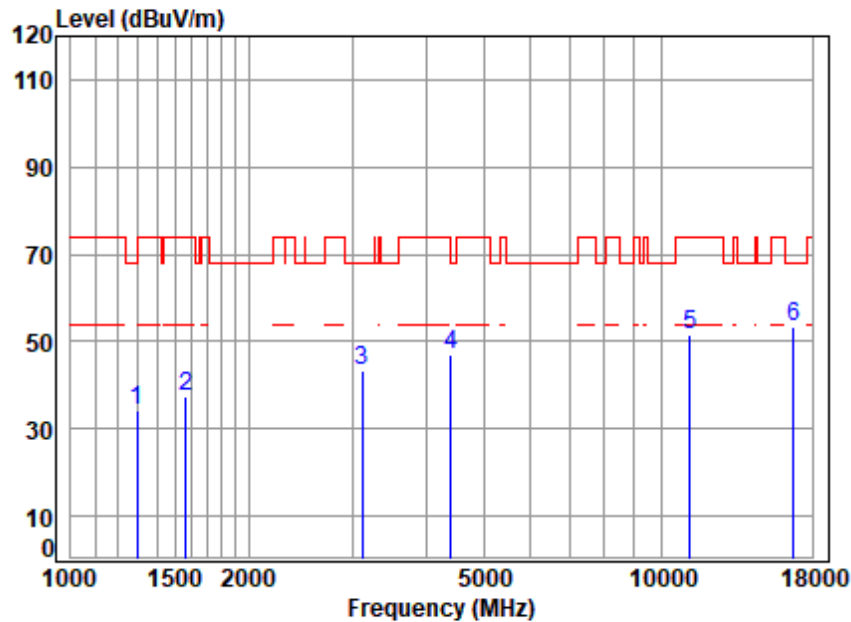


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.24	34.36	68.20	-33.84 peak
2 1565.191	3.32	26.10	39.99	47.83	37.26	74.00	-36.74 peak
3 3114.025	5.02	31.09	40.79	48.02	43.34	68.20	-24.86 peak
4 4405.090	6.67	33.44	41.79	48.77	47.09	68.20	-21.11 peak
5 11160.000	11.18	37.83	37.70	40.30	51.61	74.00	-22.39 peak
6 16740.000	14.51	42.39	40.41	36.72	53.21	68.20	-14.99 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

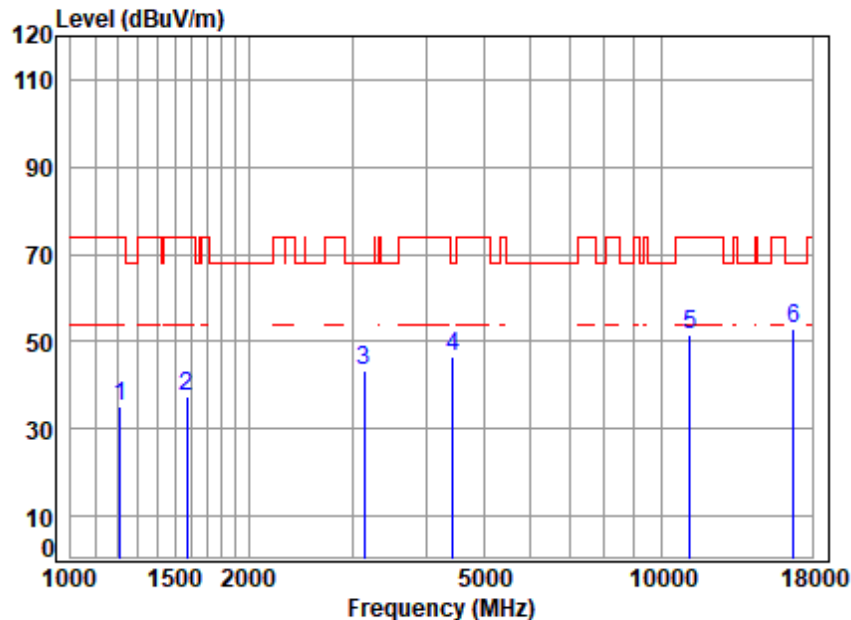


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5580 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	2.79	24.65	39.77	47.65	35.32	74.00	-38.68	peak
2	1574.265	3.33	26.14	39.99	48.03	37.51	74.00	-36.49	peak
3	3141.145	5.06	31.14	40.81	48.06	43.45	68.20	-24.75	peak
4	4430.628	6.70	33.48	41.81	48.31	46.68	68.20	-21.52	peak
5	11160.000	11.18	37.83	37.70	40.46	51.77	74.00	-22.23	peak
6	16740.000	14.51	42.39	40.41	36.24	52.73	68.20	-15.47	peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

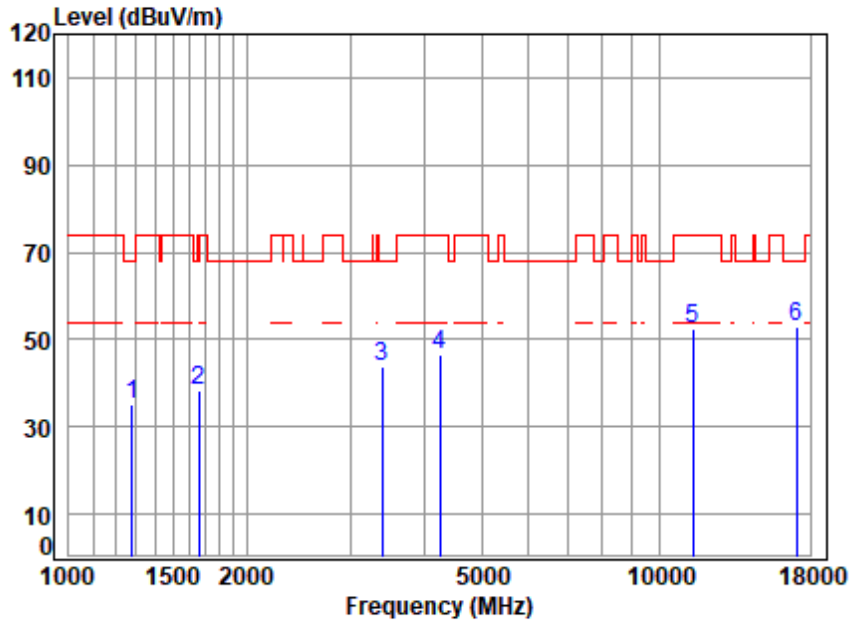


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1282.193	2.91	24.95	39.82	47.11	35.15	68.20	-33.05 peak
2 1663.137	3.40	26.52	40.04	48.59	38.47	74.00	-35.53 peak
3 3396.098	5.39	31.54	41.00	47.66	43.59	68.20	-24.61 peak
4 4254.921	6.53	33.17	41.65	48.42	46.47	74.00	-27.53 peak
5 11400.000	11.50	37.88	37.82	40.74	52.30	74.00	-21.70 peak
6 17100.000	14.14	42.66	40.32	36.49	52.97	68.20	-15.23 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

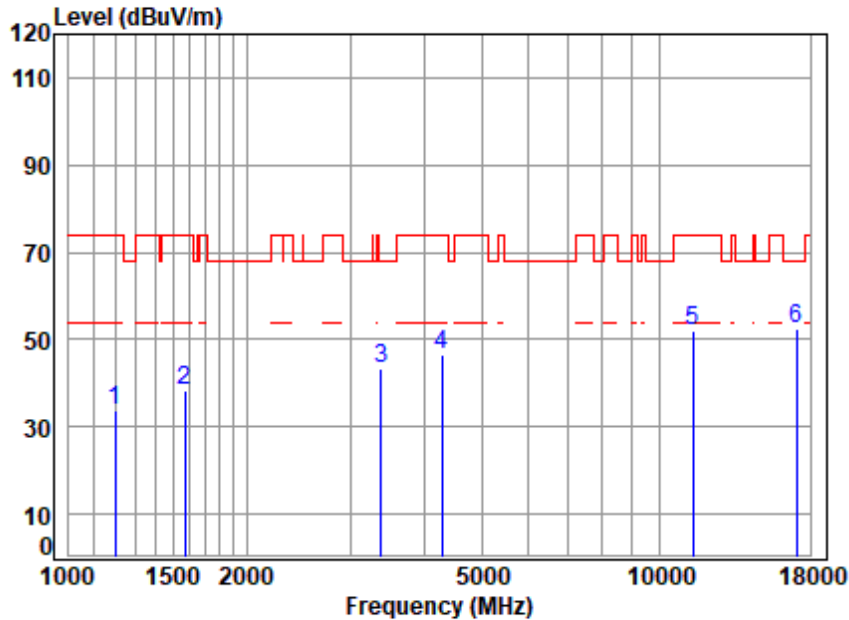


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5700 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	2.76	24.57	39.76	46.38	33.95	74.00 -40.05 peak
2	1574.265	3.33	26.14	39.99	48.76	38.24	74.00 -35.76 peak
3	3386.297	5.38	31.53	40.99	47.56	43.48	68.20 -24.72 peak
4	4291.977	6.57	33.24	41.68	48.39	46.52	74.00 -27.48 peak
5	11400.000	11.50	37.88	37.82	40.37	51.93	74.00 -22.07 peak
6	17100.000	14.14	42.66	40.32	35.99	52.47	68.20 -15.73 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

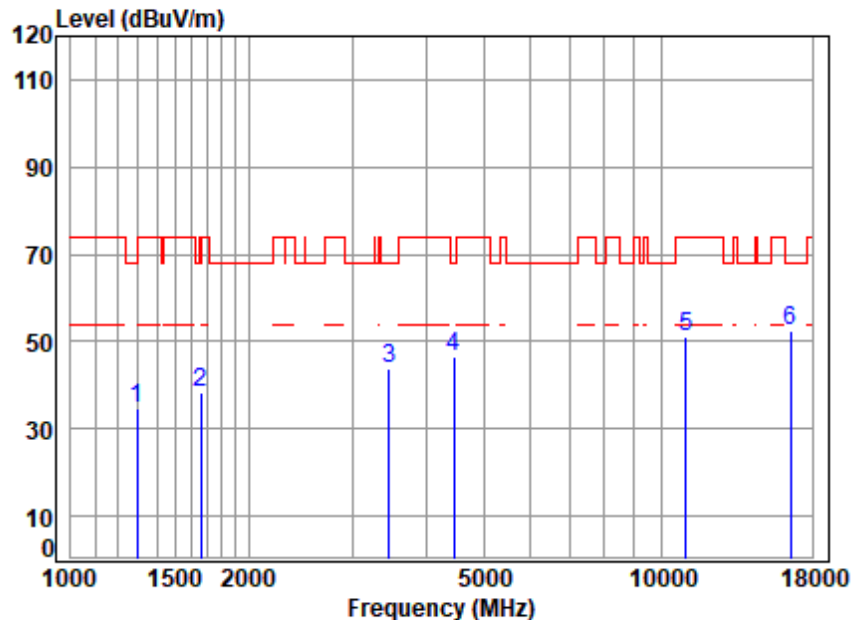


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.65	34.77	68.20	-33.43 peak
2 1663.137	3.40	26.52	40.04	48.61	38.49	74.00	-35.51 peak
3 3455.508	5.47	31.63	41.04	47.64	43.70	68.20	-24.50 peak
4 4456.315	6.72	33.53	41.84	48.18	46.59	68.20	-21.61 peak
5 11020.000	11.00	37.80	37.63	40.00	51.17	74.00	-22.83 peak
6 16530.000	14.78	42.22	40.46	35.74	52.28	68.20	-15.92 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

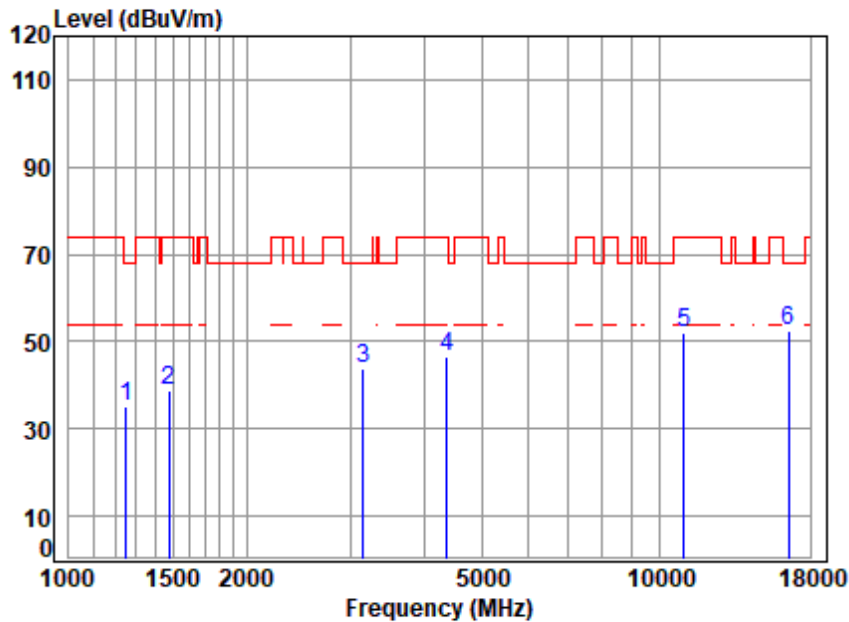


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5510 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1252.885	2.86	24.82	39.80	47.20	35.08	68.20	-33.12 peak
2	1477.276	3.23	25.72	39.94	49.58	38.59	74.00	-35.41 peak
3	3150.237	5.07	31.15	40.82	48.32	43.72	68.20	-24.48 peak
4	4367.058	6.64	33.37	41.75	48.16	46.42	74.00	-27.58 peak
5	11020.000	11.00	37.80	37.63	40.62	51.79	74.00	-22.21 peak
6	16530.000	14.78	42.22	40.46	36.08	52.62	68.20	-15.58 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

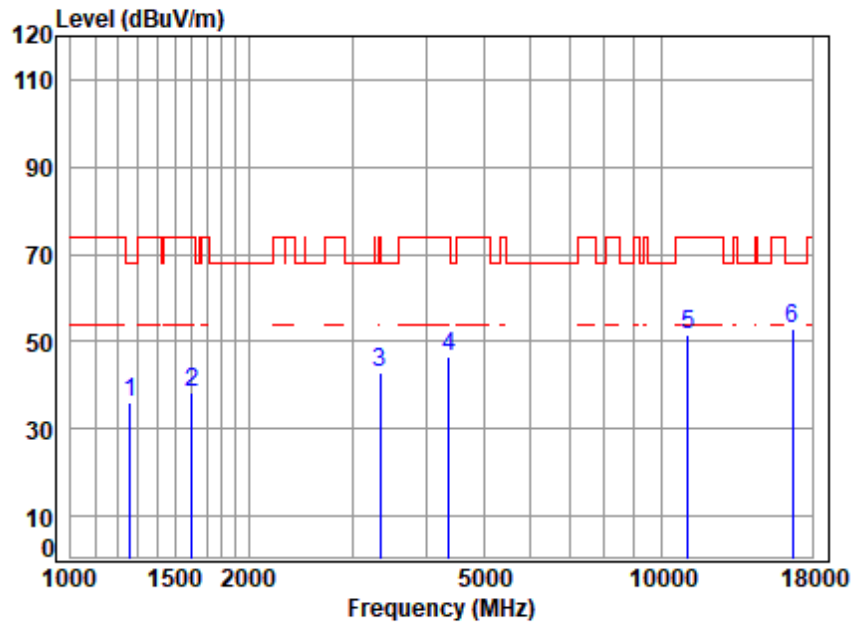


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1260.149	2.87	24.85	39.80	48.31	36.23	68.20	-31.97 peak
2 1606.441	3.35	26.28	40.01	48.61	38.23	74.00	-35.77 peak
3 3347.371	5.33	31.47	40.97	47.10	42.93	74.00	-31.07 peak
4 4367.058	6.64	33.37	41.75	48.31	46.57	74.00	-27.43 peak
5 11100.000	11.10	37.82	37.67	40.52	51.77	74.00	-22.23 peak
6 16650.000	14.62	42.32	40.43	36.40	52.91	68.20	-15.29 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

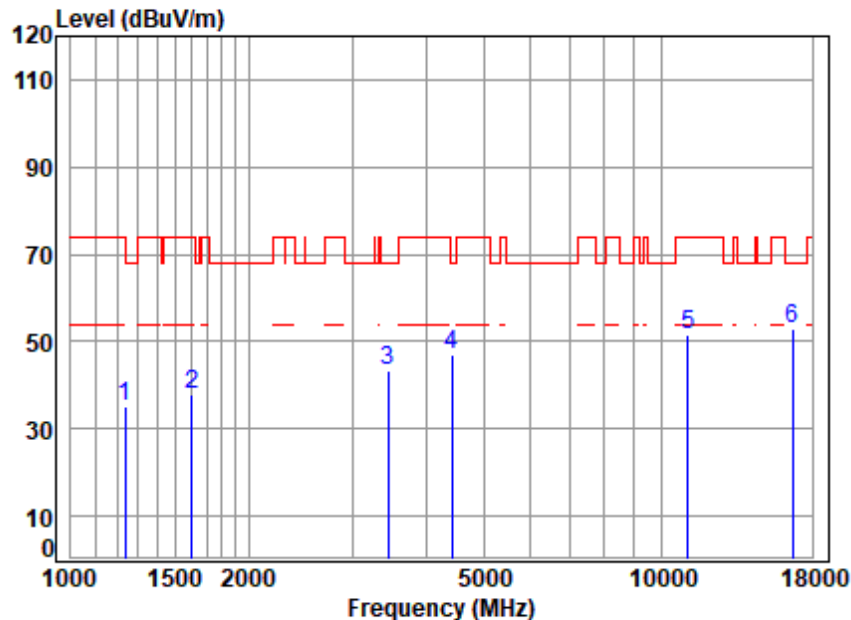


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5550 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1238.483	2.83	24.76	39.79	47.12	34.92	74.00	-39.08 peak
2 1606.441	3.35	26.28	40.01	48.25	37.87	74.00	-36.13 peak
3 3445.535	5.45	31.62	41.04	47.42	43.45	68.20	-24.75 peak
4 4417.841	6.68	33.46	41.80	48.69	47.03	68.20	-21.17 peak
5 11100.000	11.10	37.82	37.67	40.10	51.35	74.00	-22.65 peak
6 16650.000	14.62	42.32	40.43	36.37	52.88	68.20	-15.32 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

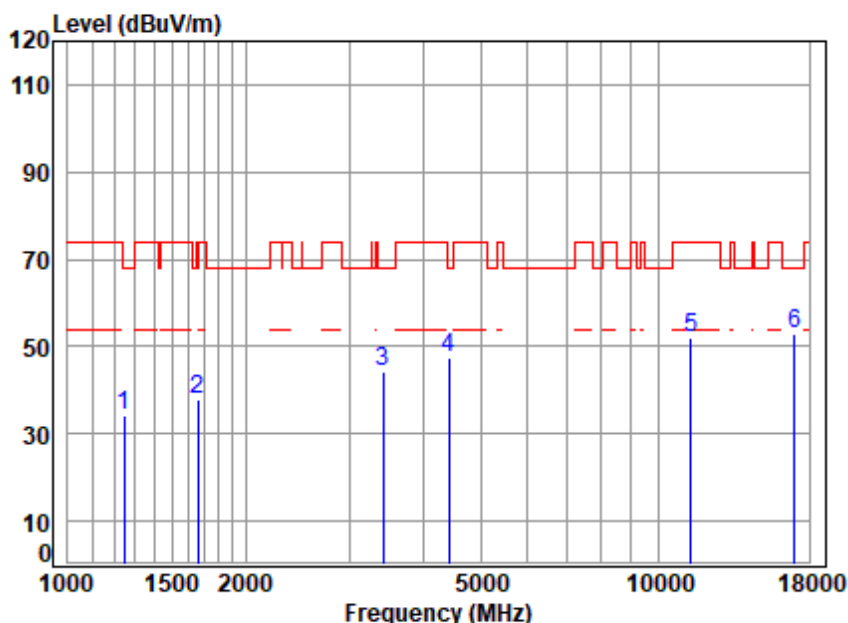


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	2.85	24.79	39.79	46.44	34.29	68.20	-33.91	peak
2	1663.137	3.40	26.52	40.04	47.85	37.73	74.00	-36.27	peak
3	3425.675	5.43	31.59	41.02	48.29	44.29	68.20	-23.91	peak
4	4417.841	6.68	33.46	41.80	49.21	47.55	68.20	-20.65	peak
5	11340.000	11.42	37.87	37.79	40.46	51.96	74.00	-22.04	peak
6	17010.000	14.17	42.61	40.34	36.64	53.08	68.20	-15.12	peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

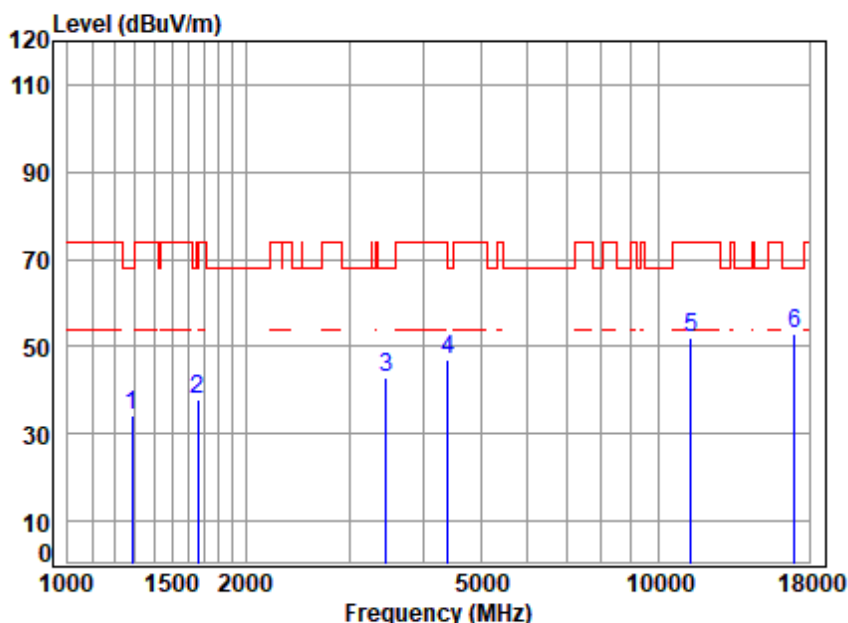


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5670 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1285.904	2.92	24.96	39.82	46.12	34.18	68.20	-34.02 peak
2	1658.337	3.40	26.50	40.04	47.90	37.76	68.20	-30.44 peak
3	3465.510	5.48	31.65	41.05	46.91	42.99	68.20	-25.21 peak
4	4405.090	6.67	33.44	41.79	48.75	47.07	68.20	-21.13 peak
5	11340.000	11.42	37.87	37.79	40.66	52.16	74.00	-21.84 peak
6	17010.000	14.17	42.61	40.34	36.63	53.07	68.20	-15.13 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

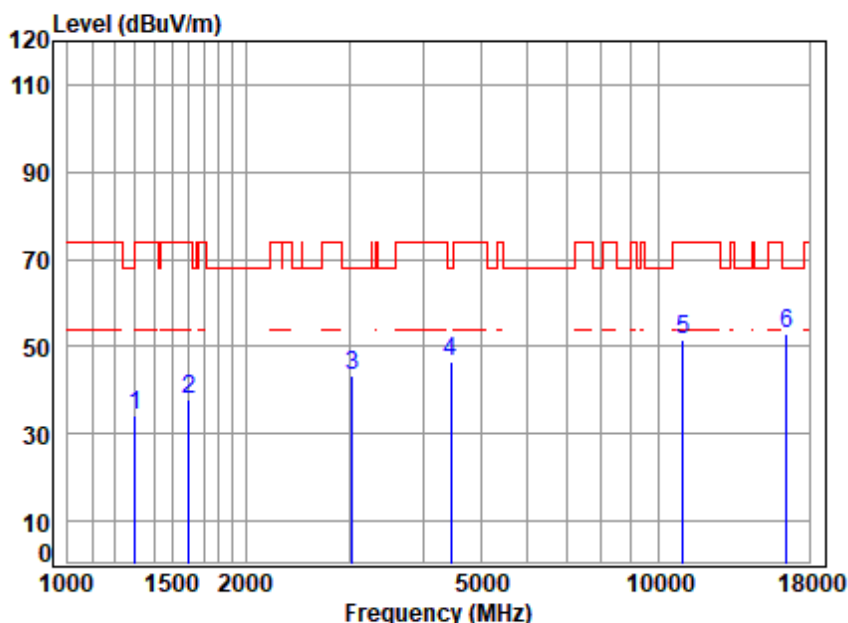


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 TX RSE
Note : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1300.858	2.94	25.03	39.83	46.25	34.39	74.00	-39.61	peak
2	1606.441	3.35	26.28	40.01	48.15	37.77	74.00	-36.23	peak
3	3034.063	4.91	30.96	40.73	48.25	43.39	68.20	-24.81	peak
4	4456.315	6.72	33.53	41.84	47.95	46.36	68.20	-21.84	peak
5	11000.000	10.97	37.80	37.62	40.21	51.36	74.00	-22.64	peak
6	16500.000	14.82	42.20	40.47	36.22	52.77	68.20	-15.43	peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

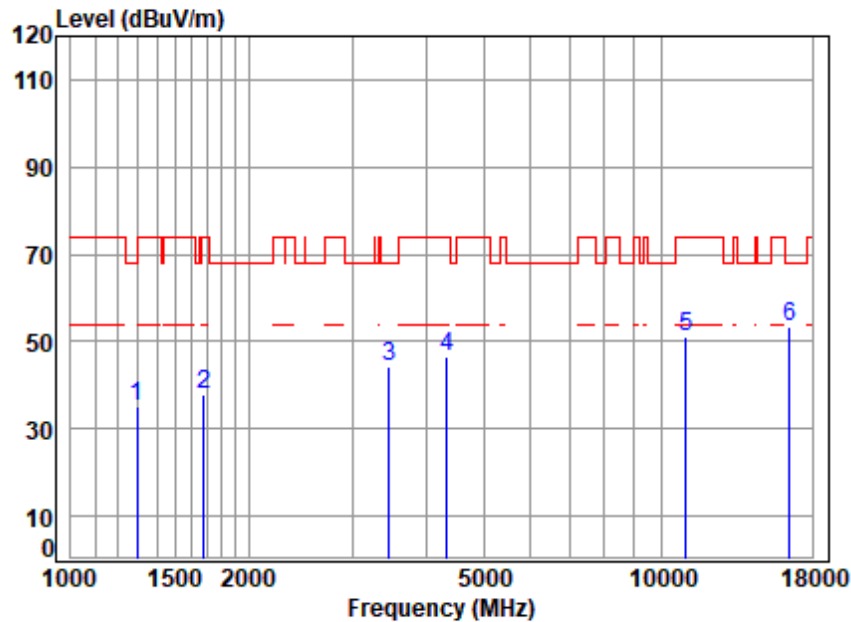


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 TX RSE
Note : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1293.359	2.93	25.00	39.82	46.90	35.01	68.20	-33.19	peak
2	1677.621	3.41	26.58	40.05	47.83	37.77	74.00	-36.23	peak
3	3455.508	5.47	31.63	41.04	48.39	44.45	68.20	-23.75	peak
4	4329.354	6.60	33.30	41.72	48.27	46.45	74.00	-27.55	peak
5	11000.000	10.97	37.80	37.62	39.88	51.03	74.00	-22.97	peak
6	16500.000	14.82	42.20	40.47	36.87	53.42	68.20	-14.78	peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

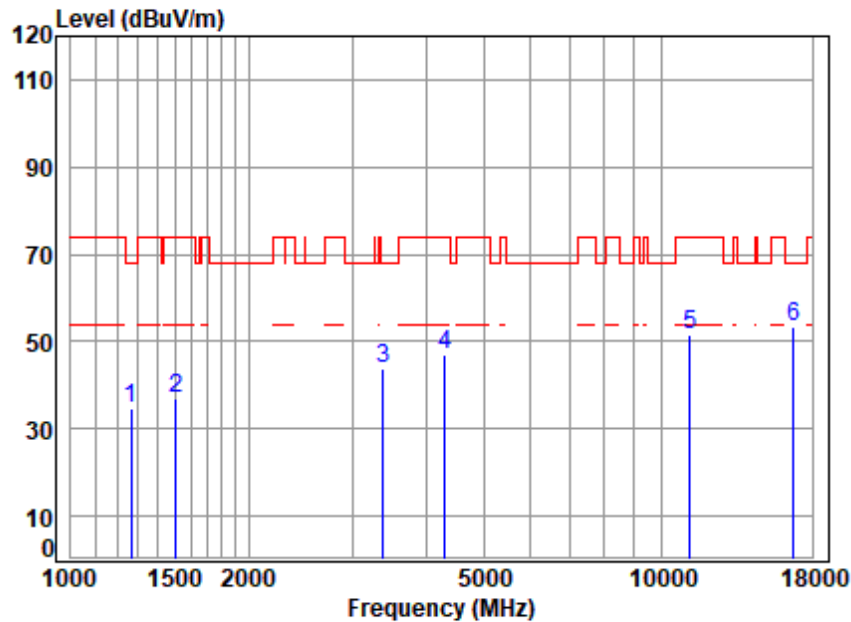


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5580 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1263.796	2.88	24.87	39.80	46.62	34.57	68.20	-33.63 peak
2 1507.470	3.27	25.83	39.96	47.65	36.79	74.00	-37.21 peak
3 3376.523	5.37	31.51	40.99	47.92	43.81	68.20	-24.39 peak
4 4304.400	6.58	33.26	41.70	48.68	46.82	74.00	-27.18 peak
5 11160.000	11.18	37.83	37.70	40.42	51.73	74.00	-22.27 peak
6 16740.000	14.51	42.39	40.41	36.80	53.29	68.20	-14.91 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

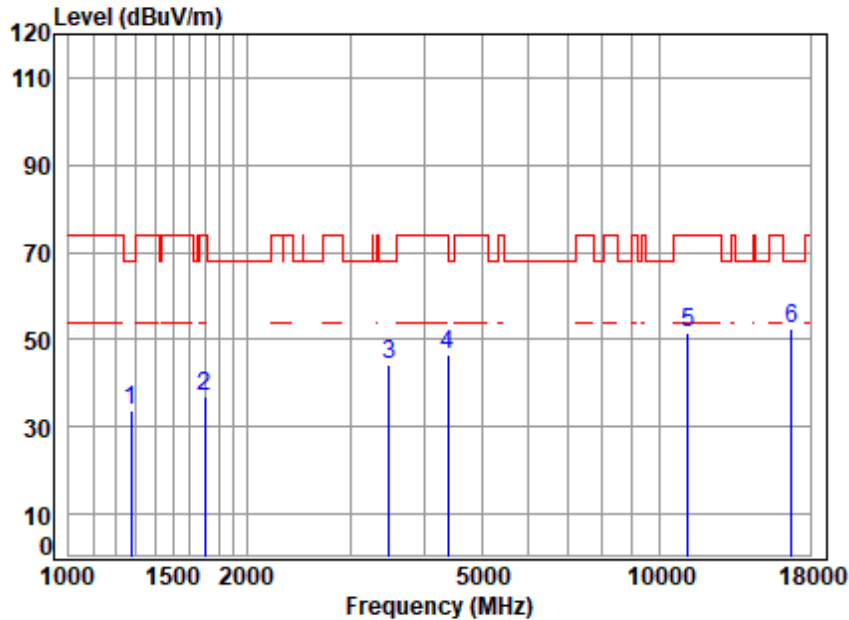


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5580 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1274.802	2.90	24.92	39.81	45.72	33.73	68.20	-34.47 peak
2 1697.129	3.43	26.66	40.06	46.85	36.88	74.00	-37.12 peak
3 3485.601	5.50	31.68	41.07	47.96	44.07	68.20	-24.13 peak
4 4379.699	6.65	33.39	41.77	48.48	46.75	74.00	-27.25 peak
5 11160.000	11.18	37.83	37.70	40.07	51.38	74.00	-22.62 peak
6 16740.000	14.51	42.39	40.41	36.17	52.66	68.20	-15.54 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

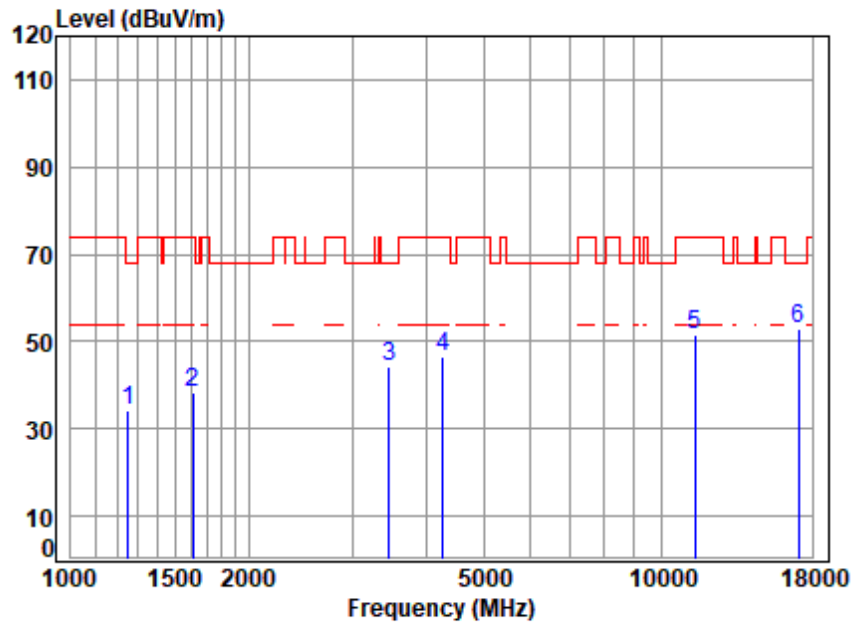


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5700 TX RSE
Note : 5G WIFI 11AC20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	2.85	24.81	39.79	46.27	34.14	68.20	-34.06	peak
2	1611.091	3.36	26.30	40.01	48.50	38.15	74.00	-35.85	peak
3	3465.510	5.48	31.65	41.05	48.15	44.23	68.20	-23.97	peak
4	4267.237	6.54	33.19	41.66	48.50	46.57	74.00	-27.43	peak
5	11400.000	11.50	37.88	37.82	40.10	51.66	74.00	-22.34	peak
6	17100.000	14.14	42.66	40.32	36.27	52.75	68.20	-15.45	peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

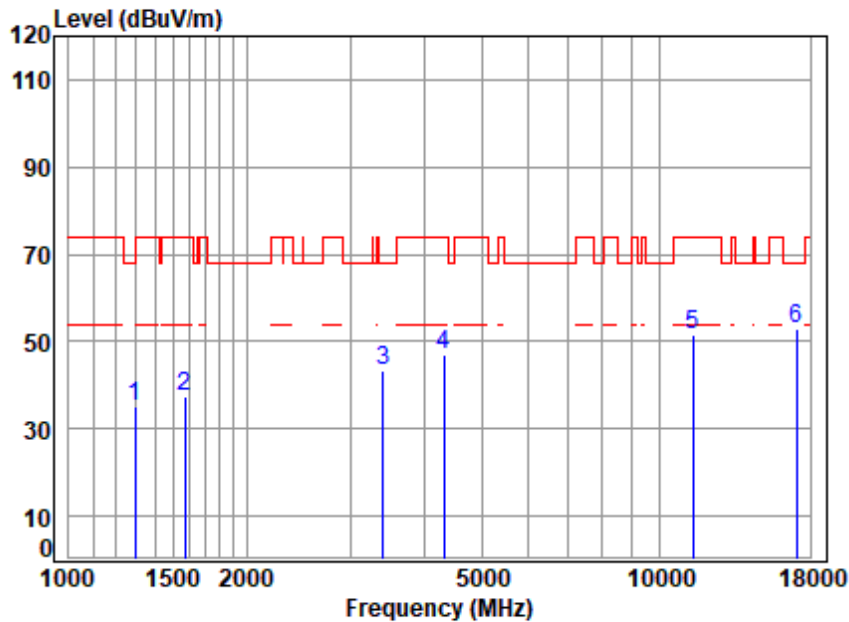


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5700 TX RSE
Note : 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	2.94	25.01	39.83	47.06	35.18	68.20	-33.02 peak
2	1574.265	3.33	26.14	39.99	48.15	37.63	74.00	-36.37 peak
3	3405.929	5.40	31.56	41.01	47.55	43.50	68.20	-24.70 peak
4	4316.859	6.59	33.28	41.71	48.80	46.96	74.00	-27.04 peak
5	11400.000	11.50	37.88	37.82	40.17	51.73	74.00	-22.27 peak
6	17100.000	14.14	42.66	40.32	36.67	53.15	68.20	-15.05 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

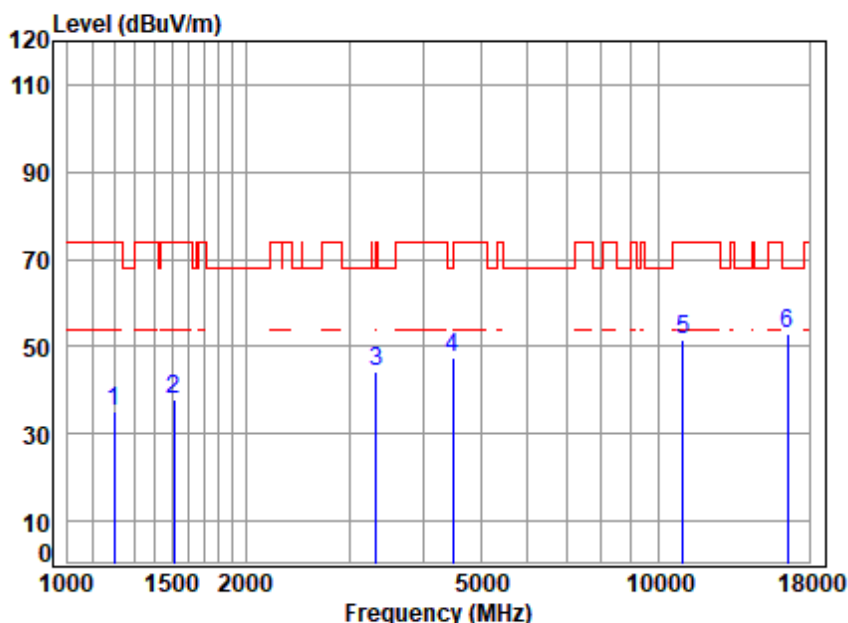


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5510 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1196.264	2.76	24.57	39.76	47.58	35.15	74.00	-38.85 peak
2 1511.833	3.27	25.85	39.96	48.62	37.78	74.00	-36.22 peak
3 3328.077	5.30	31.44	40.95	48.52	44.31	68.20	-23.89 peak
4 4482.150	6.74	33.57	41.86	48.78	47.23	68.20	-20.97 peak
5 11020.000	11.00	37.80	37.63	40.50	51.67	74.00	-22.33 peak
6 16530.000	14.78	42.22	40.46	36.56	53.10	68.20	-15.10 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

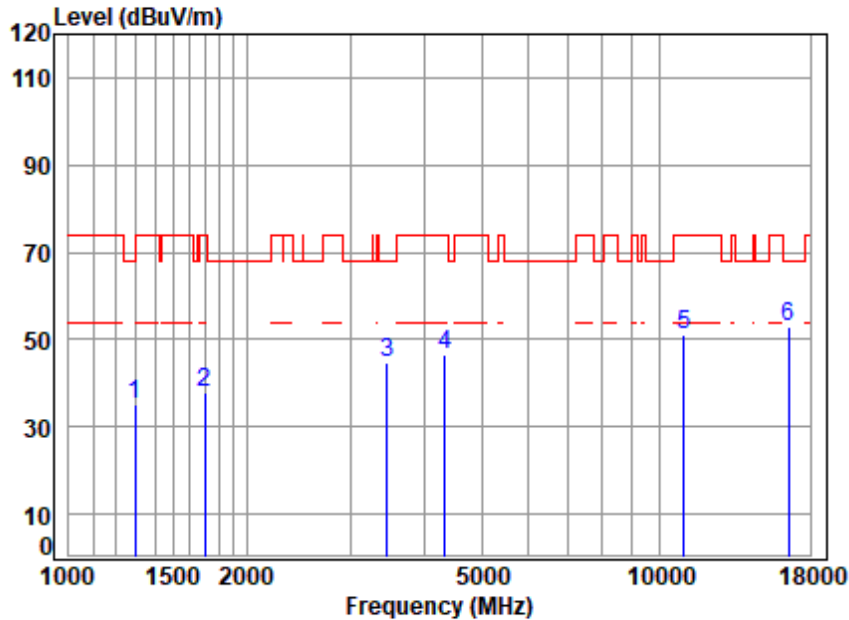


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5510 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	47.23	35.35	68.20	-32.85 peak
2 1697.129	3.43	26.66	40.06	47.93	37.96	74.00	-36.04 peak
3 3465.510	5.48	31.65	41.05	48.73	44.81	68.20	-23.39 peak
4 4329.354	6.60	33.30	41.72	48.30	46.48	74.00	-27.52 peak
5 11020.000	11.00	37.80	37.63	40.08	51.25	74.00	-22.75 peak
6 16530.000	14.78	42.22	40.46	36.19	52.73	68.20	-15.47 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

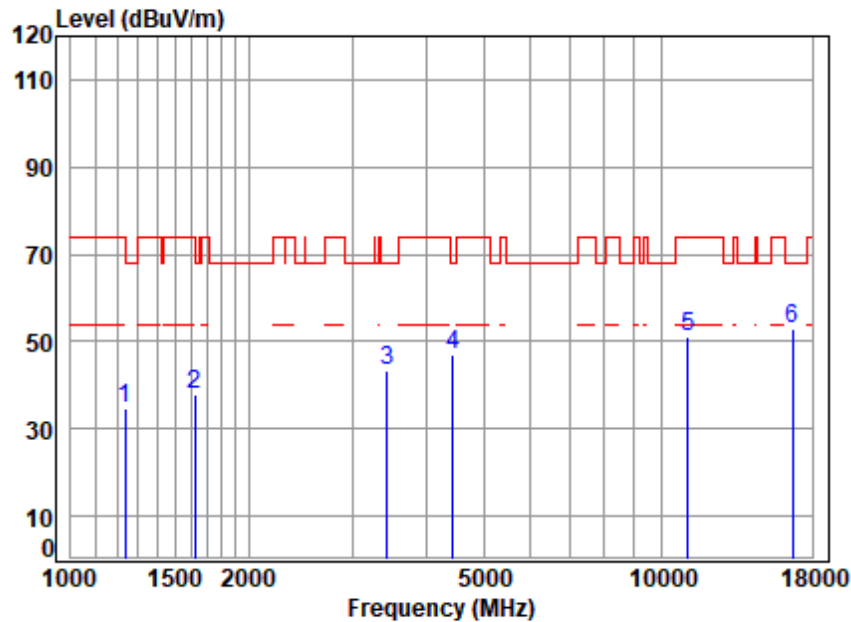


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5550 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1234.909	2.83	24.74	39.78	47.09	34.88	74.00	-39.12 peak
2 1625.121	3.37	26.36	40.02	48.15	37.86	74.00	-36.14 peak
3 3435.590	5.44	31.60	41.03	47.56	43.57	68.20	-24.63 peak
4 4430.628	6.70	33.48	41.81	48.67	47.04	68.20	-21.16 peak
5 11100.000	11.10	37.82	37.67	40.04	51.29	74.00	-22.71 peak
6 16650.000	14.62	42.32	40.43	36.57	53.08	68.20	-15.12 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:middle

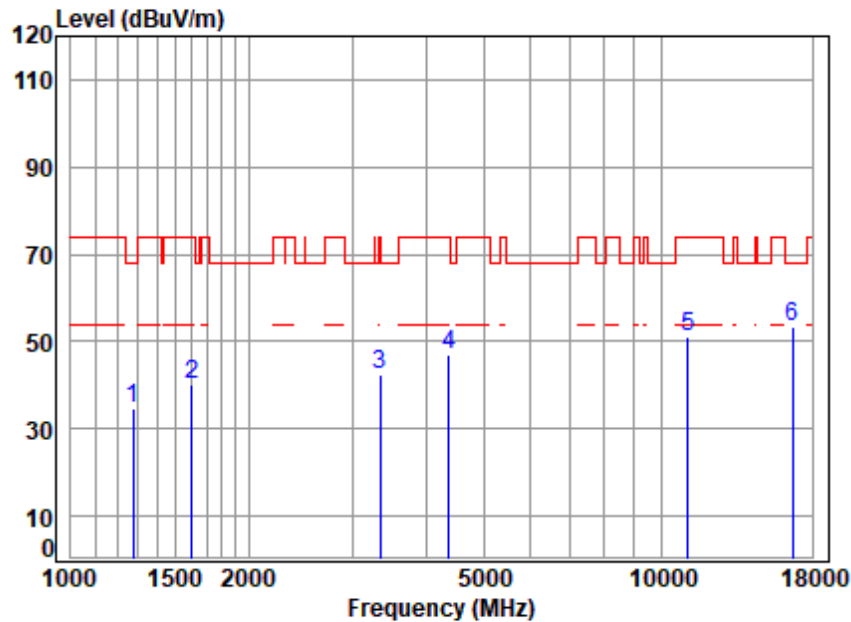


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5550 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1274.802	2.90	24.92	39.81	46.77	34.78	68.20	-33.42 peak
2 1606.441	3.35	26.28	40.01	50.54	40.16	74.00	-33.84 peak
3 3337.710	5.32	31.45	40.96	46.75	42.56	74.00	-31.44 peak
4 4367.058	6.64	33.37	41.75	48.73	46.99	74.00	-27.01 peak
5 11100.000	11.10	37.82	37.67	39.71	50.96	74.00	-23.04 peak
6 16650.000	14.62	42.32	40.43	36.69	53.20	68.20	-15.00 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

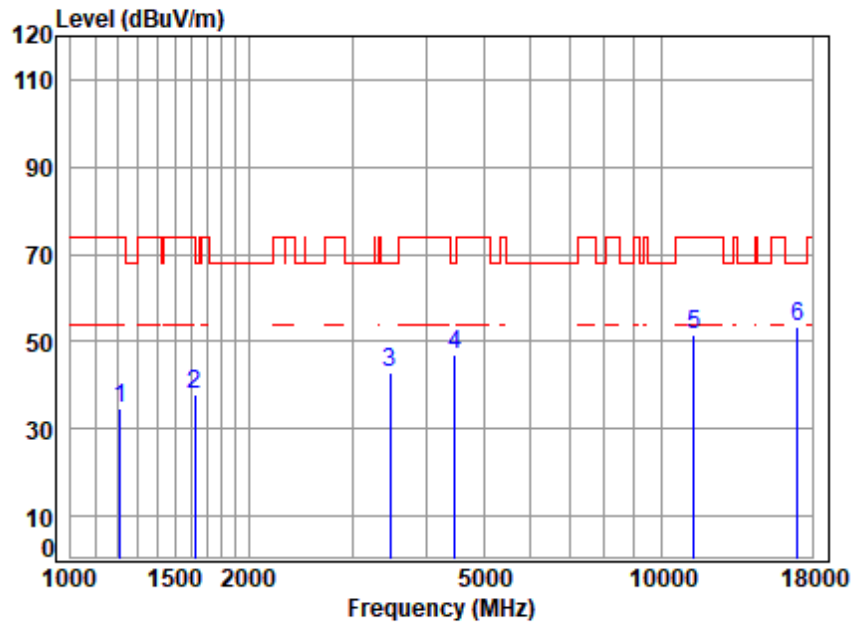


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5670 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1213.677	2.79	24.65	39.77	46.93	34.60	74.00	-39.40 peak
2 1625.121	3.37	26.36	40.02	48.08	37.79	74.00	-36.21 peak
3 3475.541	5.49	31.66	41.06	47.01	43.10	68.20	-25.10 peak
4 4469.214	6.73	33.55	41.85	48.63	47.06	68.20	-21.14 peak
5 11340.000	11.42	37.87	37.79	40.22	51.72	74.00	-22.28 peak
6 17010.000	14.17	42.61	40.34	36.93	53.37	68.20	-14.83 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

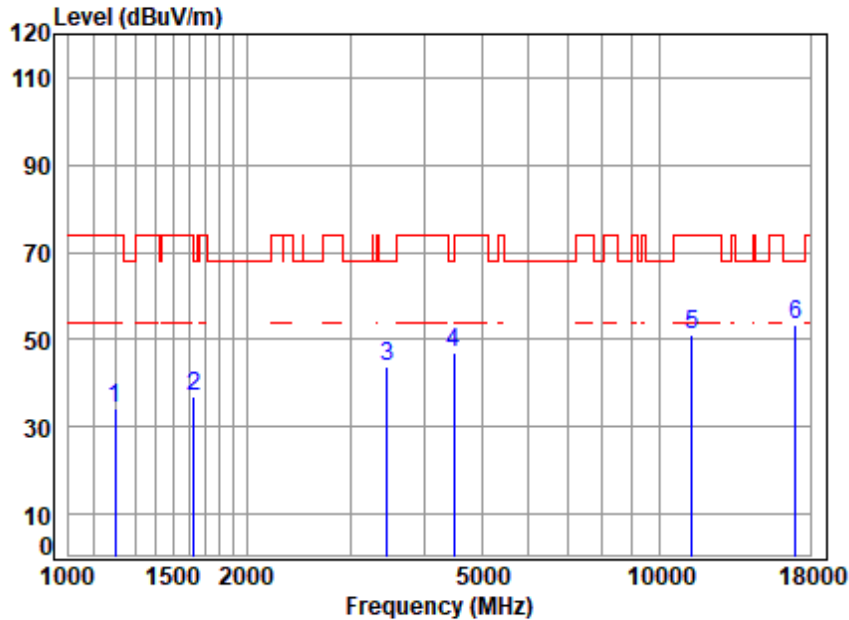


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5670 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1199.726	2.76	24.59	39.76	46.76	34.35	74.00 -39.65 peak
2	1629.825	3.37	26.38	40.02	47.15	36.88	68.20 -31.32 peak
3	3465.510	5.48	31.65	41.05	47.82	43.90	68.20 -24.30 peak
4	4482.150	6.74	33.57	41.86	48.56	47.01	68.20 -21.19 peak
5	11340.000	11.42	37.87	37.79	39.70	51.20	74.00 -22.80 peak
6	17010.000	14.17	42.61	40.34	37.02	53.46	68.20 -14.74 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

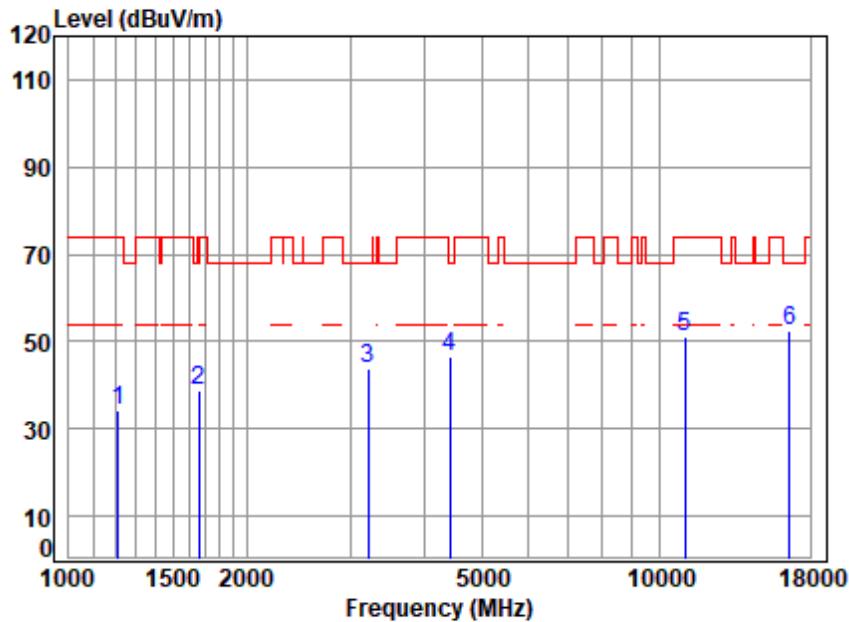


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5530 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1210.174	2.78	24.64	39.77	46.80	34.45	74.00	-39.55 peak
2 1663.137	3.40	26.52	40.04	48.79	38.67	74.00	-35.33 peak
3 3214.623	5.16	31.26	40.87	48.40	43.95	68.20	-24.25 peak
4 4417.841	6.68	33.46	41.80	48.19	46.53	68.20	-21.67 peak
5 11060.000	11.05	37.81	37.65	39.86	51.07	74.00	-22.93 peak
6 16590.000	14.70	42.27	40.45	36.13	52.65	68.20	-15.55 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

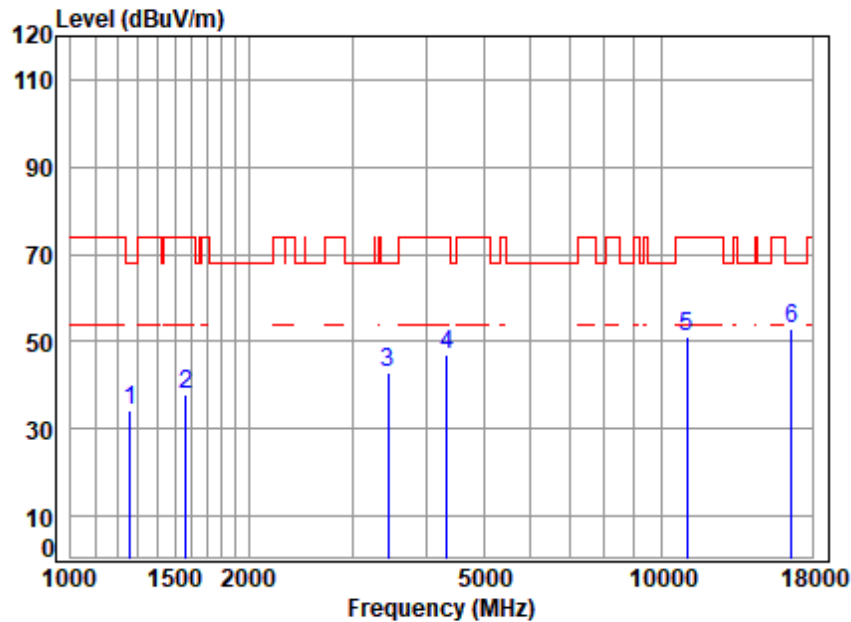


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5530 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1260.149	2.87	24.85	39.80	46.30	34.22	68.20	-33.98 peak
2 1565.191	3.32	26.10	39.99	48.55	37.98	74.00	-36.02 peak
3 3445.535	5.45	31.62	41.04	47.03	43.06	68.20	-25.14 peak
4 4341.886	6.61	33.33	41.73	48.61	46.82	74.00	-27.18 peak
5 11060.000	11.05	37.81	37.65	40.02	51.23	74.00	-22.77 peak
6 16590.000	14.70	42.27	40.45	36.64	53.16	68.20	-15.04 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

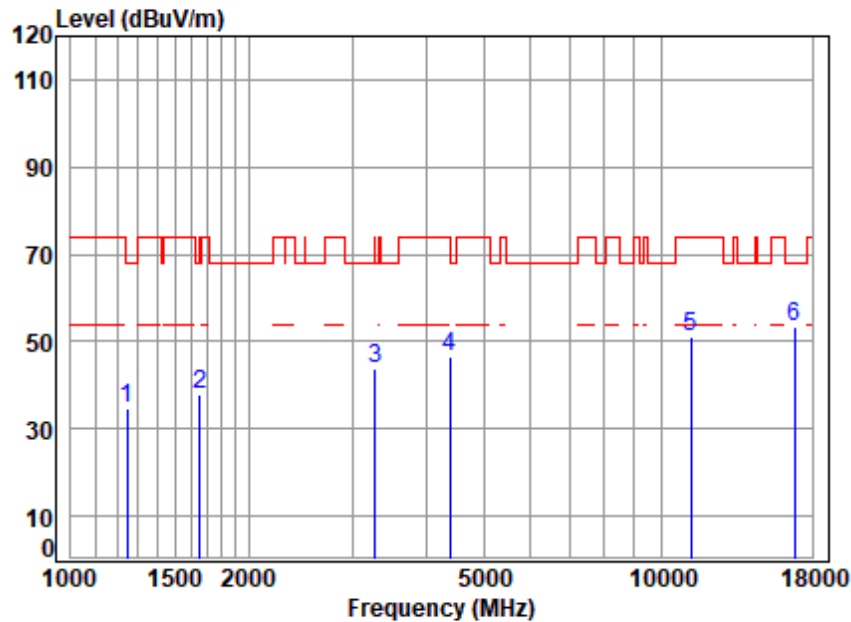


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5610 TX RSE
Note : 5G WIFI 11AC80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	2.85	24.79	39.79	46.68	34.53	68.20	-33.67	peak
2	1653.550	3.39	26.48	40.04	47.83	37.66	68.20	-30.54	peak
3	3280.326	5.24	31.36	40.92	47.92	43.60	68.20	-24.60	peak
4	4379.699	6.65	33.39	41.77	48.42	46.69	74.00	-27.31	peak
5	11220.000	11.26	37.84	37.73	39.94	51.31	74.00	-22.69	peak
6	16830.000	14.39	42.47	40.39	36.85	53.32	68.20	-14.88	peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

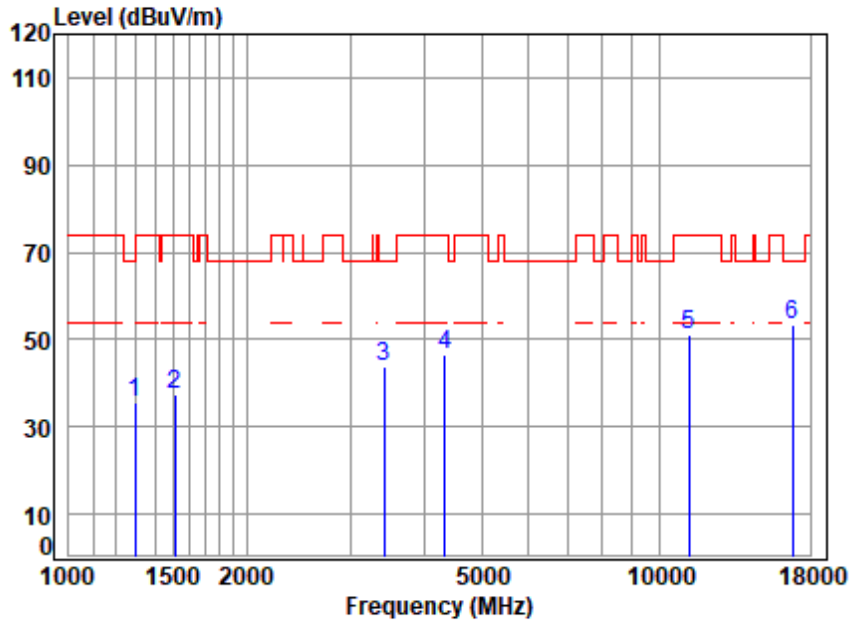


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5610 TX RSE
Note : 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1297.103	2.94	25.01	39.83	47.33	35.45	68.20	-32.75 peak
2	1511.833	3.27	25.85	39.96	48.45	37.61	74.00	-36.39 peak
3	3425.675	5.43	31.59	41.02	47.77	43.77	68.20	-24.43 peak
4	4329.354	6.60	33.30	41.72	48.51	46.69	74.00	-27.31 peak
5	11220.000	11.26	37.84	37.73	39.51	50.88	74.00	-23.12 peak
6	16830.000	14.39	42.47	40.39	36.78	53.25	68.20	-14.95 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

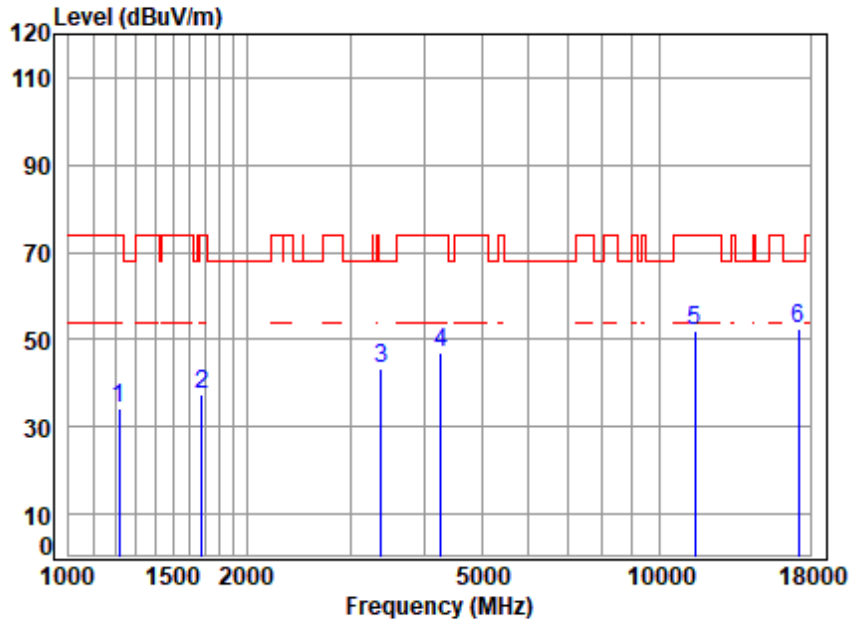


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5745 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1217.190	2.80	24.67	39.77	46.56	34.26	74.00	-39.74 peak
2 1677.621	3.41	26.58	40.05	47.63	37.57	74.00	-36.43 peak
3 3386.297	5.38	31.53	40.99	47.62	43.54	68.20	-24.66 peak
4 4267.237	6.54	33.19	41.66	48.81	46.88	74.00	-27.12 peak
5 11490.000	11.62	37.90	37.86	40.48	52.14	74.00	-21.86 peak
6 17235.000	14.09	42.74	40.28	36.02	52.57	68.20	-15.63 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

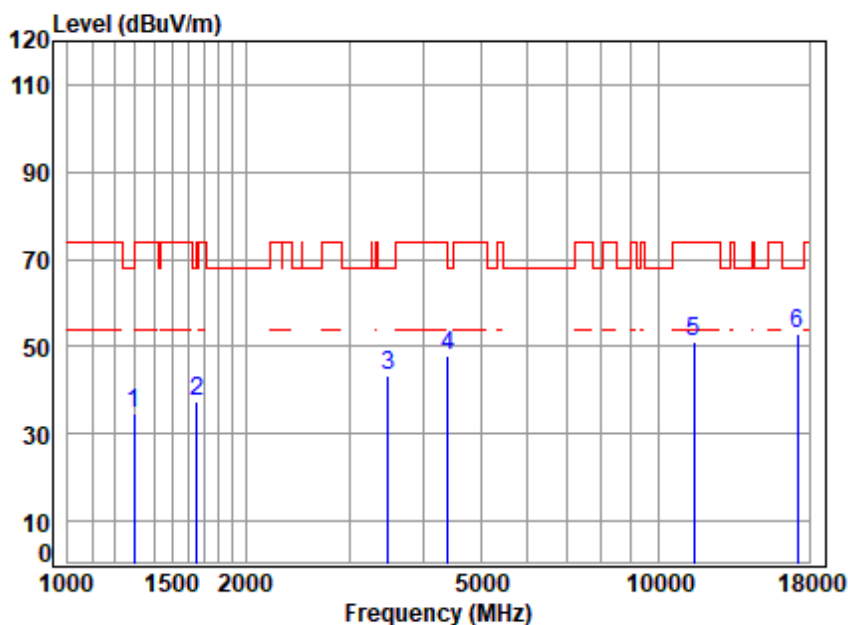

```
Site      : chamber
Condition: 3m VERTICAL
Job No    : 20124AT/20125AT
Mode      : 5745 TX RSE
Note      : 5G WIFI 11A
```

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	2.94	25.01	39.83	46.59	34.71	68.20	-33.49	peak
2	1653.550	3.39	26.48	40.04	47.73	37.56	68.20	-30.64	peak
3	3485.601	5.50	31.68	41.07	47.27	43.38	68.20	-24.82	peak
4	4405.090	6.67	33.44	41.79	49.80	48.12	68.20	-20.08	peak
5	11490.000	11.62	37.90	37.86	39.59	51.25	74.00	-22.75	peak
6	17235.000	14.09	42.74	40.28	36.19	52.74	68.20	-15.46	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of its mandate. The Company does not assume any liability for the accuracy or completeness of the information or for any loss or transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention is drawn to the fact that the results of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Center / EC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号楼 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 23; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

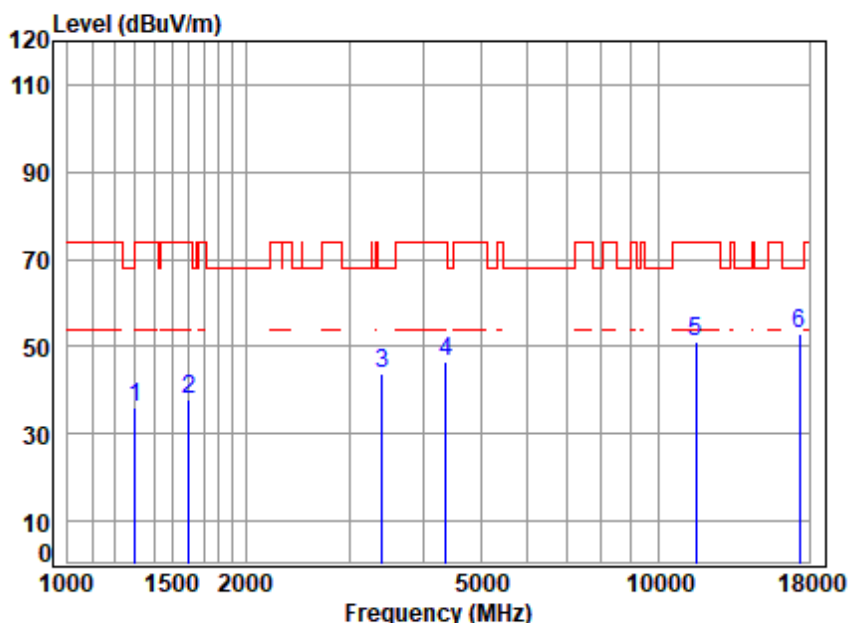


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5785 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1300.858	2.94	25.03	39.83	48.08	36.22	74.00	-37.78 peak
2 1606.441	3.35	26.28	40.01	48.06	37.68	74.00	-36.32 peak
3 3405.929	5.40	31.56	41.01	47.95	43.90	68.20	-24.30 peak
4 4367.058	6.64	33.37	41.75	48.17	46.43	74.00	-27.57 peak
5 11570.000	11.72	37.87	37.90	39.19	50.88	74.00	-23.12 peak
6 17355.000	14.06	42.81	40.25	36.53	53.15	68.20	-15.05 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

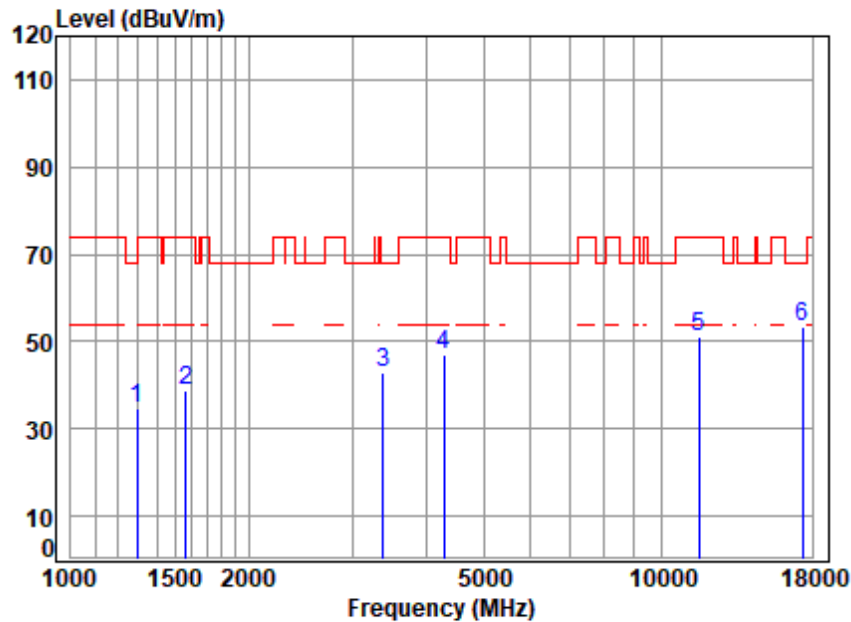


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5785 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	2.94	25.01	39.83	46.72	34.84	68.20	-33.36	peak
2	1565.191	3.32	26.10	39.99	49.53	38.96	74.00	-35.04	peak
3	3386.297	5.38	31.53	40.99	47.16	43.08	68.20	-25.12	peak
4	4279.589	6.56	33.22	41.67	48.69	46.80	74.00	-27.20	peak
5	11570.000	11.72	37.87	37.90	39.34	51.03	74.00	-22.97	peak
6	17355.000	14.06	42.81	40.25	36.66	53.28	68.20	-14.92	peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

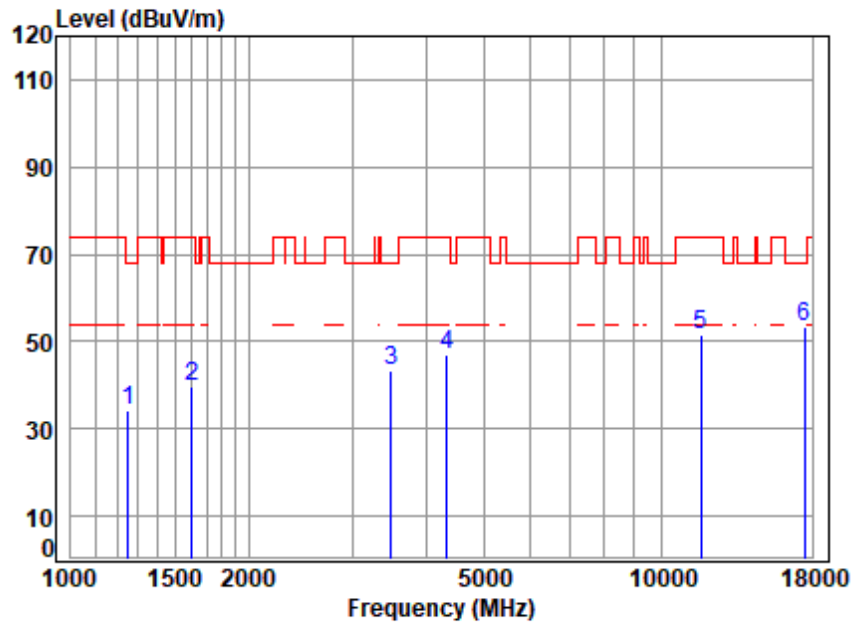


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5825 TX RSE
Note : 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1249.269	2.85	24.81	39.79	46.19	34.06	68.20	-34.14 peak
2 1606.441	3.35	26.28	40.01	50.06	39.68	74.00	-34.32 peak
3 3485.601	5.50	31.68	41.07	47.37	43.48	68.20	-24.72 peak
4 4329.354	6.60	33.30	41.72	48.68	46.86	74.00	-27.14 peak
5 11650.000	11.82	37.84	37.94	39.95	51.67	74.00	-22.33 peak
6 17475.000	14.02	42.89	40.23	36.63	53.31	68.20	-14.89 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

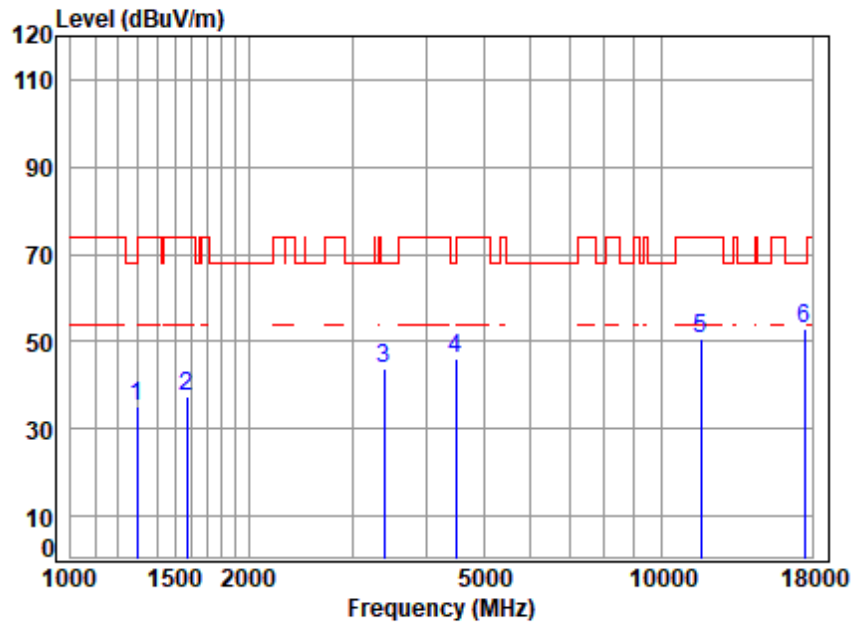


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5825 TX RSE
Note : 5G WIFI 11A

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	2.94	25.01	39.83	46.85	34.97	68.20	-33.23	peak
2	1574.265	3.33	26.14	39.99	47.99	37.47	74.00	-36.53	peak
3	3396.098	5.39	31.54	41.00	47.78	43.71	68.20	-24.49	peak
4	4482.150	6.74	33.57	41.86	47.69	46.14	68.20	-22.06	peak
5	11650.000	11.82	37.84	37.94	39.04	50.76	74.00	-23.24	peak
6	17475.000	14.02	42.89	40.23	36.07	52.75	68.20	-15.45	peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

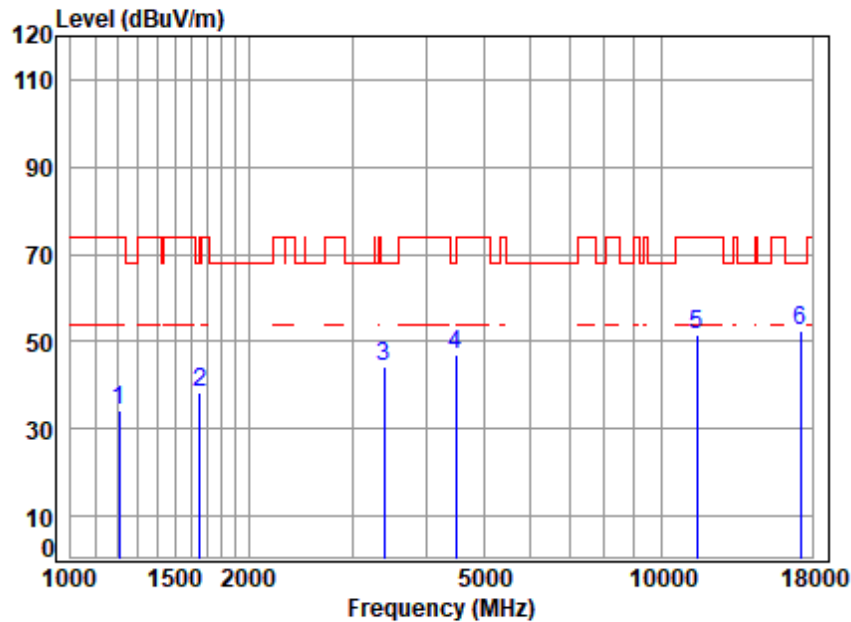


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	2.78	24.62	39.76	46.40	34.04	74.00	-39.96	peak
2	1653.550	3.39	26.48	40.04	48.37	38.20	68.20	-30.00	peak
3	3396.098	5.39	31.54	41.00	48.38	44.31	68.20	-23.89	peak
4	4482.150	6.74	33.57	41.86	48.36	46.81	68.20	-21.39	peak
5	11490.000	11.62	37.90	37.86	39.88	51.54	74.00	-22.46	peak
6	17235.000	14.09	42.74	40.28	36.11	52.66	68.20	-15.54	peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

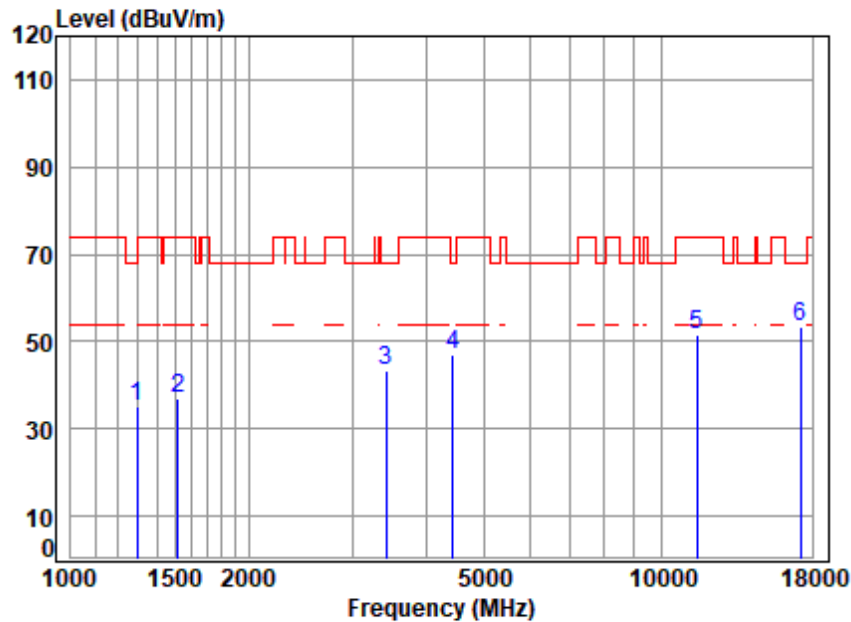


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5745 TX RSE
Note : 5G WIFI 11N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	2.94	25.01	39.83	47.22	35.34	68.20	-32.86	peak
2	1520.598	3.28	25.89	39.96	47.58	36.79	74.00	-37.21	peak
3	3415.787	5.42	31.57	41.02	47.23	43.20	68.20	-25.00	peak
4	4443.453	6.71	33.50	41.82	48.46	46.85	68.20	-21.35	peak
5	11490.000	11.62	37.90	37.86	39.86	51.52	74.00	-22.48	peak
6	17235.000	14.09	42.74	40.28	36.82	53.37	68.20	-14.83	peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

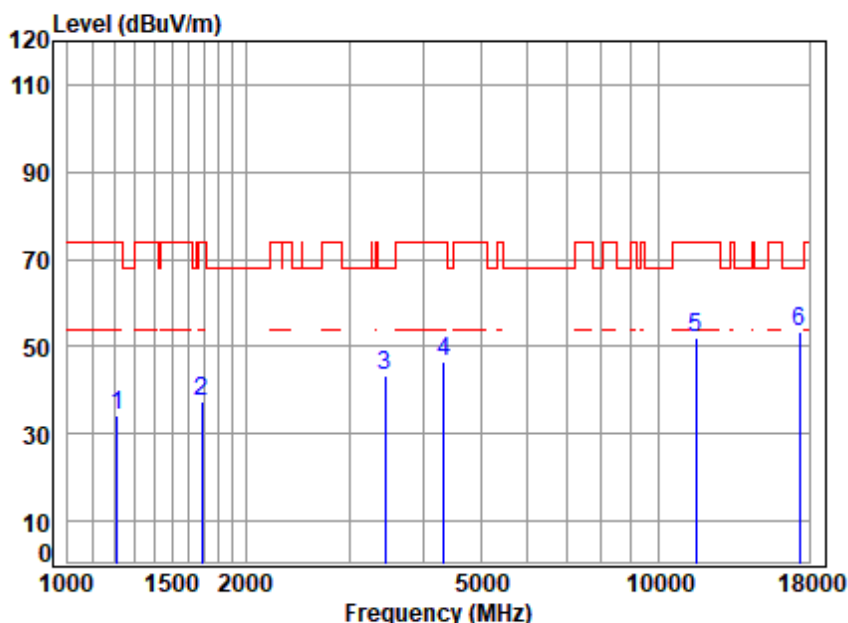


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1213.677	2.79	24.65	39.77	46.74	34.41	74.00 -39.59 peak
2	1687.347	3.42	26.62	40.05	47.57	37.56	74.00 -36.44 peak
3	3445.535	5.45	31.62	41.04	47.37	43.40	68.20 -24.80 peak
4	4329.354	6.60	33.30	41.72	48.32	46.50	74.00 -27.50 peak
5	11570.000	11.72	37.87	37.90	40.30	51.99	74.00 -22.01 peak
6	17355.000	14.06	42.81	40.25	36.57	53.19	68.20 -15.01 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

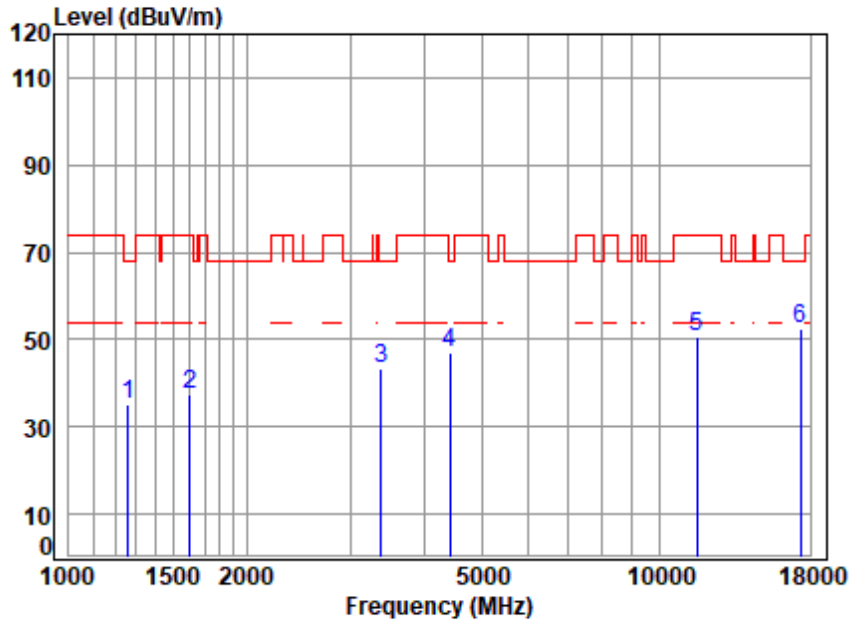


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5785 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1260.149	2.87	24.85	39.80	47.20	35.12	68.20 -33.08 peak
2	1606.441	3.35	26.28	40.01	47.73	37.35	74.00 -36.65 peak
3	3386.297	5.38	31.53	40.99	47.49	43.41	68.20 -24.79 peak
4	4417.841	6.68	33.46	41.80	48.59	46.93	68.20 -21.27 peak
5	11570.000	11.72	37.87	37.90	38.89	50.58	74.00 -23.42 peak
6	17355.000	14.06	42.81	40.25	35.89	52.51	68.20 -15.69 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

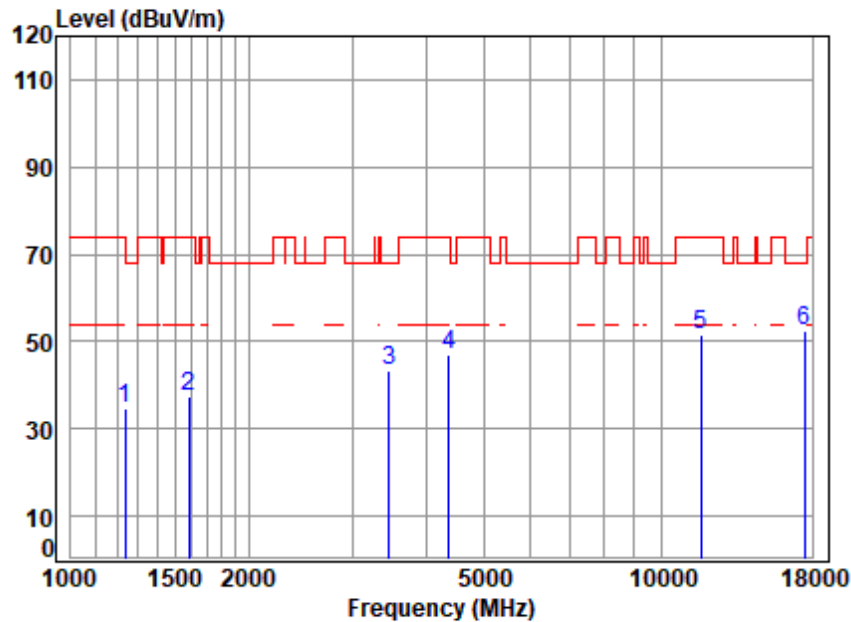


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5825 TX RSE
Note : 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1238.483	2.83	24.76	39.79	46.75	34.55	74.00	-39.45 peak
2 1583.392	3.33	26.18	40.00	47.89	37.40	74.00	-36.60 peak
3 3465.510	5.48	31.65	41.05	47.39	43.47	68.20	-24.73 peak
4 4367.058	6.64	33.37	41.75	48.51	46.77	74.00	-27.23 peak
5 11650.000	11.82	37.84	37.94	39.96	51.68	74.00	-22.32 peak
6 17475.000	14.02	42.89	40.23	36.02	52.70	68.20	-15.50 peak



Test Mode: 23; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

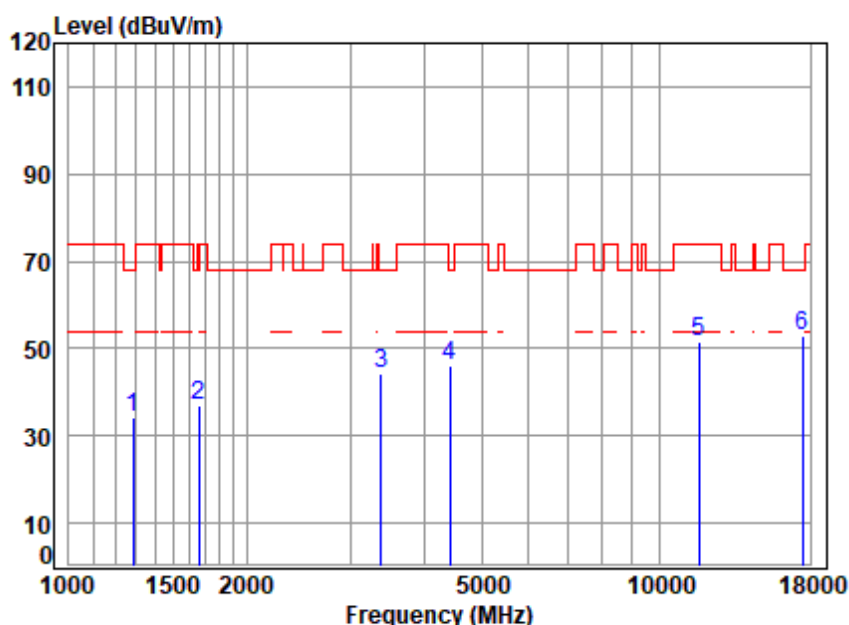

```
Site      : chamber
Condition: 3m VERTICAL
Job No    : 20124AT/20125AT
Mode      : 5825 TX RSE
Note      : 5G WIFI 11N20
```

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	2.92	24.96	39.82	46.31	34.37	68.20	-33.83	peak
2	1658.337	3.40	26.50	40.04	47.31	37.17	68.20	-31.03	peak
3	3376.523	5.37	31.51	40.99	48.30	44.19	68.20	-24.01	peak
4	4417.841	6.68	33.46	41.80	47.87	46.21	68.20	-21.99	peak
5	11650.000	11.82	37.84	37.94	39.97	51.69	74.00	-22.31	peak
6	17475.000	14.02	42.89	40.23	36.08	52.76	68.20	-15.44	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client. This document does not generate parties to a contract and the Company's responsibility and the Client's obligation to provide the information contained in this document cannot be excepted in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

For further information, check the validity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, at email: CN.Doechner@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Center EEC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号楼 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

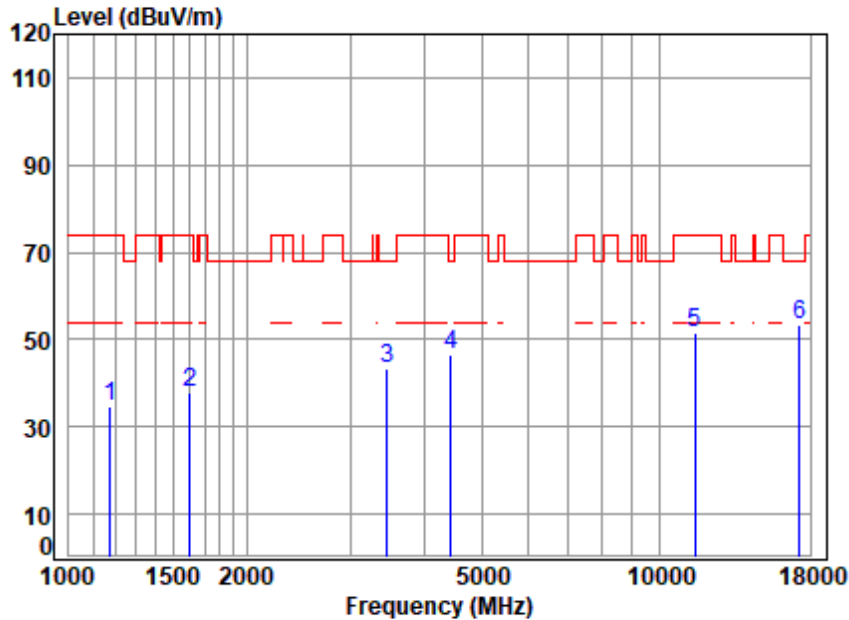


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5755 TX RSE
Note : 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1175.697	2.72	24.48	39.74	47.31	34.77	74.00	-39.23 peak
2	1606.441	3.35	26.28	40.01	48.22	37.84	74.00	-36.16 peak
3	3455.508	5.47	31.63	41.04	47.27	43.33	68.20	-24.87 peak
4	4443.453	6.71	33.50	41.82	48.17	46.56	68.20	-21.64 peak
5	11510.000	11.64	37.90	37.87	39.95	51.62	74.00	-22.38 peak
6	17265.000	14.08	42.76	40.28	36.94	53.50	68.20	-14.70 peak



Test Mode: 23; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 40MHz; Channel: Low

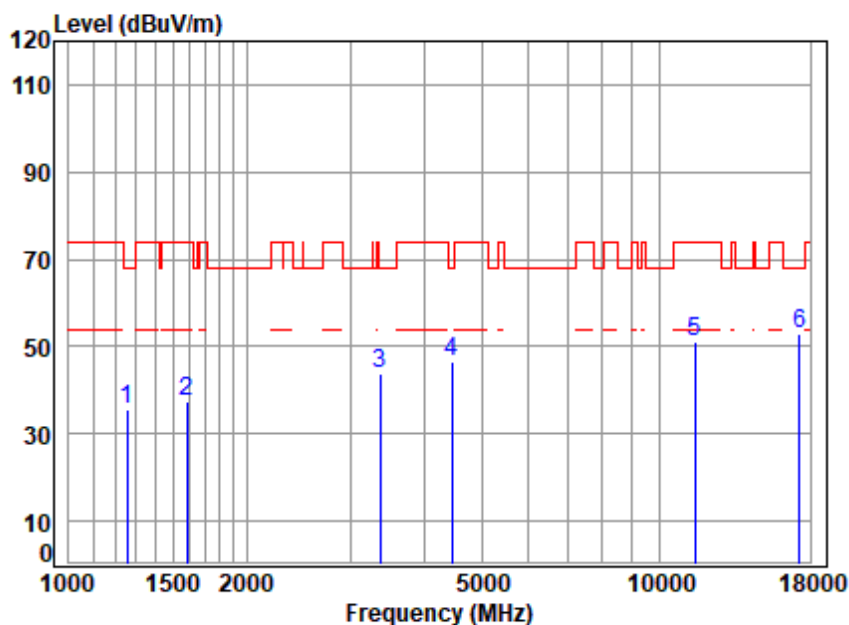

```
Site      : chamber
Condition: 3m VERTICAL
Job No    : 20124AT/20125AT
Mode      : 5755 TX RSE
Note      : 5G WIFI 11N40
```

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1256.512	2.87	24.84	39.80	47.62	35.53	68.20	-32.67	peak
2	1583.392	3.33	26.18	40.00	48.10	37.61	74.00	-36.39	peak
3	3366.778	5.35	31.50	40.98	47.77	43.64	68.20	-24.56	peak
4	4456.315	6.72	33.53	41.84	48.08	46.49	68.20	-21.71	peak
5	11510.000	11.64	37.90	37.87	39.27	50.94	74.00	-23.06	peak
6	17265.000	14.08	42.76	40.28	36.40	52.96	68.20	-15.24	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of its assistance, and that any holder of this document is not to be held responsible for any claims, damages or losses arising from a transaction from, exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the validity of testing/inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@sgs.com.

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Center EEC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号楼 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

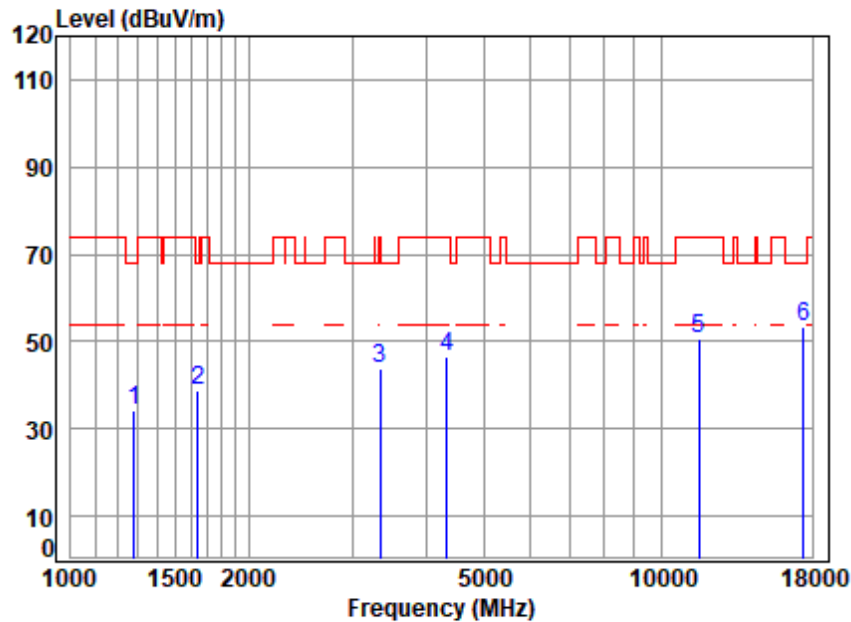


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	2.91	24.95	39.82	46.02	34.06	68.20	-34.14 peak
2	1644.019	3.38	26.44	40.03	49.03	38.82	68.20	-29.38 peak
3	3347.371	5.33	31.47	40.97	48.20	44.03	74.00	-29.97 peak
4	4329.354	6.60	33.30	41.72	48.47	46.65	74.00	-27.35 peak
5	11590.000	11.74	37.86	37.91	38.93	50.62	74.00	-23.38 peak
6	17385.000	14.05	42.83	40.25	36.72	53.35	68.20	-14.85 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

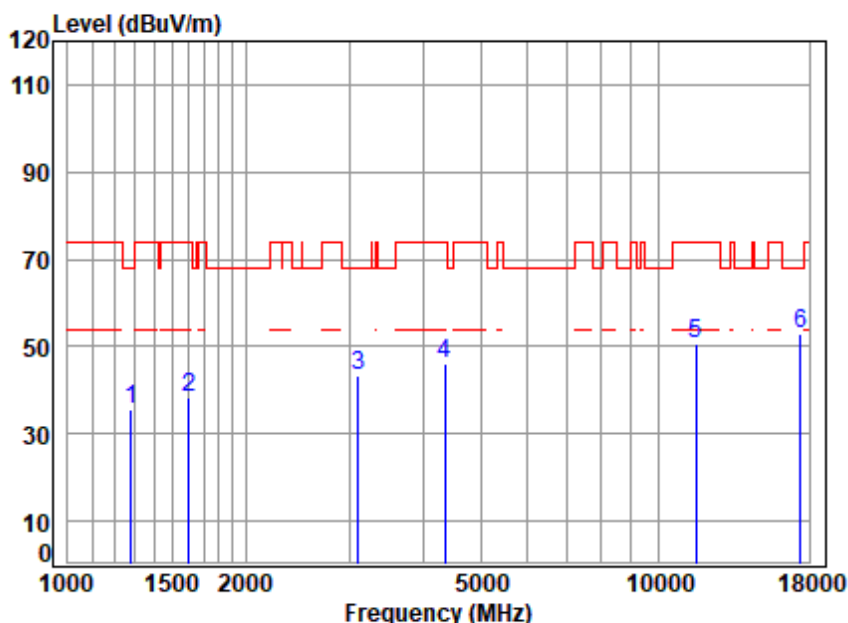


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5795 TX RSE
Note : 5G WIFI 11N40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	2.91	24.95	39.82	47.67	35.71	68.20	-32.49	peak
2	1601.804	3.35	26.26	40.01	48.76	38.36	74.00	-35.64	peak
3	3105.037	5.01	31.08	40.78	48.19	43.50	68.20	-24.70	peak
4	4354.454	6.63	33.35	41.74	47.83	46.07	74.00	-27.93	peak
5	11590.000	11.74	37.86	37.91	38.87	50.56	74.00	-23.44	peak
6	17385.000	14.05	42.83	40.25	36.52	53.15	68.20	-15.05	peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

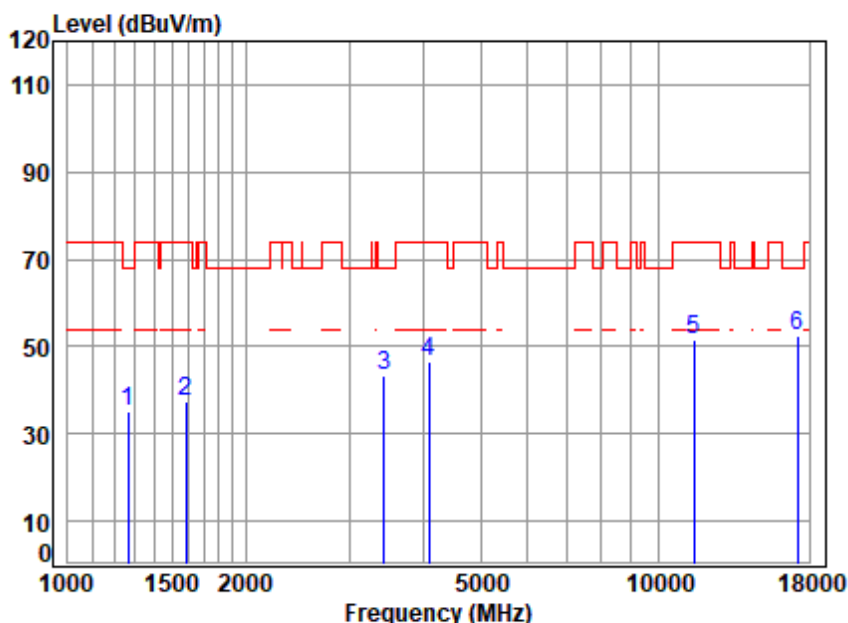


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5745 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1267.454	2.89	24.89	39.81	47.16	35.13	68.20	-33.07 peak
2 1587.975	3.34	26.20	40.00	48.04	37.58	74.00	-36.42 peak
3 3435.590	5.44	31.60	41.03	47.25	43.26	68.20	-24.94 peak
4 4086.182	6.37	32.86	41.49	48.68	46.42	74.00	-27.58 peak
5 11490.000	11.62	37.90	37.86	40.10	51.76	74.00	-22.24 peak
6 17235.000	14.09	42.74	40.28	36.12	52.67	68.20	-15.53 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

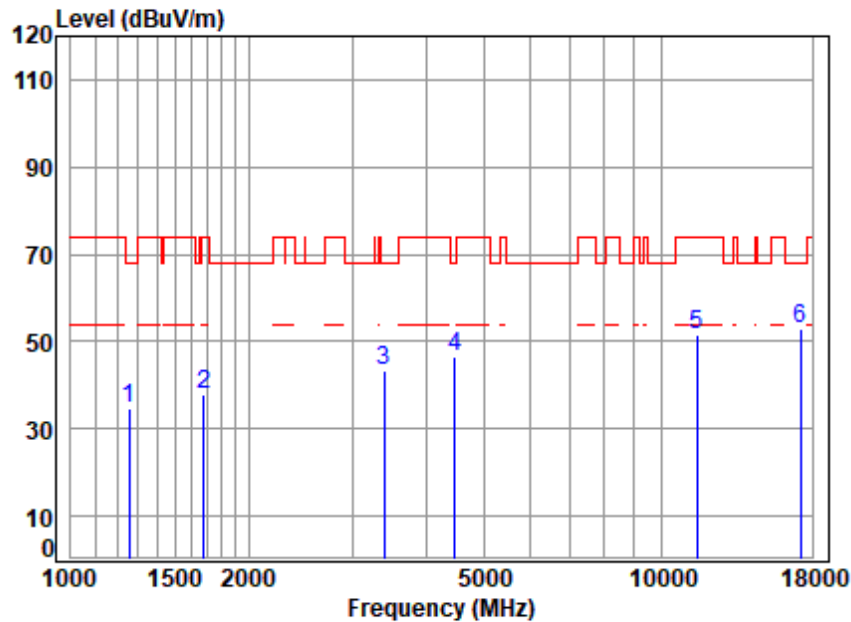


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5745 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1256.512	2.87	24.84	39.80	46.80	34.71	68.20 -33.49 peak
2	1682.477	3.42	26.60	40.05	47.86	37.83	74.00 -36.17 peak
3	3396.098	5.39	31.54	41.00	47.54	43.47	68.20 -24.73 peak
4	4469.214	6.73	33.55	41.85	48.09	46.52	68.20 -21.68 peak
5	11490.000	11.62	37.90	37.86	39.80	51.46	74.00 -22.54 peak
6	17235.000	14.09	42.74	40.28	36.52	53.07	68.20 -15.13 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

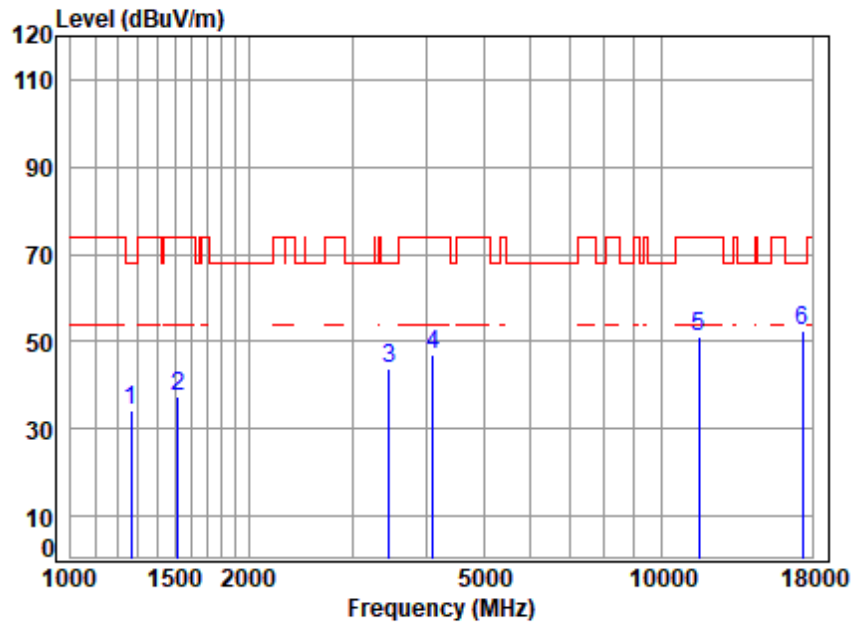


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5785 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1267.454	2.89	24.89	39.81	46.44	34.41	68.20	-33.79 peak
2 1516.210	3.27	25.87	39.96	48.02	37.20	74.00	-36.80 peak
3 3455.508	5.47	31.63	41.04	47.75	43.81	68.20	-24.39 peak
4 4109.872	6.39	32.91	41.51	49.14	46.93	74.00	-27.07 peak
5 11570.000	11.72	37.87	37.90	39.27	50.96	74.00	-23.04 peak
6 17355.000	14.06	42.81	40.25	36.05	52.67	68.20	-15.53 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

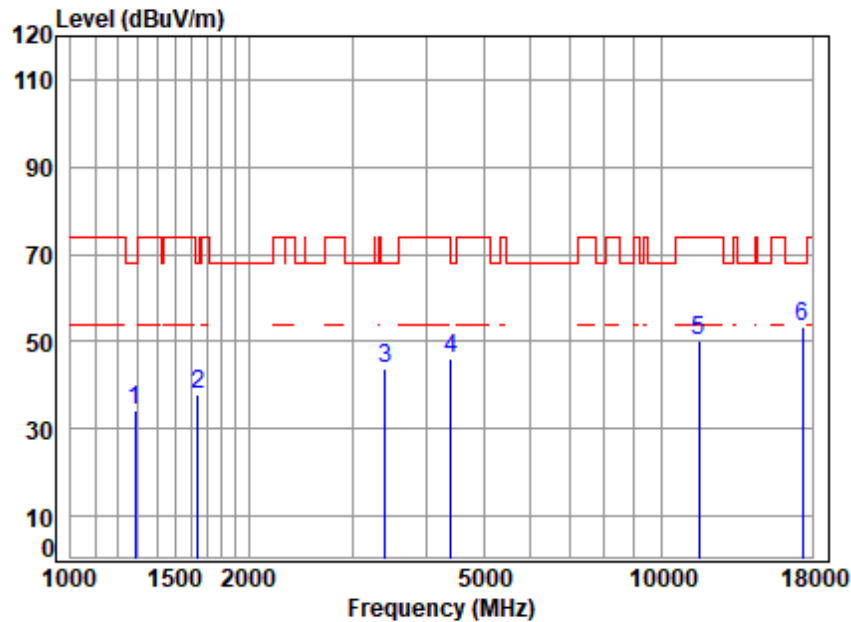


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5785 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1285.904	2.92	24.96	39.82	46.36	34.42	68.20	-33.78 peak
2 1644.019	3.38	26.44	40.03	48.05	37.84	68.20	-30.36 peak
3 3405.929	5.40	31.56	41.01	47.92	43.87	68.20	-24.33 peak
4 4405.090	6.67	33.44	41.79	47.88	46.20	68.20	-22.00 peak
5 11570.000	11.72	37.87	37.90	38.73	50.42	74.00	-23.58 peak
6 17355.000	14.06	42.81	40.25	36.71	53.33	68.20	-14.87 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

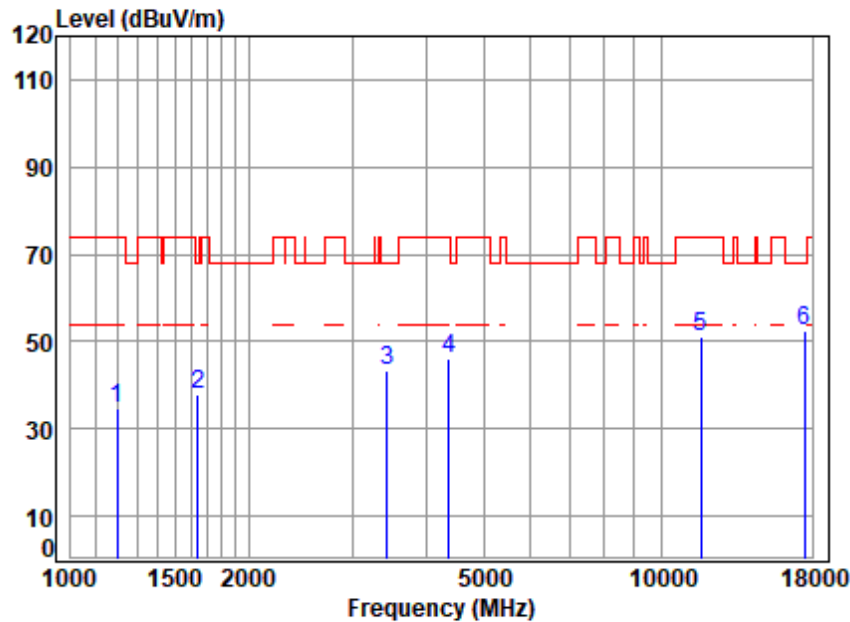


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5825 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1196.264	2.76	24.57	39.76	47.14	34.71	74.00	-39.29 peak
2 1644.019	3.38	26.44	40.03	48.25	38.04	68.20	-30.16 peak
3 3435.590	5.44	31.60	41.03	47.14	43.15	68.20	-25.05 peak
4 4367.058	6.64	33.37	41.75	47.96	46.22	74.00	-27.78 peak
5 11650.000	11.82	37.84	37.94	39.51	51.23	74.00	-22.77 peak
6 17475.000	14.02	42.89	40.23	35.87	52.55	68.20	-15.65 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

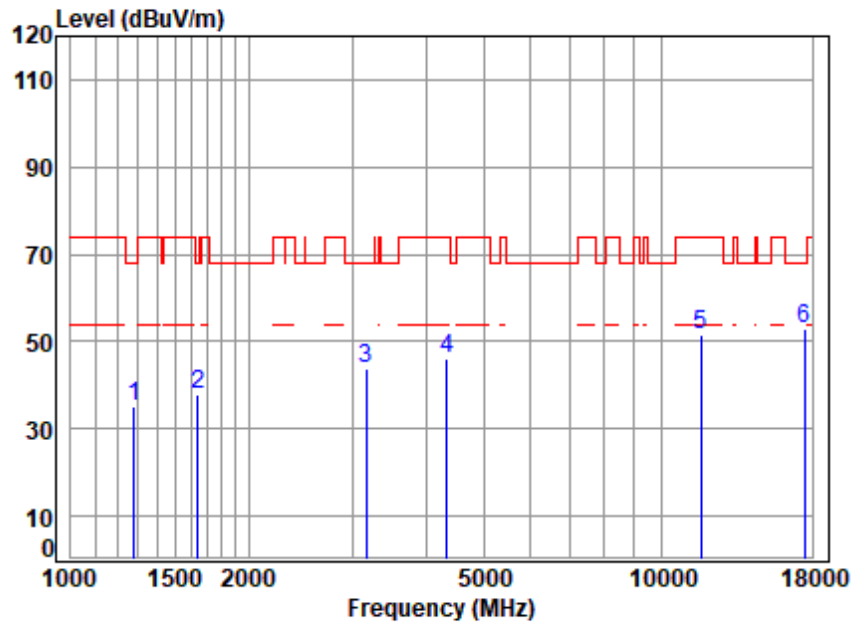


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5825 TX RSE
Note : 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1282.193	2.91	24.95	39.82	46.97	35.01	68.20	-33.19 peak
2 1639.274	3.38	26.42	40.03	48.30	38.07	68.20	-30.13 peak
3 3168.500	5.09	31.18	40.83	48.24	43.68	68.20	-24.52 peak
4 4329.354	6.60	33.30	41.72	48.09	46.27	74.00	-27.73 peak
5 11650.000	11.82	37.84	37.94	39.82	51.54	74.00	-22.46 peak
6 17475.000	14.02	42.89	40.23	36.07	52.75	68.20	-15.45 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

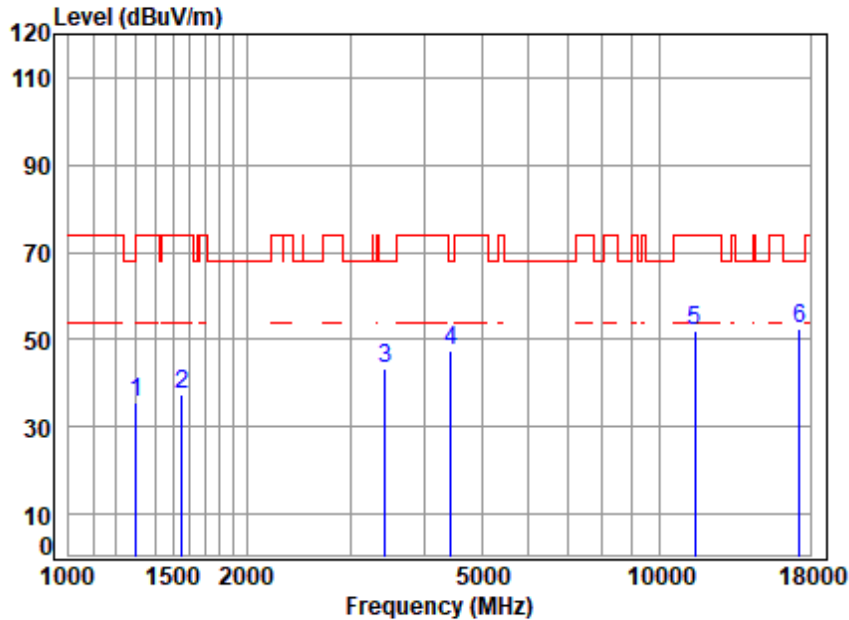


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5755 TX RSE
Note : 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1300.858	2.94	25.03	39.83	47.47	35.61	74.00	-38.39 peak
2	1551.677	3.31	26.04	39.98	48.20	37.57	74.00	-36.43 peak
3	3435.590	5.44	31.60	41.03	47.37	43.38	68.20	-24.82 peak
4	4430.628	6.70	33.48	41.81	49.11	47.48	68.20	-20.72 peak
5	11510.000	11.64	37.90	37.87	40.17	51.84	74.00	-22.16 peak
6	17265.000	14.08	42.76	40.28	36.08	52.64	68.20	-15.56 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

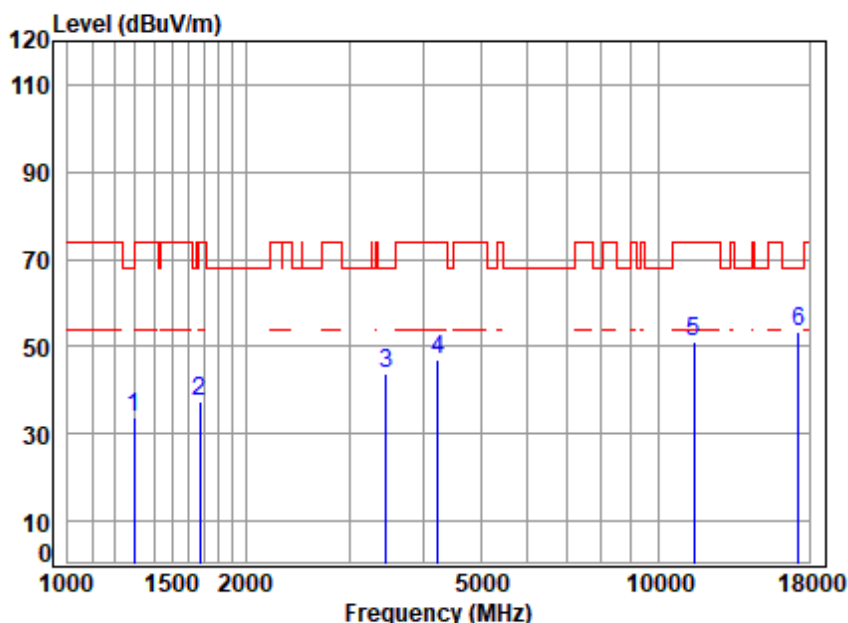


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5755 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	45.79	33.91	68.20	-34.29 peak
2 1672.779	3.41	26.56	40.05	47.50	37.42	74.00	-36.58 peak
3 3455.508	5.47	31.63	41.04	47.68	43.74	68.20	-24.46 peak
4 4230.396	6.51	33.13	41.63	48.77	46.78	74.00	-27.22 peak
5 11510.000	11.64	37.90	37.87	39.53	51.20	74.00	-22.80 peak
6 17265.000	14.08	42.76	40.28	36.68	53.24	68.20	-14.96 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

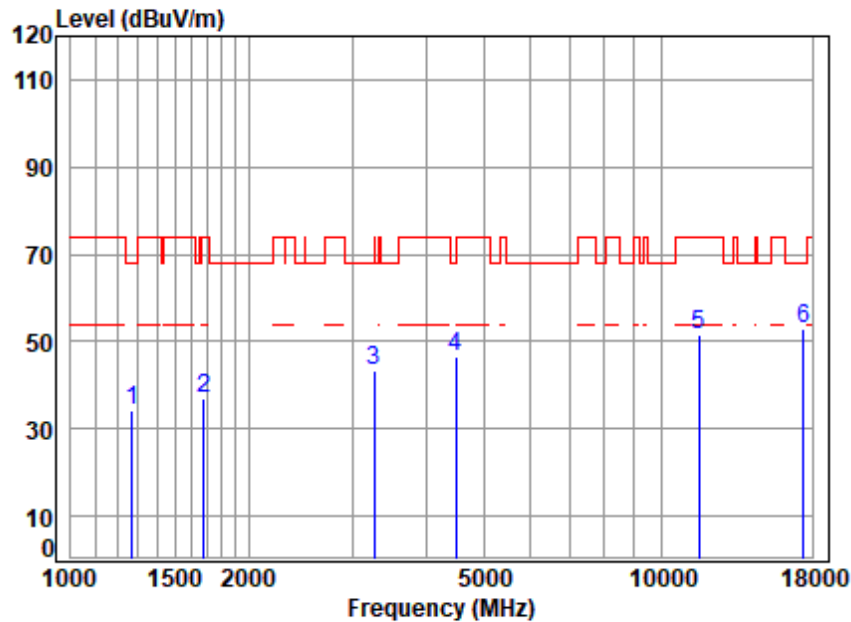


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5795 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1271.123	2.89	24.90	39.81	46.04	34.02	68.20	-34.18 peak
2 1682.477	3.42	26.60	40.05	47.21	37.18	74.00	-36.82 peak
3 3261.418	5.22	31.33	40.90	47.57	43.22	74.00	-30.78 peak
4 4495.125	6.76	33.59	41.87	48.06	46.54	68.20	-21.66 peak
5 11590.000	11.74	37.86	37.91	39.72	51.41	74.00	-22.59 peak
6 17385.000	14.05	42.83	40.25	36.16	52.79	68.20	-15.41 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

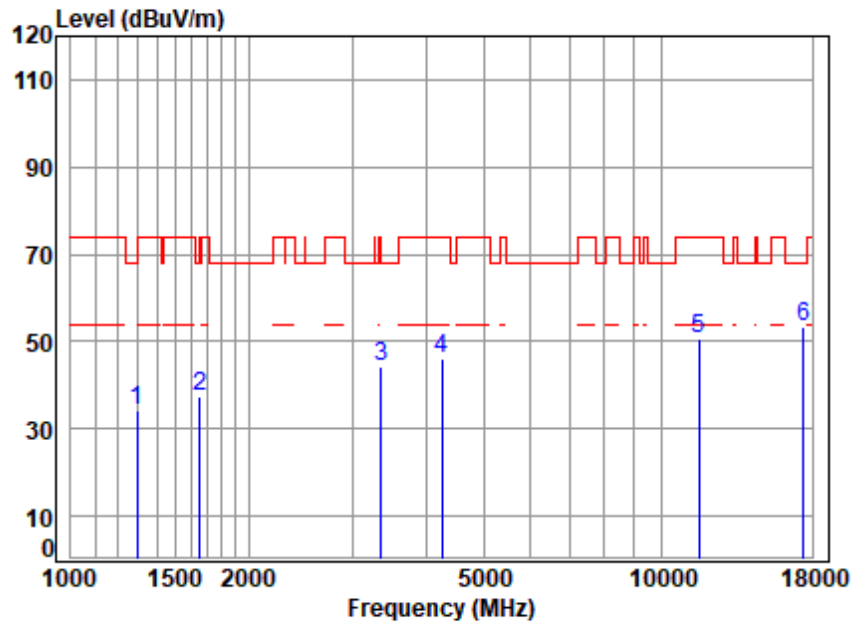


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5795 TX RSE
Note : 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.12	34.24	68.20	-33.96 peak
2 1653.550	3.39	26.48	40.04	47.61	37.44	68.20	-30.76 peak
3 3357.061	5.34	31.48	40.97	48.64	44.49	74.00	-29.51 peak
4 4254.921	6.53	33.17	41.65	48.15	46.20	74.00	-27.80 peak
5 11590.000	11.74	37.86	37.91	38.81	50.50	74.00	-23.50 peak
6 17385.000	14.05	42.83	40.25	36.74	53.37	68.20	-14.83 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

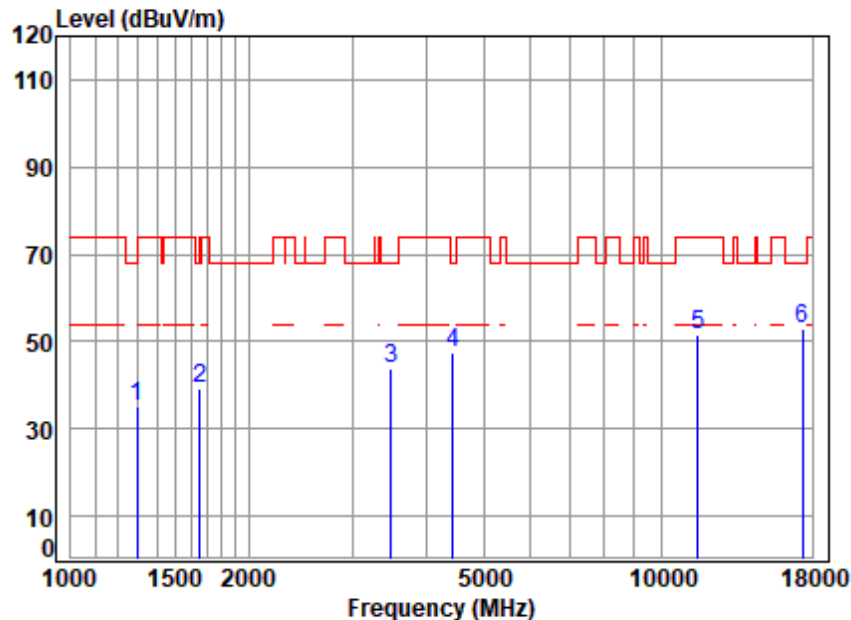


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5775 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1297.103	2.94	25.01	39.83	46.86	34.98	68.20	-33.22 peak
2 1653.550	3.39	26.48	40.04	49.49	39.32	68.20	-28.88 peak
3 3485.601	5.50	31.68	41.07	47.86	43.97	68.20	-24.23 peak
4 4430.628	6.70	33.48	41.81	49.00	47.37	68.20	-20.83 peak
5 11550.000	11.69	37.88	37.89	39.88	51.56	74.00	-22.44 peak
6 17325.000	14.07	42.80	40.26	36.45	53.06	68.20	-15.14 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

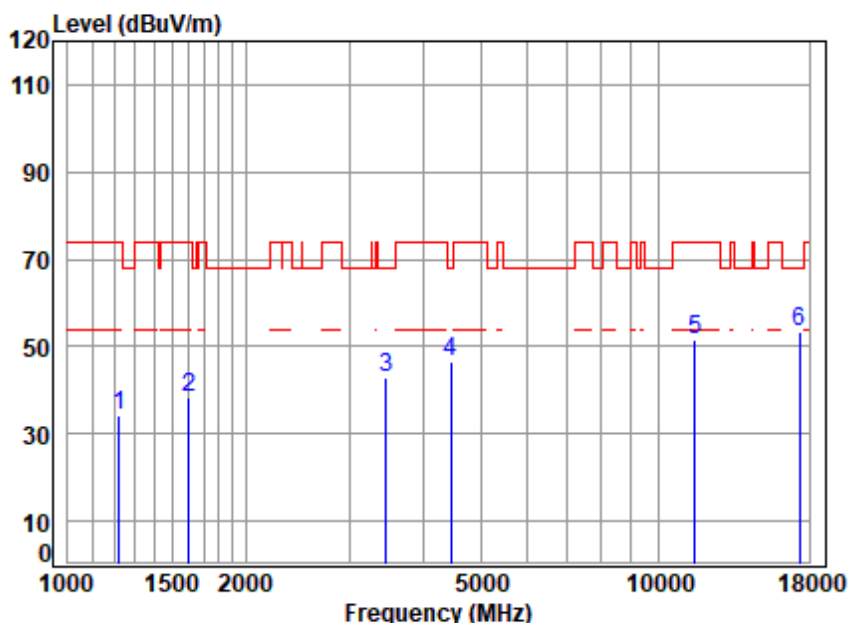

Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5775 TX RSE
Note : 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 1224.247	2.81	24.70	39.78	46.57	34.30	74.00	-39.70 peak
2 1606.441	3.35	26.28	40.01	48.88	38.50	74.00	-35.50 peak
3 3465.510	5.48	31.65	41.05	46.89	42.97	68.20	-25.23 peak
4 4456.315	6.72	33.53	41.84	48.01	46.42	68.20	-21.78 peak
5 11550.000	11.69	37.88	37.89	39.71	51.39	74.00	-22.61 peak
6 17325.000	14.07	42.80	40.26	36.93	53.54	68.20	-14.66 peak



7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.407(b)
Test Method: KDB 789033 D02 II G
Measurement Distance: 3m

Limit:		
For transmitters operating in the 5.15-5.25 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).	
For transmitters operating in the 5.25-5.35 GHz band:	All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).	
For transmitters operating in the 5.47-5.725 GHz band:	All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.2dBuV/m).	
For transmitters operating in the 5.725-5.85 GHz band:	(i) All emissions shall be limited to a level of -27 dBm/MHz (68.2dBuV/m) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz (105.2dBuV/m) at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz (110.8dBuV/m) at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz (122.2dBuV/m) at the band edge.	
Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C Humidity: 52.1 % RH Atmospheric Pressure: 1010 mbar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Pre-scan	16	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	17	Charge + TX mode (U-NII-1)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	18	TX mode (U-NII-2A)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	19	Charge + TX mode (U-NII-2A)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	20	TX mode (U-NII-2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Final test	21	Charge + TX mode (U-NII-2C)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

		802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80). Only the data of worst case is recorded in the report.
Pre-scan	22	TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(HT80). Only the data of worst case is recorded in the report.
Final test	23	Charge + TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(HT80). Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

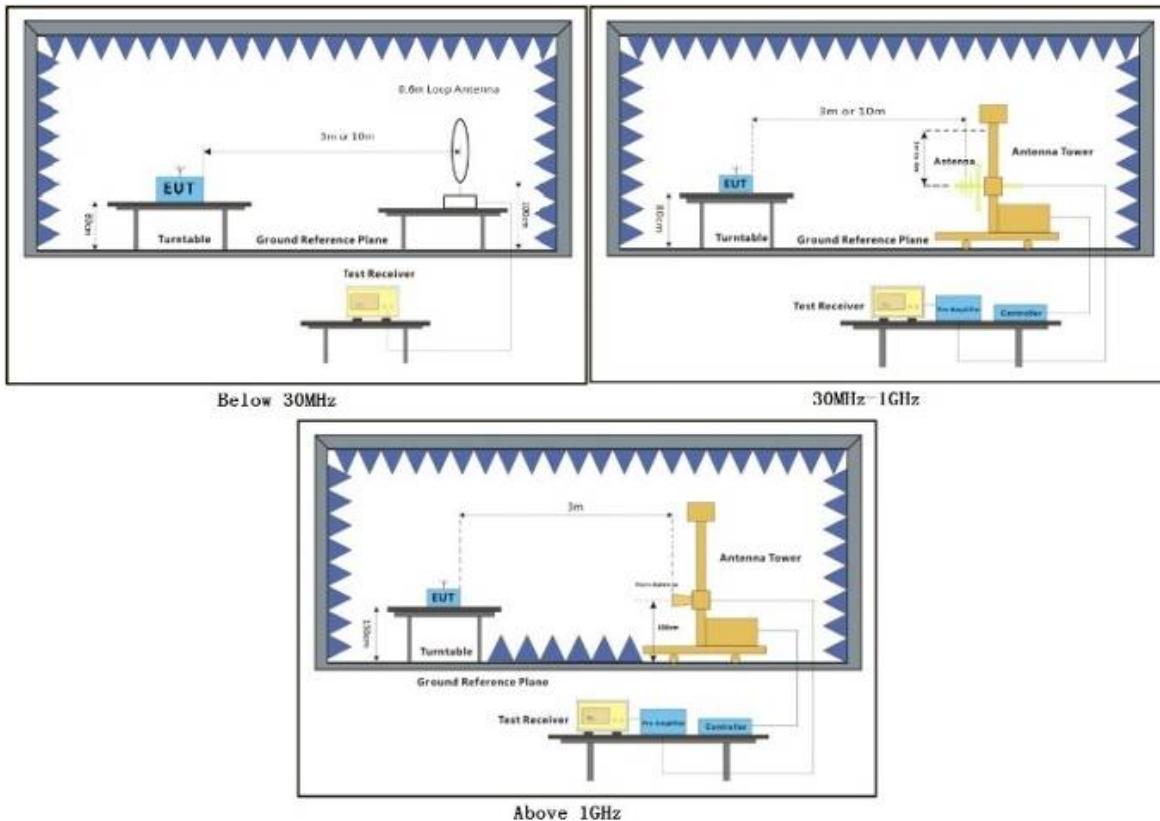

7.4.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Pretest the EUT at antenna 1 and antenna 2, found the antenna 1 which is worst case for 802.11a/n/ac mode, only the worst test data is recorded in the report.



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

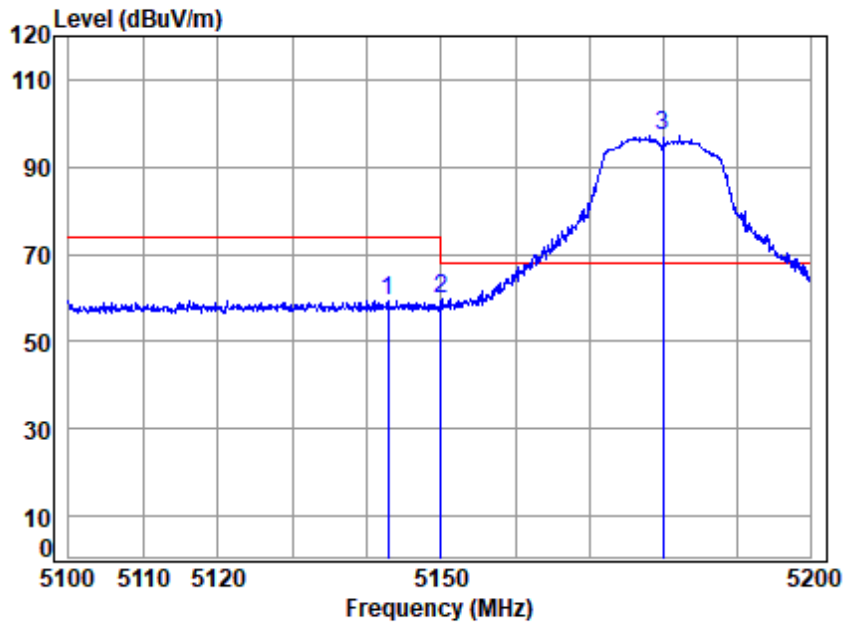


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5142.862	7.56	34.32	42.32	59.67	59.23	74.00	-14.77 peak
2 5149.980	7.57	34.32	42.32	60.11	59.68	74.00	-14.32 peak
3 * 5180.000	7.63	34.35	42.32	97.45	97.11	68.20	28.91 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

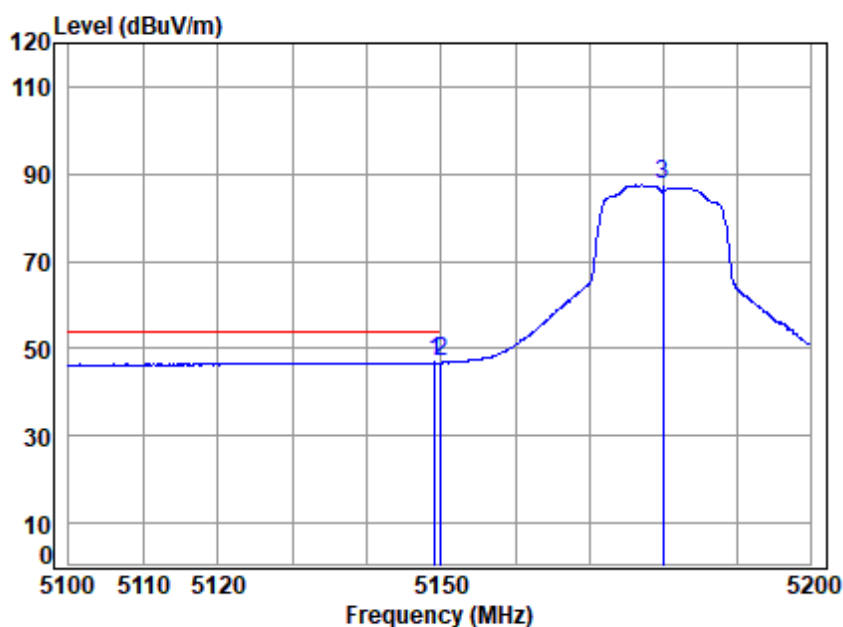

```
Site      : chamber
Condition: 3m HORIZONTAL
Job No    : 20124AT/20125AT
Mode      : 5180 Band edge
           : 5G WIFI 11A
```

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.157	7.57	34.32	42.32	47.20	46.77	54.00	-7.23	Average
2	5149.980	7.57	34.32	42.32	47.30	46.87	54.00	-7.13	Average
3	5180.000	7.63	34.35	42.32	87.75	87.41	-----	-----	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client. This document does not generate parties to a contract and the Client's responsibility to the Company is not affected. Any alteration, forgery or falsification of the content of this document, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

For further information, check the validity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, at email: CN.Doechner@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Center EEC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号楼 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

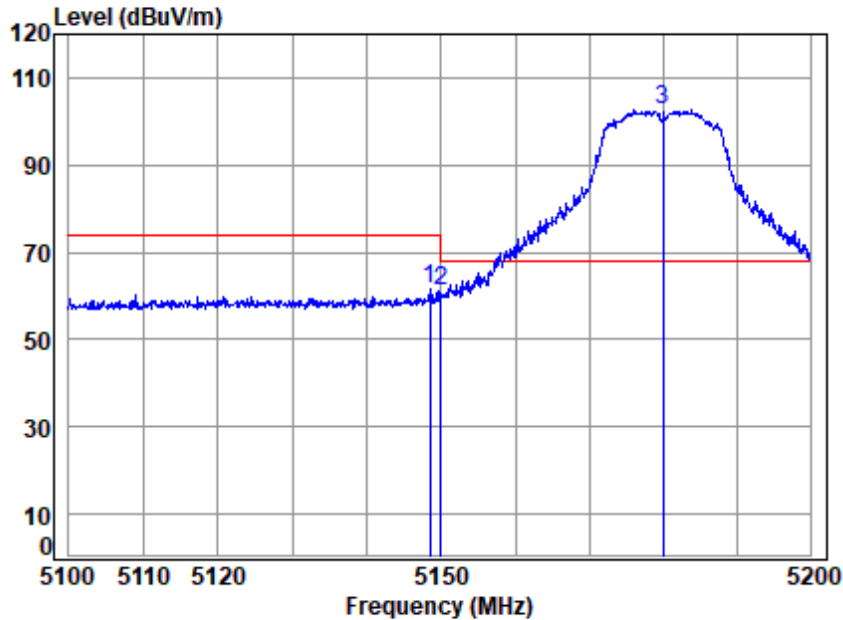


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.458	7.57	34.32	42.32	61.82	61.39	74.00	-12.61 peak
2	5149.980	7.57	34.32	42.32	61.59	61.16	74.00	-12.84 peak
3 *	5180.000	7.63	34.35	42.32	103.02	102.68	68.20	34.48 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

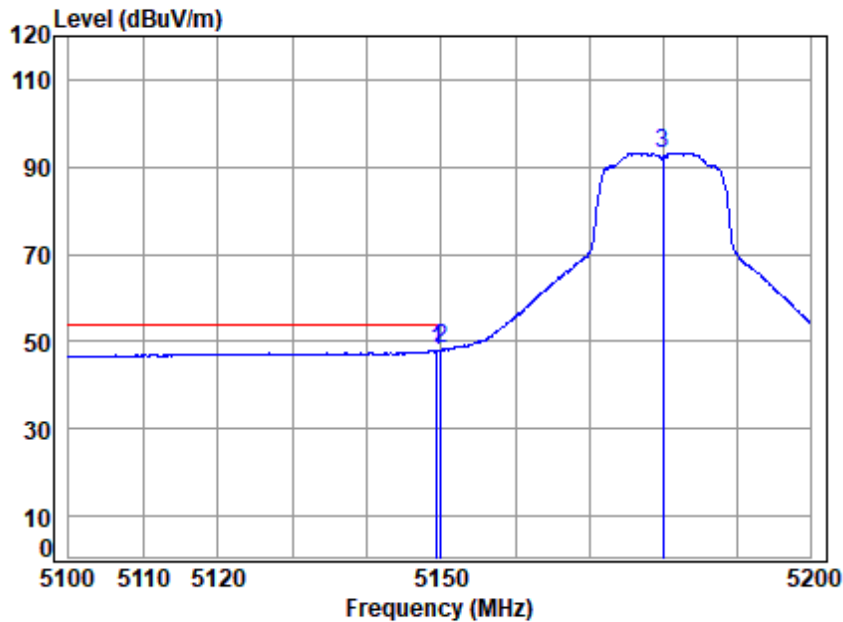


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.458	7.57	34.32	42.32	48.30	47.87	54.00	-6.13 Average
2	5149.980	7.57	34.32	42.32	48.59	48.16	54.00	-5.84 Average
3	5180.000	7.63	34.35	42.32	93.59	93.25	-----	----- Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

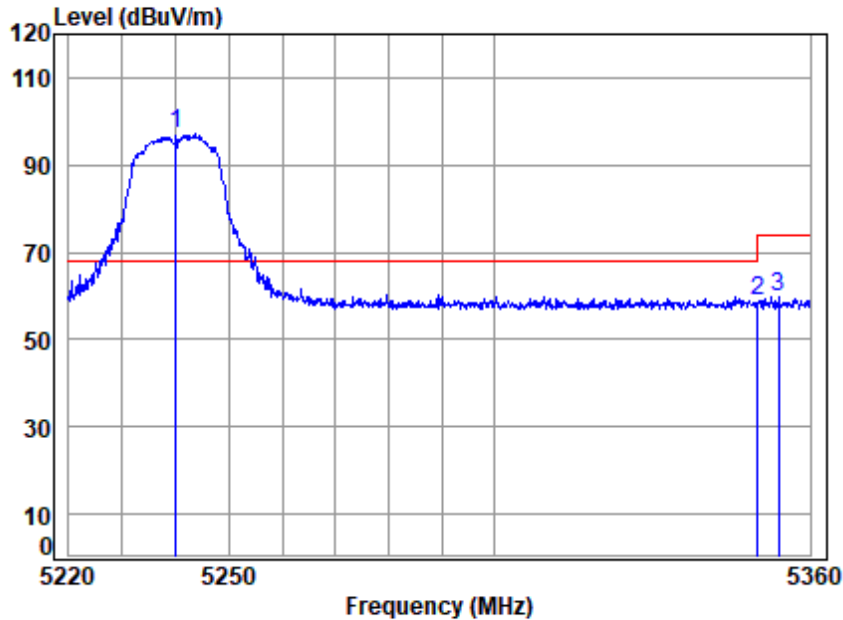


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5240.000	7.73	34.40	42.33	97.28	97.08	68.20	28.88 peak
2 5350.020	7.92	34.48	42.34	58.70	58.76	74.00	-15.24 peak
3 5353.903	7.93	34.49	42.34	59.80	59.88	74.00	-14.12 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

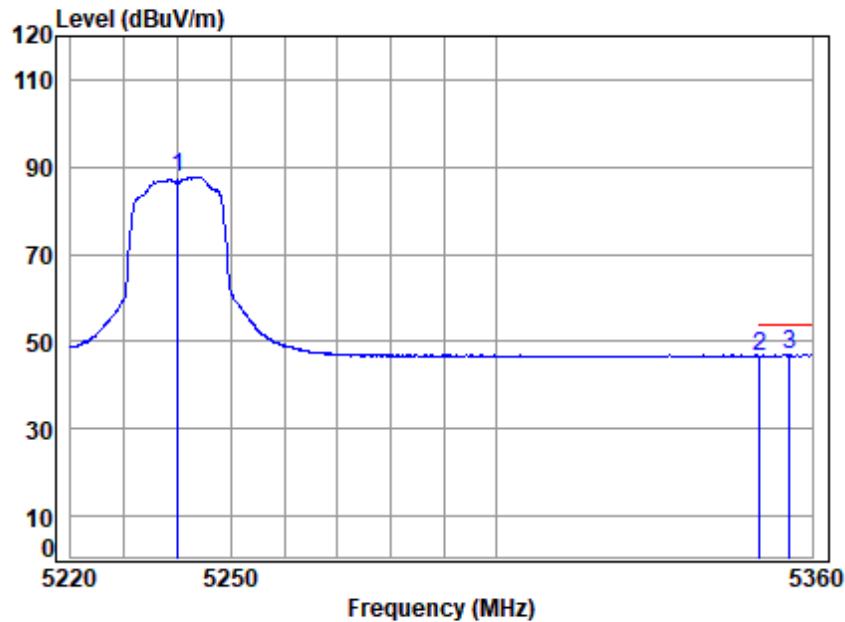


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5240.000	7.73	34.40	42.33	88.01	87.81	-----	-----
2 5350.020	7.92	34.48	42.34	46.65	46.71	54.00	-7.29
3 5355.604	7.93	34.49	42.34	46.86	46.94	54.00	-7.06



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

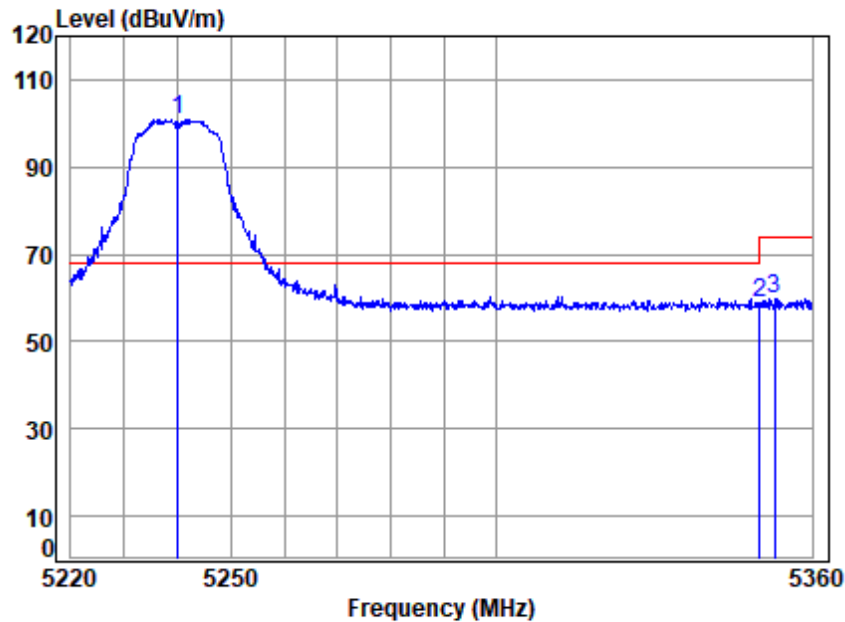


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5240.000	7.73	34.40	42.33	101.21	101.01	68.20	32.81 peak
2 5350.020	7.92	34.48	42.34	58.94	59.00	74.00	-15.00 peak
3 5352.770	7.93	34.49	42.34	59.61	59.69	74.00	-14.31 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

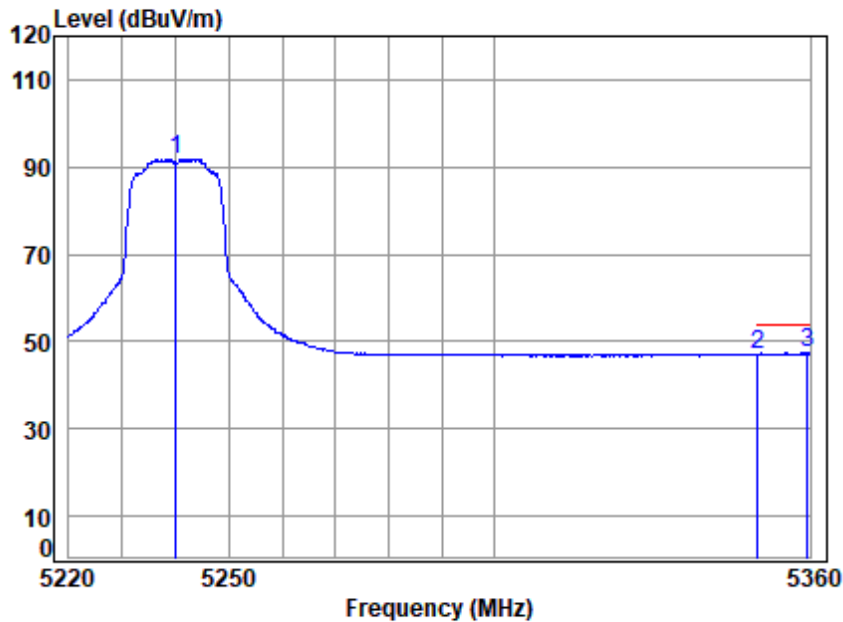


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5240.000	7.73	34.40	42.33	92.01	91.81	-----	----- Average
2 5350.020	7.92	34.48	42.34	47.14	47.20	54.00	-6.80 Average
3 5359.433	7.94	34.49	42.34	47.26	47.35	54.00	-6.65 Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

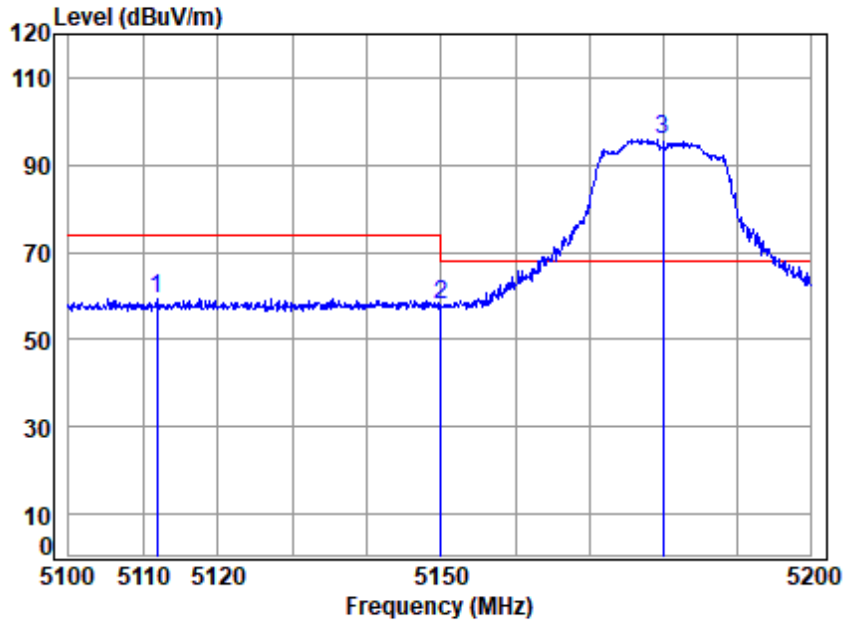


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5111.798	7.50	34.29	42.31	59.90	59.38	74.00	-14.62 peak
2 5149.980	7.57	34.32	42.32	58.47	58.04	74.00	-15.96 peak
3 * 5180.000	7.63	34.35	42.32	96.24	95.90	68.20	27.70 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

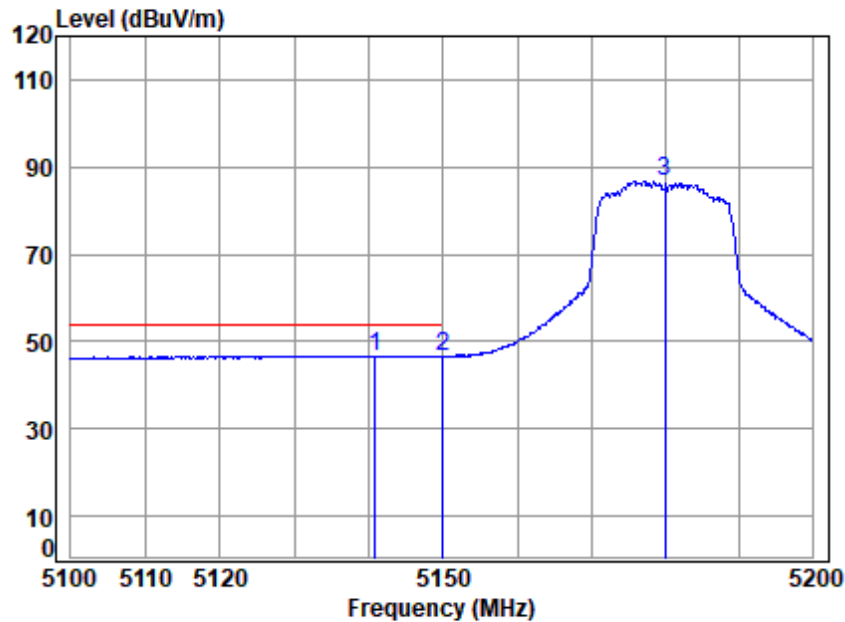


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5140.765	7.56	34.32	42.32	47.18	46.74	54.00	-7.26	Average
2 5149.980	7.57	34.32	42.32	47.12	46.69	54.00	-7.31	Average
3 5180.000	7.63	34.35	42.32	86.99	86.65	-----	-----	Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

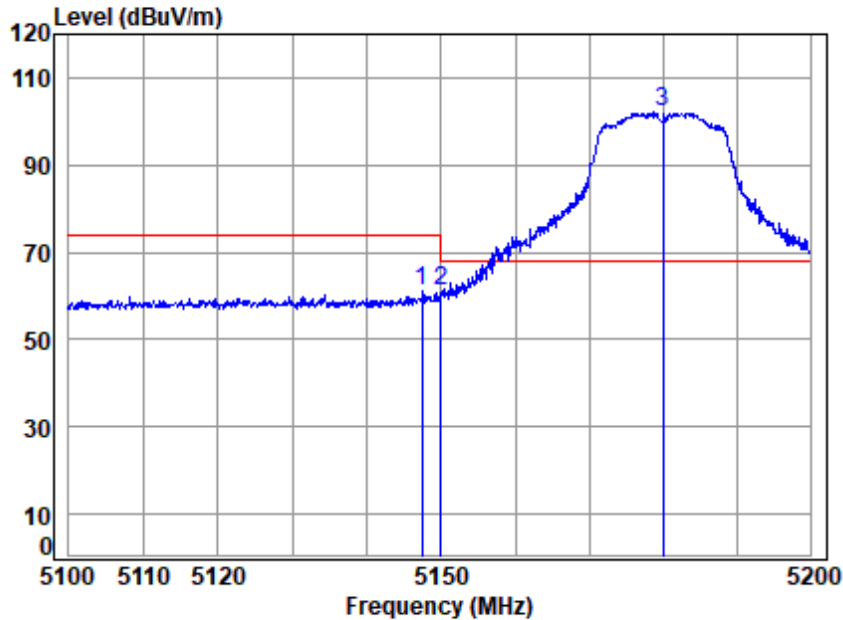


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5147.458	7.57	34.32	42.32	61.37	60.94	74.00	-13.06 peak
2	5149.980	7.57	34.32	42.32	61.62	61.19	74.00	-12.81 peak
3 *	5180.000	7.63	34.35	42.32	102.36	102.02	68.20	33.82 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

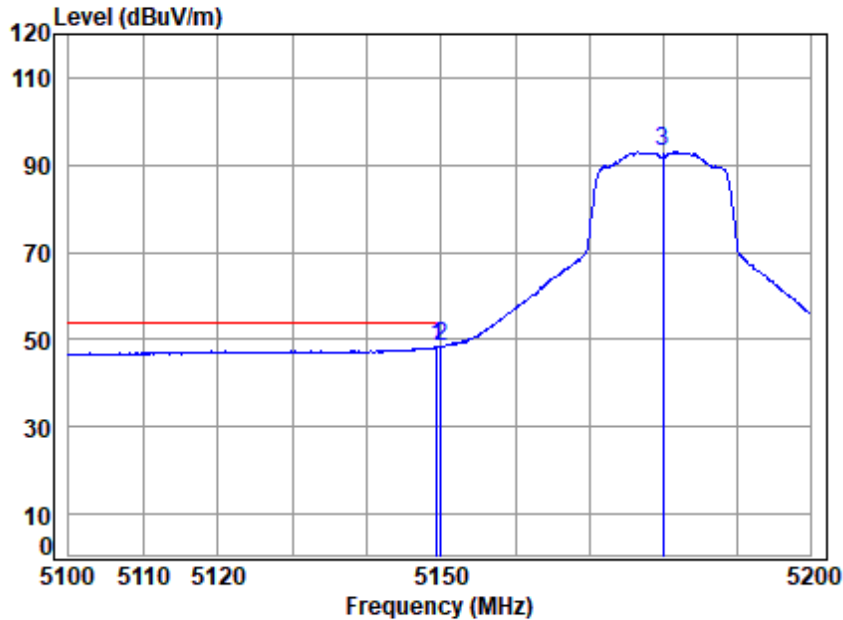


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.357	7.57	34.32	42.32	48.64	48.21	54.00	-5.79 Average
2	5149.980	7.57	34.32	42.32	48.93	48.50	54.00	-5.50 Average
3	5180.000	7.63	34.35	42.32	93.35	93.01	-----	----- Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

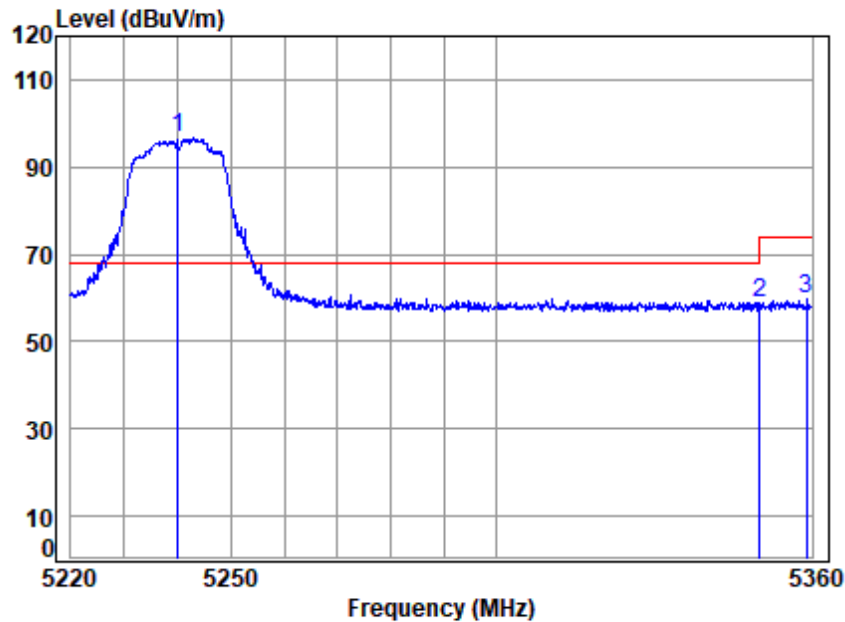


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5240.000	7.73	34.40	42.33	96.86	96.66	68.20	28.46	peak
2 5350.020	7.92	34.48	42.34	58.69	58.75	74.00	-15.25	peak
3 5359.007	7.94	34.49	42.34	59.68	59.77	74.00	-14.23	peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

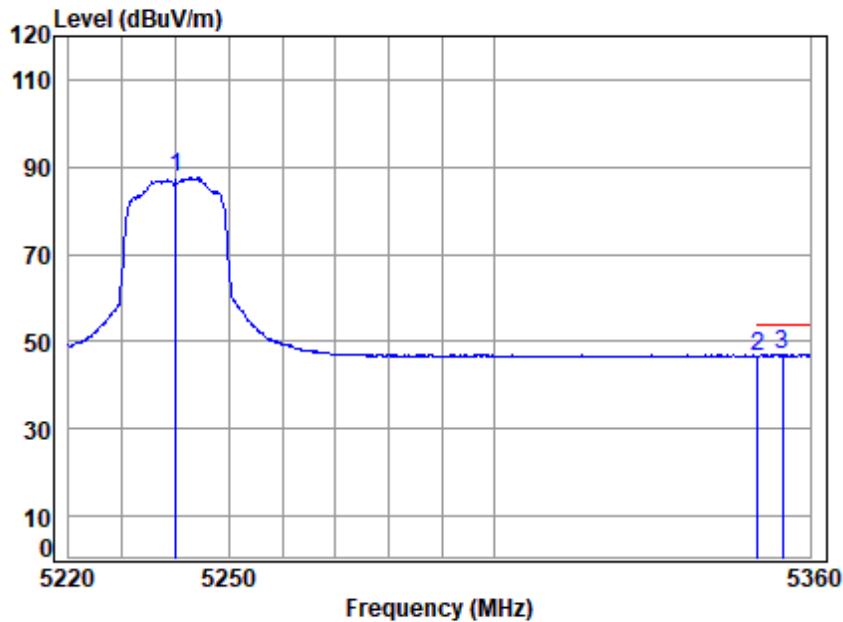


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5240.000	7.73	34.40	42.33	87.70	87.50	-----	----- Average
2 5350.020	7.92	34.48	42.34	46.71	46.77	54.00	-7.23 Average
3 5354.754	7.93	34.49	42.34	46.89	46.97	54.00	-7.03 Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

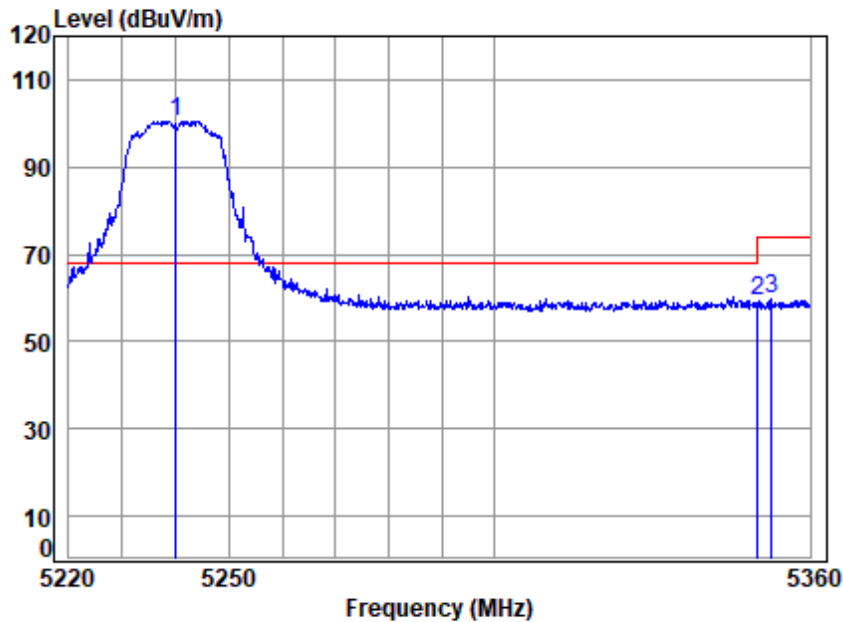


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5240.000	7.73	34.40	42.33	100.77	100.57	68.20	32.37 peak
2 5350.020	7.92	34.48	42.34	59.42	59.48	74.00	-14.52 peak
3 5352.628	7.93	34.49	42.34	59.64	59.72	74.00	-14.28 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

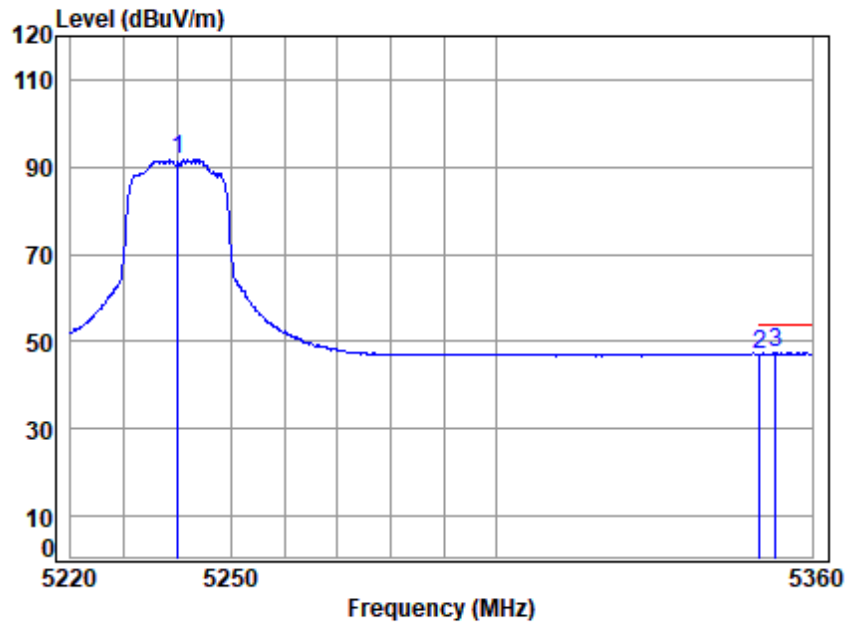


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5240.000	7.73	34.40	42.33	91.81	91.61	-----	-----
2 5350.020	7.92	34.48	42.34	47.11	47.17	54.00	-6.83
3 5353.053	7.93	34.49	42.34	47.26	47.34	54.00	-6.66
							Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

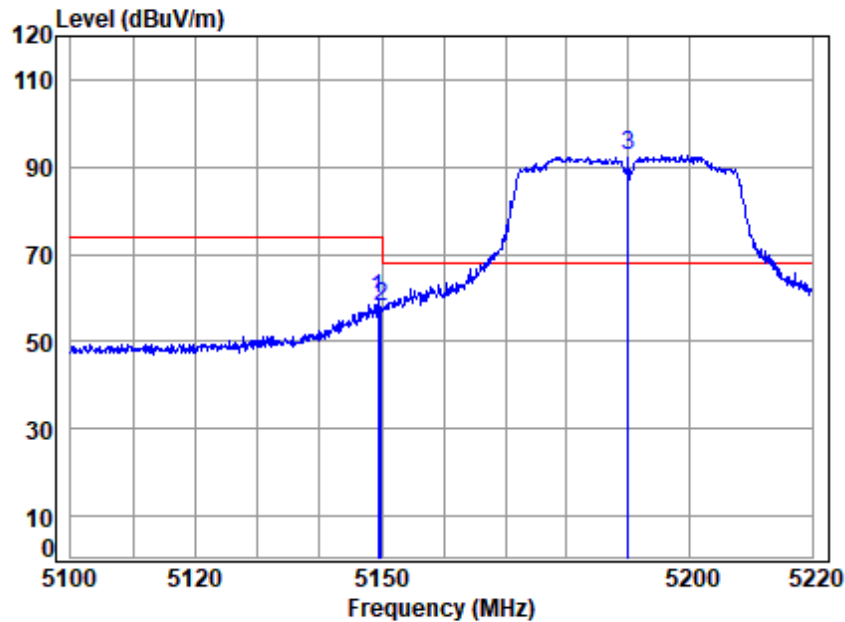


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5149.461	7.57	34.32	42.32	59.98	59.55	74.00	-14.45 peak
2 5149.980	7.57	34.32	42.32	58.51	58.08	74.00	-15.92 peak
3 * 5190.000	7.64	34.36	42.32	92.80	92.48	68.20	24.28 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

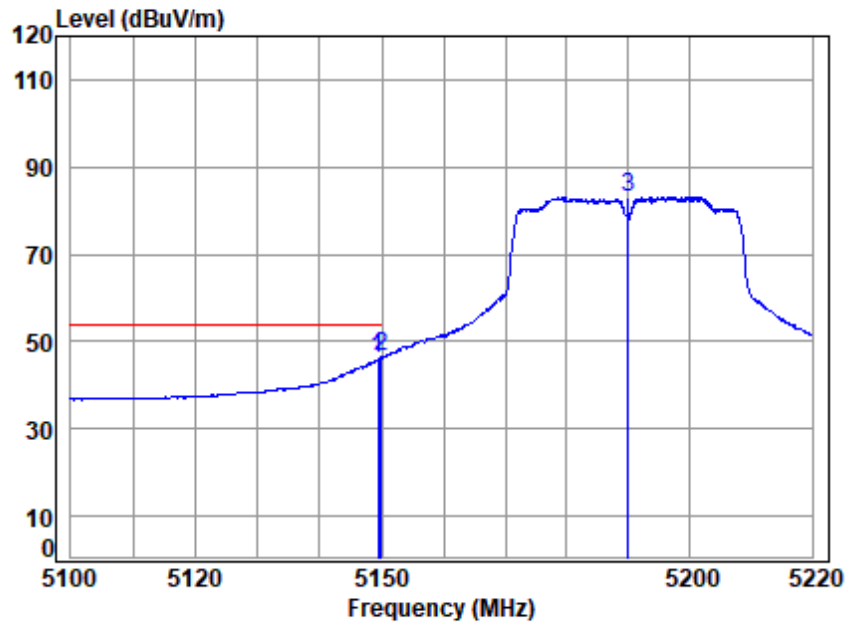


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5149.461	7.57	34.32	42.32	46.48	46.05	54.00	-7.95	Average
2 5149.980	7.57	34.32	42.32	47.18	46.75	54.00	-7.25	Average
3 5190.000	7.64	34.36	42.32	83.42	83.10	-----	-----	Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

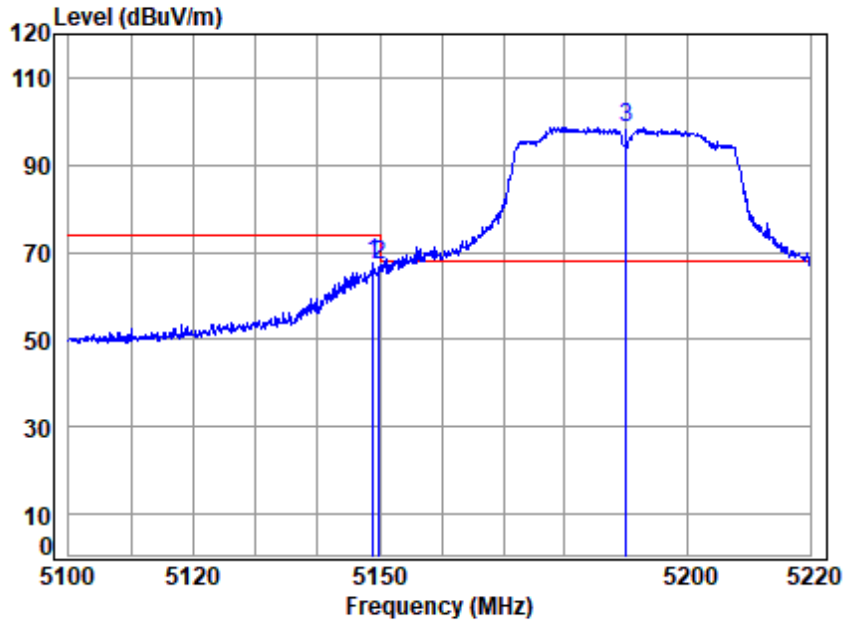


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5148.863	7.57	34.32	42.32	67.98	67.55	74.00	-6.45 peak
2 5149.980	7.57	34.32	42.32	67.44	67.01	74.00	-6.99 peak
3 * 5190.000	7.64	34.36	42.32	99.00	98.68	68.20	30.48 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

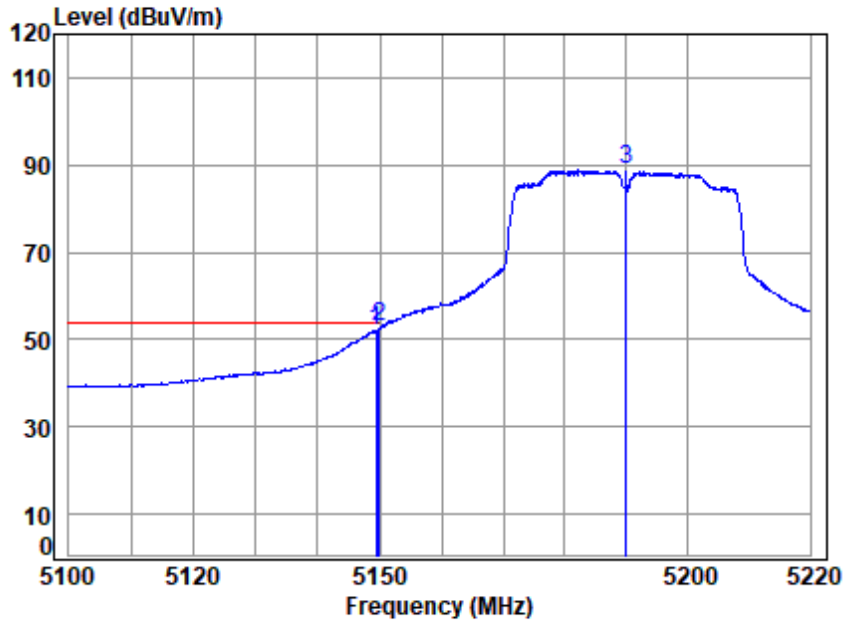


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5149.461	7.57	34.32	42.32	52.66	52.23	54.00	-1.77	Average
2 5149.980	7.57	34.32	42.32	53.36	52.93	54.00	-1.07	Average
3 5190.000	7.64	34.36	42.32	89.10	88.78	-----	-----	Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

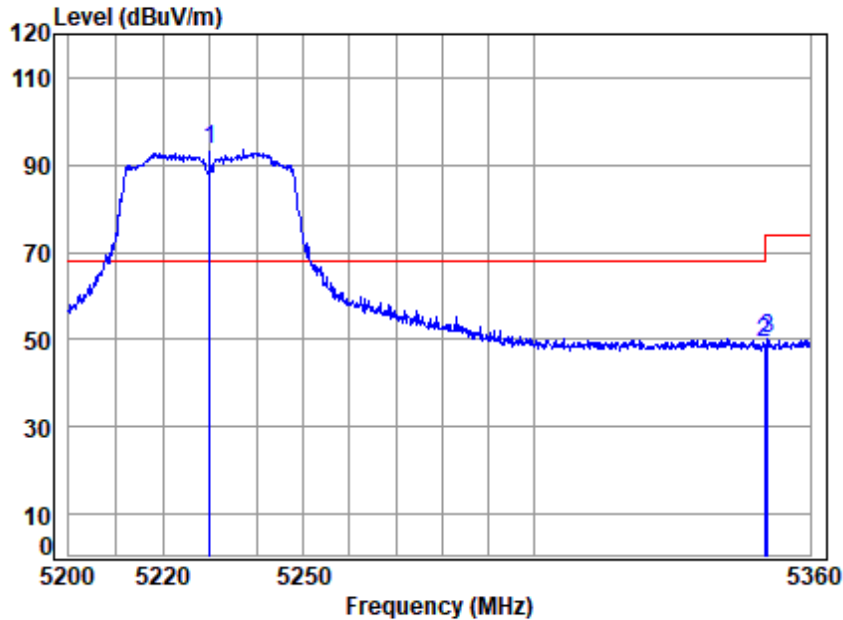


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5230.000	7.72	34.39	42.32	93.68	93.47	68.20	25.27 peak
2 5350.020	7.92	34.48	42.34	49.19	49.25	74.00	-24.75 peak
3 5350.749	7.93	34.48	42.34	49.94	50.01	74.00	-23.99 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

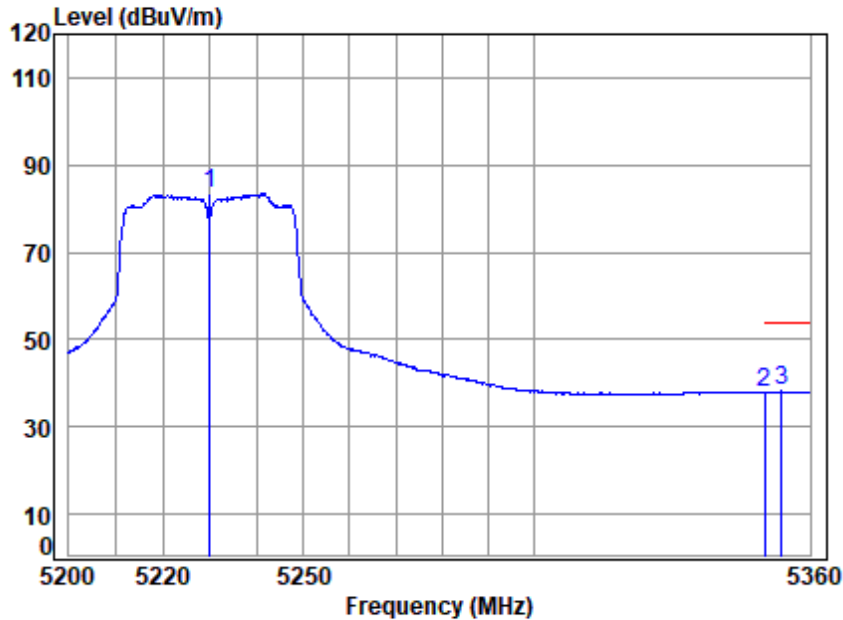


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5230.000	7.72	34.39	42.32	83.62	83.41	-----	----- Average
2	5350.020	7.92	34.48	42.34	37.86	37.92	54.00	-16.08 Average
3	5353.831	7.93	34.49	42.34	38.04	38.12	54.00	-15.88 Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

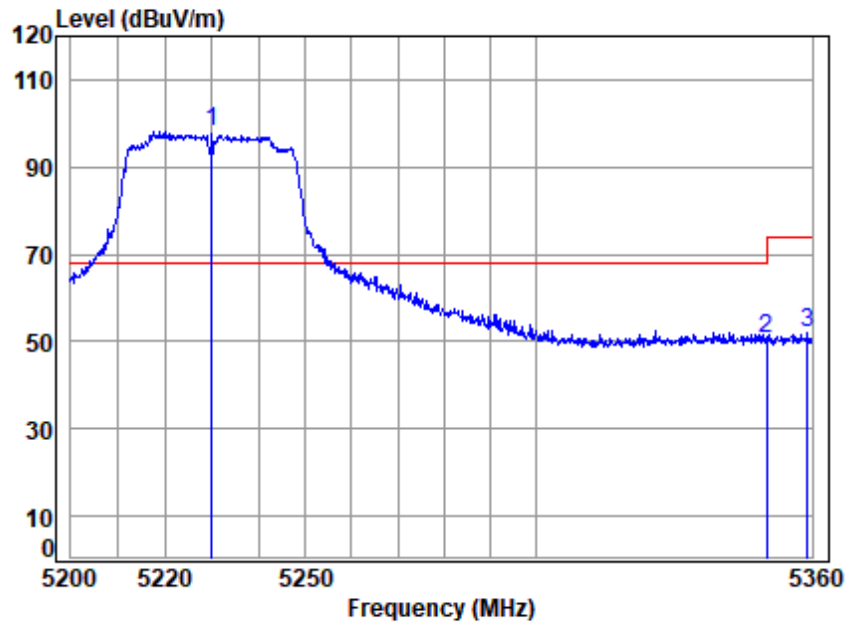


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5230.000	7.72	34.39	42.32	98.42	98.21	68.20	30.01 peak
2 5350.020	7.92	34.48	42.34	50.59	50.65	74.00	-23.35 peak
3 5359.025	7.94	34.49	42.34	51.75	51.84	74.00	-22.16 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

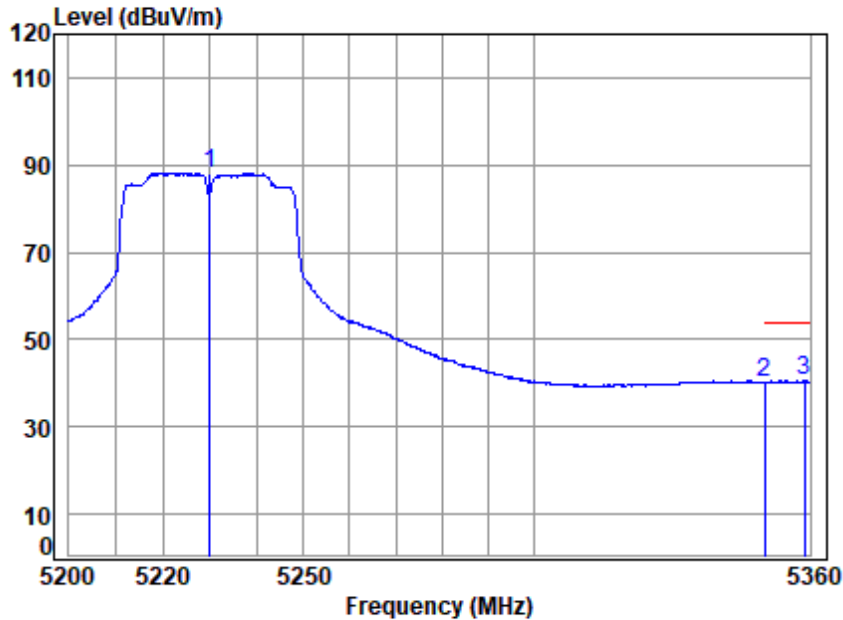


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5230.000	7.72	34.39	42.32	88.40	88.19	-----	-----
2 5350.020	7.92	34.48	42.34	40.21	40.27	54.00	-13.73
3 5358.863	7.94	34.49	42.34	40.40	40.49	54.00	-13.51
							Average
							Average
							Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

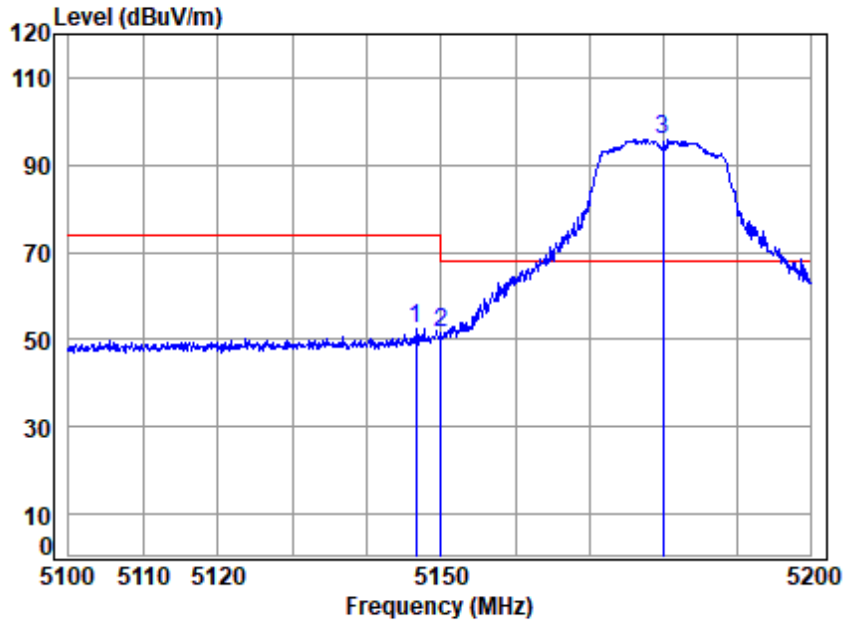


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5146.658	7.57	34.32	42.32	52.85	52.42	74.00	-21.58 peak
2 5149.980	7.57	34.32	42.32	52.05	51.62	74.00	-22.38 peak
3 * 5180.000	7.63	34.35	42.32	96.36	96.02	68.20	27.82 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

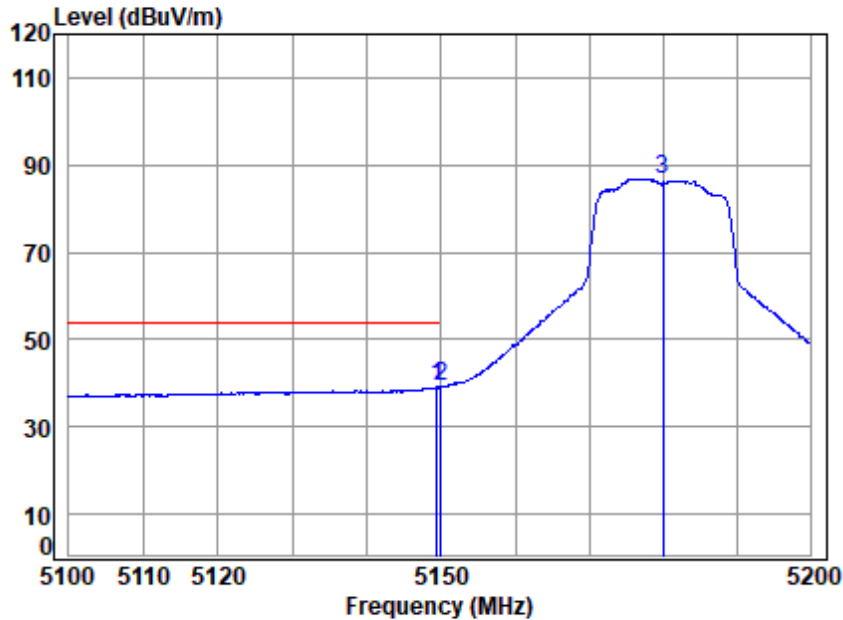


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5149.357	7.57	34.32	42.32	39.45	39.02	54.00	-14.98	Average
2 5149.980	7.57	34.32	42.32	39.71	39.28	54.00	-14.72	Average
3 5180.000	7.63	34.35	42.32	87.24	86.90	-----	-----	Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

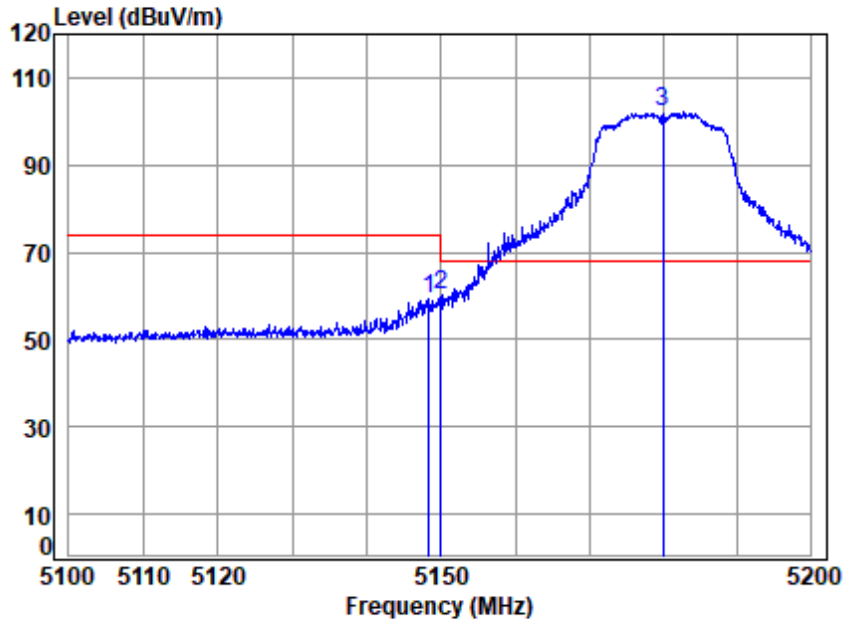


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5148.357	7.57	34.32	42.32	59.92	59.49	74.00	-14.51 peak
2	5149.980	7.57	34.32	42.32	60.64	60.21	74.00	-13.79 peak
3 *	5180.000	7.63	34.35	42.32	102.43	102.09	68.20	33.89 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

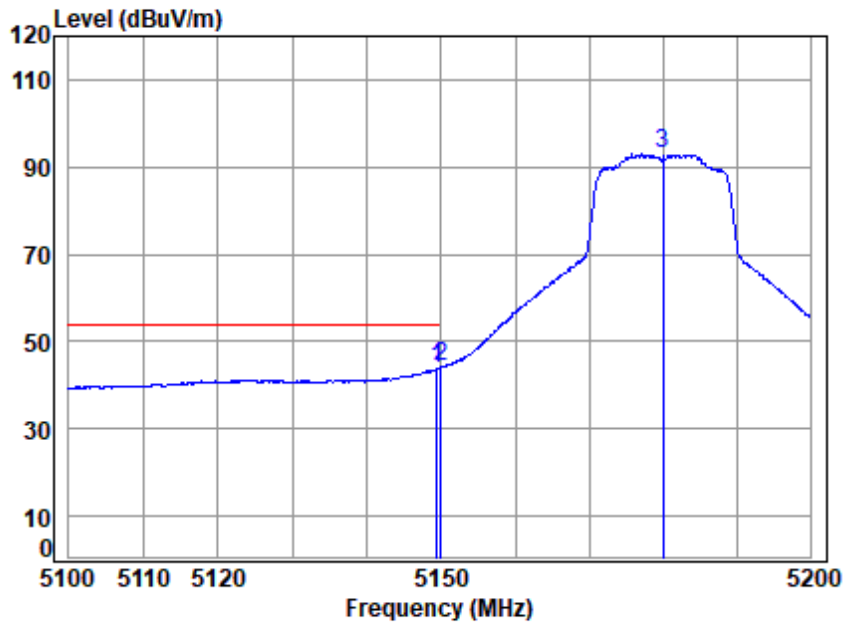


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5180 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.357	7.57	34.32	42.32	44.28	43.85	54.00	-10.15 Average
2	5149.980	7.57	34.32	42.32	44.69	44.26	54.00	-9.74 Average
3	5180.000	7.63	34.35	42.32	93.20	92.86	-----	----- Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

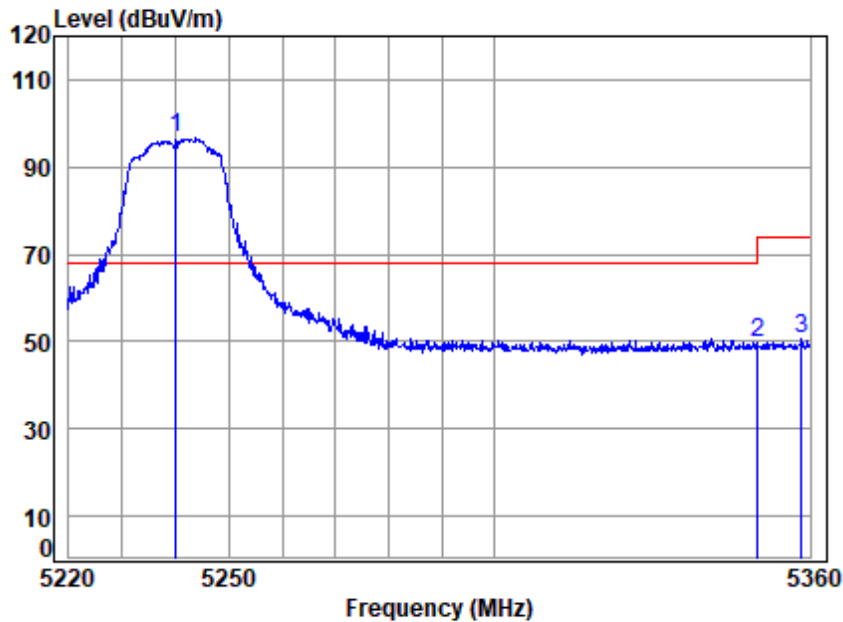


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5240.000	7.73	34.40	42.33	96.73	96.53	68.20	28.33	peak
2 5350.020	7.92	34.48	42.34	49.65	49.71	74.00	-24.29	peak
3 5358.440	7.94	34.49	42.34	50.38	50.47	74.00	-23.53	peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

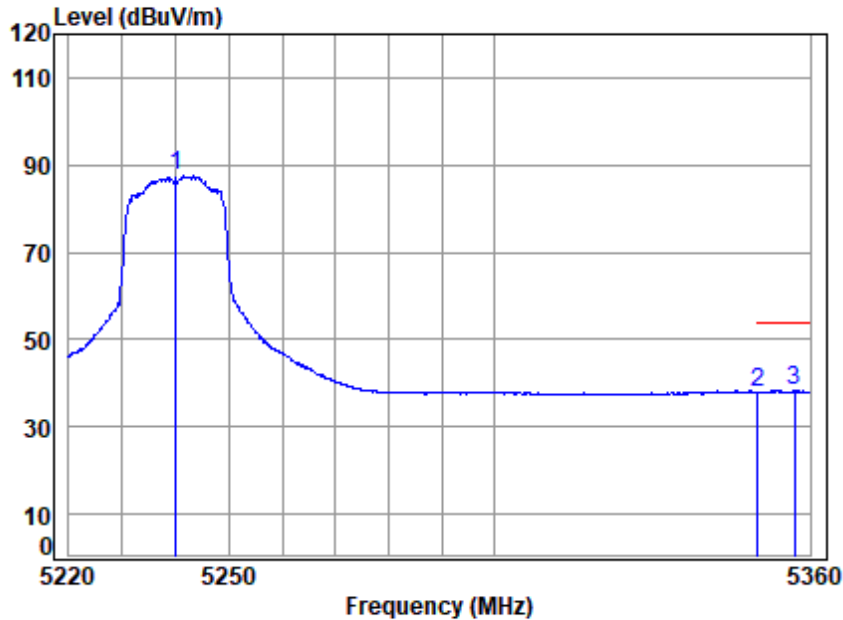


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5240.000	7.73	34.40	42.33	87.67	87.47	-----	----- Average
2 5350.020	7.92	34.48	42.34	37.99	38.05	54.00	-15.95 Average
3 5357.022	7.94	34.49	42.34	38.17	38.26	54.00	-15.74 Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

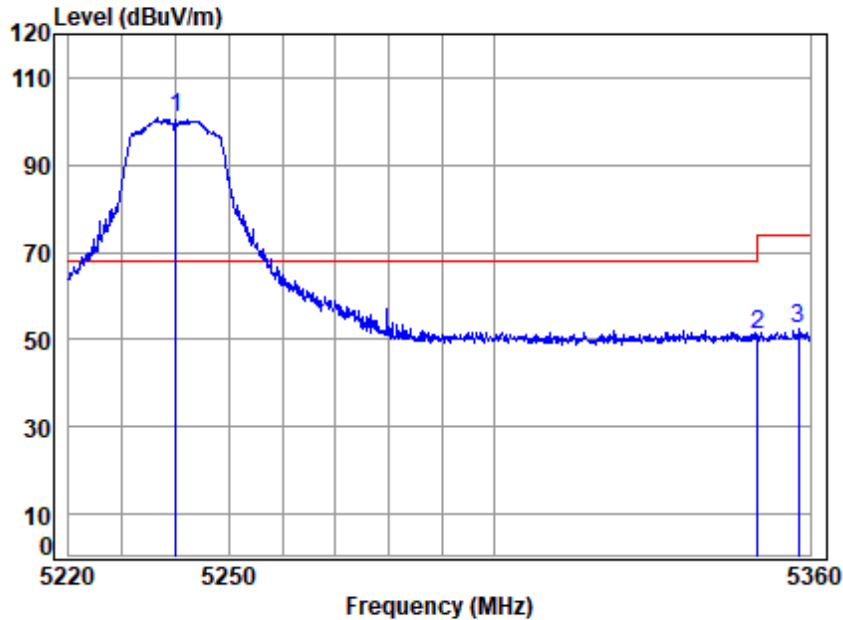


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5240.000	7.73	34.40	42.33	100.84	100.64	68.20	32.44	peak
2 5350.020	7.92	34.48	42.34	50.95	51.01	74.00	-22.99	peak
3 5357.873	7.94	34.49	42.34	52.28	52.37	74.00	-21.63	peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

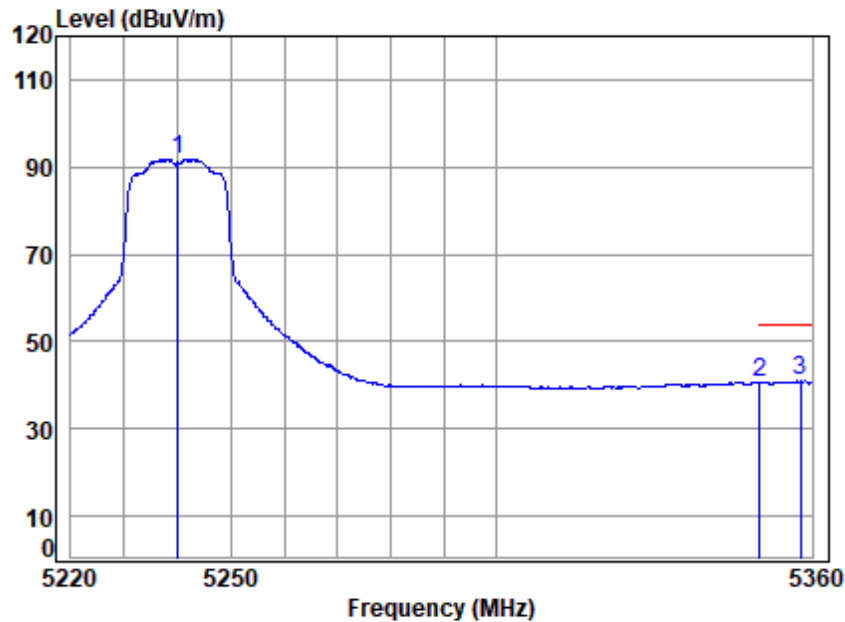


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5240 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5240.000	7.73	34.40	42.33	91.99	91.79	-----	-----
2 5350.020	7.92	34.48	42.34	40.73	40.79	54.00	-13.21
3 5357.873	7.94	34.49	42.34	40.85	40.94	54.00	-13.06
							Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

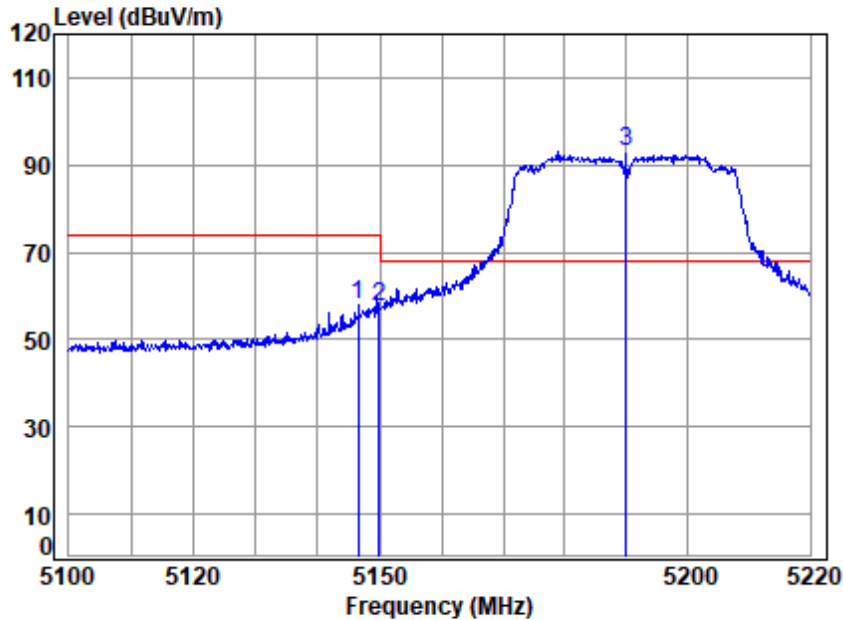


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5146.588	7.57	34.32	42.32	58.42	57.99	74.00	-16.01 peak
2 5149.980	7.57	34.32	42.32	57.83	57.40	74.00	-16.60 peak
3 * 5190.000	7.64	34.36	42.32	93.39	93.07	68.20	24.87 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

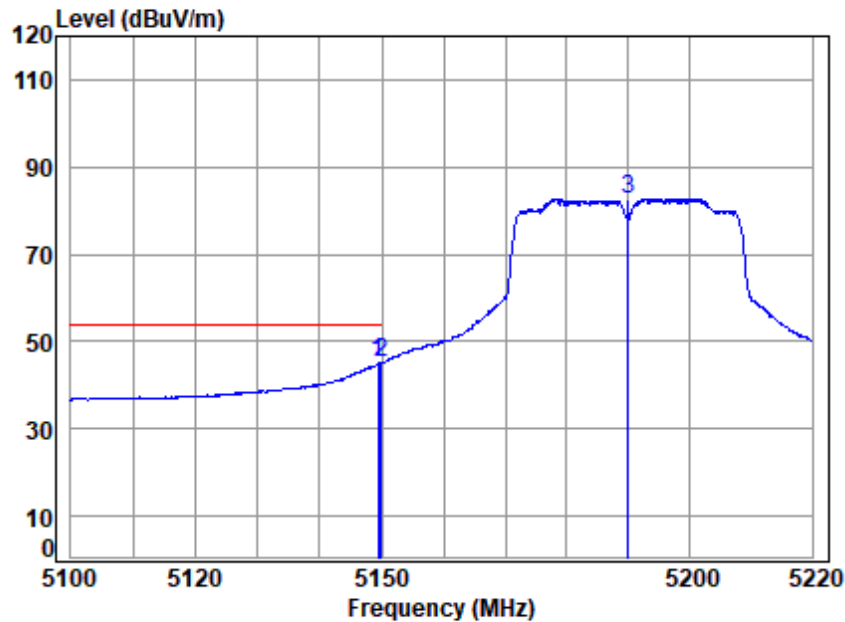


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5149.461	7.57	34.32	42.32	45.45	45.02	54.00	-8.98	Average
2 5149.980	7.57	34.32	42.32	45.75	45.32	54.00	-8.68	Average
3 5190.000	7.64	34.36	42.32	83.11	82.79	-----	-----	Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

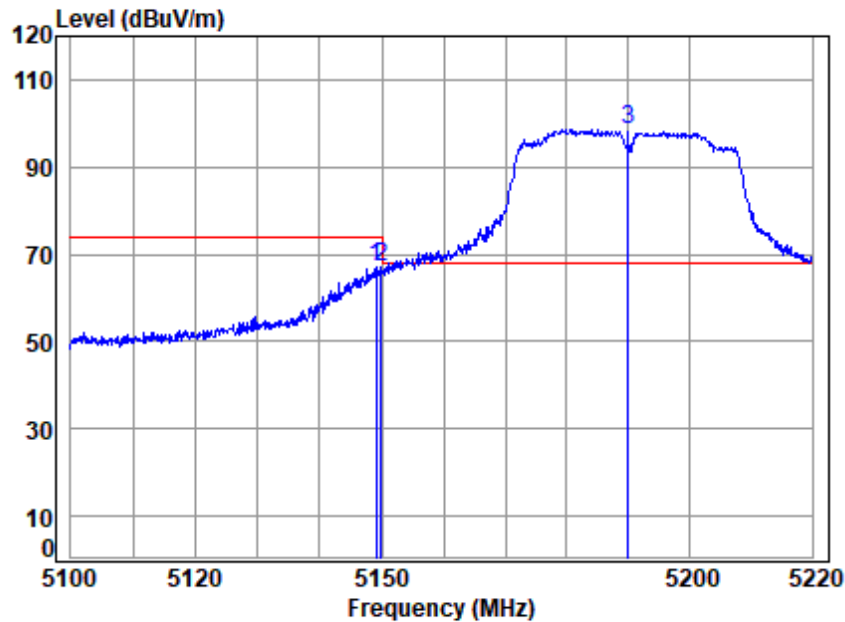


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5149.102	7.57	34.32	42.32	67.54	67.11	74.00	-6.89 peak
2 5149.980	7.57	34.32	42.32	67.71	67.28	74.00	-6.72 peak
3 * 5190.000	7.64	34.36	42.32	98.95	98.63	68.20	30.43 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

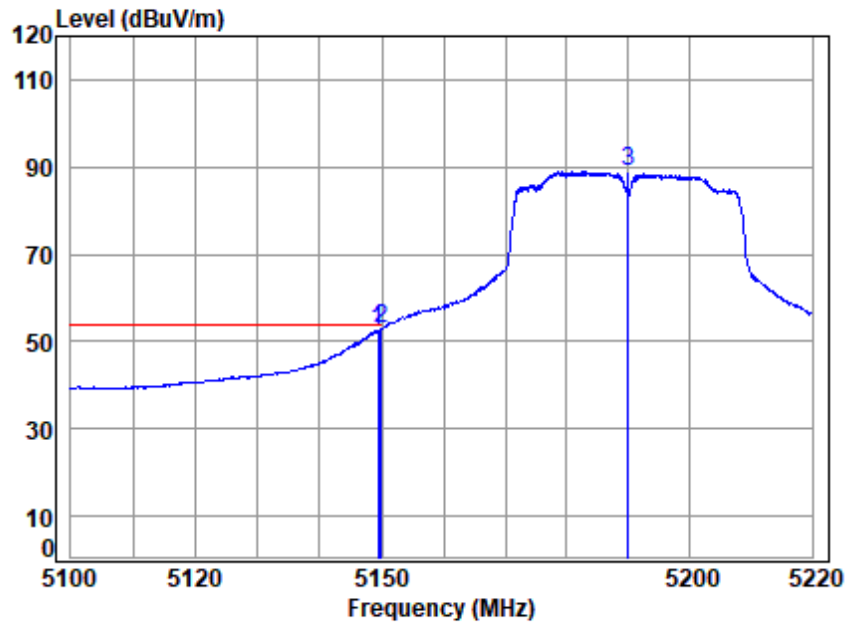


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5190 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.461	7.57	34.32	42.32	52.89	52.46	54.00	-1.54 Average
2	5149.980	7.57	34.32	42.32	53.38	52.95	54.00	-1.05 Average
3	5190.000	7.64	34.36	42.32	89.15	88.83	-----	----- Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

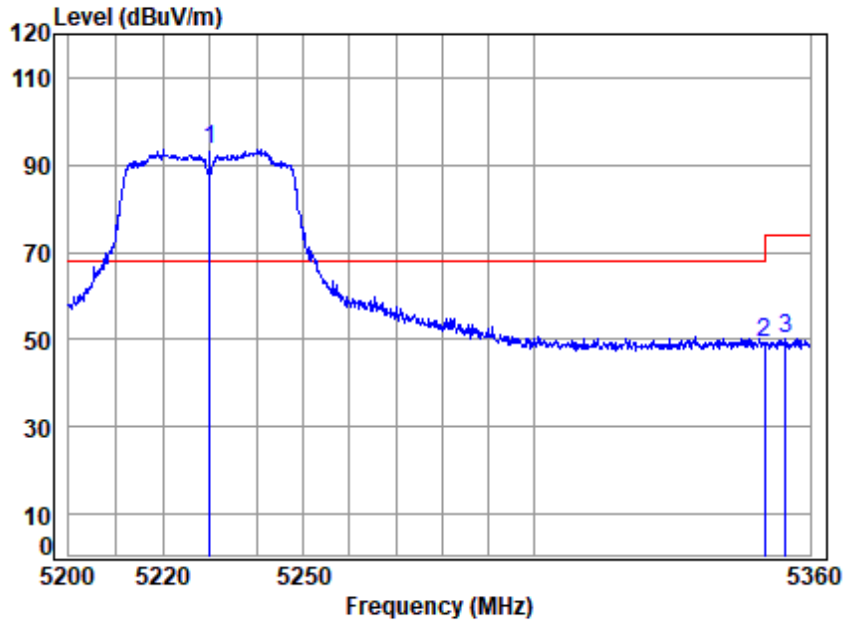


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5230.000	7.72	34.39	42.32	93.64	93.43	68.20	25.23	peak
2 5350.020	7.92	34.48	42.34	49.29	49.35	74.00	-24.65	peak
3 5354.642	7.93	34.49	42.34	50.12	50.20	74.00	-23.80	peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

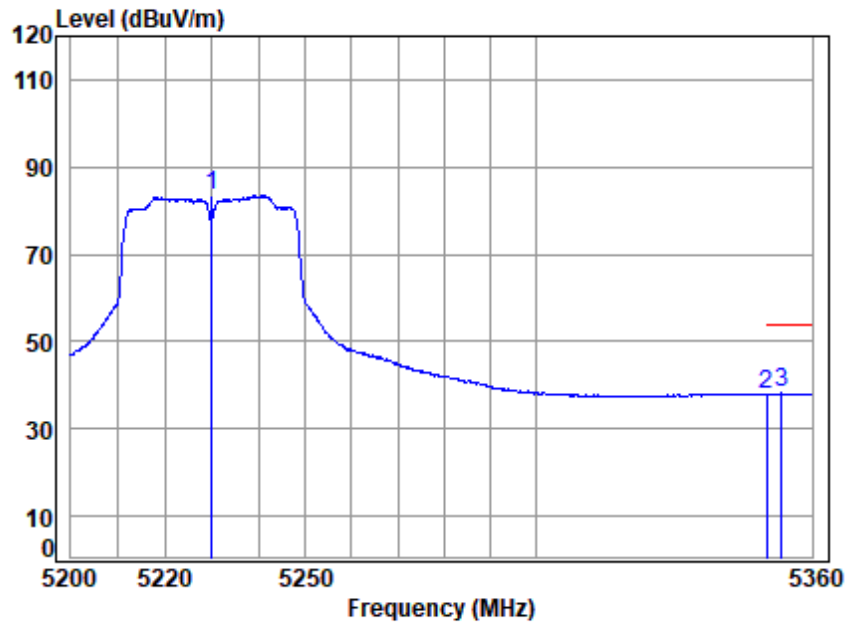


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5230.000	7.72	34.39	42.32	83.70	83.49	-----	----- Average
2 5350.020	7.92	34.48	42.34	37.89	37.95	54.00	-16.05 Average
3 5353.344	7.93	34.49	42.34	38.08	38.16	54.00	-15.84 Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

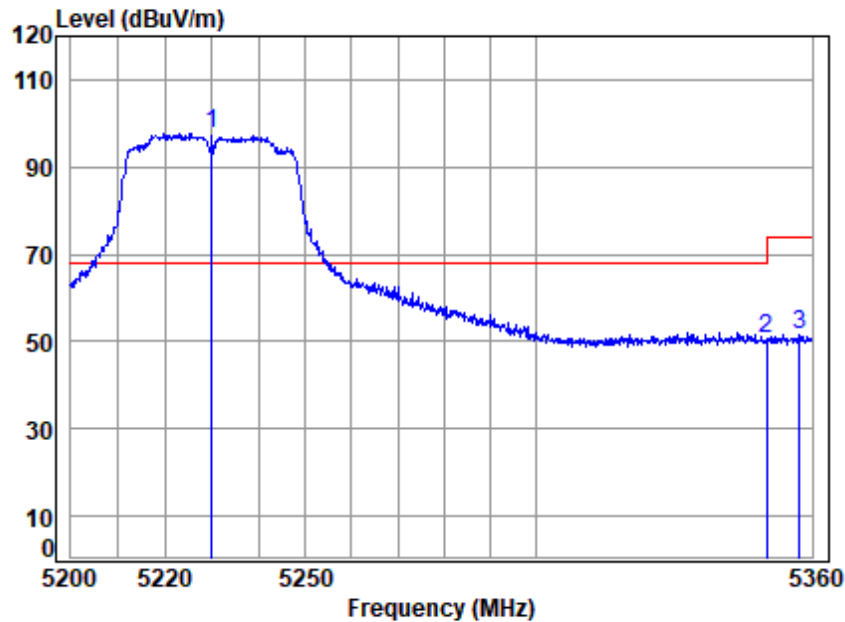


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5230.000	7.72	34.39	42.32	97.85	97.64	68.20	29.44	peak
2 5350.020	7.92	34.48	42.34	50.77	50.83	74.00	-23.17	peak
3 5357.239	7.94	34.49	42.34	51.59	51.68	74.00	-22.32	peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

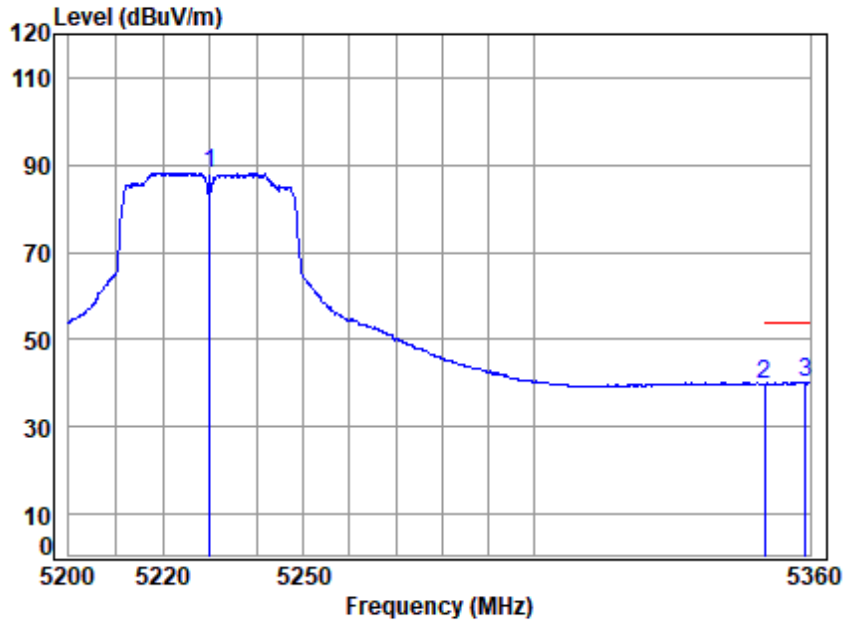


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5230 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5230.000	7.72	34.39	42.32	88.40	88.19	-----	-----
2 5350.020	7.92	34.48	42.34	39.82	39.88	54.00	-14.12
3 5359.025	7.94	34.49	42.34	40.11	40.20	54.00	-13.80
							Average



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

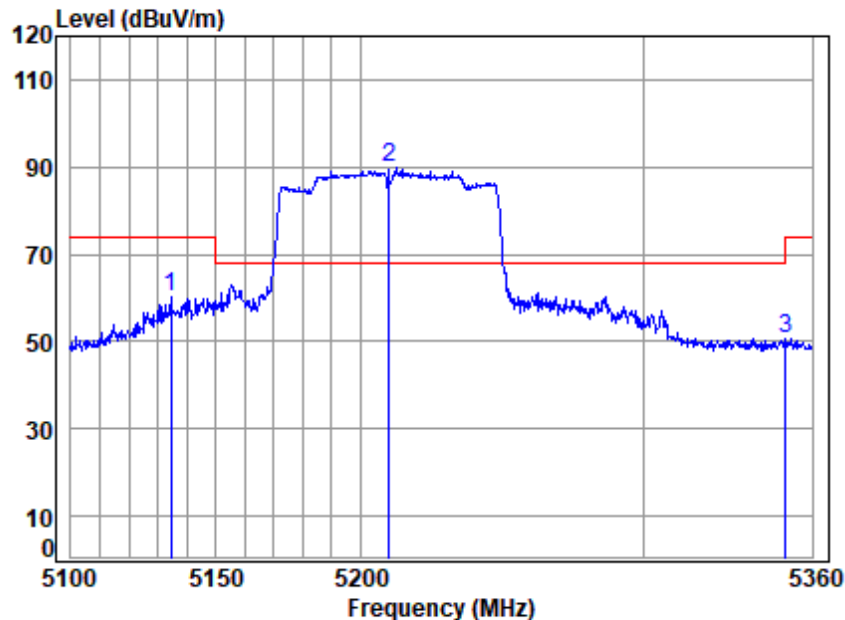


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5134.350	7.54	34.31	42.31	60.58	60.12	74.00	-13.88 peak
2 * 5210.000	7.68	34.37	42.32	90.01	89.74	68.20	21.54 peak
3 5350.414	7.93	34.48	42.34	50.56	50.63	74.00	-23.37 peak



Test Mode: 17; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

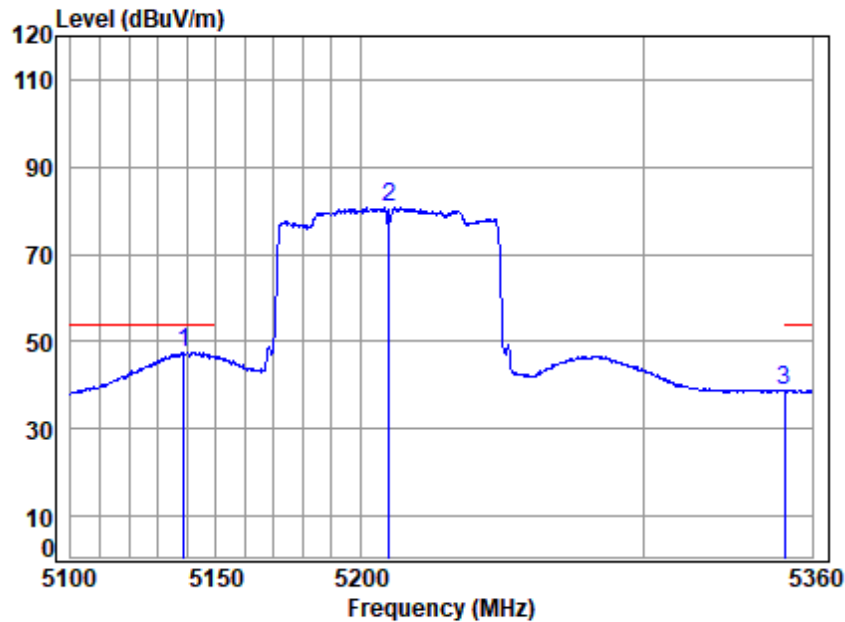


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5138.947	7.55	34.32	42.32	48.08	47.63	54.00	-6.37
2 5210.000	7.68	34.37	42.32	80.98	80.71	-----	-----
3 5350.148	7.92	34.48	42.34	38.83	38.89	54.00	-15.11
							Average



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

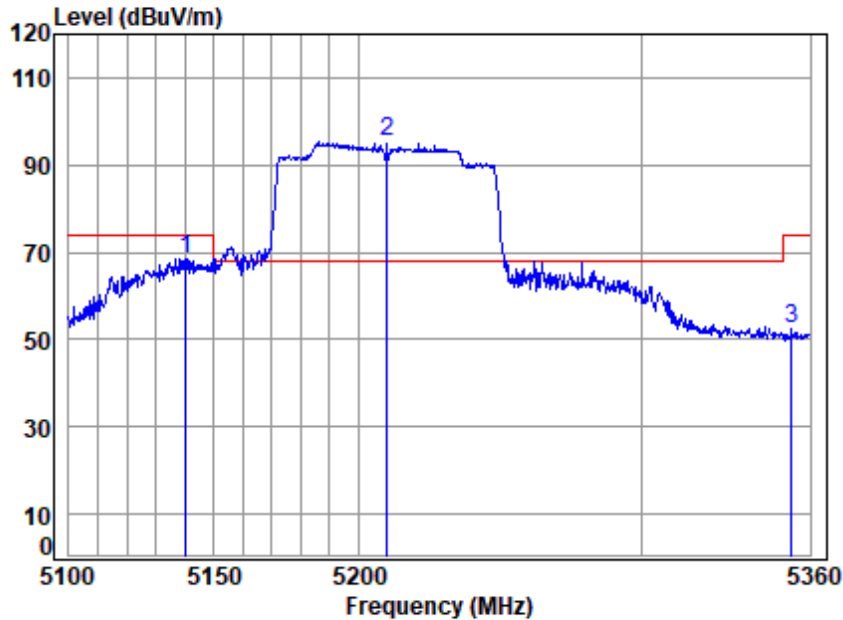


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5140.225	7.56	34.32	42.32	69.03	68.59	74.00	-5.41 peak
2 * 5210.000	7.68	34.37	42.32	95.57	95.30	68.20	27.10 peak
3 5353.341	7.93	34.49	42.34	52.61	52.69	74.00	-21.31 peak



Test Mode: 17; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

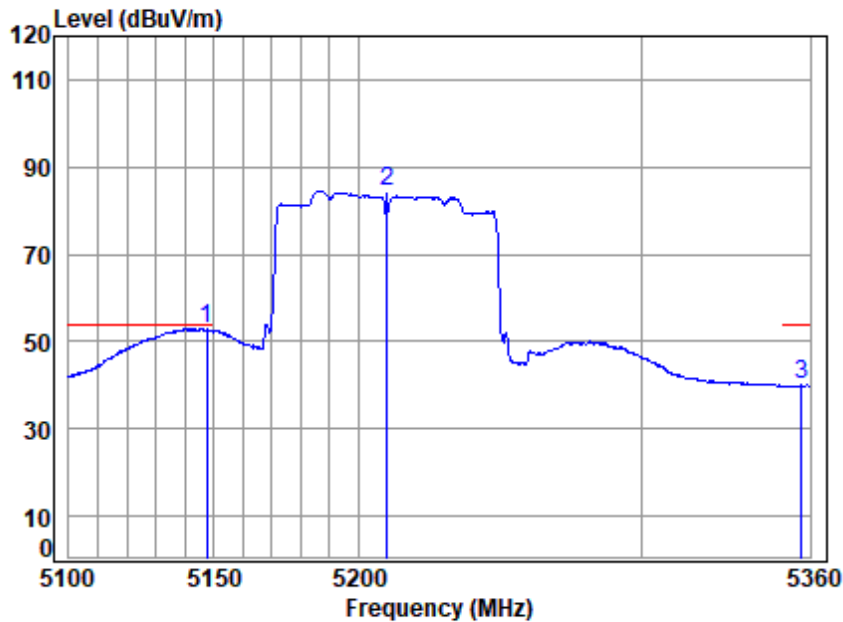


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5210 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5147.386	7.57	34.32	42.32	53.38	52.95	54.00
2	5210.000	7.64	34.35	42.32	84.76	84.43	-----
3	5356.803	7.94	34.49	42.34	39.90	39.99	54.00
							-14.01
							Average
							Average
							Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

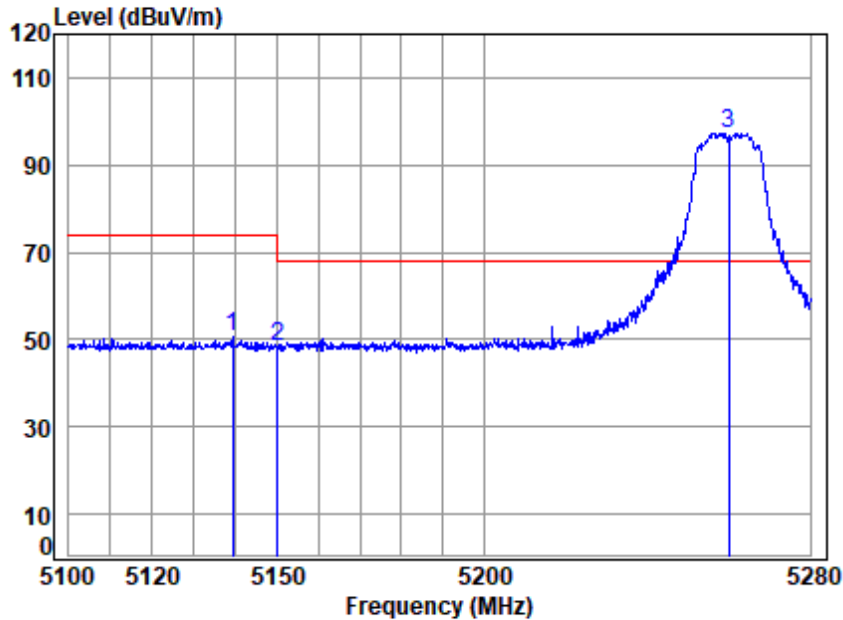


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5139.244	7.55	34.32	42.32	51.04	50.59	74.00	-23.41 peak
2 5149.980	7.57	34.32	42.32	48.97	48.54	74.00	-25.46 peak
3 * 5260.000	7.77	34.41	42.33	97.50	97.35	68.20	29.15 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

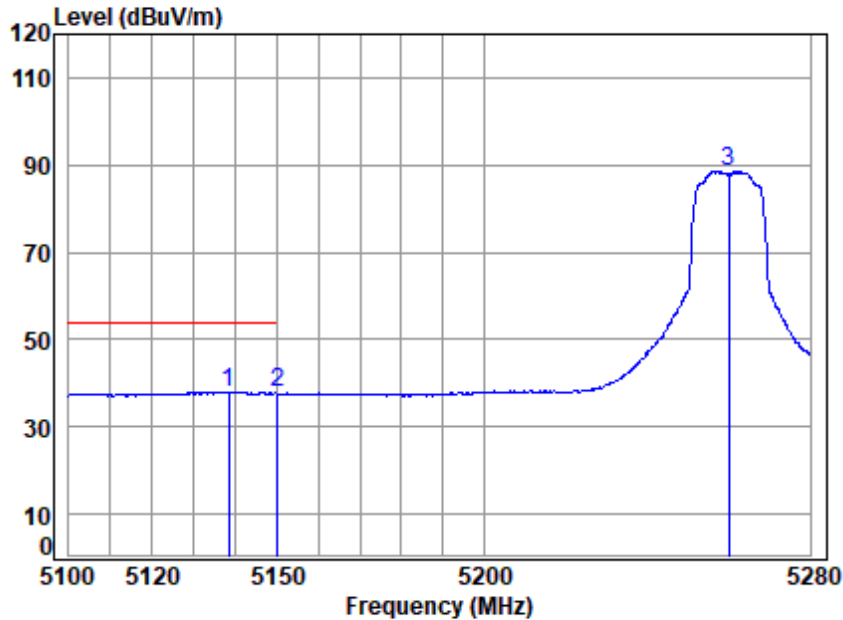


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5138.353	7.55	34.31	42.31	38.37	37.92	54.00 -16.08
2	5149.980	7.57	34.32	42.32	38.10	37.67	54.00 -16.33
3	5260.000	7.77	34.41	42.33	88.74	88.59	-----



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

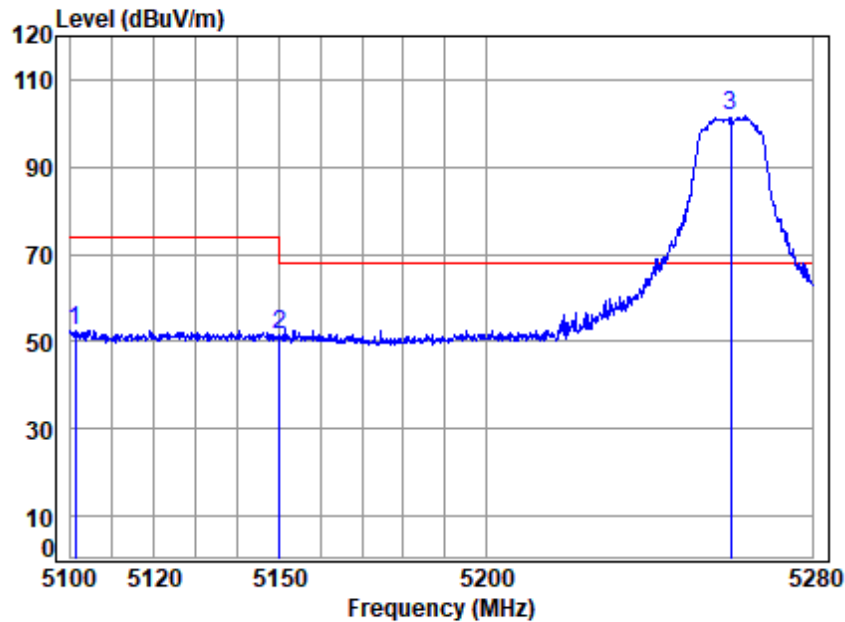


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5101.062	7.48	34.28	42.31	53.24	52.69	74.00	-21.31 peak
2 5149.980	7.57	34.32	42.32	52.07	51.64	74.00	-22.36 peak
3 * 5260.000	7.77	34.41	42.33	101.85	101.70	68.20	33.50 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

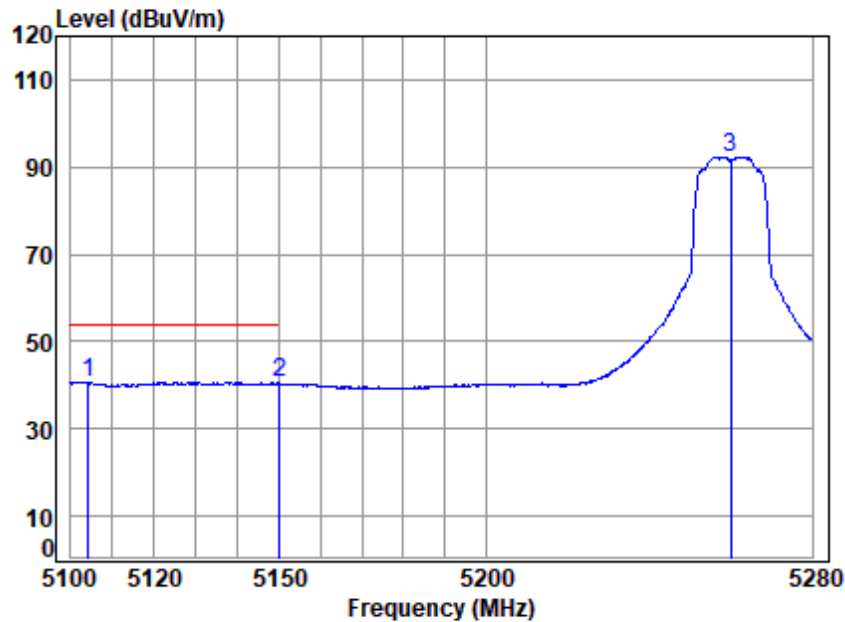


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5104.247	7.49	34.29	42.31	41.19	40.66	54.00	-13.34	Average
2 5149.980	7.57	34.32	42.32	40.92	40.49	54.00	-13.51	Average
3 5260.000	7.77	34.41	42.33	92.49	92.34	-----	-----	Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

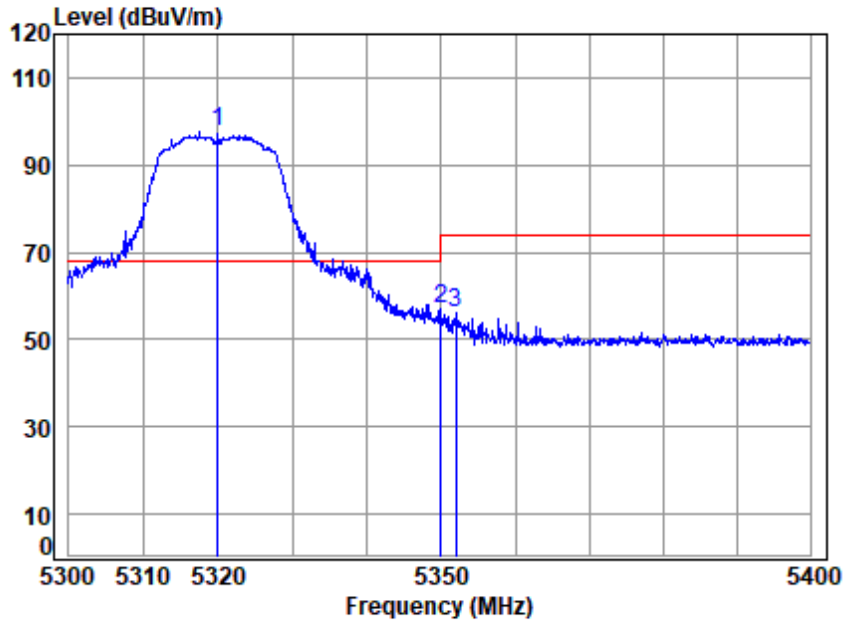


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5320.000	7.87	34.46	42.33	97.62	97.62	68.20	29.42 peak
2 5350.020	7.92	34.48	42.34	56.89	56.95	74.00	-17.05 peak
3 5351.967	7.93	34.49	42.34	56.01	56.09	74.00	-17.91 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

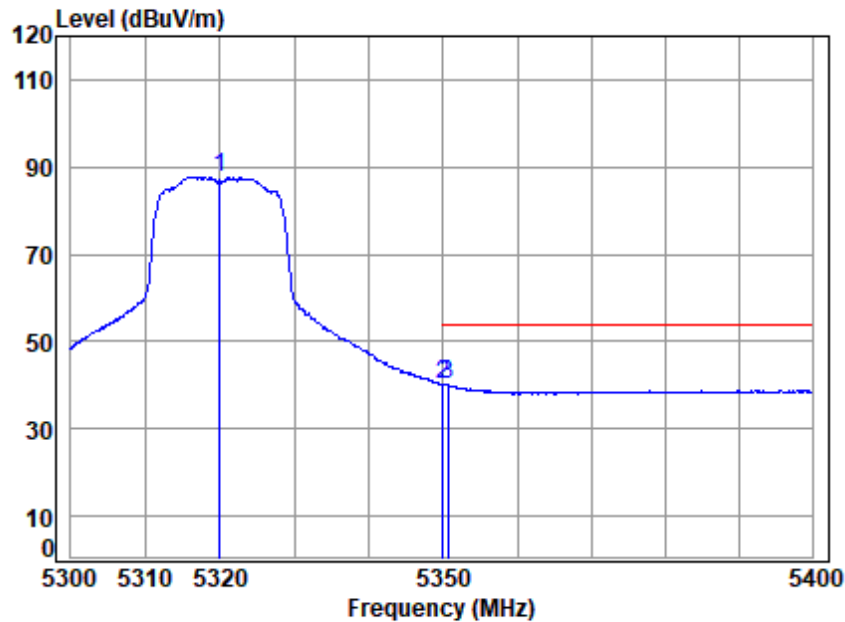


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	7.87	34.46	42.33	87.64	87.64	-----	-----
2 5350.020	7.92	34.48	42.34	40.24	40.30	54.00	-13.70
3 5350.667	7.93	34.48	42.34	39.96	40.03	54.00	-13.97
							Average



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

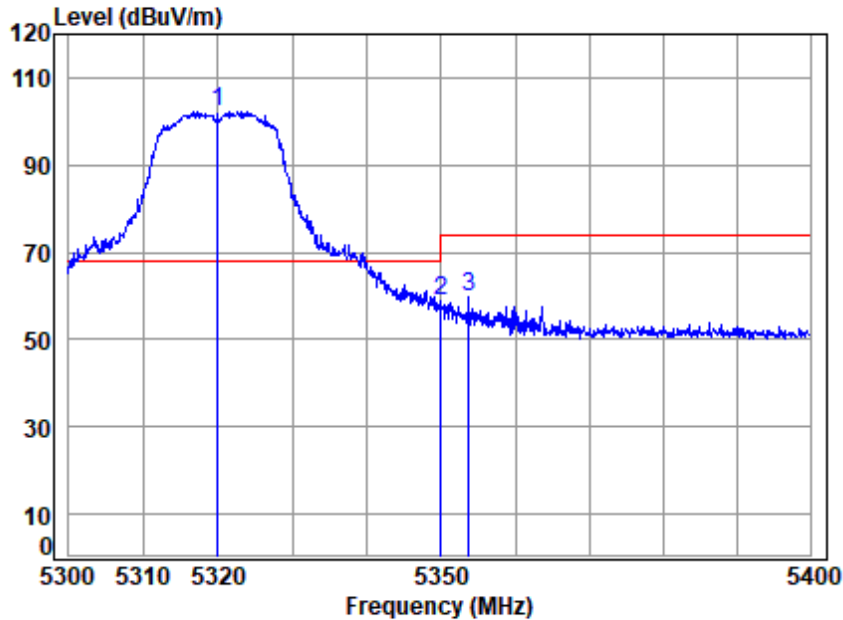


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5320.000	7.87	34.46	42.33	102.34	102.34	68.20	34.14	peak
2 5350.020	7.92	34.48	42.34	58.76	58.82	74.00	-15.18	peak
3 5353.667	7.93	34.49	42.34	59.90	59.98	74.00	-14.02	peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

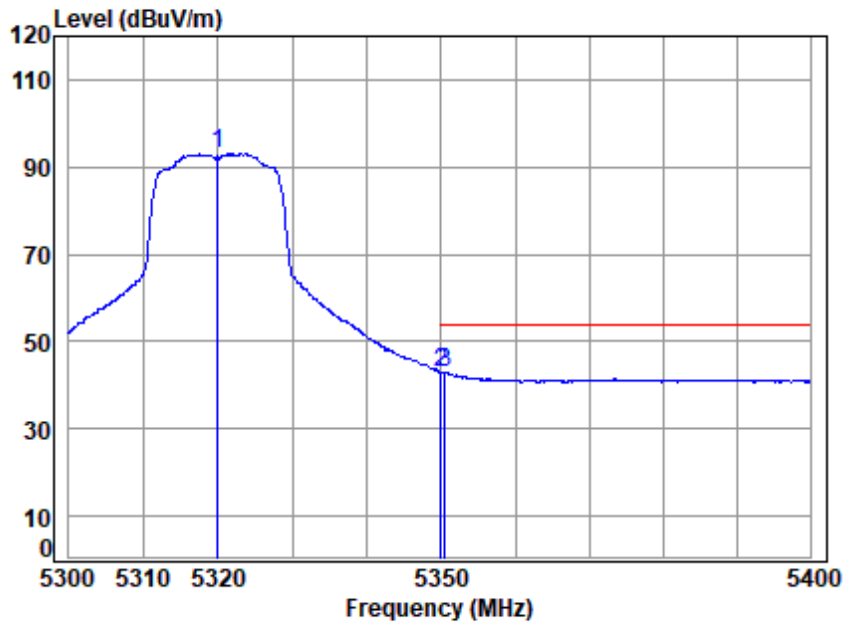


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	7.87	34.46	42.33	93.09	93.09	-----	-----
2 5350.020	7.92	34.48	42.34	42.92	42.98	54.00	-11.02
3 5350.566	7.93	34.48	42.34	42.95	43.02	54.00	-10.98
							Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

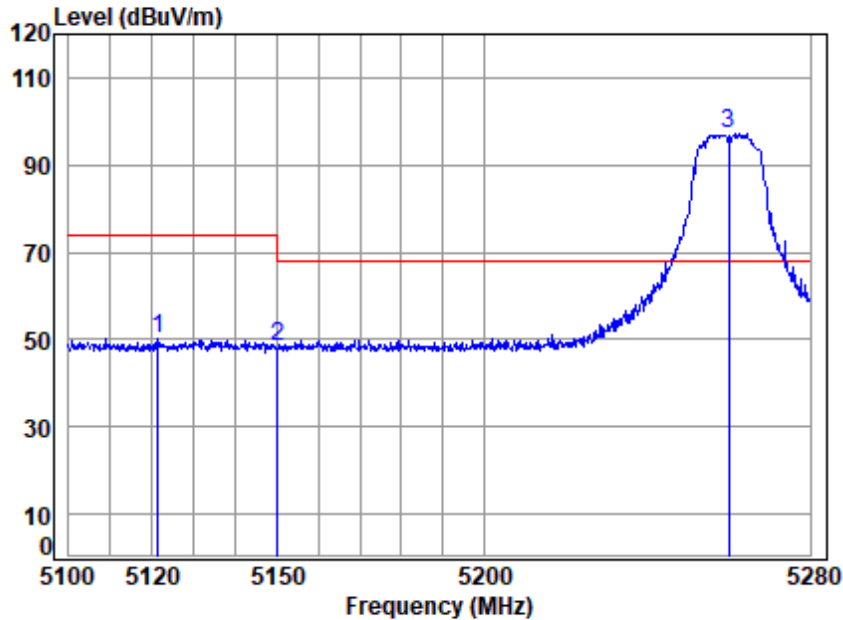


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5121.272	7.52	34.30	42.31	50.72	50.23	74.00	-23.77 peak
2 5149.980	7.57	34.32	42.32	48.95	48.52	74.00	-25.48 peak
3 * 5260.000	7.77	34.41	42.33	97.42	97.27	68.20	29.07 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

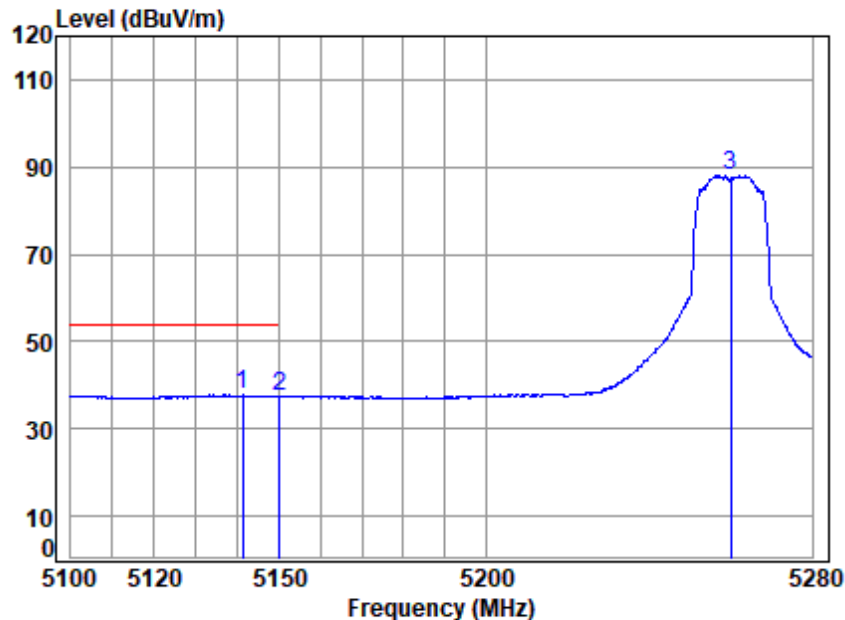


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5141.206	7.56	34.32	42.32	38.21	37.77	54.00	-16.23	Average
2 5149.980	7.57	34.32	42.32	37.86	37.43	54.00	-16.57	Average
3 5260.000	7.77	34.41	42.33	88.22	88.07	-----	-----	Average



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

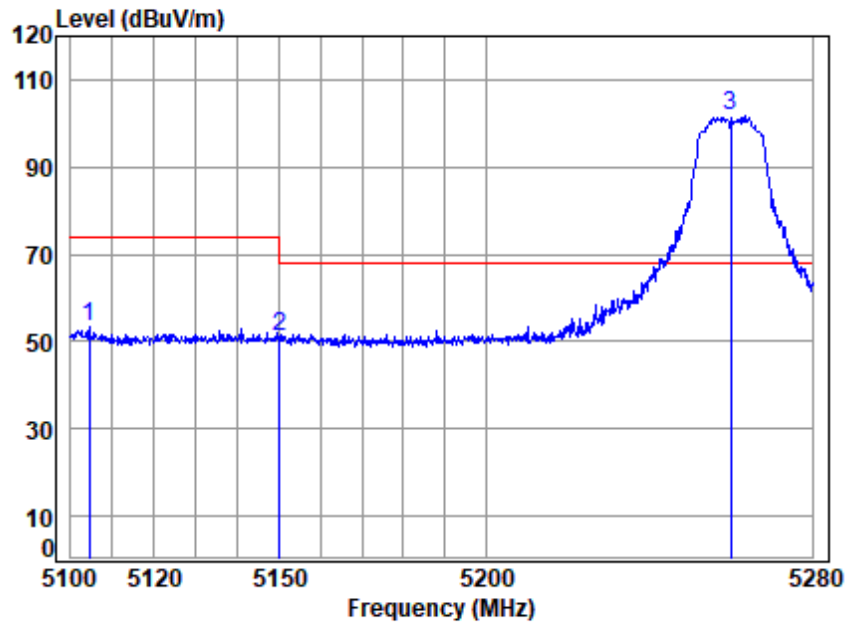


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5104.424	7.49	34.29	42.31	53.73	53.20	74.00	-20.80 peak
2 5149.980	7.57	34.32	42.32	51.64	51.21	74.00	-22.79 peak
3 * 5260.000	7.77	34.41	42.33	101.99	101.84	68.20	33.64 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

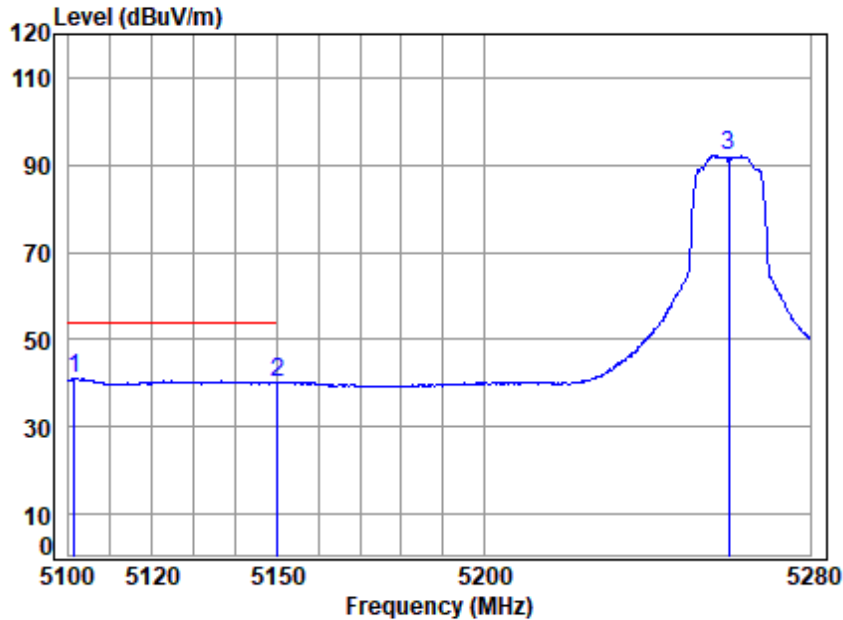


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5101.238	7.49	34.28	42.31	41.74	41.20	54.00	-12.80 Average
2	5149.980	7.57	34.32	42.32	40.61	40.18	54.00	-13.82 Average
3	5260.000	7.77	34.41	42.33	92.27	92.12	-----	----- Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

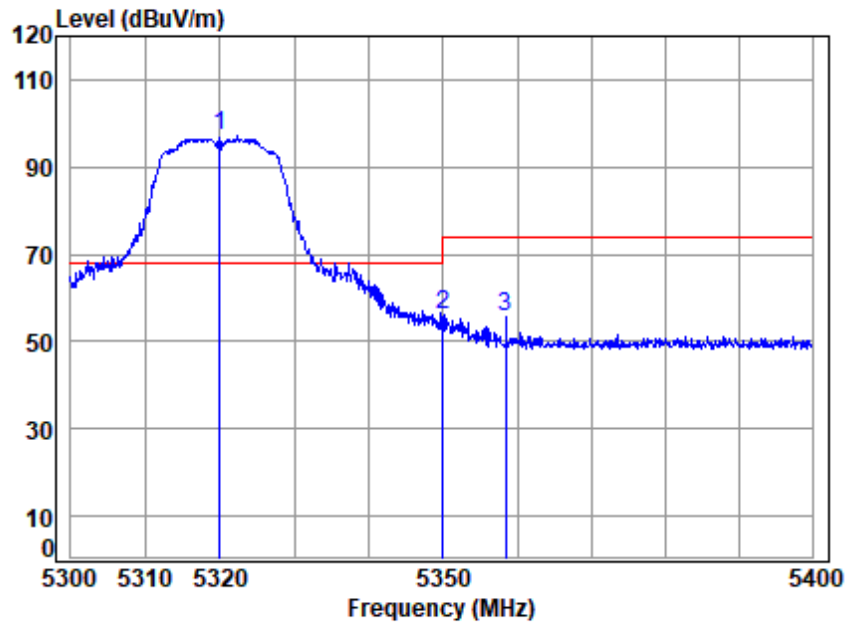


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5320.000	7.87	34.46	42.33	97.33	97.33	68.20	29.13	peak
2 5350.020	7.92	34.48	42.34	56.05	56.11	74.00	-17.89	peak
3 5358.473	7.94	34.49	42.34	55.44	55.53	74.00	-18.47	peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

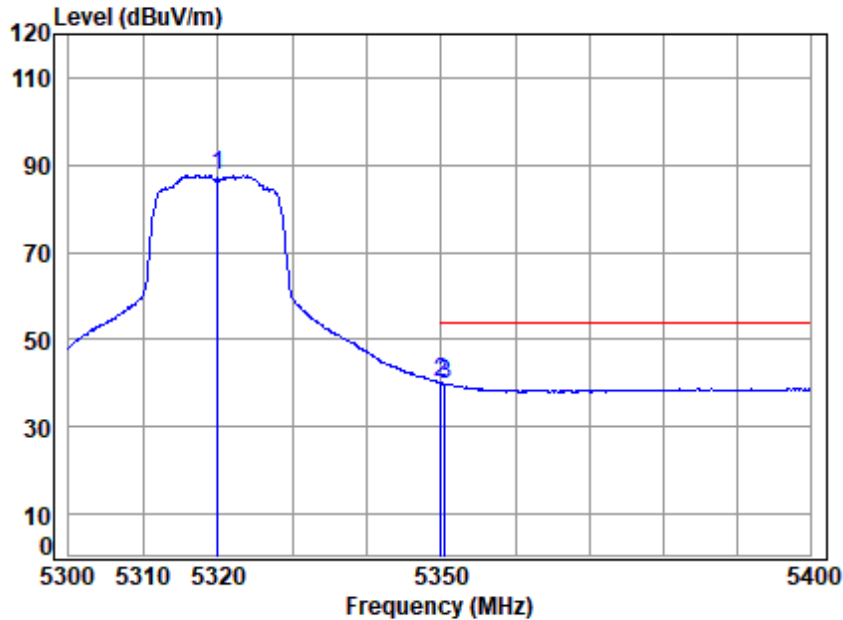


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	7.87	34.46	42.33	87.59	87.59	-----	-----
2 5350.020	7.92	34.48	42.34	39.98	40.04	54.00	-13.96
3 5350.566	7.93	34.48	42.34	39.72	39.79	54.00	-14.21



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

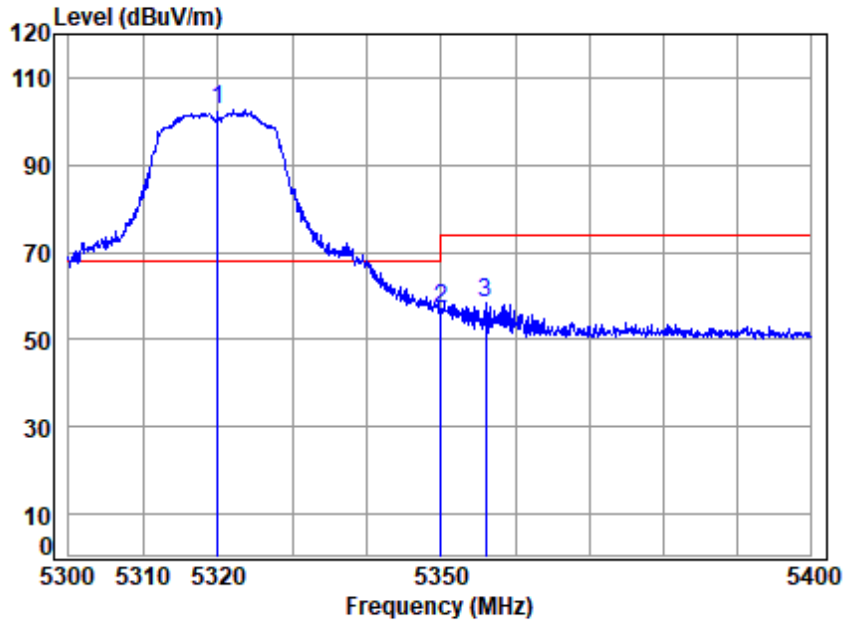


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5320.000	7.87	34.46	42.33	102.61	102.61	68.20	34.41	peak
2 5350.020	7.92	34.48	42.34	56.95	57.01	74.00	-16.99	peak
3 5355.970	7.93	34.49	42.34	58.22	58.30	74.00	-15.70	peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

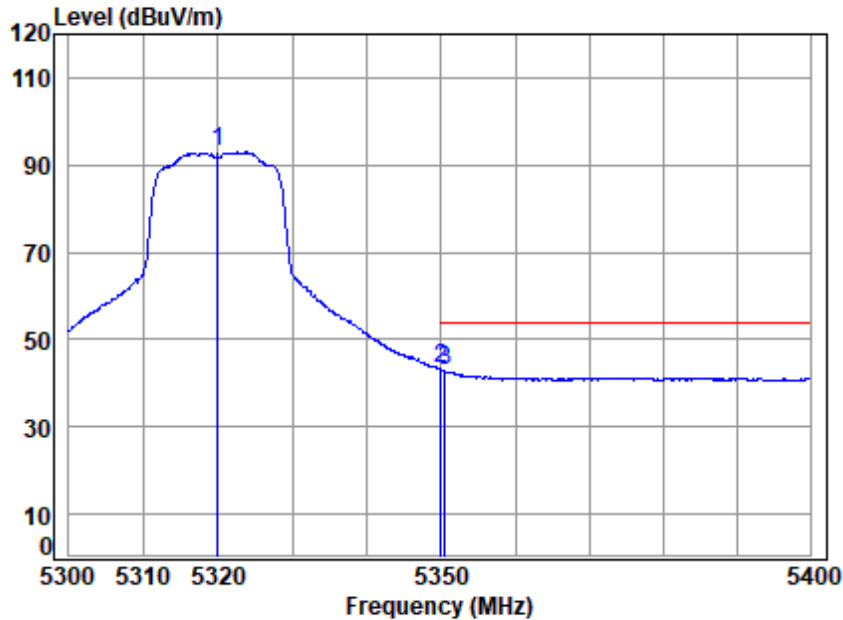

Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	7.87	34.46	42.33	92.91	92.91	-----	-----
2 5350.020	7.92	34.48	42.34	43.16	43.22	54.00	-10.78
3 5350.566	7.93	34.48	42.34	42.75	42.82	54.00	-11.18




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

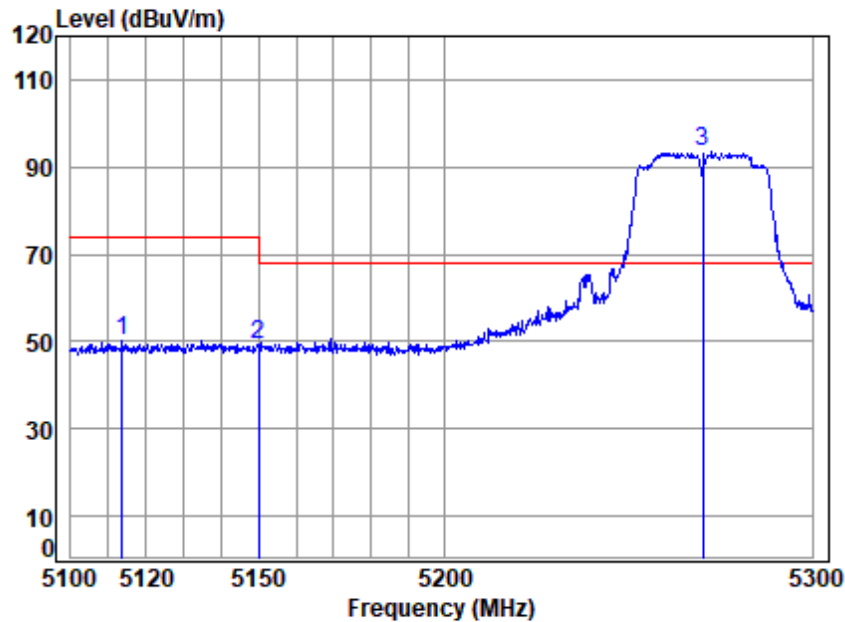


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5113.751	7.51	34.29	42.31	50.69	50.18	74.00	-23.82 peak
2 5149.980	7.57	34.32	42.32	49.54	49.11	74.00	-24.89 peak
3 * 5270.000	7.79	34.42	42.33	93.54	93.42	68.20	25.22 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

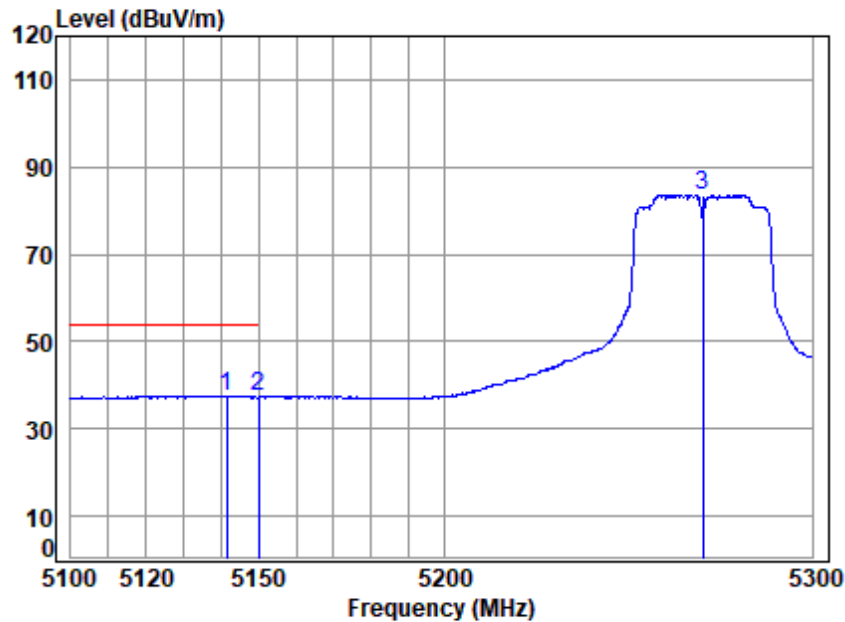


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5141.562	7.56	34.32	42.32	38.04	37.60	54.00	-16.40	Average
2 5149.980	7.57	34.32	42.32	37.75	37.32	54.00	-16.68	Average
3 5270.000	7.79	34.42	42.33	83.74	83.62	-----	-----	Average



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

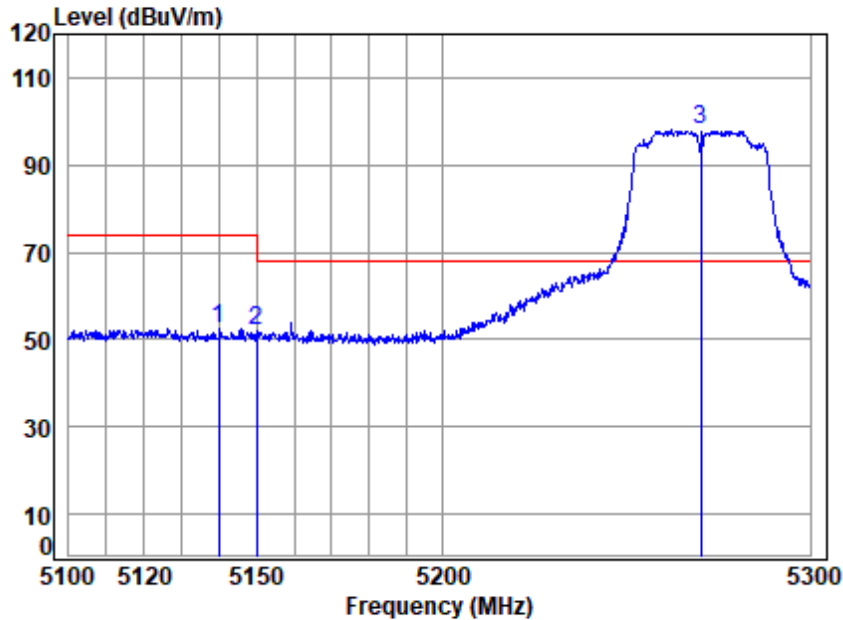


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5139.980	7.55	34.32	42.32	52.85	52.40	74.00	-21.60 peak
2 5149.980	7.57	34.32	42.32	52.37	51.94	74.00	-22.06 peak
3 * 5270.000	7.79	34.42	42.33	98.15	98.03	68.20	29.83 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

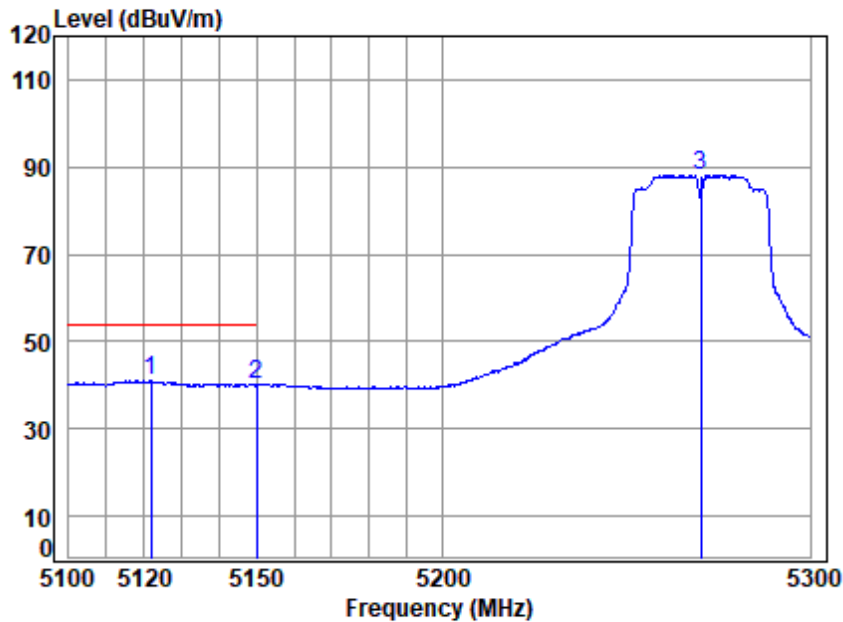


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5121.822	7.52	34.30	42.31	41.60	41.11	54.00	-12.89 Average
2	5149.980	7.57	34.32	42.32	40.59	40.16	54.00	-13.84 Average
3	5270.000	7.79	34.42	42.33	88.21	88.09	-----	----- Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

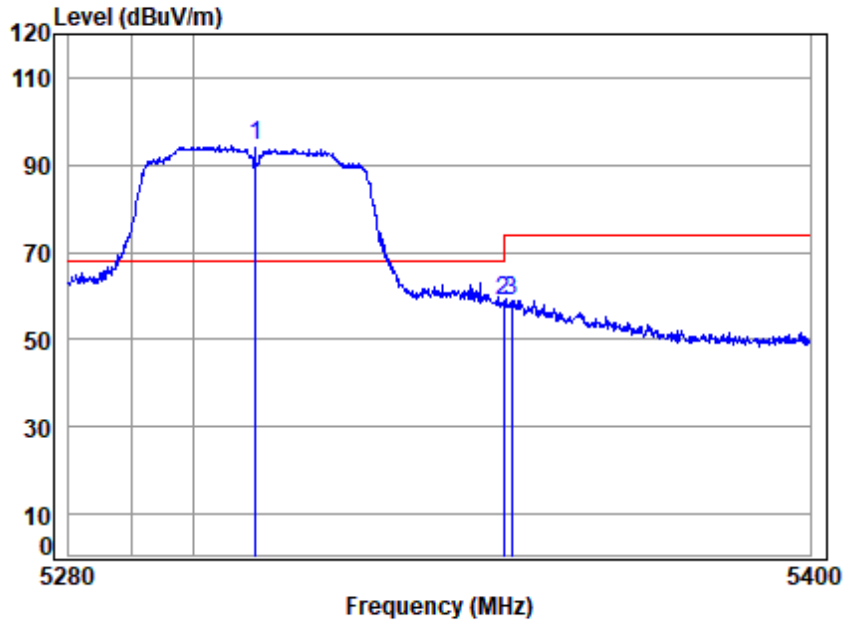


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5310.000	7.86	34.45	42.33	94.36	94.34	68.20	26.14 peak
2 5350.020	7.92	34.48	42.34	58.87	58.93	74.00	-15.07 peak
3 5351.315	7.93	34.48	42.34	58.96	59.03	74.00	-14.97 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

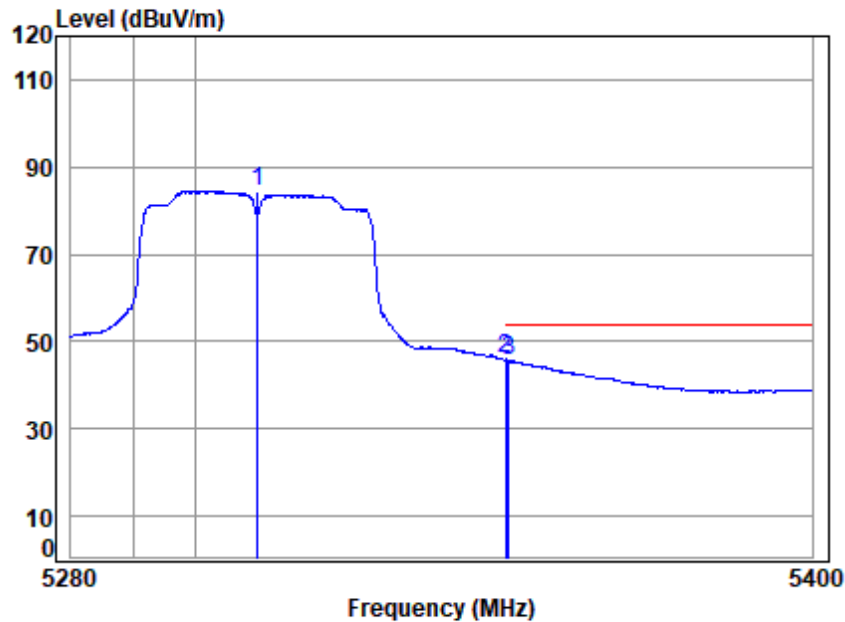


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	7.86	34.45	42.33	84.58	84.56	-----	----- Average
2	5350.020	7.92	34.48	42.34	45.95	46.01	54.00	-7.99 Average
3	5350.594	7.93	34.48	42.34	45.65	45.72	54.00	-8.28 Average



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

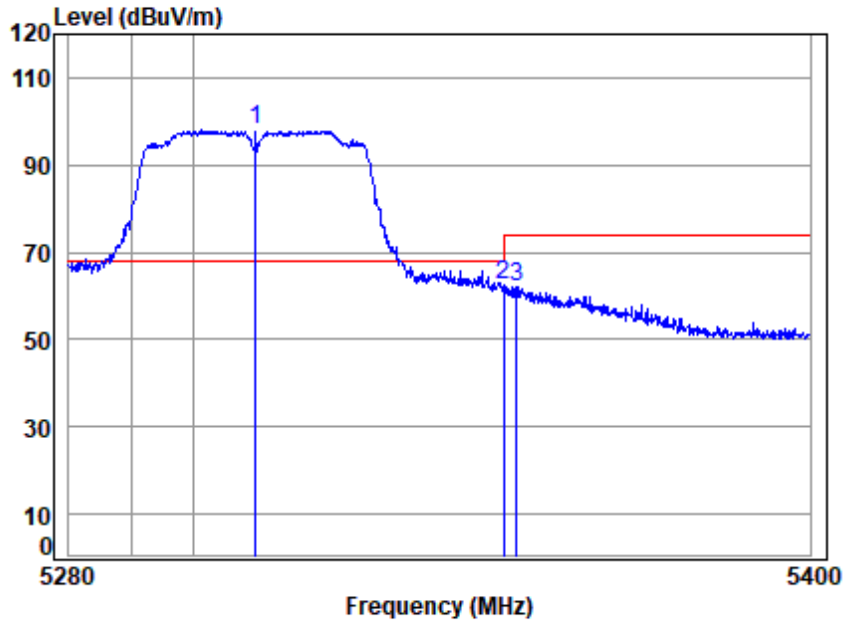


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5310.000	7.86	34.45	42.33	98.14	98.12	68.20	29.92 peak
2 5350.020	7.92	34.48	42.34	62.26	62.32	74.00	-11.68 peak
3 5352.157	7.93	34.49	42.34	61.90	61.98	74.00	-12.02 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

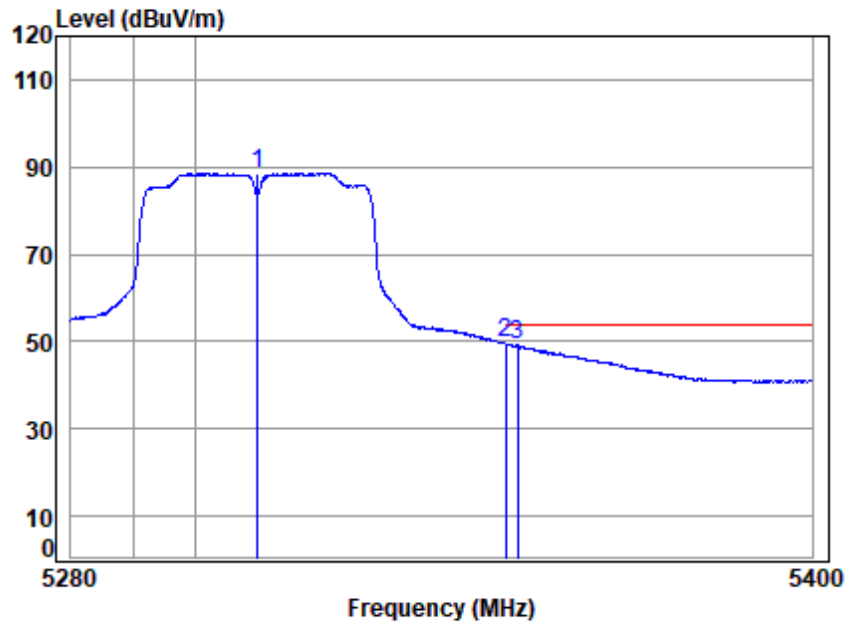


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	7.86	34.45	42.33	88.69	88.67	-----	----- Average
2	5350.020	7.92	34.48	42.34	49.68	49.74	54.00	-4.26 Average
3	5352.037	7.93	34.49	42.34	49.13	49.21	54.00	-4.79 Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

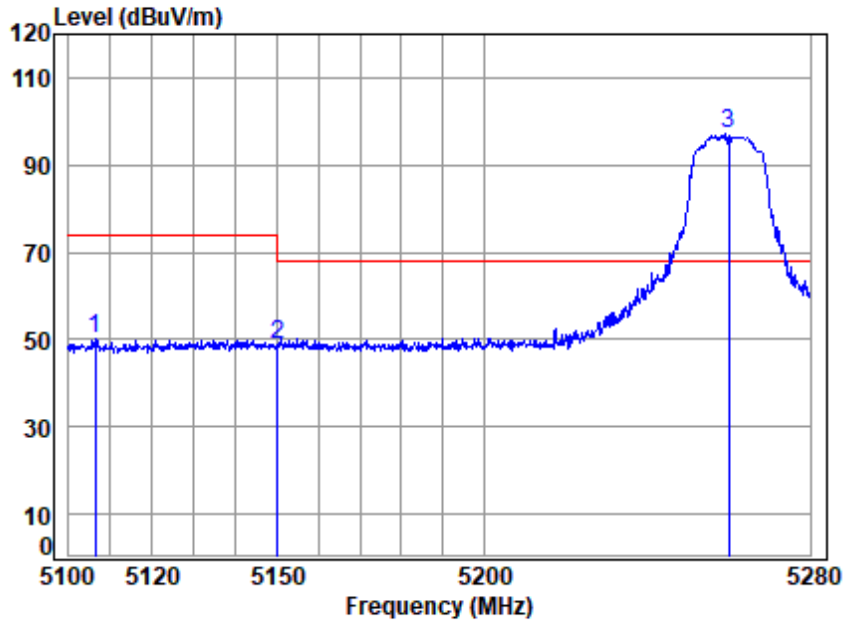


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5106.372	7.49	34.29	42.31	50.62	50.09	74.00	-23.91 peak
2 5149.980	7.57	34.32	42.32	49.20	48.77	74.00	-25.23 peak
3 * 5260.000	7.77	34.41	42.33	97.36	97.21	68.20	29.01 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

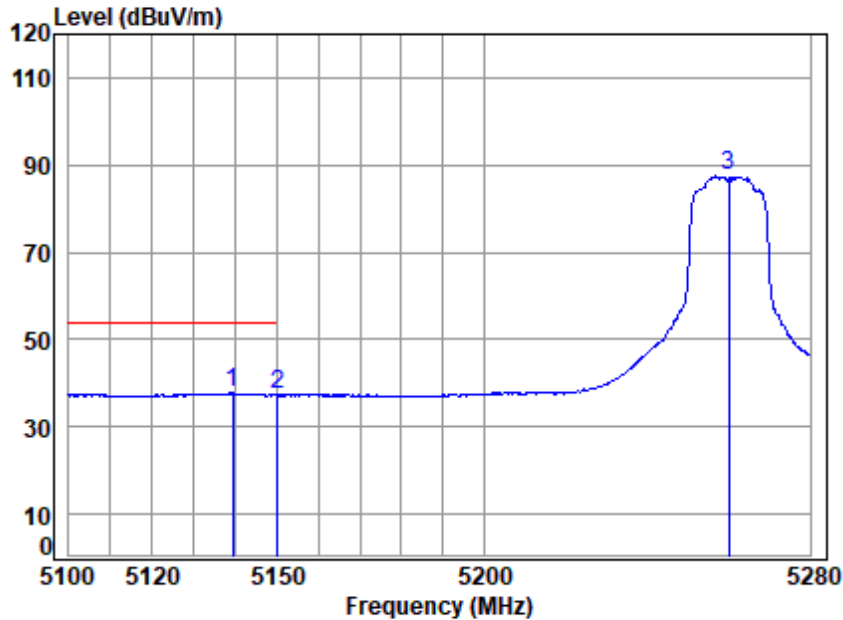


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5139.244	7.55	34.32	42.32	38.12	37.67	54.00	-16.33 Average
2	5149.980	7.57	34.32	42.32	37.93	37.50	54.00	-16.50 Average
3	5260.000	7.77	34.41	42.33	87.54	87.39	-----	----- Average



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

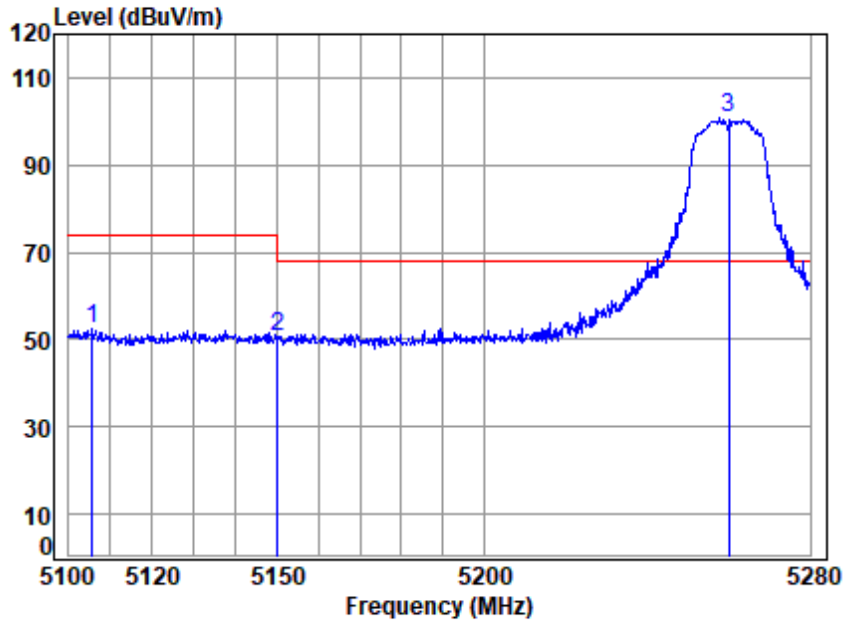


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5105.664	7.49	34.29	42.31	52.83	52.30	74.00	-21.70 peak
2 5149.980	7.57	34.32	42.32	50.99	50.56	74.00	-23.44 peak
3 * 5260.000	7.77	34.41	42.33	100.77	100.62	68.20	32.42 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

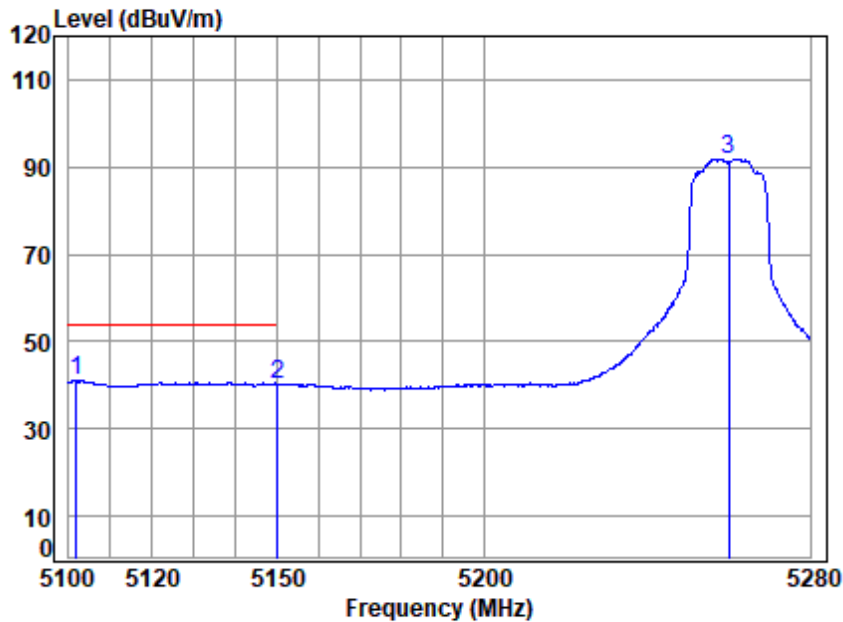


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5260 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5101.769	7.49	34.28	42.31	41.55	41.01	54.00	-12.99	Average
2 5149.980	7.57	34.32	42.32	40.76	40.33	54.00	-13.67	Average
3 5260.000	7.77	34.41	42.33	92.05	91.90	-----	-----	Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

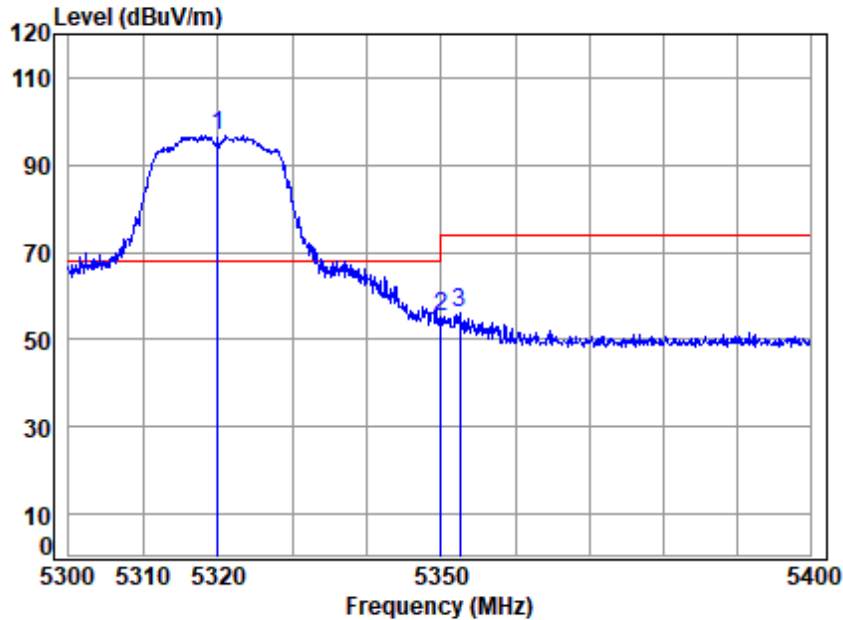


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5320.000	7.87	34.46	42.33	96.84	96.84	68.20	28.64	peak
2 5350.020	7.92	34.48	42.34	55.04	55.10	74.00	-18.90	peak
3 5352.467	7.93	34.49	42.34	55.93	56.01	74.00	-17.99	peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

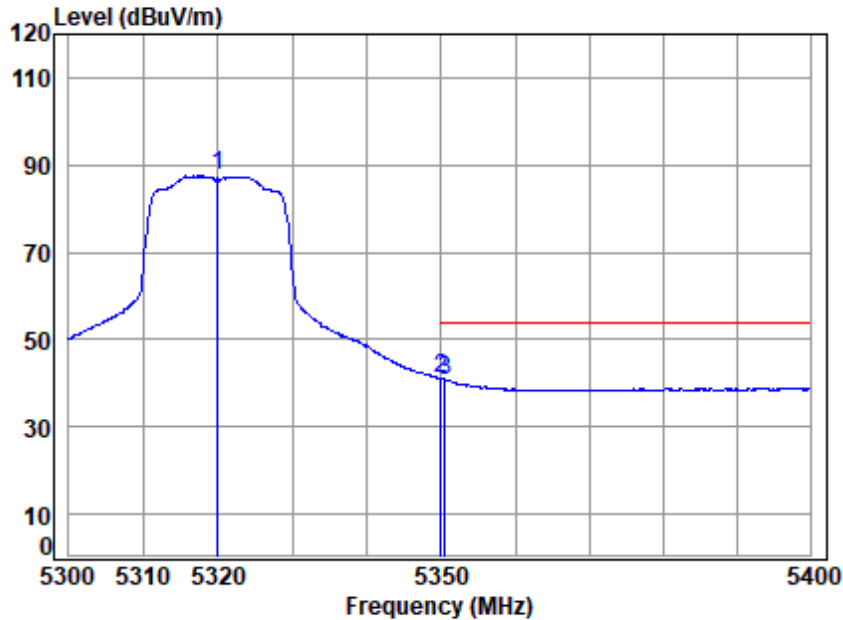


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	7.87	34.46	42.33	87.51	87.51	-----	-----
2 5350.020	7.92	34.48	42.34	40.92	40.98	54.00	-13.02
3 5350.566	7.93	34.48	42.34	40.57	40.64	54.00	-13.36



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

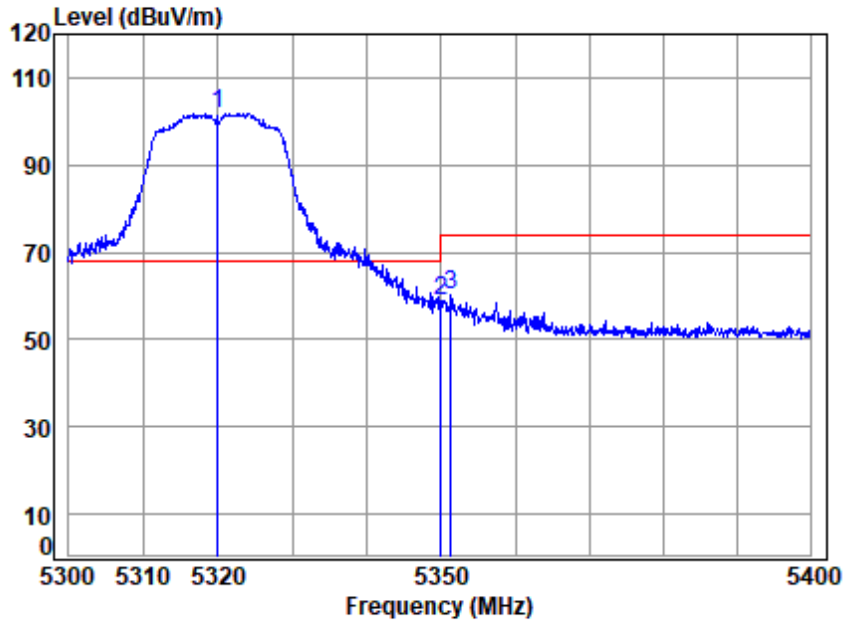


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5320.000	7.87	34.46	42.33	101.86	101.86	68.20	33.66	peak
2 5350.020	7.92	34.48	42.34	58.84	58.90	74.00	-15.10	peak
3 5351.367	7.93	34.49	42.34	60.12	60.20	74.00	-13.80	peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

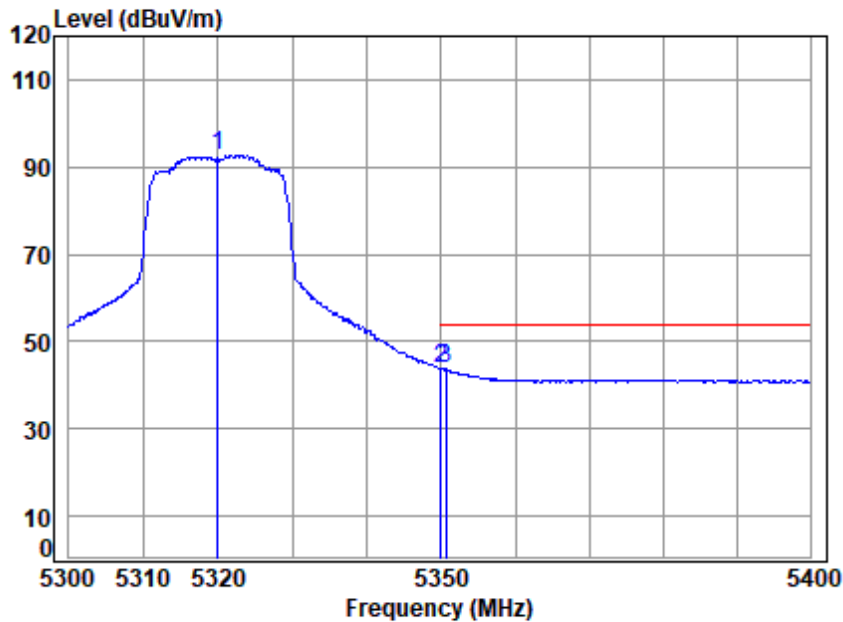


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5320 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5320.000	7.87	34.46	42.33	92.68	92.68	-----	-----
2 5350.020	7.92	34.48	42.34	43.92	43.98	54.00	-10.02
3 5350.667	7.93	34.48	42.34	43.53	43.60	54.00	-10.40



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

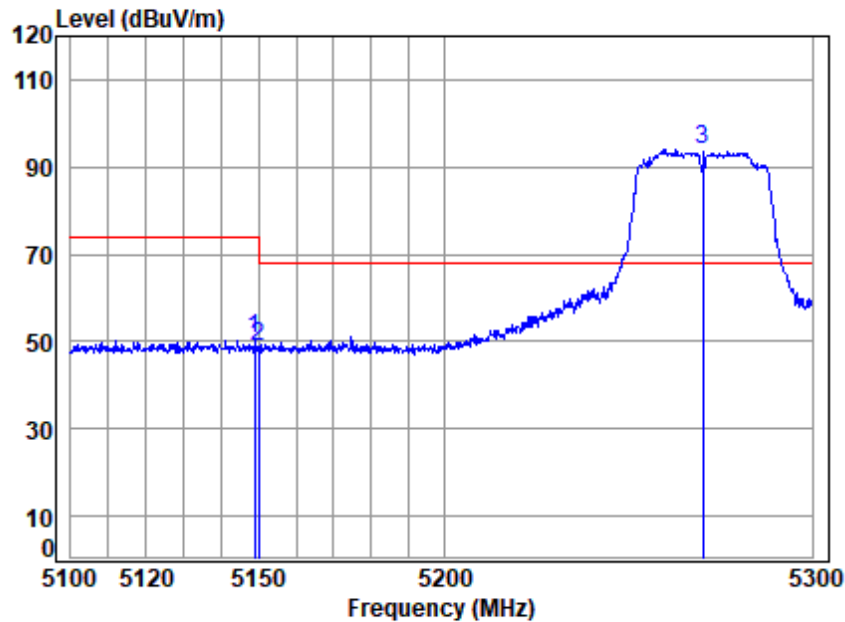


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5148.885	7.57	34.32	42.32	51.00	50.57	74.00	-23.43 peak
2 5149.980	7.57	34.32	42.32	49.24	48.81	74.00	-25.19 peak
3 * 5270.000	7.79	34.42	42.33	94.26	94.14	68.20	25.94 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

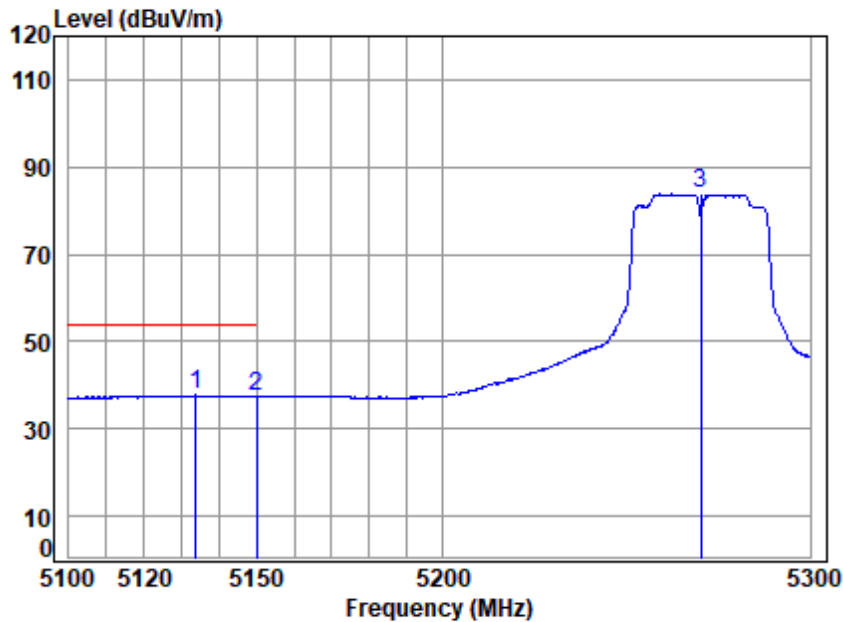

Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5133.854	7.54	34.31	42.31	38.11	37.65	54.00 -16.35
2	5149.980	7.57	34.32	42.32	37.93	37.50	54.00 -16.50
3	5270.000	7.79	34.42	42.33	83.87	83.75	-----




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

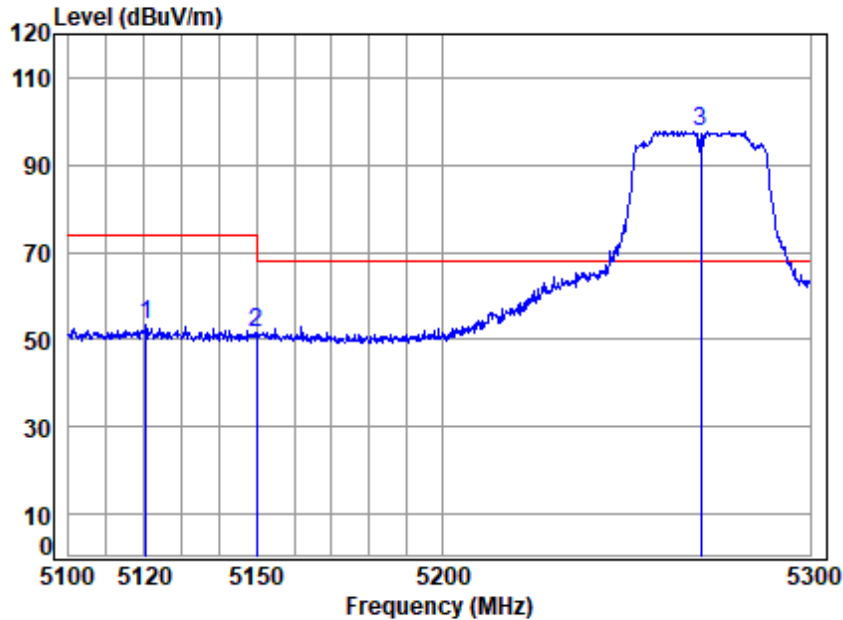


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5120.443	7.52	34.30	42.31	53.66	53.17	74.00	-20.83 peak
2 5149.980	7.57	34.32	42.32	51.79	51.36	74.00	-22.64 peak
3 * 5270.000	7.79	34.42	42.33	97.88	97.76	68.20	29.56 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

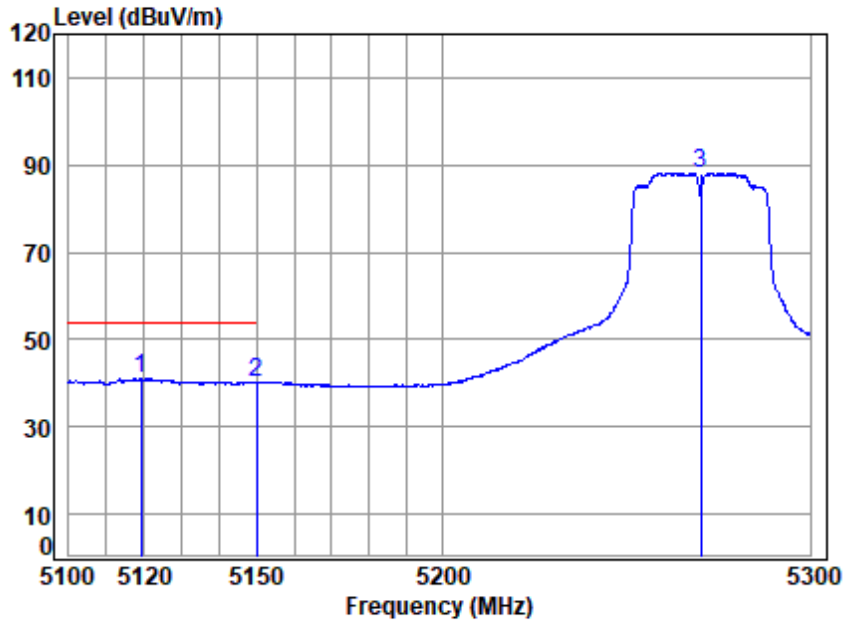


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5270 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5119.065	7.52	34.30	42.31	41.49	41.00	54.00	-13.00 Average
2	5149.980	7.57	34.32	42.32	40.61	40.18	54.00	-13.82 Average
3	5270.000	7.79	34.42	42.33	88.28	88.16	-----	----- Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

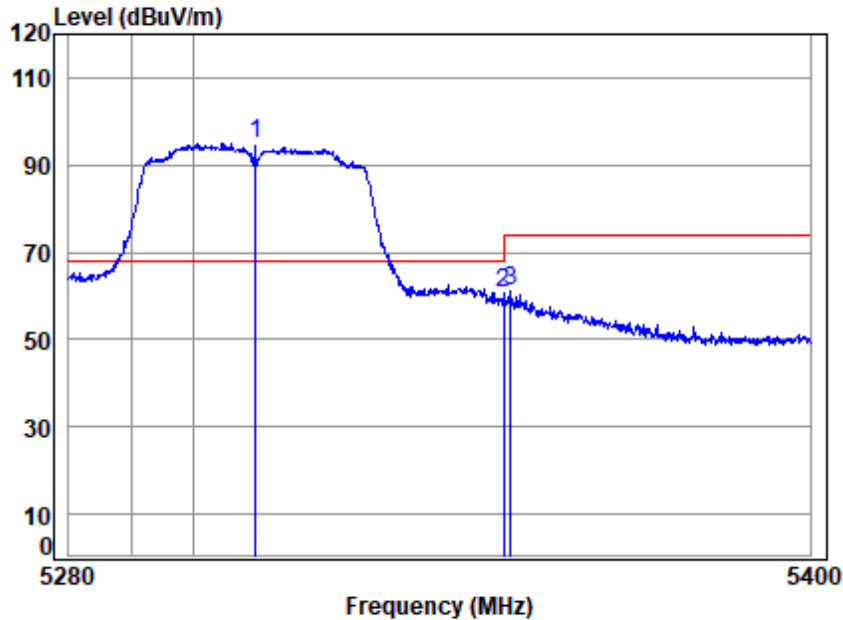


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5310.000	7.86	34.45	42.33	94.81	94.79	68.20	26.59 peak
2 5350.020	7.92	34.48	42.34	60.51	60.57	74.00	-13.43 peak
3 5351.195	7.93	34.48	42.34	60.95	61.02	74.00	-12.98 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

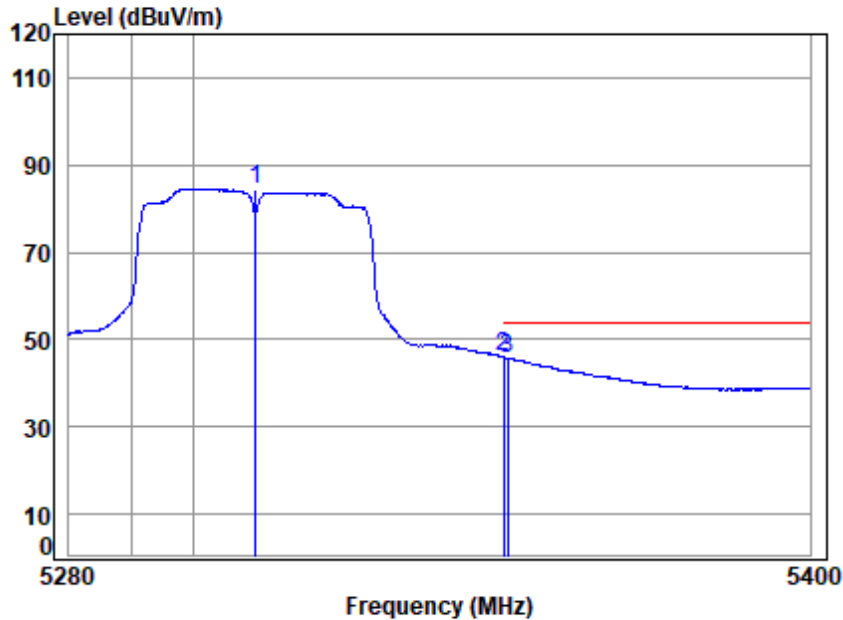


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	7.86	34.45	42.33	84.60	84.58	-----	----- Average
2	5350.020	7.92	34.48	42.34	45.88	45.94	54.00	-8.06 Average
3	5350.714	7.93	34.48	42.34	45.73	45.80	54.00	-8.20 Average



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

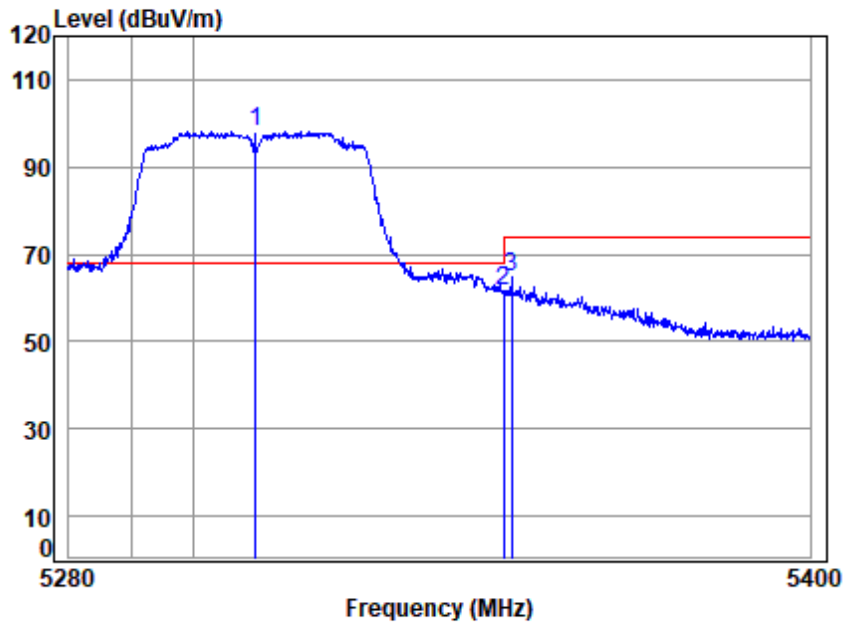


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5310.000	7.86	34.45	42.33	98.27	98.25	68.20	30.05 peak
2 5350.020	7.92	34.48	42.34	61.76	61.82	74.00	-12.18 peak
3 5351.315	7.93	34.48	42.34	64.82	64.89	74.00	-9.11 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

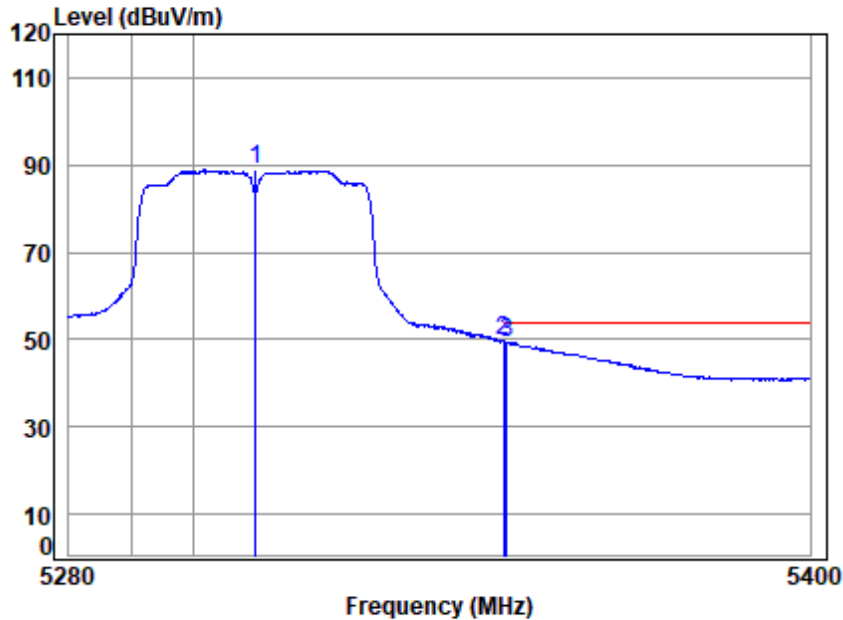


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5310 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5310.000	7.86	34.45	42.33	88.81	88.79	-----	----- Average
2	5350.020	7.92	34.48	42.34	49.62	49.68	54.00	-4.32 Average
3	5350.594	7.93	34.48	42.34	49.39	49.46	54.00	-4.54 Average



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

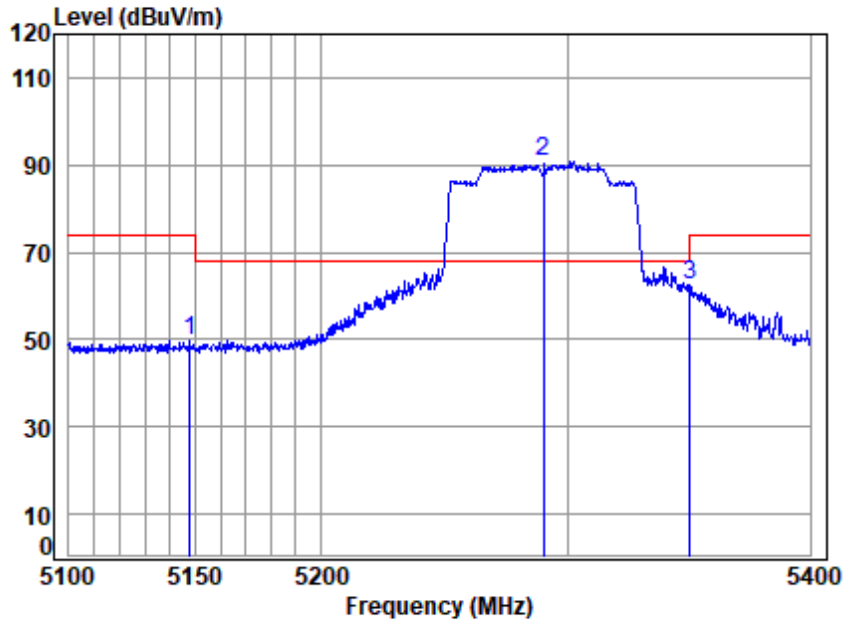


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5147.738	7.57	34.32	42.32	50.34	49.91	74.00	-24.09 peak
2 * 5290.000	7.82	34.44	42.33	91.02	90.95	68.20	22.75 peak
3 5350.229	7.93	34.48	42.34	62.64	62.71	74.00	-11.29 peak



Test Mode: 19; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

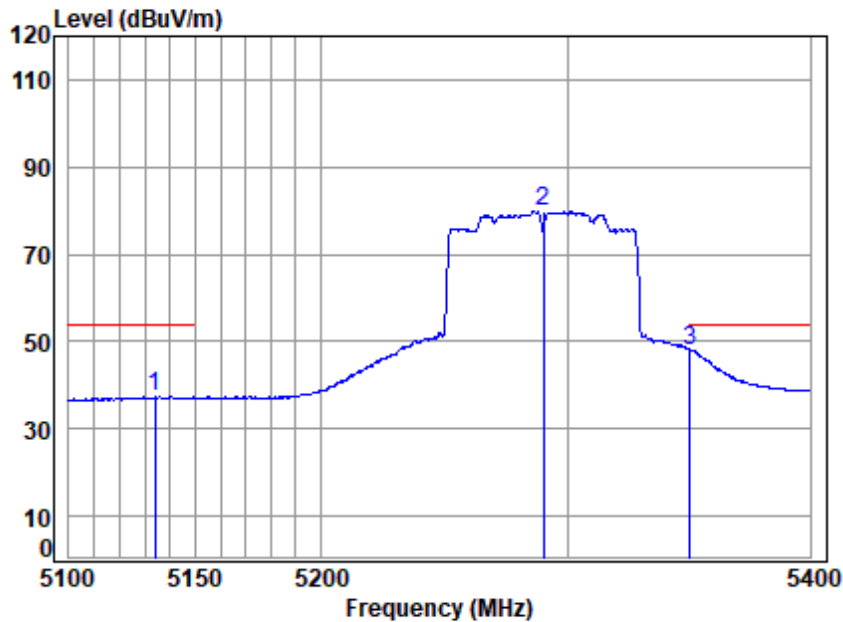


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5134.221	7.54	34.31	42.31	37.88	37.42	54.00	-16.58 Average
2	5290.000	7.82	34.44	42.33	79.85	79.78	-----	----- Average
3	5350.229	7.93	34.48	42.34	47.96	48.03	54.00	-5.97 Average



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

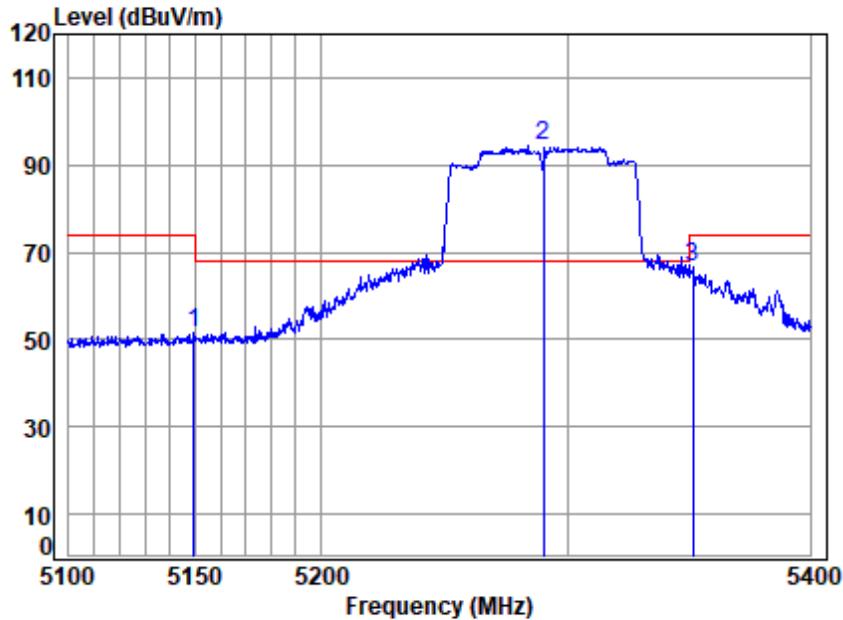


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5149.503	7.57	34.32	42.32	52.20	51.77	74.00	-22.23 peak
2 * 5290.000	7.82	34.44	42.33	94.39	94.32	68.20	26.12 peak
3 5351.452	7.93	34.49	42.34	66.62	66.70	74.00	-7.30 peak



Test Mode: 19; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

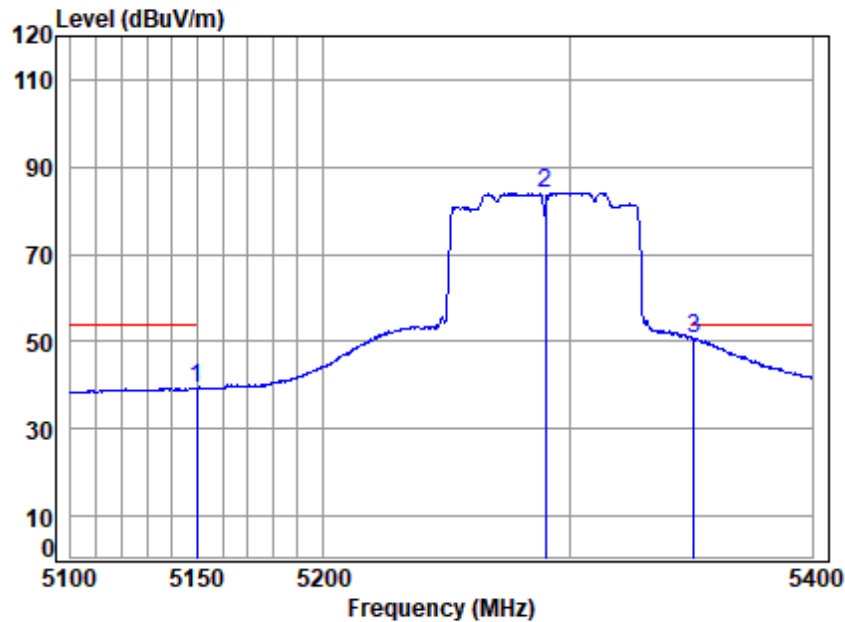


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5290 Band edge
: 5G WIFI 11AC80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.798	7.57	34.32	42.32	39.74	39.31	54.00	-14.69 Average
2	5290.000	7.82	34.44	42.33	84.23	84.16	-----	----- Average
3	5351.146	7.93	34.48	42.34	50.56	50.63	54.00	-3.37 Average



Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

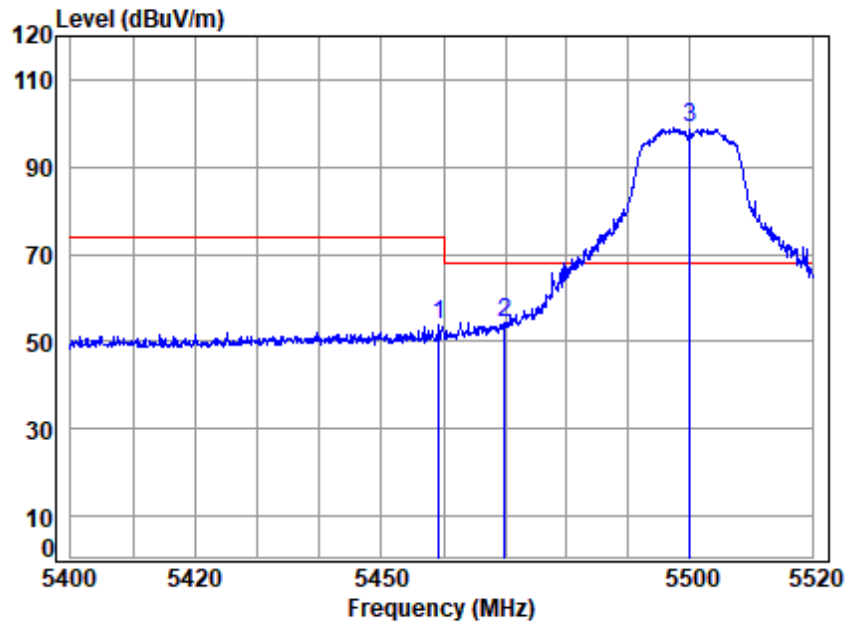


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.190	8.11	34.57	42.35	53.52	53.85	74.00	-20.15 peak
2 5469.880	8.13	34.58	42.35	54.13	54.49	68.20	-13.71 peak
3 * 5500.000	8.18	34.60	42.35	98.43	98.86	68.20	30.66 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

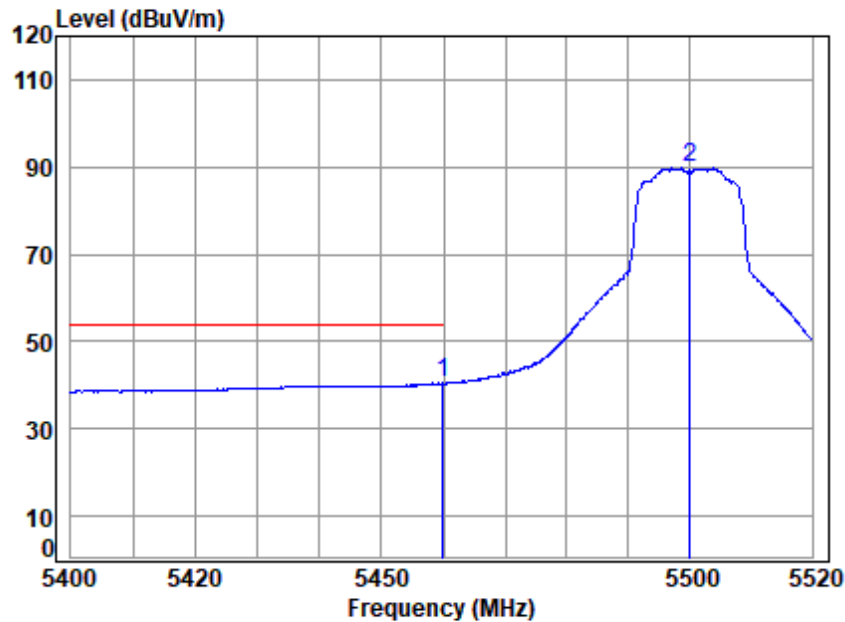


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.910	8.11	34.57	42.35	40.13	40.46	54.00	-13.54 Average
2 5500.000	8.18	34.60	42.35	89.27	89.70	-----	----- Average



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

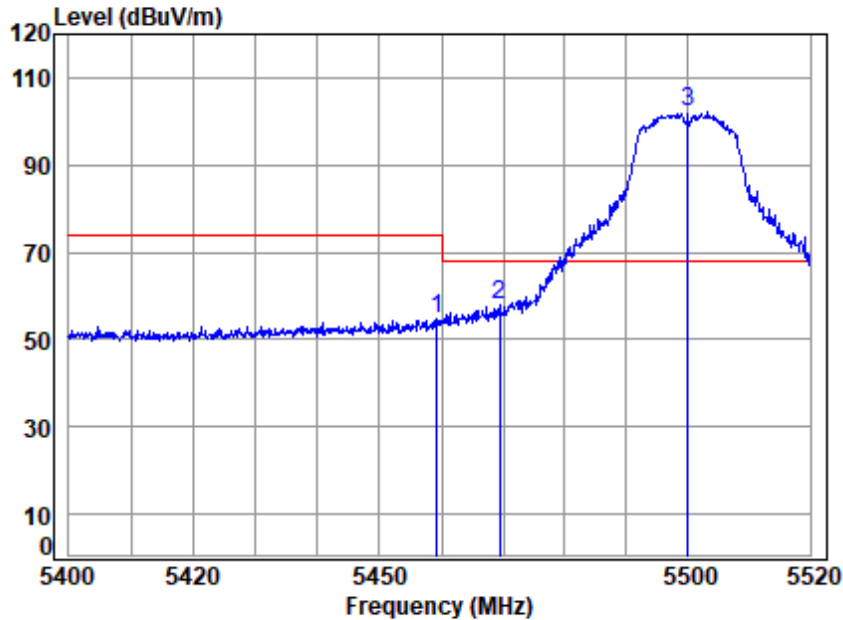


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.311	8.11	34.57	42.35	54.60	54.93	74.00	-19.07 peak
2 5469.399	8.13	34.58	42.35	57.60	57.96	68.20	-10.24 peak
3 * 5500.000	8.18	34.60	42.35	101.62	102.05	68.20	33.85 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

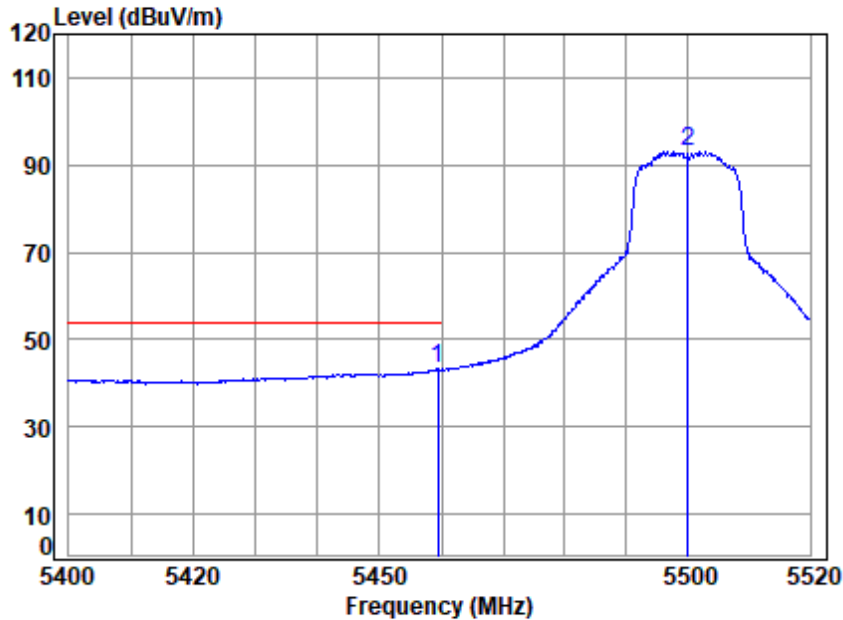


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.430	8.11	34.57	42.35	42.89	43.22	54.00	-10.78
2 5500.000	8.18	34.60	42.35	92.49	92.92	-----	-----
							Average



Test Mode: 21; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

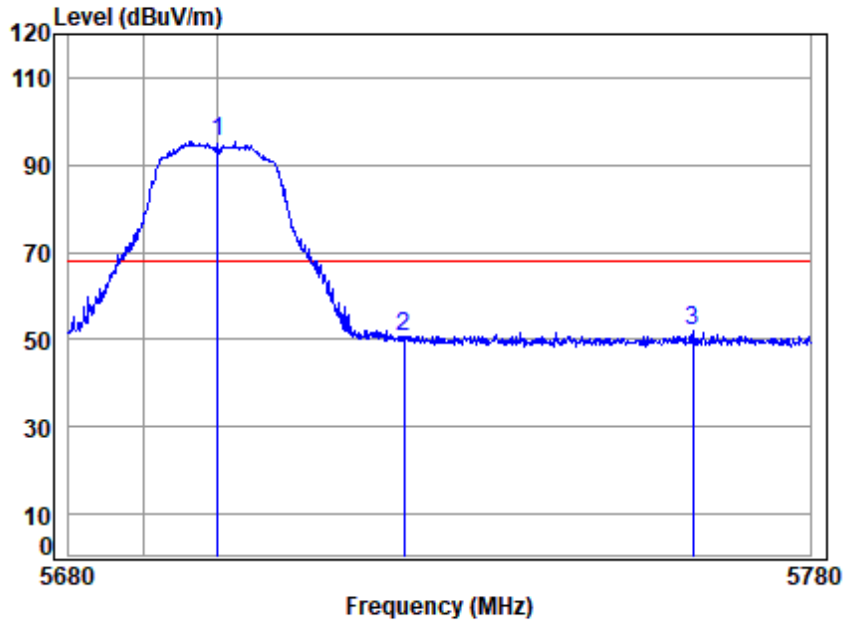


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5700 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5700.000	8.21	34.81	42.37	94.54	95.19	68.20	26.99 peak
2 5725.000	8.22	34.83	42.37	50.06	50.74	68.20	-17.46 peak
3 5764.083	8.22	34.87	42.38	51.17	51.88	68.20	-16.32 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

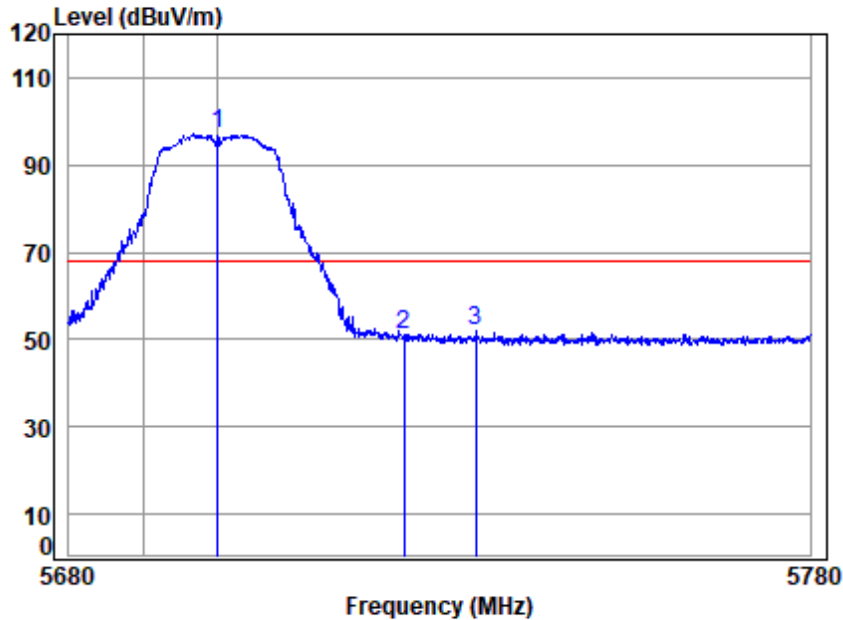


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5700 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5700.000	8.21	34.81	42.37	96.37	97.02	68.20	28.82 peak
2 5725.000	8.22	34.83	42.37	50.58	51.26	68.20	-16.94 peak
3 5734.684	8.22	34.84	42.38	51.37	52.05	68.20	-16.15 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

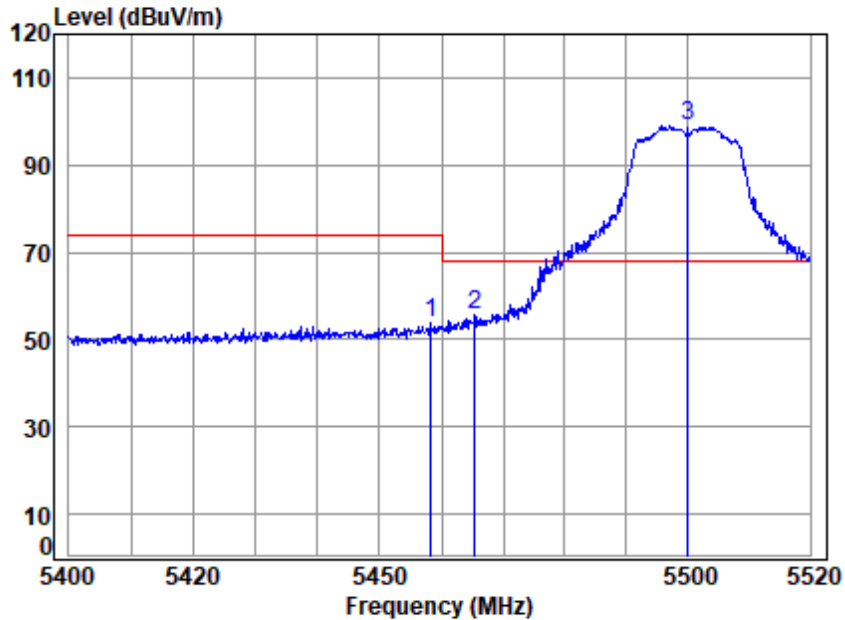


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5458.230	8.11	34.57	42.35	53.33	53.66	74.00	-20.34 peak
2 5465.433	8.12	34.57	42.35	55.24	55.58	68.20	-12.62 peak
3 * 5500.000	8.18	34.60	42.35	98.72	99.15	68.20	30.95 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

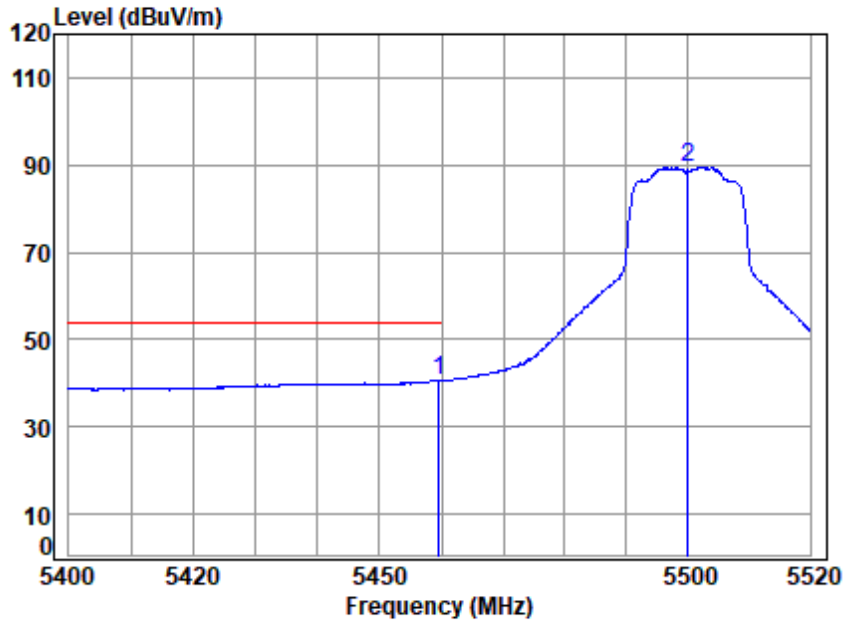


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.670	8.11	34.57	42.35	40.27	40.60	54.00	-13.40 Average
2 5500.000	8.18	34.60	42.35	89.03	89.46	-----	----- Average



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

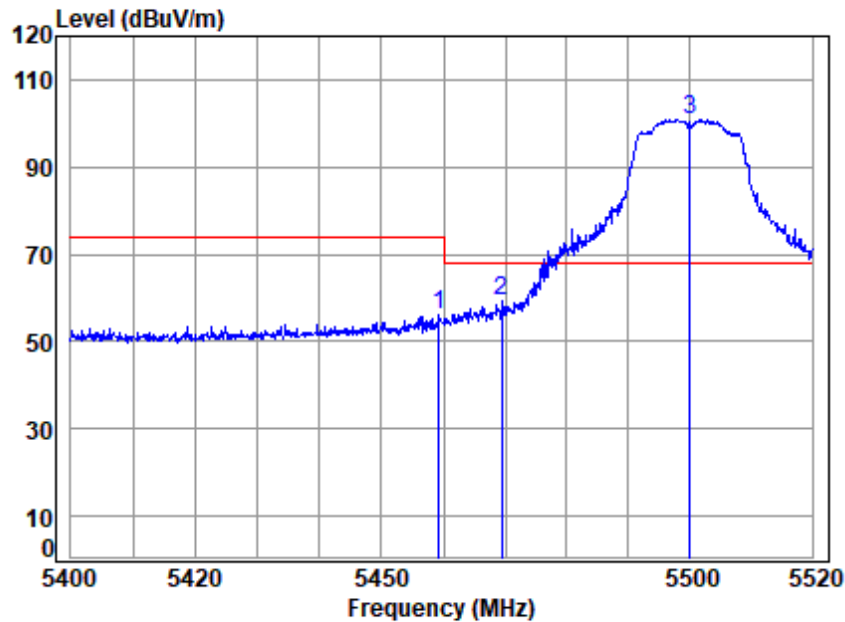


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.311	8.11	34.57	42.35	55.82	56.15	74.00	-17.85 peak
2 5469.399	8.13	34.58	42.35	59.10	59.46	68.20	-8.74 peak
3 * 5500.000	8.18	34.60	42.35	100.40	100.83	68.20	32.63 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

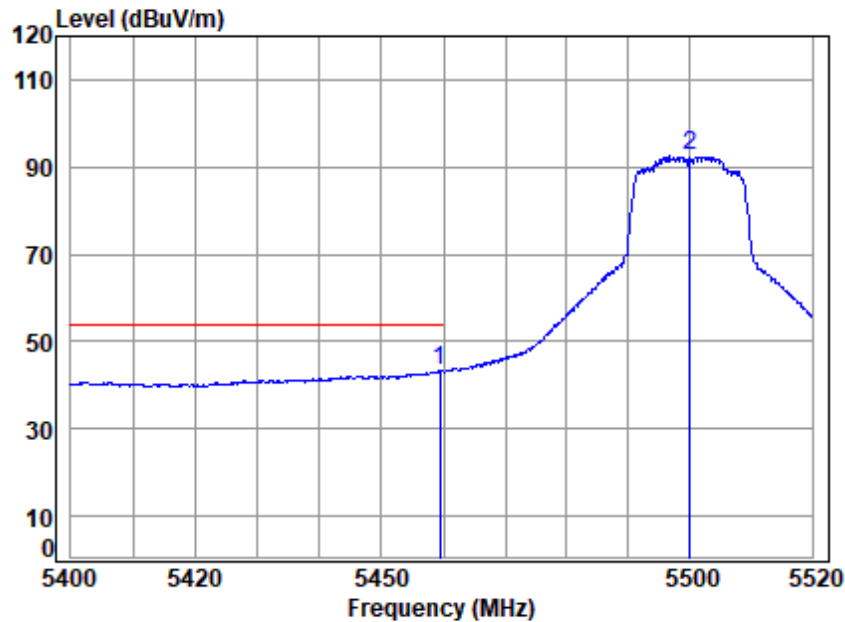


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.430	8.11	34.57	42.35	42.89	43.22	54.00	-10.78 Average
2 5500.000	8.18	34.60	42.35	92.05	92.48	-----	----- Average



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

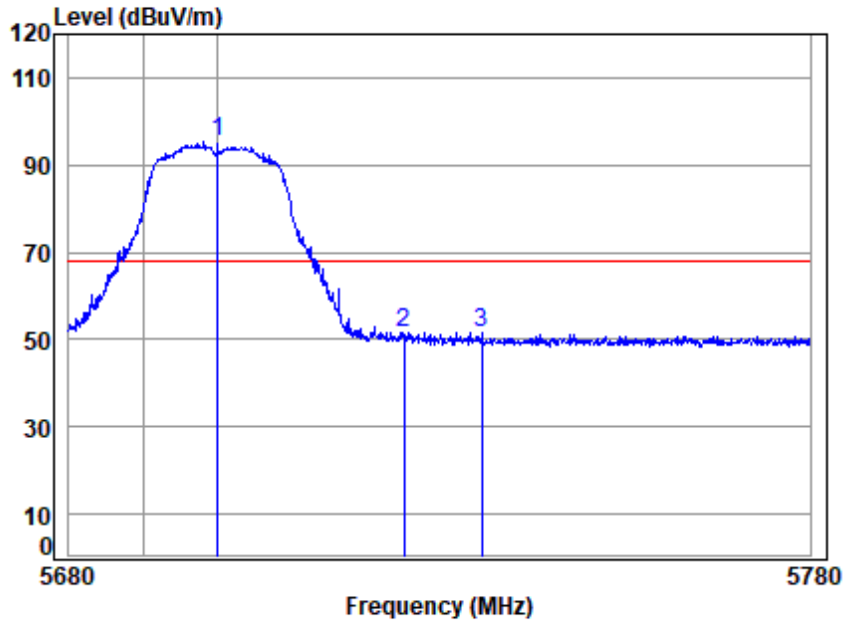


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5700 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5700.000	8.21	34.81	42.37	94.72	95.37	68.20	27.17	peak
2 5725.000	8.22	34.83	42.37	51.02	51.70	68.20	-16.50	peak
3 5735.484	8.22	34.84	42.38	50.93	51.61	68.20	-16.59	peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

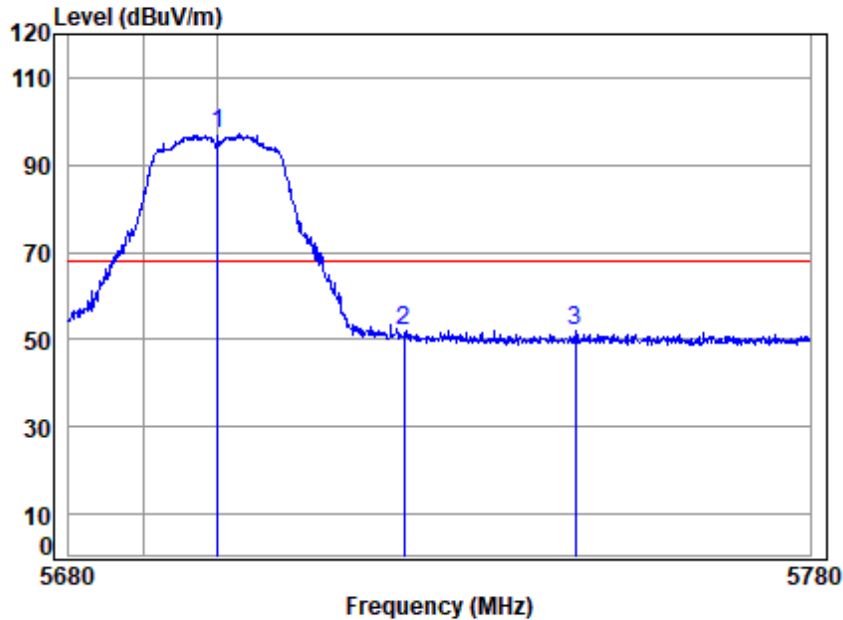


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5700 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5700.000	8.21	34.81	42.37	96.36	97.01	68.20	28.81 peak
2 5725.000	8.22	34.83	42.37	51.15	51.83	68.20	-16.37 peak
3 5748.111	8.22	34.85	42.38	51.28	51.97	68.20	-16.23 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

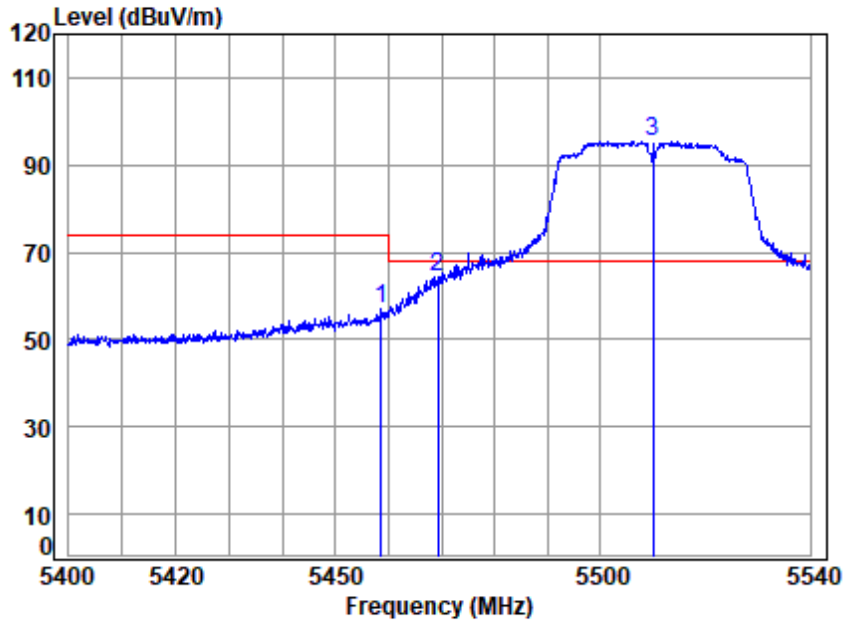


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5458.643	8.11	34.57	42.35	56.81	57.14	74.00	-16.86 peak
2 5469.272	8.13	34.58	42.35	63.96	64.32	68.20	-3.88 peak
3 * 5510.000	8.18	34.61	42.35	94.95	95.39	68.20	27.19 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

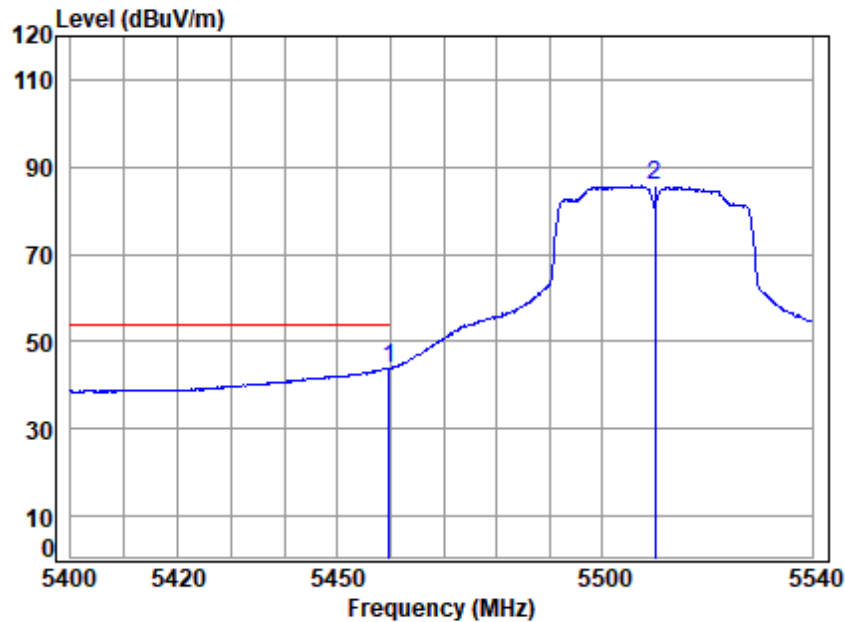


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.761	8.11	34.57	42.35	43.52	43.85	54.00	-10.15
2 5510.000	8.18	34.61	42.35	85.25	85.69	-----	-----



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

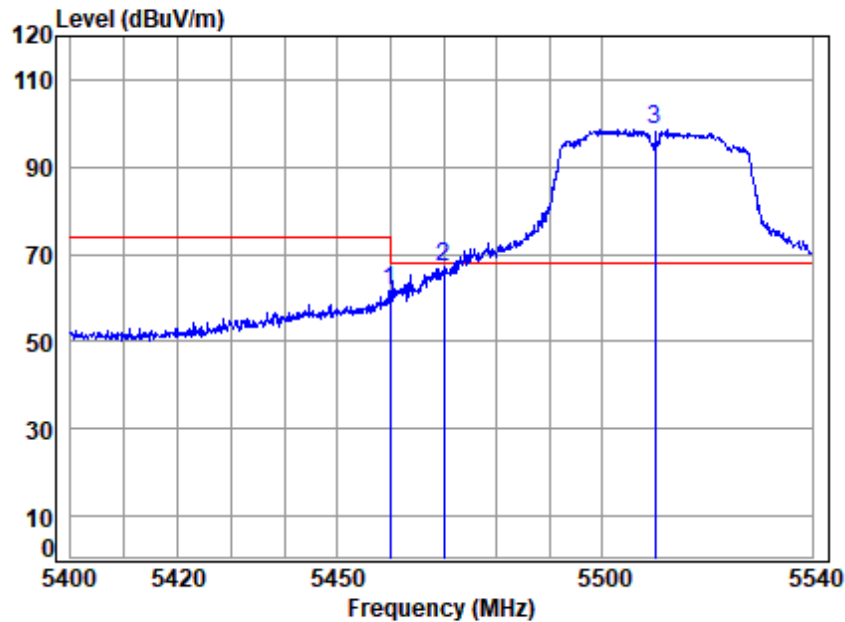


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.901	8.11	34.57	42.35	61.36	61.69	74.00	-12.31 peak
2 5469.972	8.13	34.58	42.35	66.77	67.13	68.20	-1.07 peak
3 * 5510.000	8.18	34.61	42.35	98.29	98.73	68.20	30.53 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

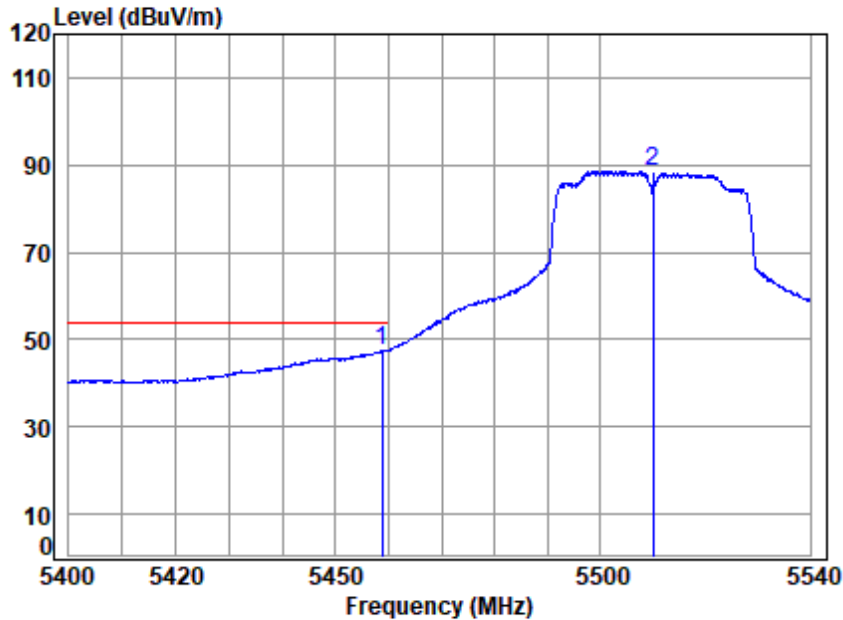


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5458.783	8.11	34.57	42.35	47.26	47.59	54.00	-6.41 Average
2 5510.000	8.18	34.61	42.35	88.27	88.71	-----	----- Average



Test Mode: 21; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

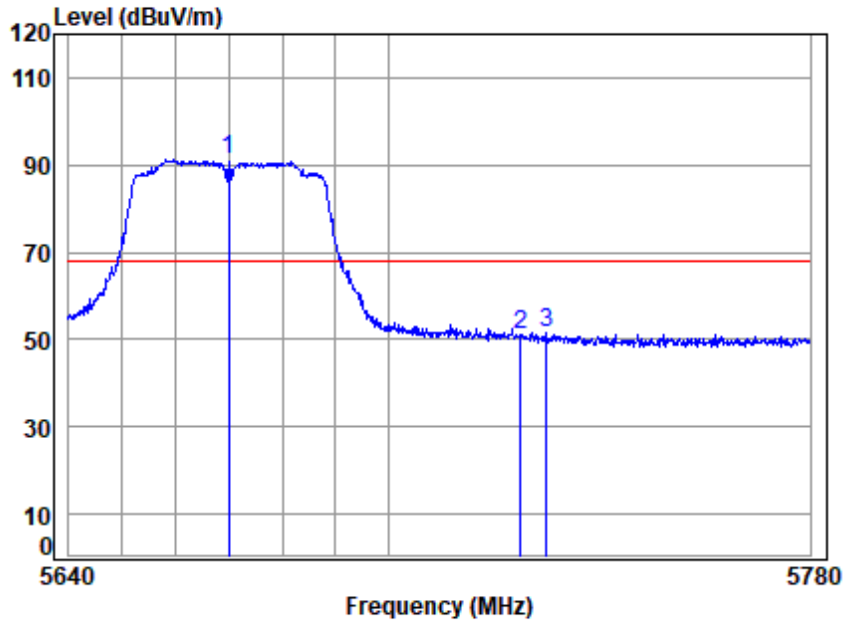


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5670 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5670.000	8.21	34.77	42.37	90.74	91.35	68.20	23.15 peak
2 5725.000	8.22	34.83	42.37	50.38	51.06	68.20	-17.14 peak
3 5729.907	8.22	34.84	42.37	50.85	51.54	68.20	-16.66 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

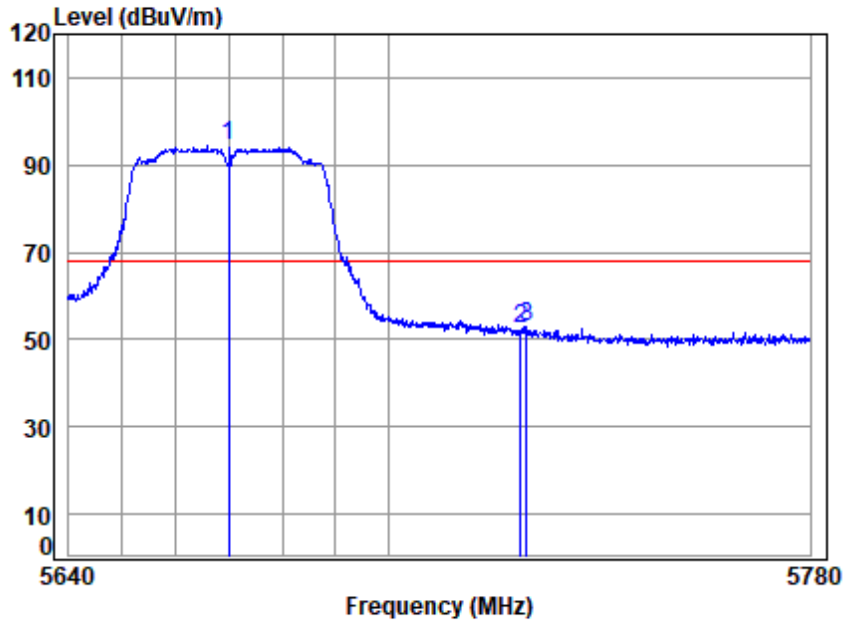


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5670 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5670.000	8.21	34.77	42.37	93.77	94.38	68.20	26.18 peak
2 5725.000	8.22	34.83	42.37	51.99	52.67	68.20	-15.53 peak
3 5725.974	8.22	34.83	42.37	52.31	52.99	68.20	-15.21 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

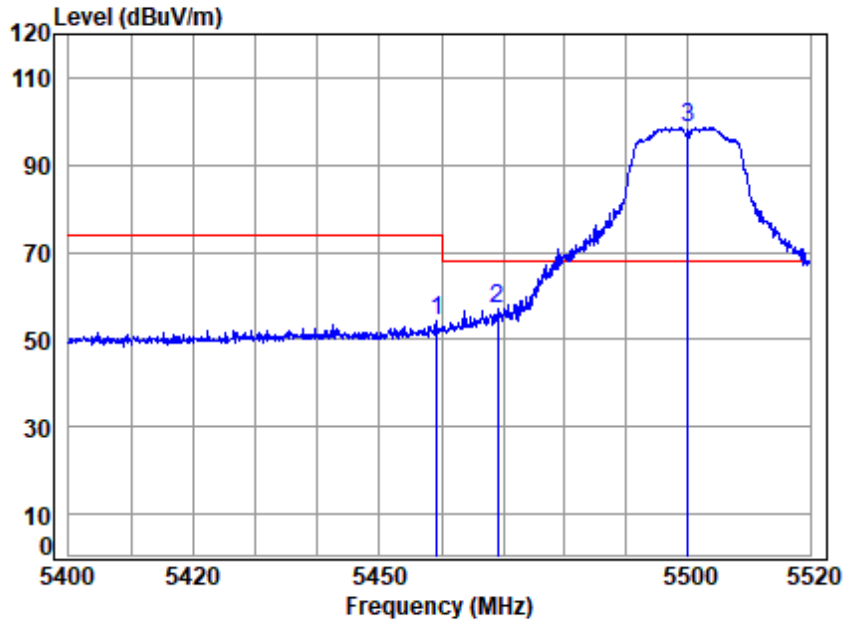

Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.190	8.11	34.57	42.35	54.01	54.34	74.00	-19.66 peak
2 5469.038	8.13	34.58	42.35	56.67	57.03	68.20	-11.17 peak
3 * 5500.000	8.18	34.60	42.35	98.18	98.61	68.20	30.41 peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

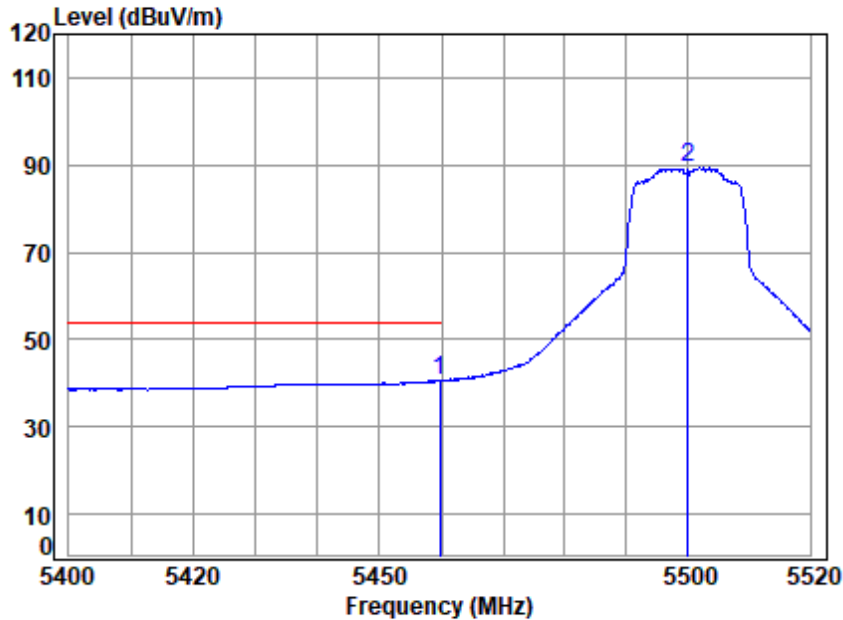


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5459.791	8.11	34.57	42.35	40.28	40.61	54.00	-13.39 Average
2	5500.000	8.18	34.60	42.35	89.02	89.45	-----	----- Average



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

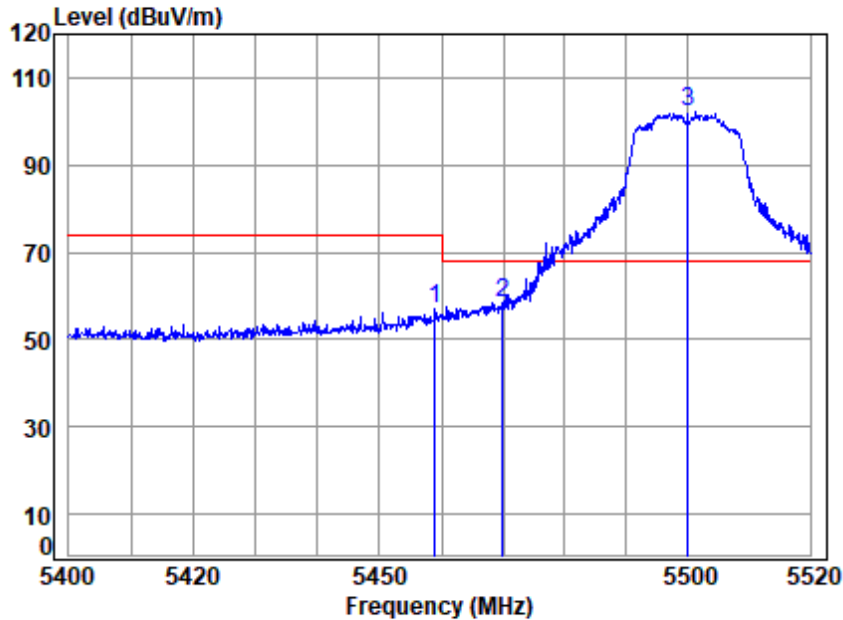


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5458.950	8.11	34.57	42.35	56.70	57.03	74.00	-16.97 peak
2 5469.880	8.13	34.58	42.35	58.14	58.50	68.20	-9.70 peak
3 * 5500.000	8.18	34.60	42.35	101.56	101.99	68.20	33.79 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

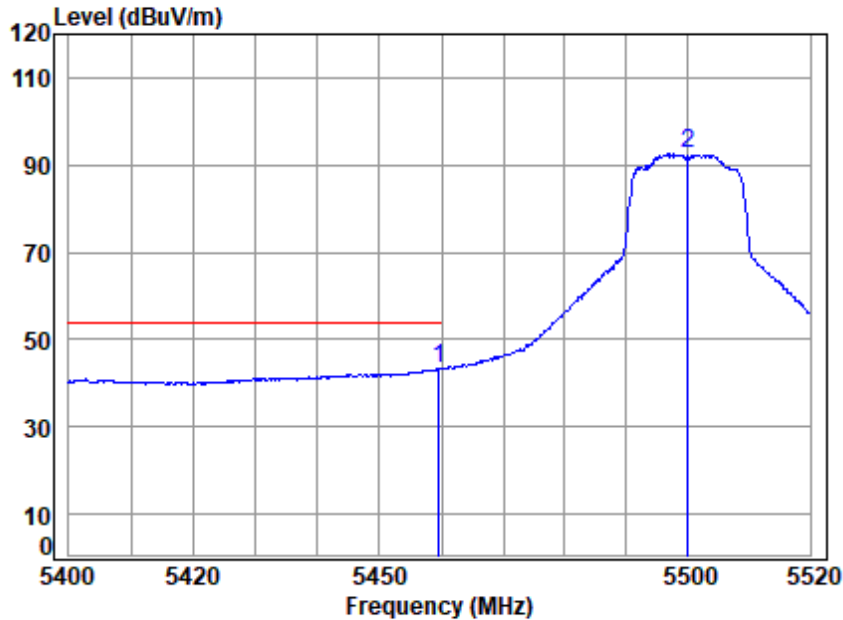


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5500 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5459.550	8.11	34.57	42.35	42.97	43.30	54.00	-10.70 Average
2	5500.000	8.18	34.60	42.35	92.14	92.57	-----	----- Average



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

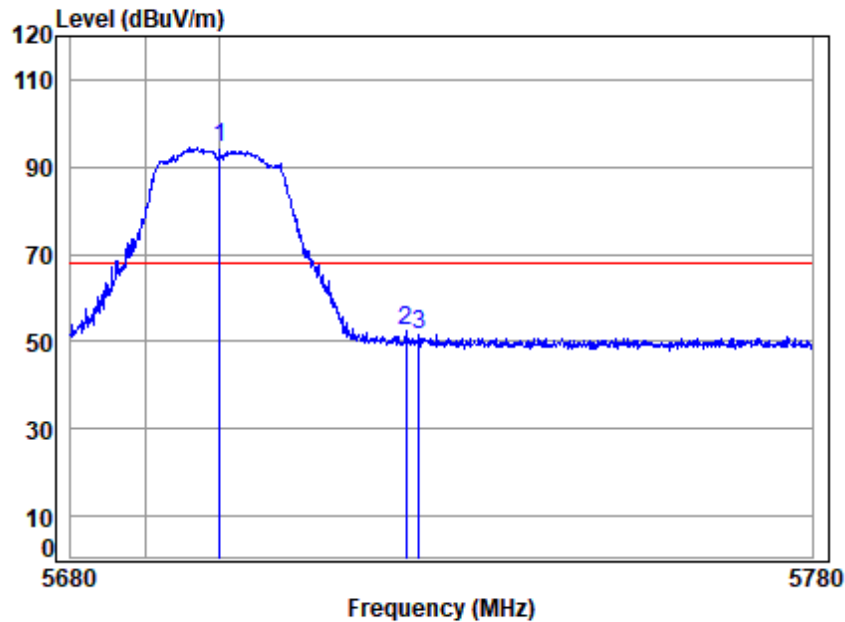


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5700 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5700.000	8.21	34.81	42.37	93.58	94.23	68.20	26.03	peak
2 5725.000	8.22	34.83	42.37	51.72	52.40	68.20	-15.80	peak
3 5726.783	8.22	34.83	42.37	50.81	51.49	68.20	-16.71	peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

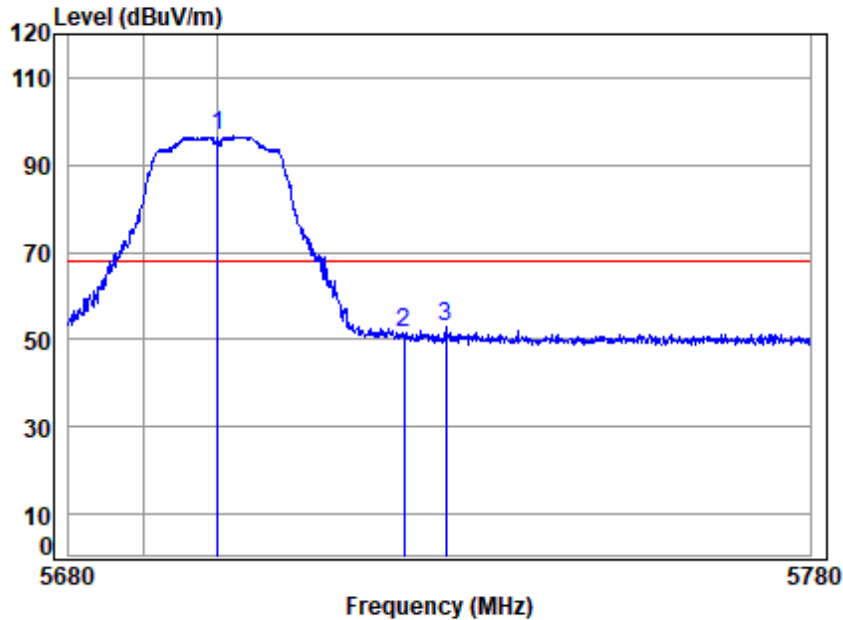


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5700 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 * 5700.000	8.21	34.81	42.37	95.99	96.64	68.20	28.44	peak
2 5725.000	8.22	34.83	42.37	51.05	51.73	68.20	-16.47	peak
3 5730.682	8.22	34.84	42.37	52.07	52.76	68.20	-15.44	peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

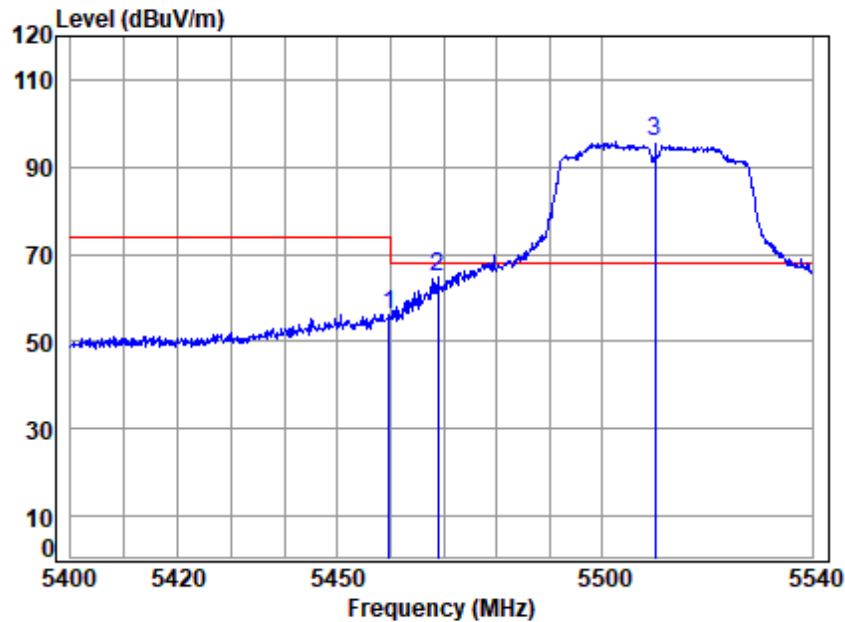


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.761	8.11	34.57	42.35	55.84	56.17	74.00	-17.83 peak
2 5468.852	8.13	34.58	42.35	64.31	64.67	68.20	-3.53 peak
3 * 5510.000	8.18	34.61	42.35	95.53	95.97	68.20	27.77 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

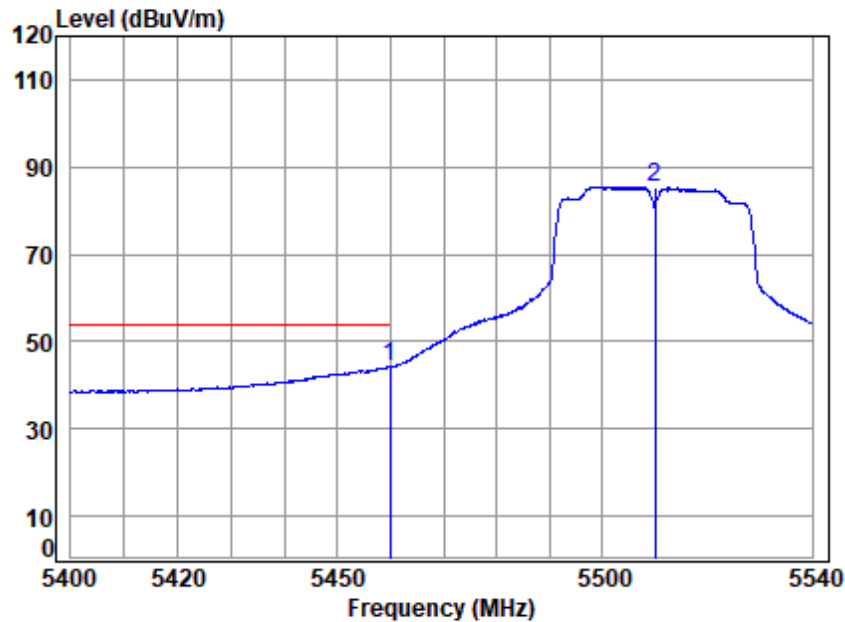


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.901	8.11	34.57	42.35	43.88	44.21	54.00	-9.79
2 5510.000	8.18	34.61	42.35	85.05	85.49	-----	-----
							Average



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

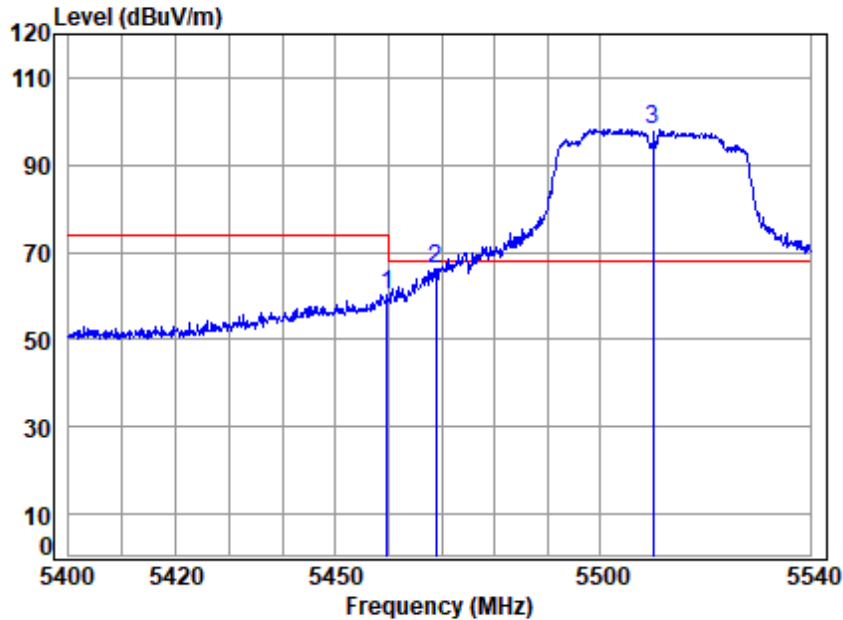


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.761	8.11	34.57	42.35	59.83	60.16	74.00	-13.84 peak
2 5468.852	8.13	34.58	42.35	65.95	66.31	68.20	-1.89 peak
3 * 5510.000	8.18	34.61	42.35	97.82	98.26	68.20	30.06 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

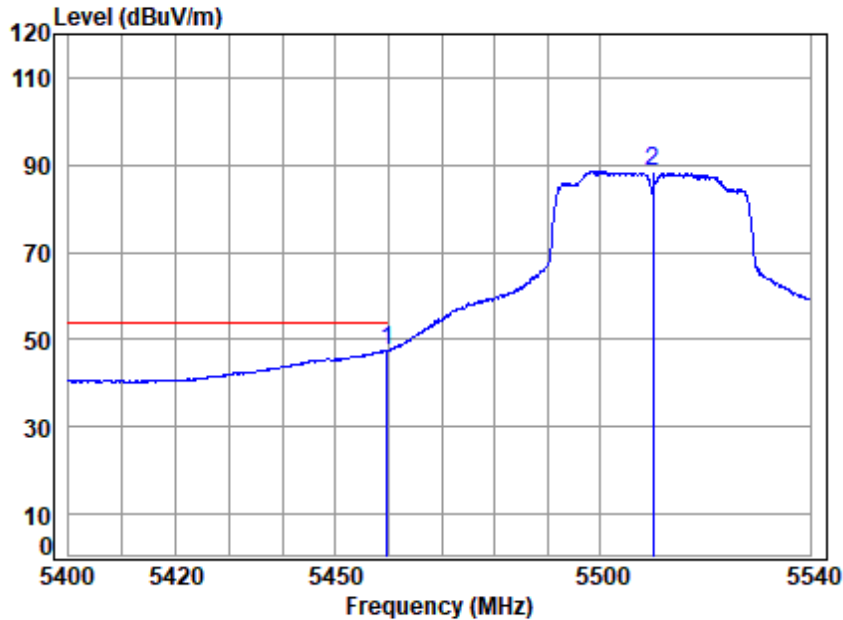


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5510 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5459.761	8.11	34.57	42.35	47.26	47.59	54.00	-6.41 Average
2 5510.000	8.18	34.61	42.35	88.10	88.54	-----	----- Average



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

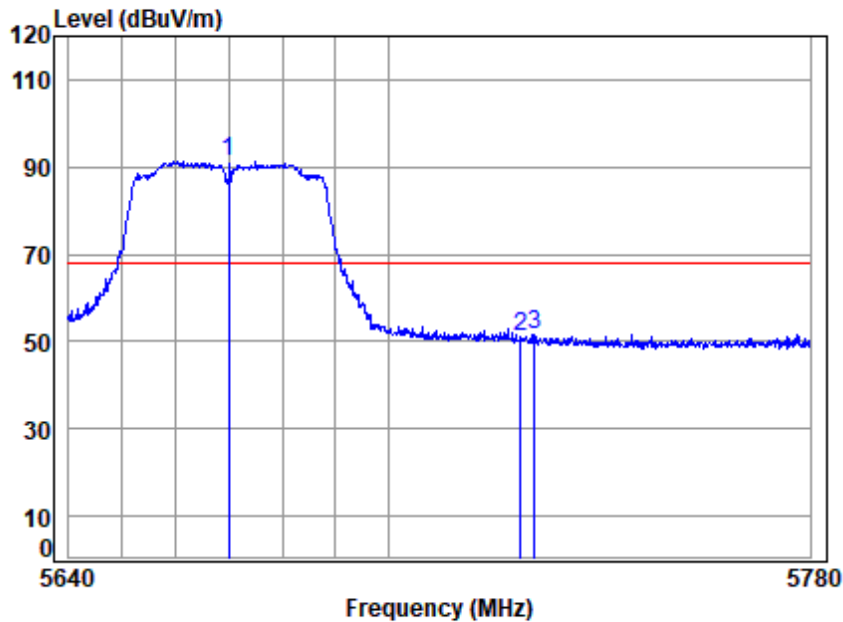


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5670 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5670.000	8.21	34.77	42.37	90.67	91.28	68.20	23.08 peak
2 5725.000	8.22	34.83	42.37	50.34	51.02	68.20	-17.18 peak
3 5727.519	8.22	34.83	42.37	51.04	51.72	68.20	-16.48 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

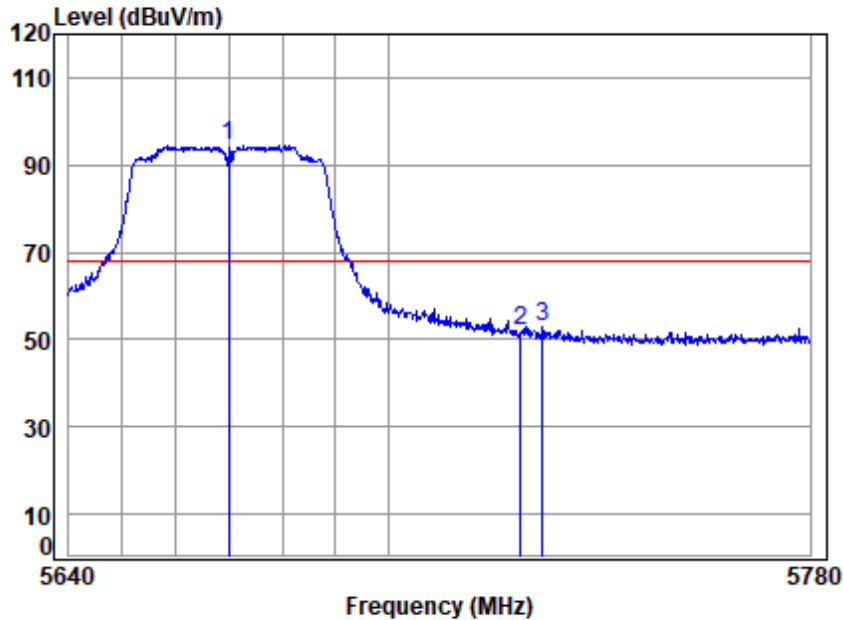


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5670 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5670.000	8.21	34.77	42.37	93.86	94.47	68.20	26.27 peak
2 5725.000	8.22	34.83	42.37	51.15	51.83	68.20	-16.37 peak
3 5729.063	8.22	34.83	42.37	52.44	53.12	68.20	-15.08 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

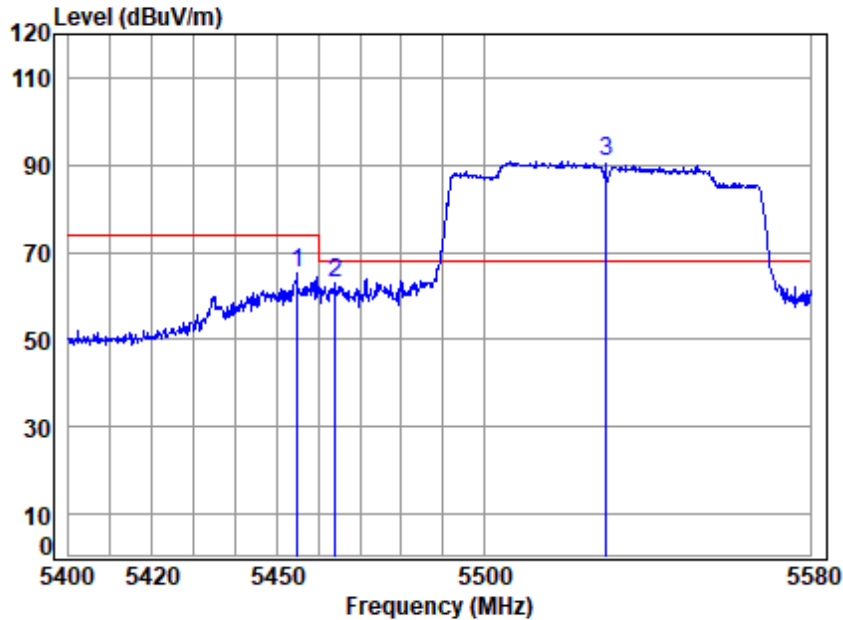


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5530 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5454.813	8.10	34.57	42.35	64.71	65.03	74.00	-8.97 peak
2 5463.942	8.12	34.57	42.35	62.76	63.10	68.20	-5.10 peak
3 * 5530.000	8.19	34.63	42.36	90.54	91.00	68.20	22.80 peak



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

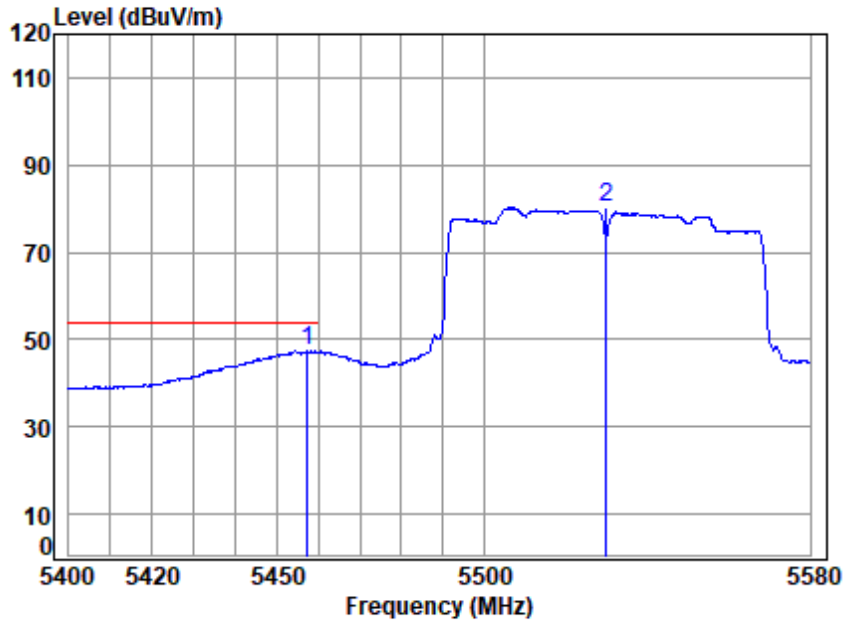


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5530 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5457.317	8.11	34.57	42.35	47.07	47.40	54.00	-6.60 Average
2 5530.000	8.19	34.63	42.36	79.67	80.13	-----	----- Average



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

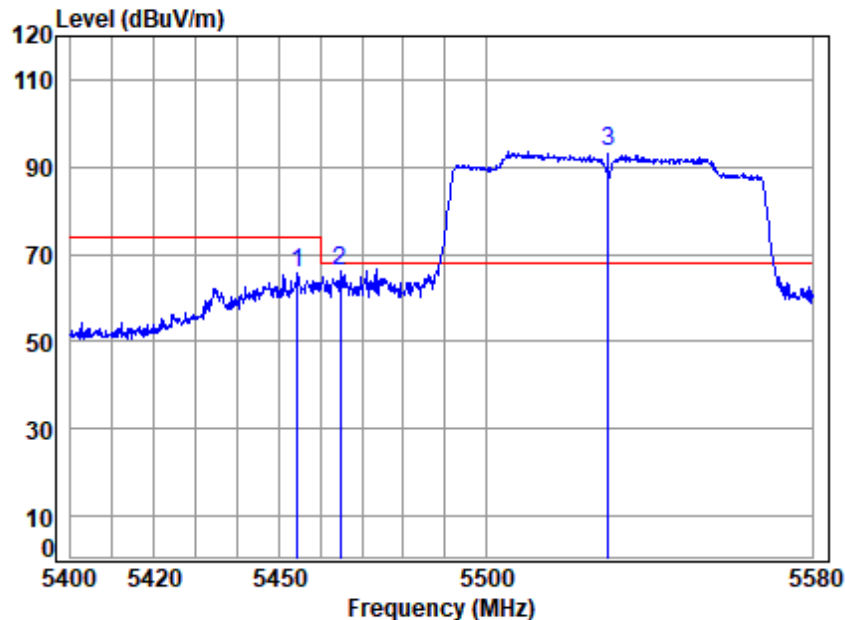


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5530 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5454.455	8.10	34.57	42.35	65.44	65.76	74.00	-8.24 peak
2 5464.659	8.12	34.57	42.35	65.84	66.18	68.20	-2.02 peak
3 * 5530.000	8.19	34.63	42.36	92.98	93.44	68.20	25.24 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

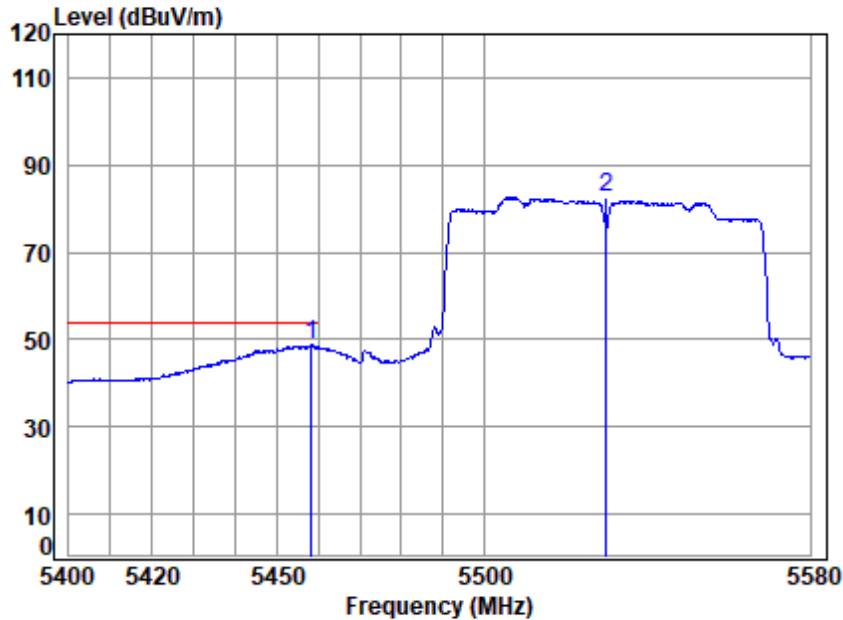


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5530 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5458.391	8.11	34.57	42.35	48.34	48.67	54.00	-5.33 Average
2 5530.000	8.19	34.63	42.36	82.11	82.57	-----	----- Average



Test Mode: 21; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

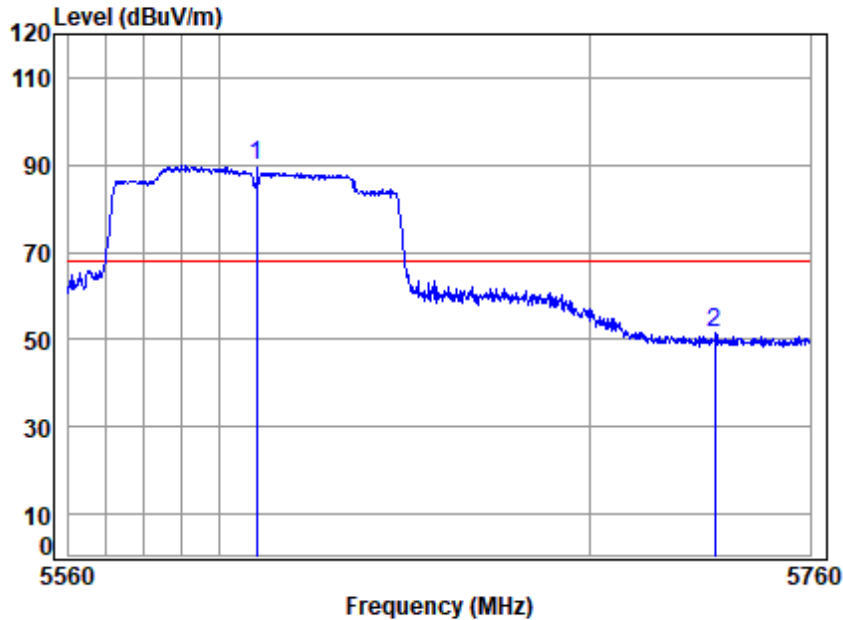


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5610 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5610.000	8.20	34.71	42.36	89.28	89.83	68.20	21.63 peak
2 5734.004	8.22	34.84	42.38	51.01	51.69	68.20	-16.51 peak



Test Mode: 21; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

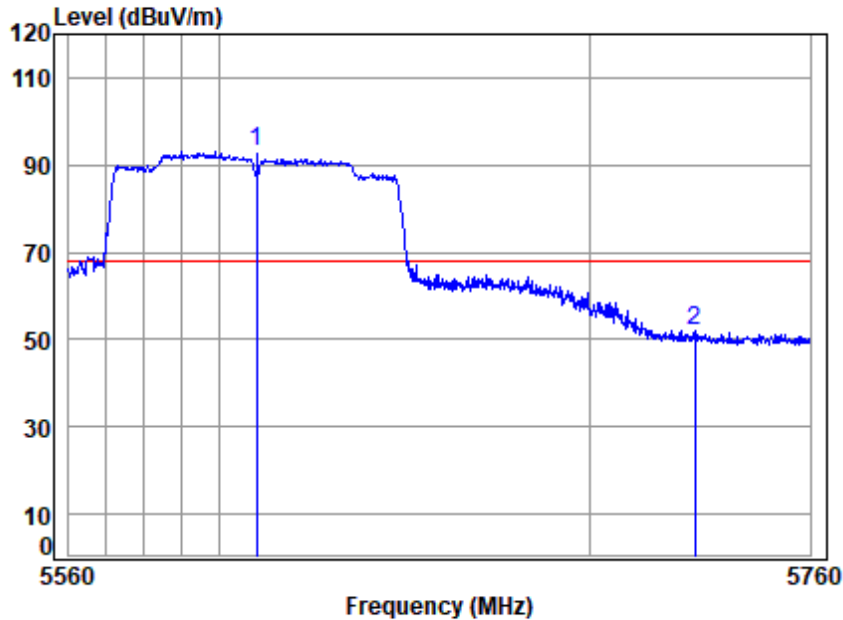


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5610 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 * 5610.000	8.20	34.71	42.36	92.62	93.17	68.20	24.97 peak
2 5728.333	8.22	34.83	42.37	51.27	51.95	68.20	-16.25 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

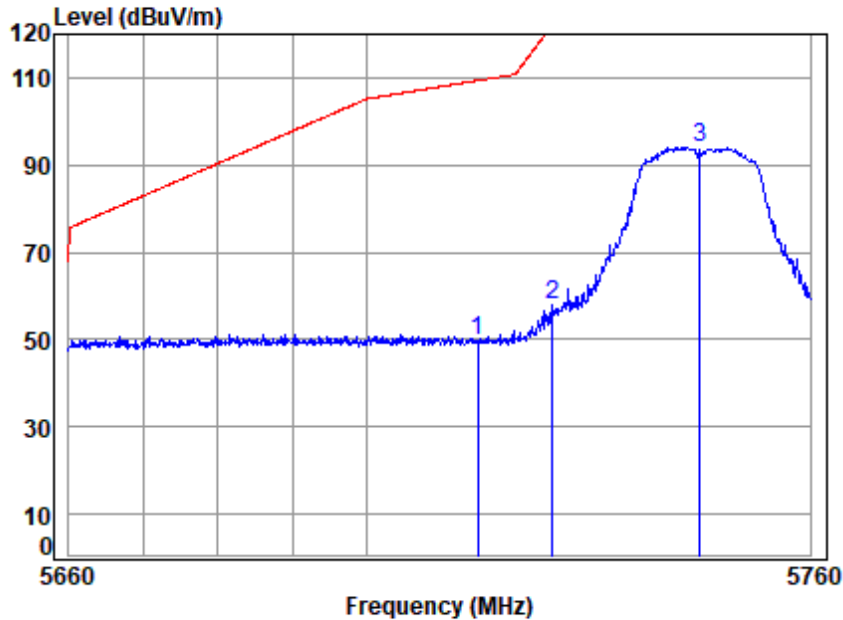


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5745 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	49.12	49.79	109.40	-59.61 peak
2	5725.000	8.22	34.83	42.37	57.49	58.17	122.20	-64.03 peak
3	5745.000	8.22	34.85	42.38	93.36	94.05	125.20	-31.15 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

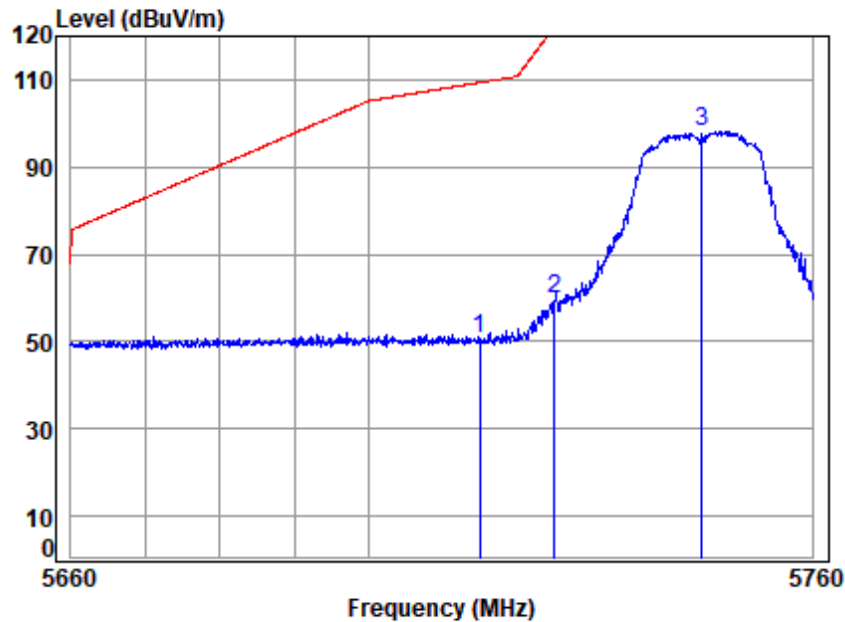


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5745 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	49.84	50.51	109.40	-58.89 peak
2	5725.000	8.22	34.83	42.37	59.20	59.88	122.20	-62.32 peak
3	5745.000	8.22	34.85	42.38	97.38	98.07	125.20	-27.13 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

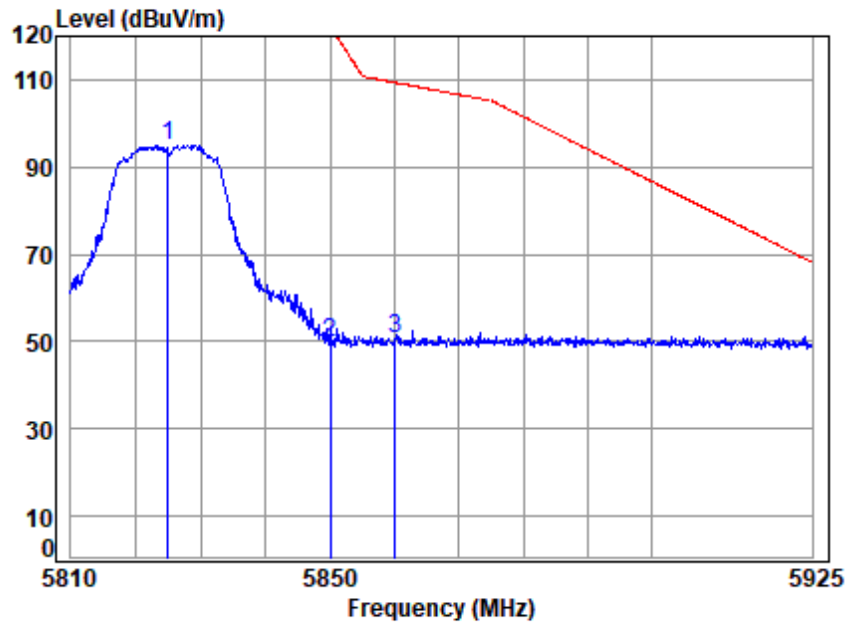


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5825 Band edge
: 5G WIFI 11A

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	8.23	34.93	42.38	94.26	95.04	125.20	-30.16 peak
2 5850.000	8.24	34.95	42.39	49.09	49.89	122.20	-72.31 peak
3 5860.000	8.24	34.96	42.39	49.72	50.53	109.40	-58.87 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

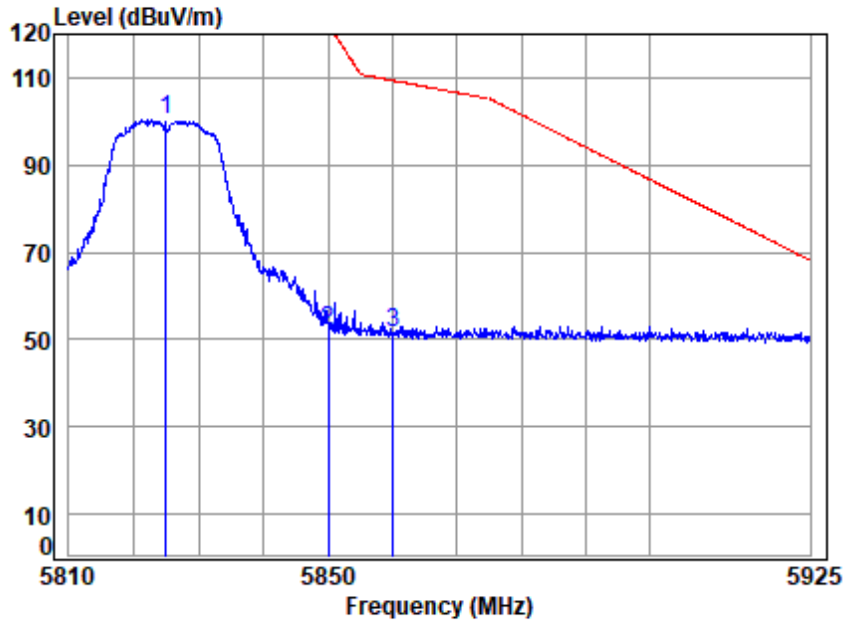


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5825 Band edge
: 5G WIFI 11A

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5825.000	8.23	34.93	42.38	99.57	100.35	125.20	-24.85 peak
2	5850.000	8.24	34.95	42.39	51.25	52.05	122.20	-70.15 peak
3	5860.000	8.24	34.96	42.39	50.76	51.57	109.40	-57.83 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

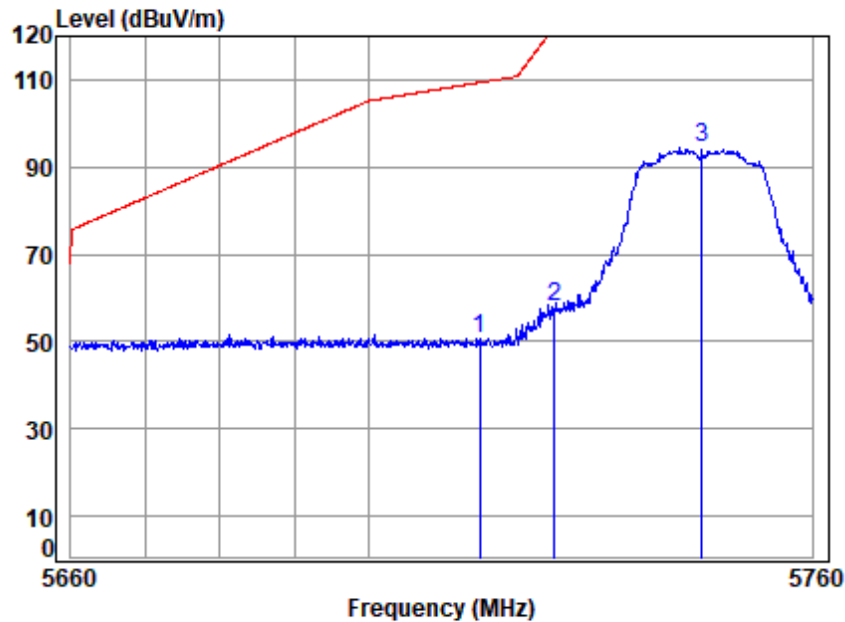


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5745 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	50.09	50.76	109.40	-58.64 peak
2	5725.000	8.22	34.83	42.37	57.48	58.16	122.20	-64.04 peak
3	5745.000	8.22	34.85	42.38	93.53	94.22	125.20	-30.98 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

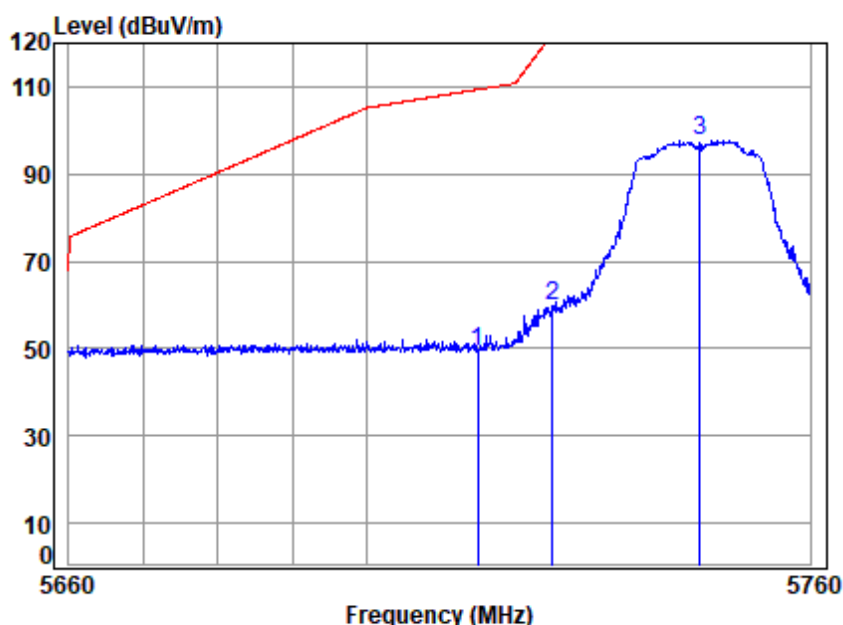


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5745 Band edge
: 5G WIFI 11N20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	48.65	49.32	109.40	-60.08 peak
2	5725.000	8.22	34.83	42.37	59.27	59.95	122.20	-62.25 peak
3	5745.000	8.22	34.85	42.38	96.96	97.65	125.20	-27.55 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

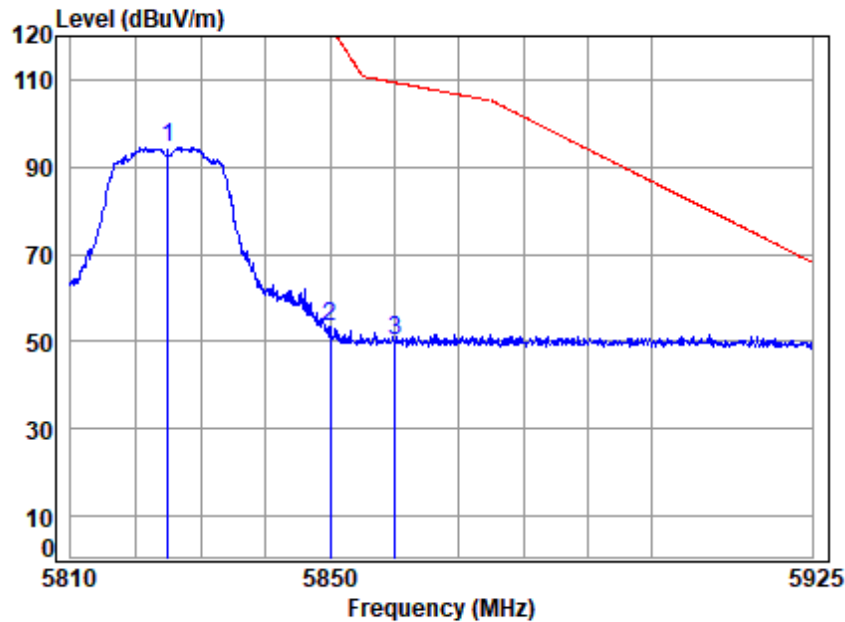


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5825 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	8.23	34.93	42.38	93.70	94.48	125.20	-30.72 peak
2 5850.000	8.24	34.95	42.39	52.41	53.21	122.20	-68.99 peak
3 5860.000	8.24	34.96	42.39	49.54	50.35	109.40	-59.05 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

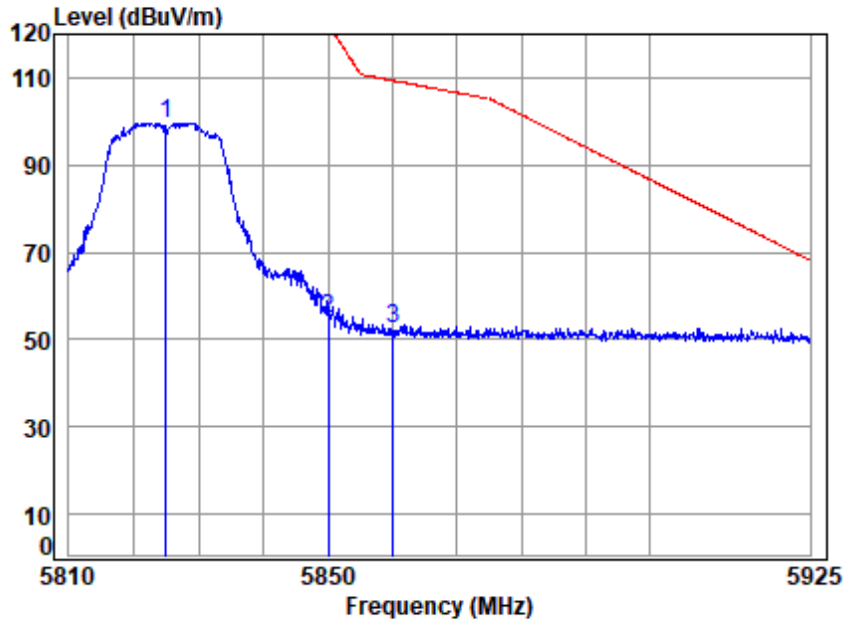


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5825 Band edge
: 5G WIFI 11N20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	8.23	34.93	42.38	98.91	99.69	125.20	-25.51 peak
2 5850.000	8.24	34.95	42.39	54.14	54.94	122.20	-67.26 peak
3 5860.000	8.24	34.96	42.39	51.54	52.35	109.40	-57.05 peak



Test Mode: 23; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: Low

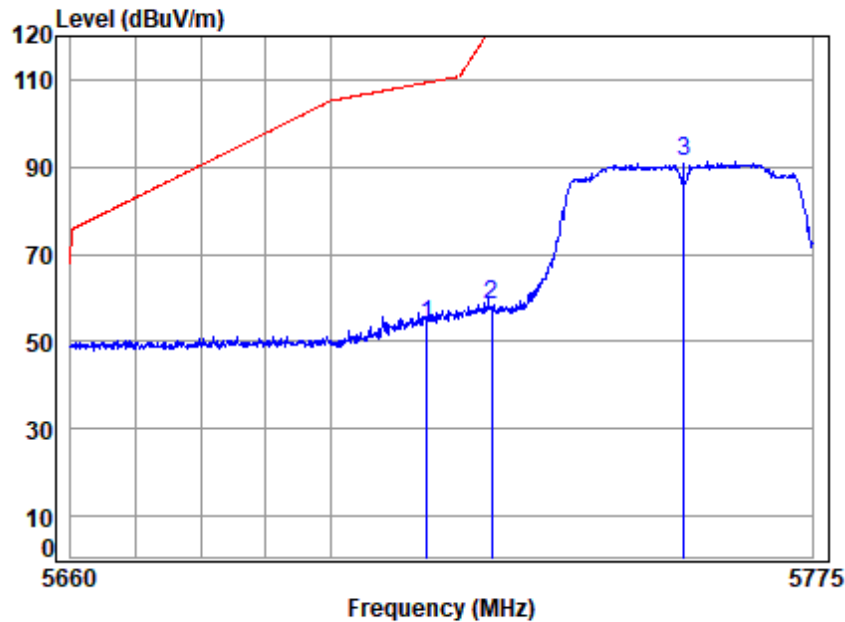


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5755 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	53.17	53.84	109.40	-55.56 peak
2	5725.000	8.22	34.83	42.37	57.67	58.35	122.20	-63.85 peak
3	5755.000	8.22	34.86	42.38	90.65	91.35	125.20	-33.85 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

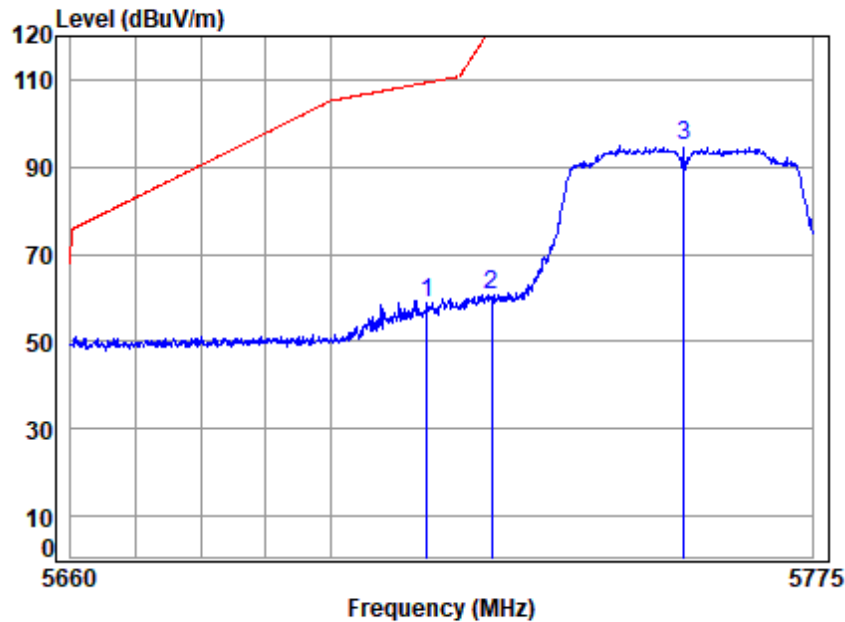


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5755 Band edge
: 5G WIFI 11N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	58.20	58.87	109.40	-50.53 peak
2	5725.000	8.22	34.83	42.37	60.12	60.80	122.20	-61.40 peak
3	5755.000	8.22	34.86	42.38	94.02	94.72	125.20	-30.48 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

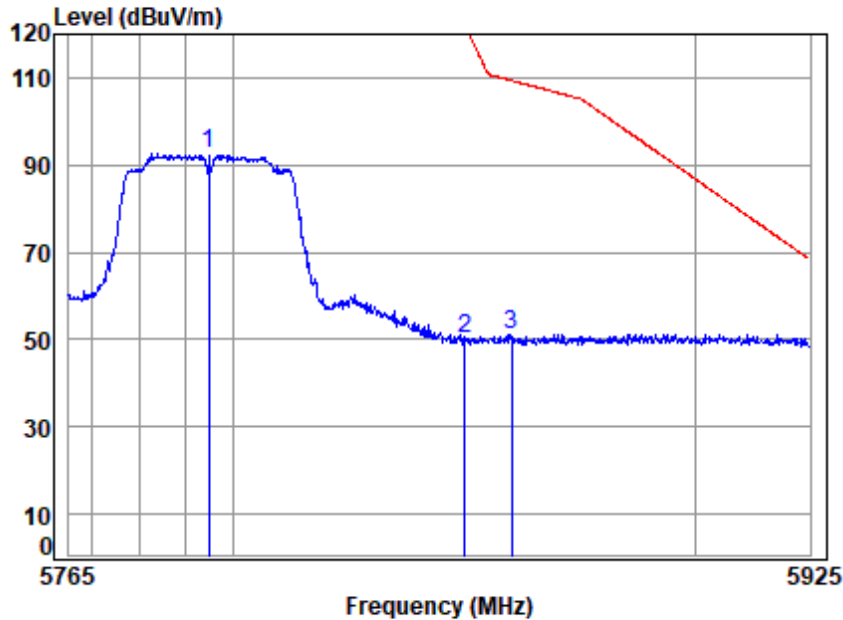


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5795 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5795.000	8.23	34.90	42.38	92.01	92.76	125.20	-32.44 peak
2 5850.000	8.24	34.95	42.39	49.43	50.23	122.20	-71.97 peak
3 5860.000	8.24	34.96	42.39	50.12	50.93	109.40	-58.47 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

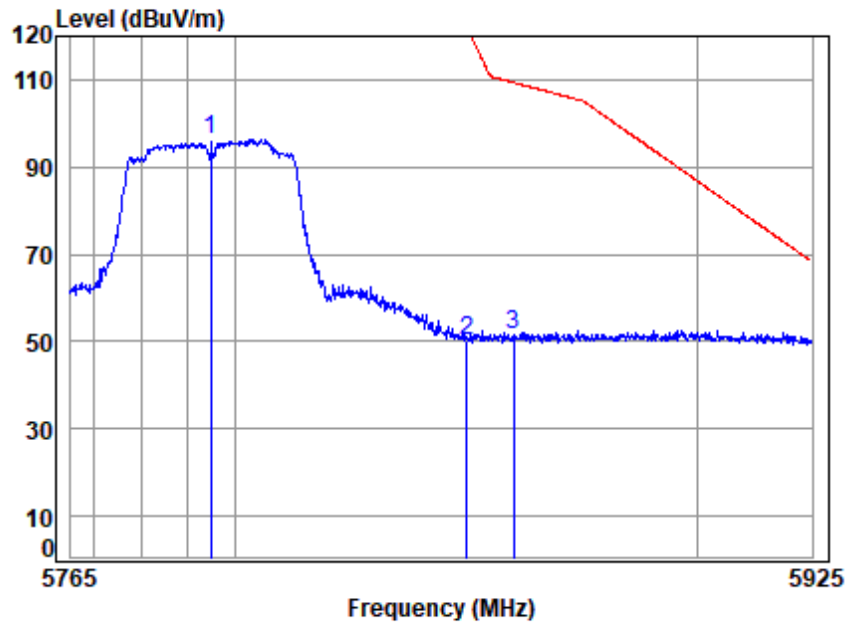


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5795 Band edge
: 5G WIFI 11N40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5795.000	8.23	34.90	42.38	95.57	96.32	125.20	-28.88 peak
2 5850.000	8.24	34.95	42.39	49.61	50.41	122.20	-71.79 peak
3 5860.000	8.24	34.96	42.39	50.61	51.42	109.40	-57.98 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

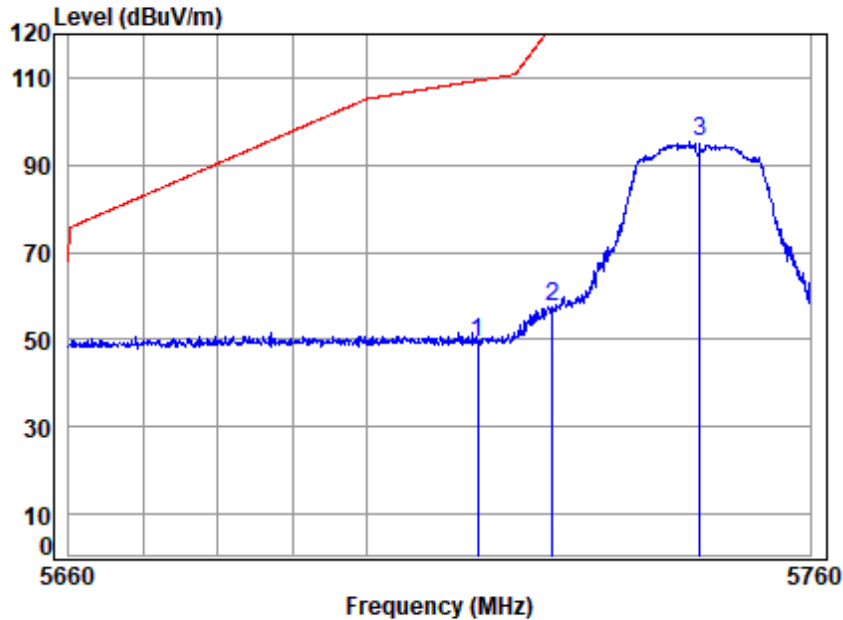


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5745 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	48.43	49.10	109.40	-60.30 peak
2	5725.000	8.22	34.83	42.37	57.03	57.71	122.20	-64.49 peak
3	5745.000	8.22	34.85	42.38	94.60	95.29	125.20	-29.91 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

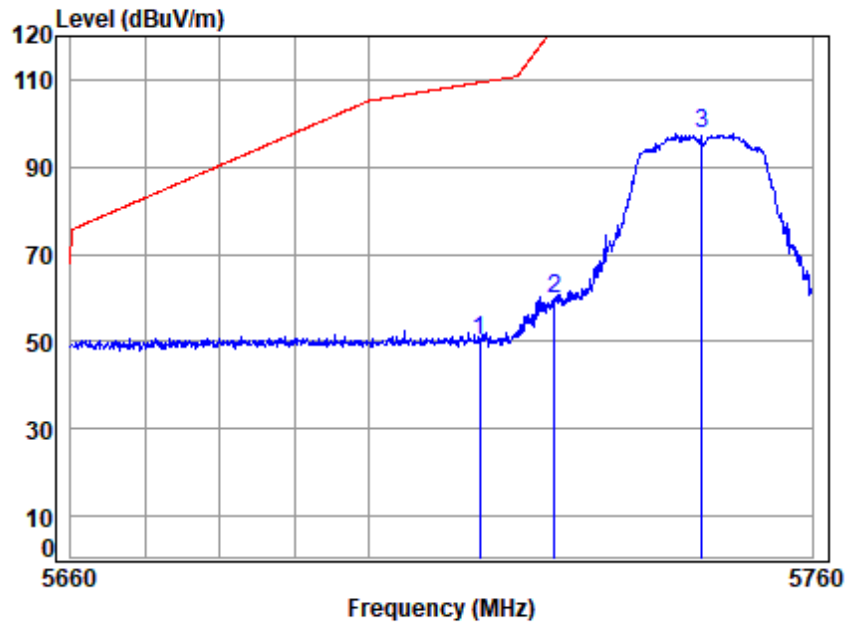


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5745 Band edge
: 5G WIFI 11AC20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	49.67	50.34	109.40	-59.06 peak
2	5725.000	8.22	34.83	42.37	59.27	59.95	122.20	-62.25 peak
3	5745.000	8.22	34.85	42.38	97.06	97.75	125.20	-27.45 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

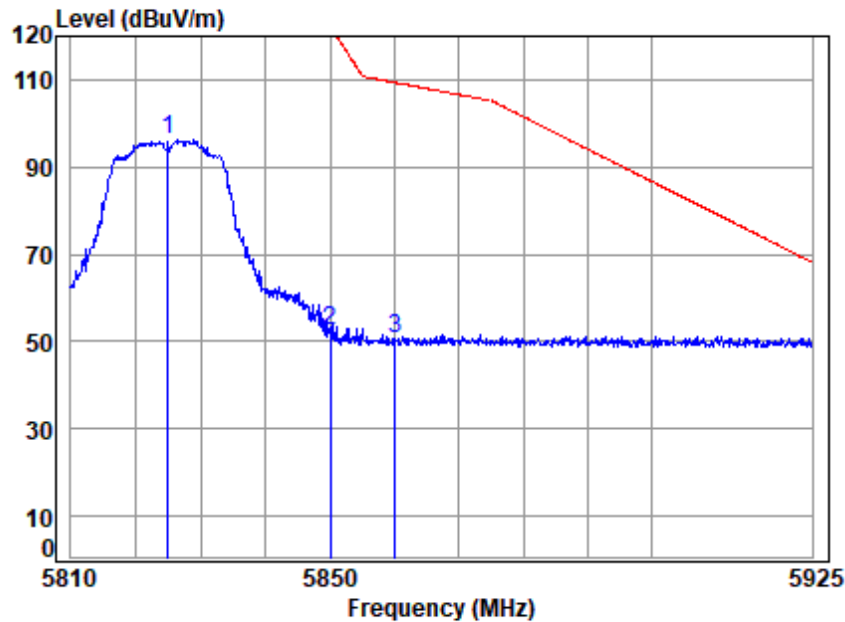


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5825 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	8.23	34.93	42.38	95.48	96.26	125.20	-28.94 peak
2 5850.000	8.24	34.95	42.39	51.75	52.55	122.20	-69.65 peak
3 5860.000	8.24	34.96	42.39	50.01	50.82	109.40	-58.58 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

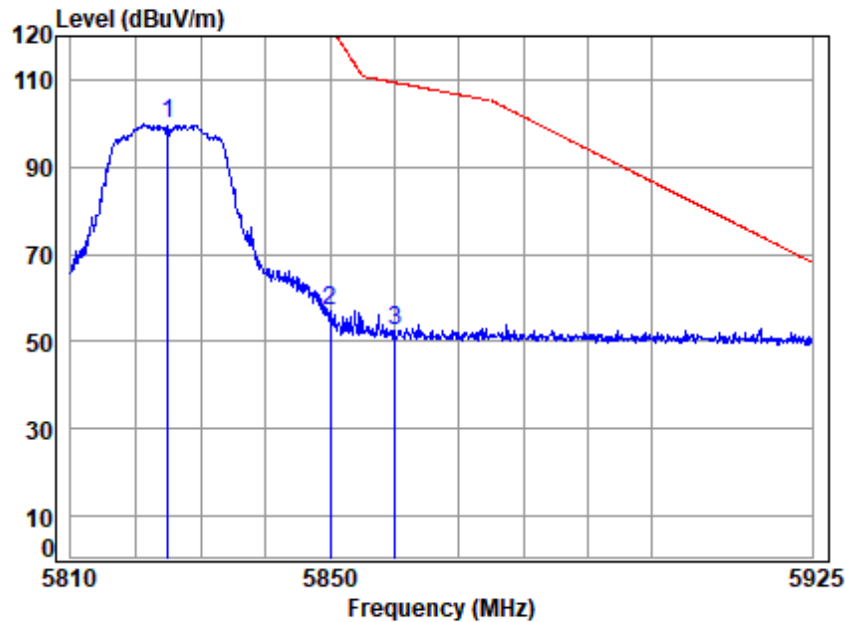


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5825 Band edge
: 5G WIFI 11AC20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	8.23	34.93	42.38	98.92	99.70	125.20	-25.50 peak
2 5850.000	8.24	34.95	42.39	56.29	57.09	122.20	-65.11 peak
3 5860.000	8.24	34.96	42.39	51.58	52.39	109.40	-57.01 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

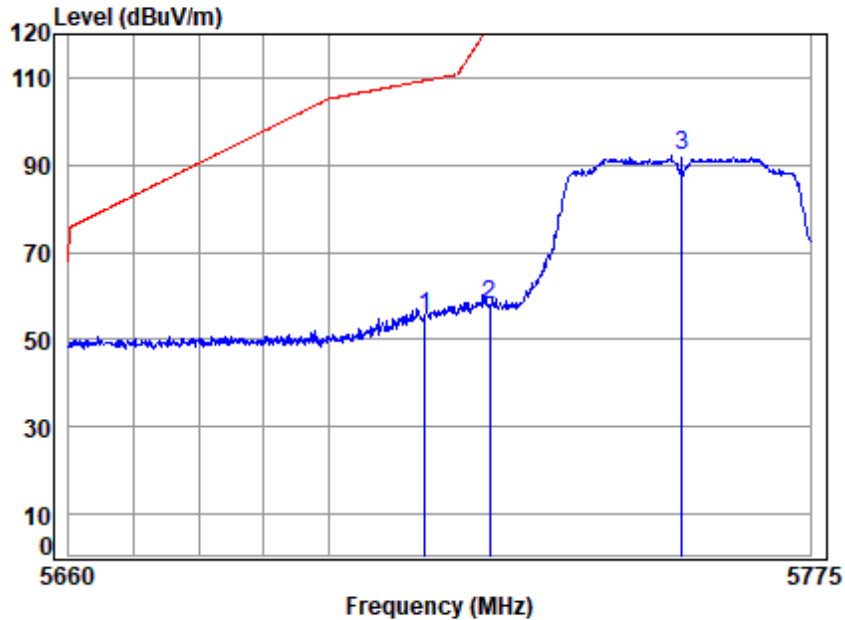


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5755 Band edge
: 5G WIFI 11AC40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5715.000	8.22	34.82	42.37	54.47	55.14	109.40	-54.26 peak
2	5725.000	8.22	34.83	42.37	57.20	57.88	122.20	-64.32 peak
3	5755.000	8.22	34.86	42.38	91.27	91.97	125.20	-33.23 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

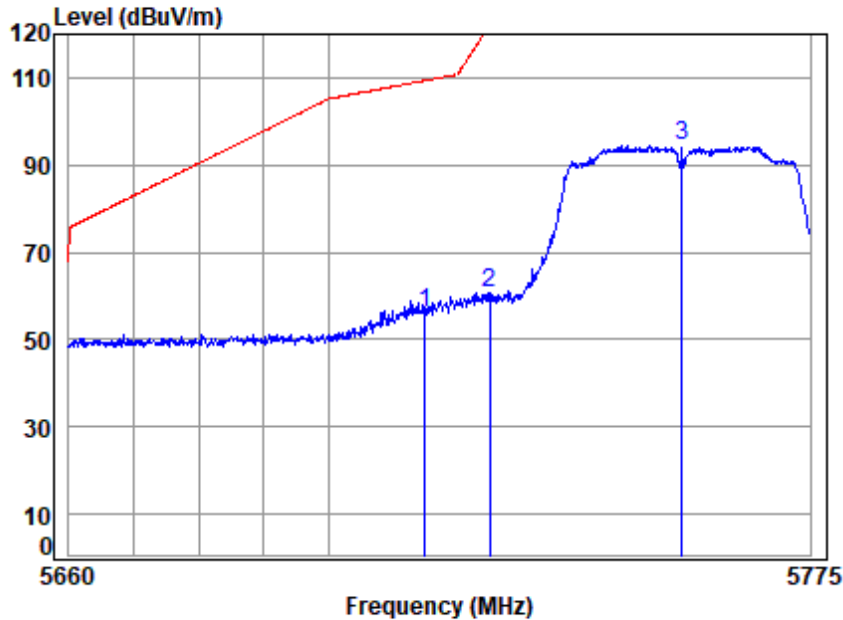


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5755 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5715.000	8.22	34.82	42.37	55.29	55.96	109.40	-53.44 peak
2 5725.000	8.22	34.83	42.37	60.04	60.72	122.20	-61.48 peak
3 5755.000	8.22	34.86	42.38	93.93	94.63	125.20	-30.57 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

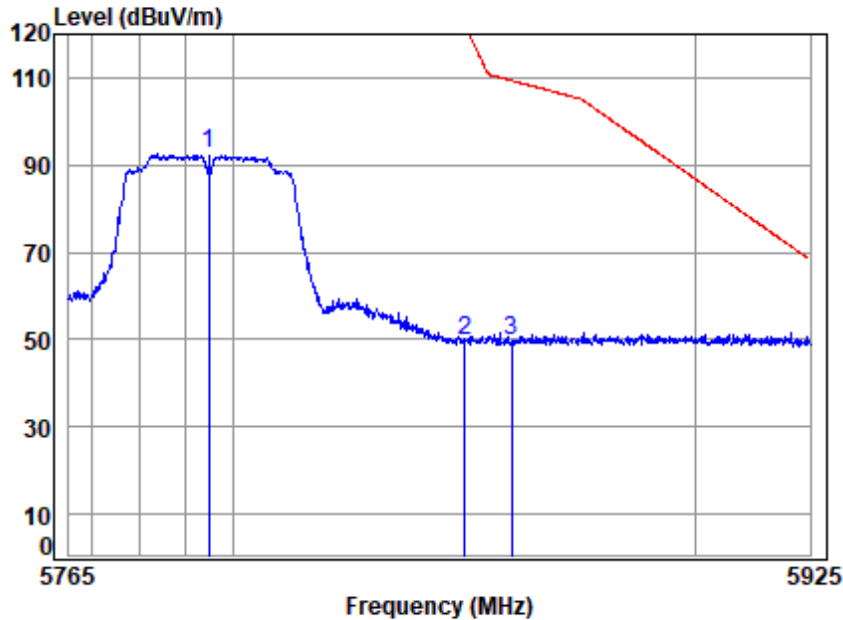


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5795 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5795.000	8.23	34.90	42.38	92.07	92.82	125.20	-32.38 peak
2 5850.000	8.24	34.95	42.39	48.74	49.54	122.20	-72.66 peak
3 5860.000	8.24	34.96	42.39	49.10	49.91	109.40	-59.49 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

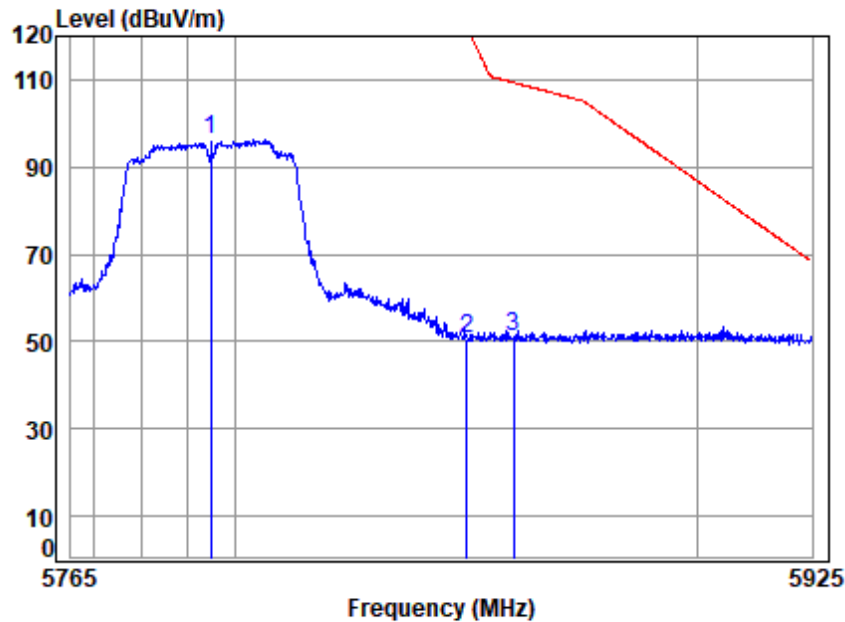


Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5795 Band edge
: 5G WIFI 11AC40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5795.000	8.23	34.90	42.38	95.53	96.28	125.20	-28.92 peak
2 5850.000	8.24	34.95	42.39	49.90	50.70	122.20	-71.50 peak
3 5860.000	8.24	34.96	42.39	50.39	51.20	109.40	-58.20 peak



Test Mode: 23; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

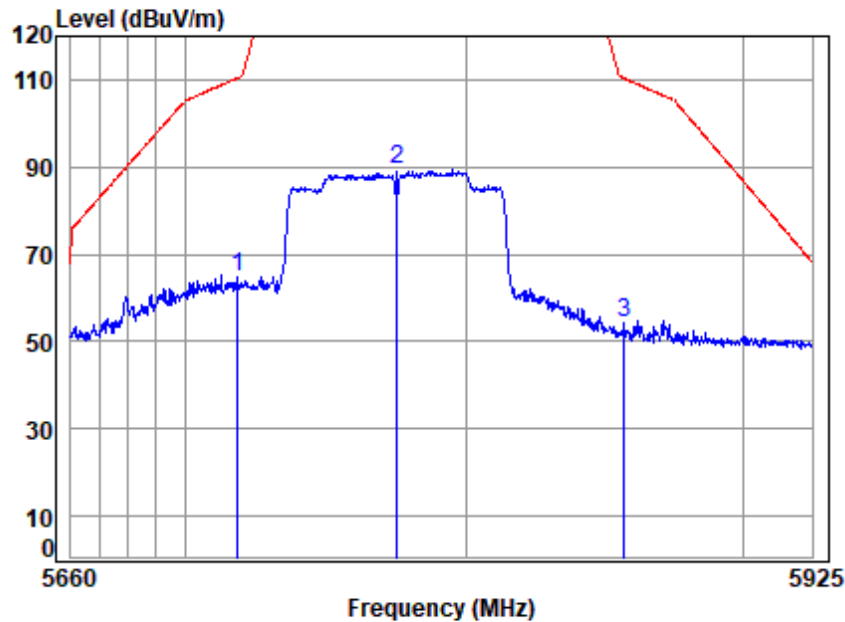


Site : chamber
Condition: 3m HORIZONTAL
Job No : 20124AT/20125AT
Mode : 5775 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5718.572	8.22	34.82	42.37	64.26	64.93	110.40	-45.47 peak
2 5775.000	8.22	34.88	42.38	88.62	89.34	125.20	-35.86 peak
3 5856.537	8.24	34.96	42.39	53.28	54.09	110.37	-56.28 peak



Test Mode: 23; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

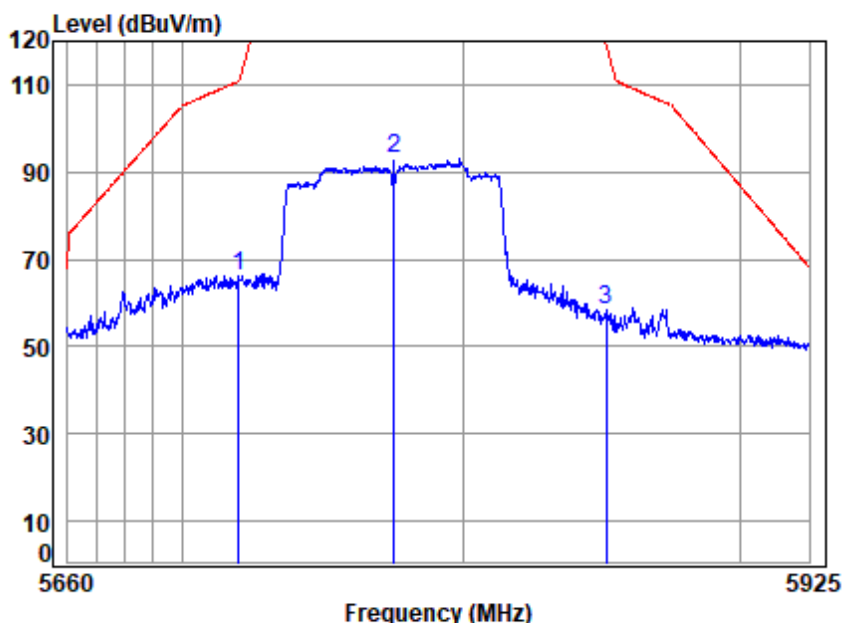

Site : chamber
Condition: 3m VERTICAL
Job No : 20124AT/20125AT
Mode : 5775 Band edge
: 5G WIFI 11AC80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5719.881	8.22	34.83	42.37	65.69	66.37	110.77	-44.40 peak
2 5775.000	8.22	34.88	42.38	92.30	93.02	125.20	-32.18 peak
3 5851.180	8.24	34.96	42.39	57.37	58.18	119.51	-61.33 peak



7.5 Non-occupancy period

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3
Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C Humidity: 52.1 % RH Atmospheric Pressure: 1010 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SGS-CSTC Laboratory)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


7.5.2 Test Setup Diagram

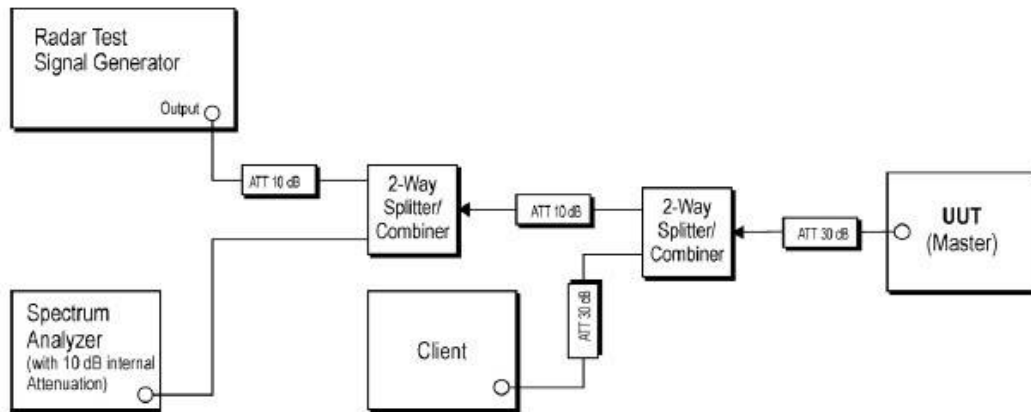

DFS master

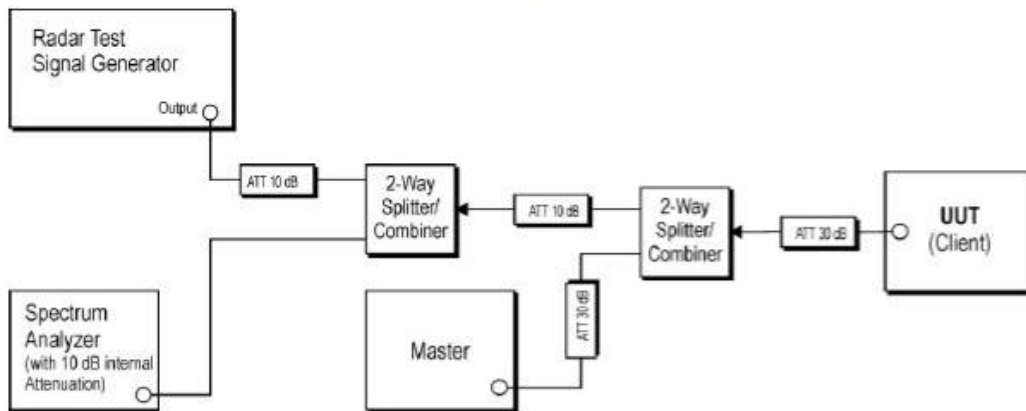

DFS slave with radar detection

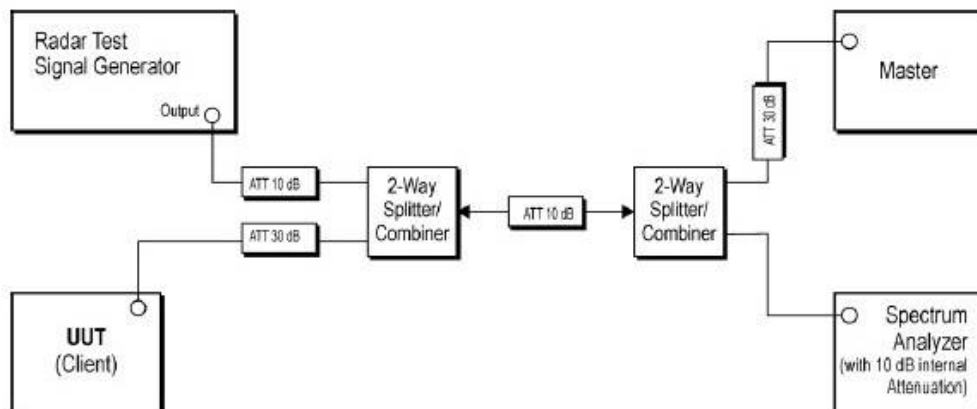

DFS slave without radar detection



7.5.3 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer To Appendix For Details



7.6 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3
Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.6.1 E.U.T. Operation

Operating Environment:


Temperature: 22.3 °C Humidity: 52.1 % RH Atmospheric Pressure: 1010 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


7.6.2 Test Setup Diagram

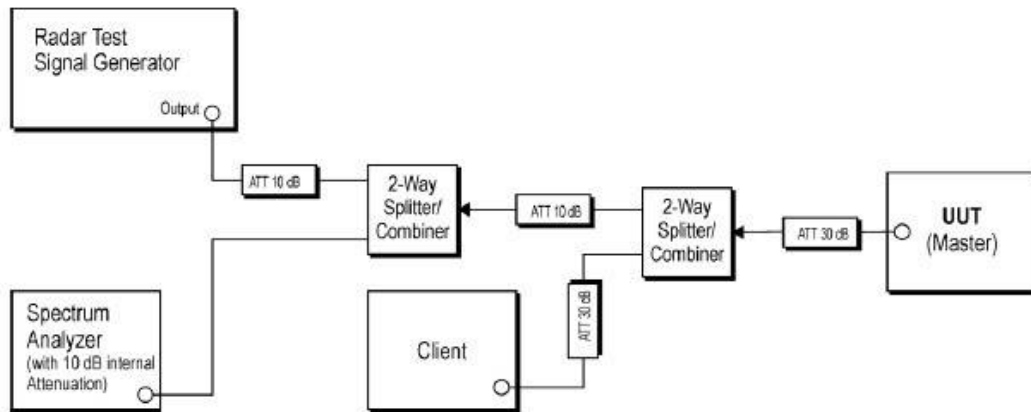

DFS master

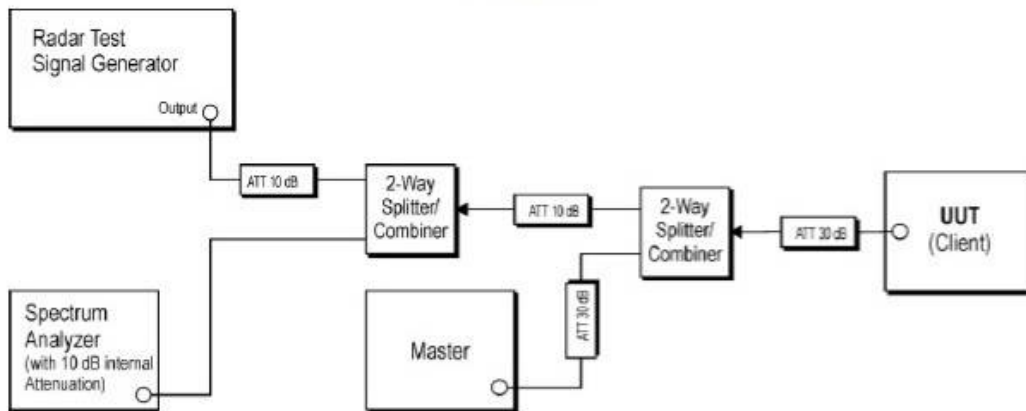

DFS slave with radar detection

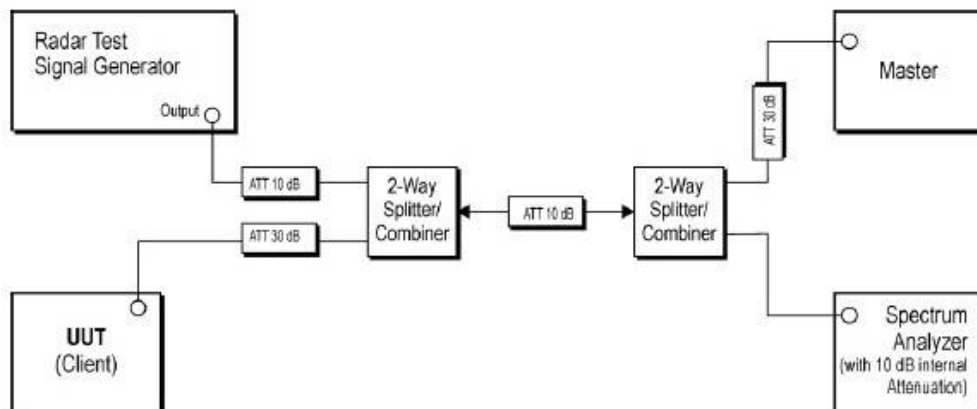

DFS slave without radar detection



7.6.3 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer To Appendix For Details



7.7 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3
Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 22.3 °C Humidity: 52.1 % RH Atmospheric Pressure: 1010 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


7.7.2 Test Setup Diagram

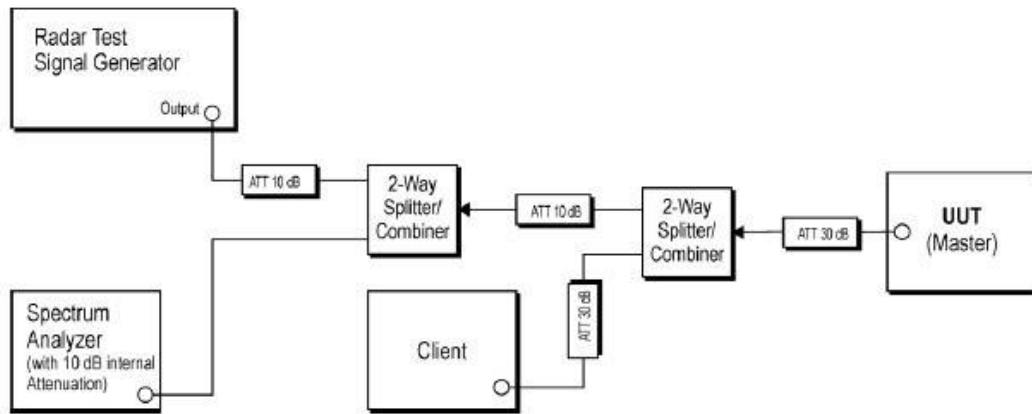

DFS master

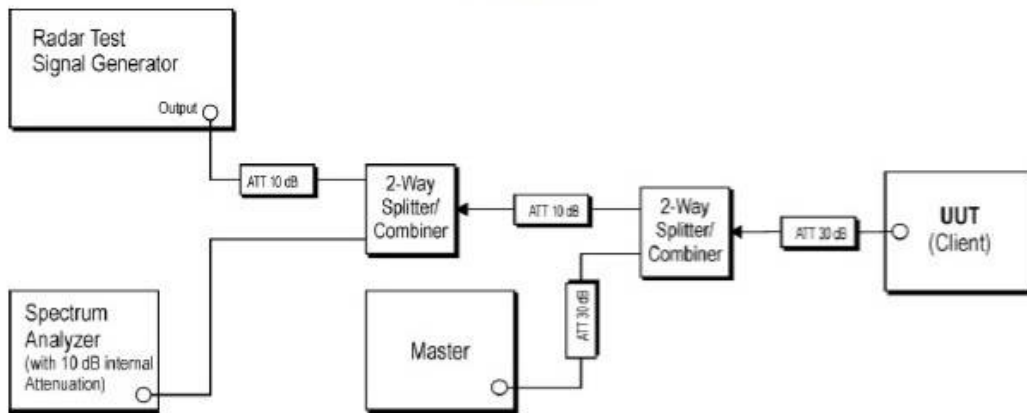

DFS slave with radar detection

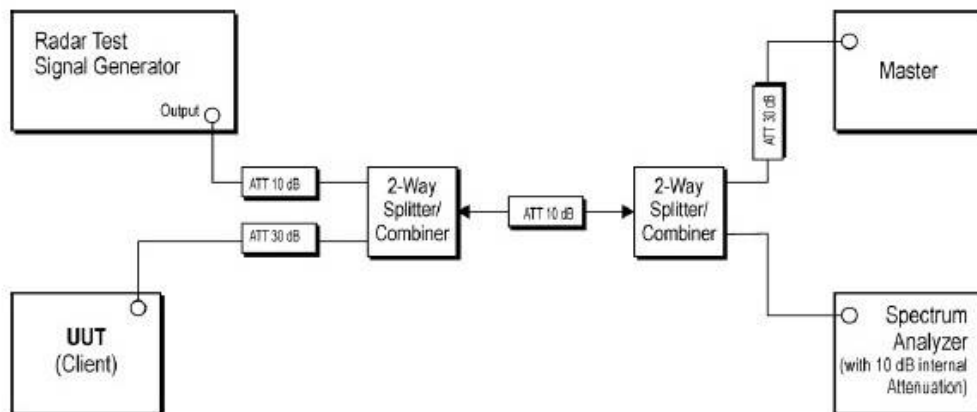

DFS slave without radar detection



7.7.3 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer To Appendix For Details



8 Appendix


6. (DFS: Non-occupancy period; Channel Move Time; Channel Closing Transmission Time)

Note: All antennas type has been tested and we found the antenna 1 has the worst result.
Only record the worst test result.

Test plots as follows:

Radar Waveform Calibration Result



Radar Type 0


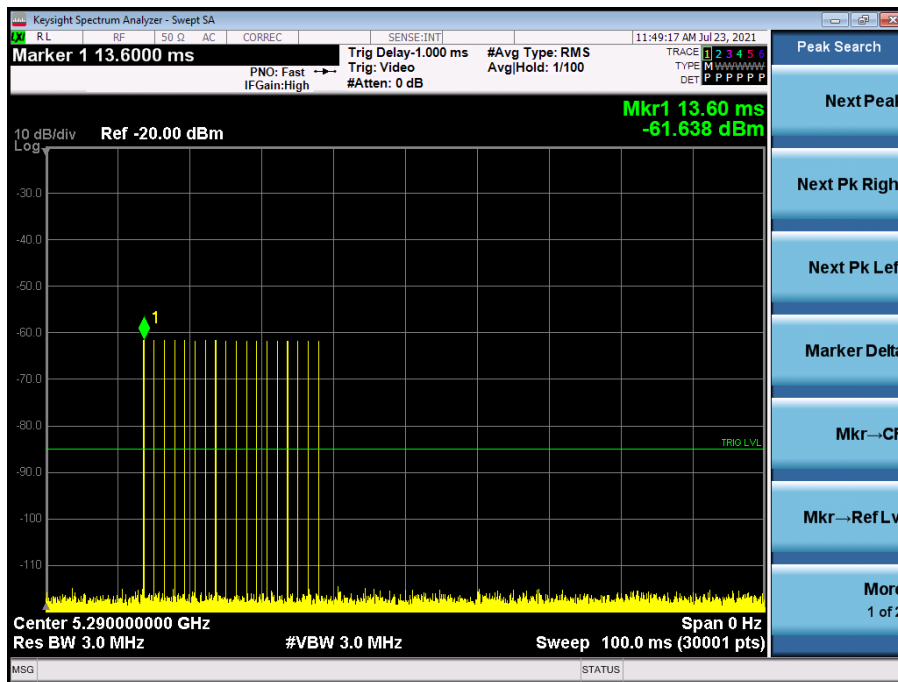


Test Data:

BW/Channel	Test Item	Test data	Limit	Results
80MHz/ 5530MHz	Non-occupancy period	Refer to test point	>30 min	pass
	Channel Move Time	0.2640s	<10 s	Pass
	Channel Closing Transmission Time	0.0185s	<60ms	Pass

Test plots as follows:

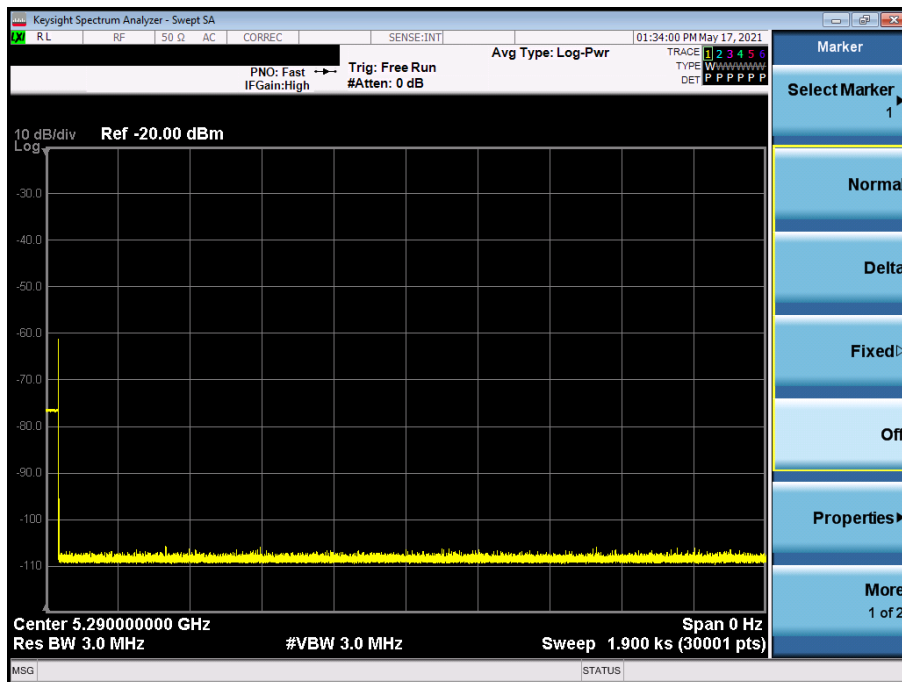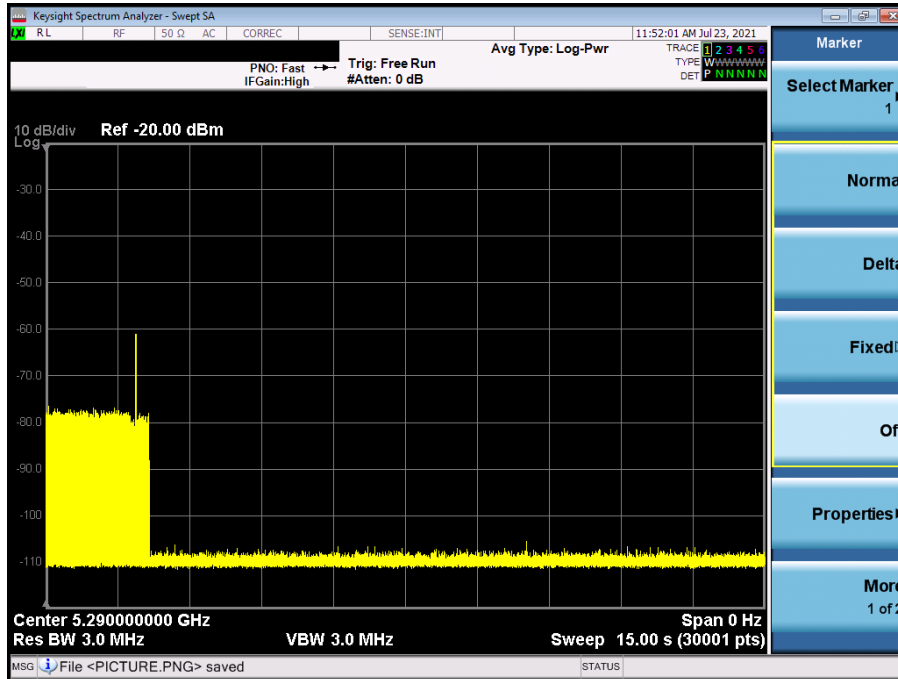

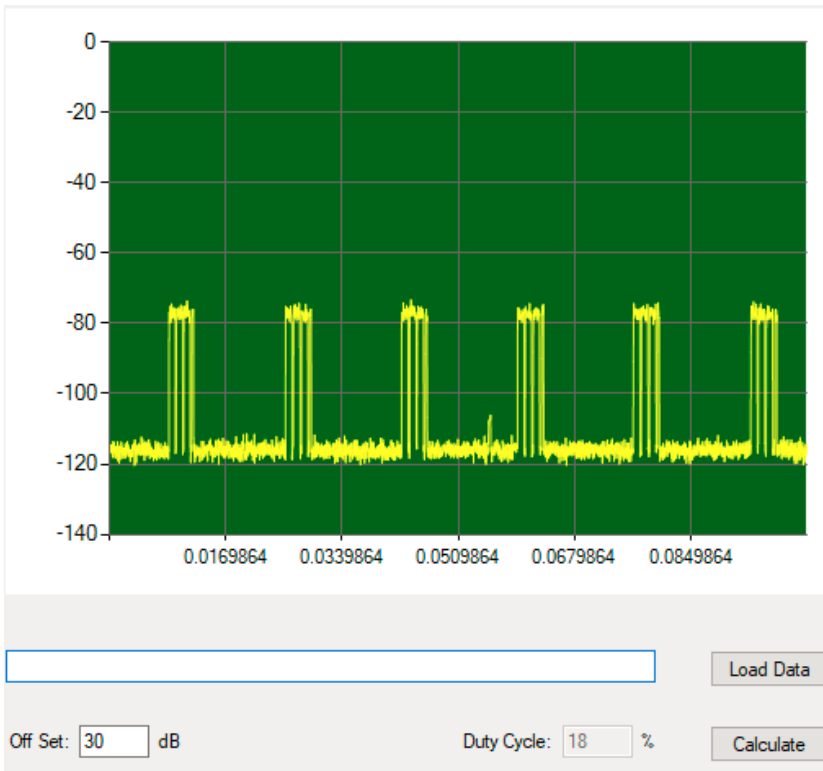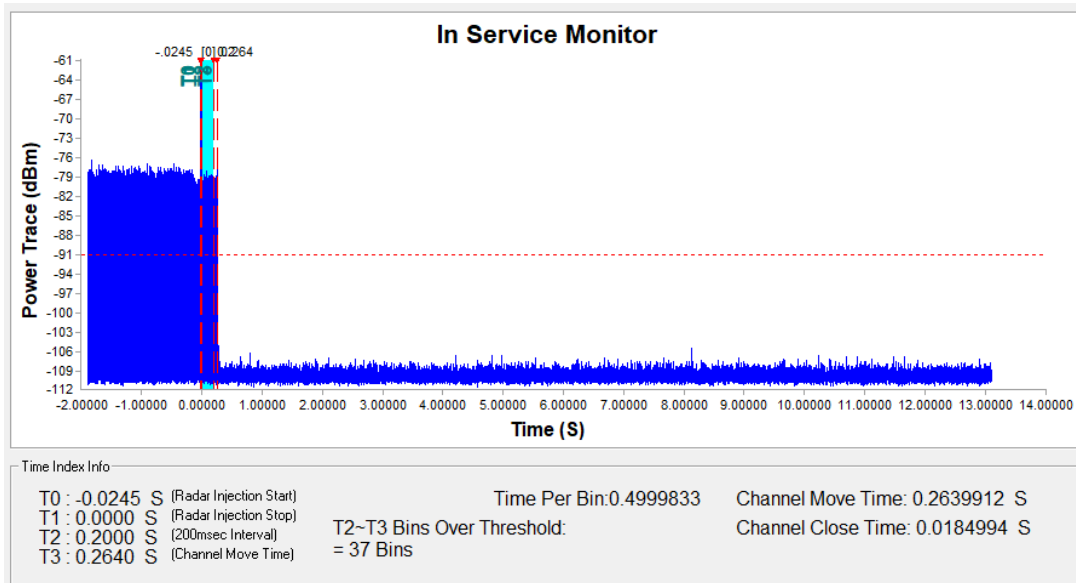

9 Test Setup Photo

Refer to setup photos for SZCR2103020124AT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

10 EUT Constructional Details (EUT Photos)

Refer to external and internal photos for SZCR2103020124AT

- End of the Report -

