


User Manual

Ceiling Fan with Light BS-LY-9078



Ceiling fan light installation video.....	1
Ceiling fan installation tool list	3
Ceiling fan accessories list	5
1.Install the speaker in the lampshade	8
2.Install the light source, speaker and lampshade	10
3.Install ceiling fan downrod ,coupling cover and canopy	13
4.Mounting Bracket installation,install the ceiling fan to the mounting bracket	16
5.Install the remote control receiver	19
iLamp APP owner's manual.....	23
Troubleshooting guide	27
Problem: light doesn't work	27
Problem: ceiling Fan will not start	28
Problem: ceiling Fan & Light don't work / Remote control drive malfunction	28
Problem: speaker cannot play music	29
How to choose a suitable ceiling fan location for installation	31
Safety warnings	33

Please observe the owner's manual general safety precautions carefully before and during all phases of handling, installation, removal, operation and maintenance of this product. Failure to comply with these precautions violates safety standards of design, manufacture and intended use of the product. BAYSQUIRREL assumes no liability for customer's failure to comply with these requirements.

CEILING FAN LIGHT INSTALLATION VIDEO

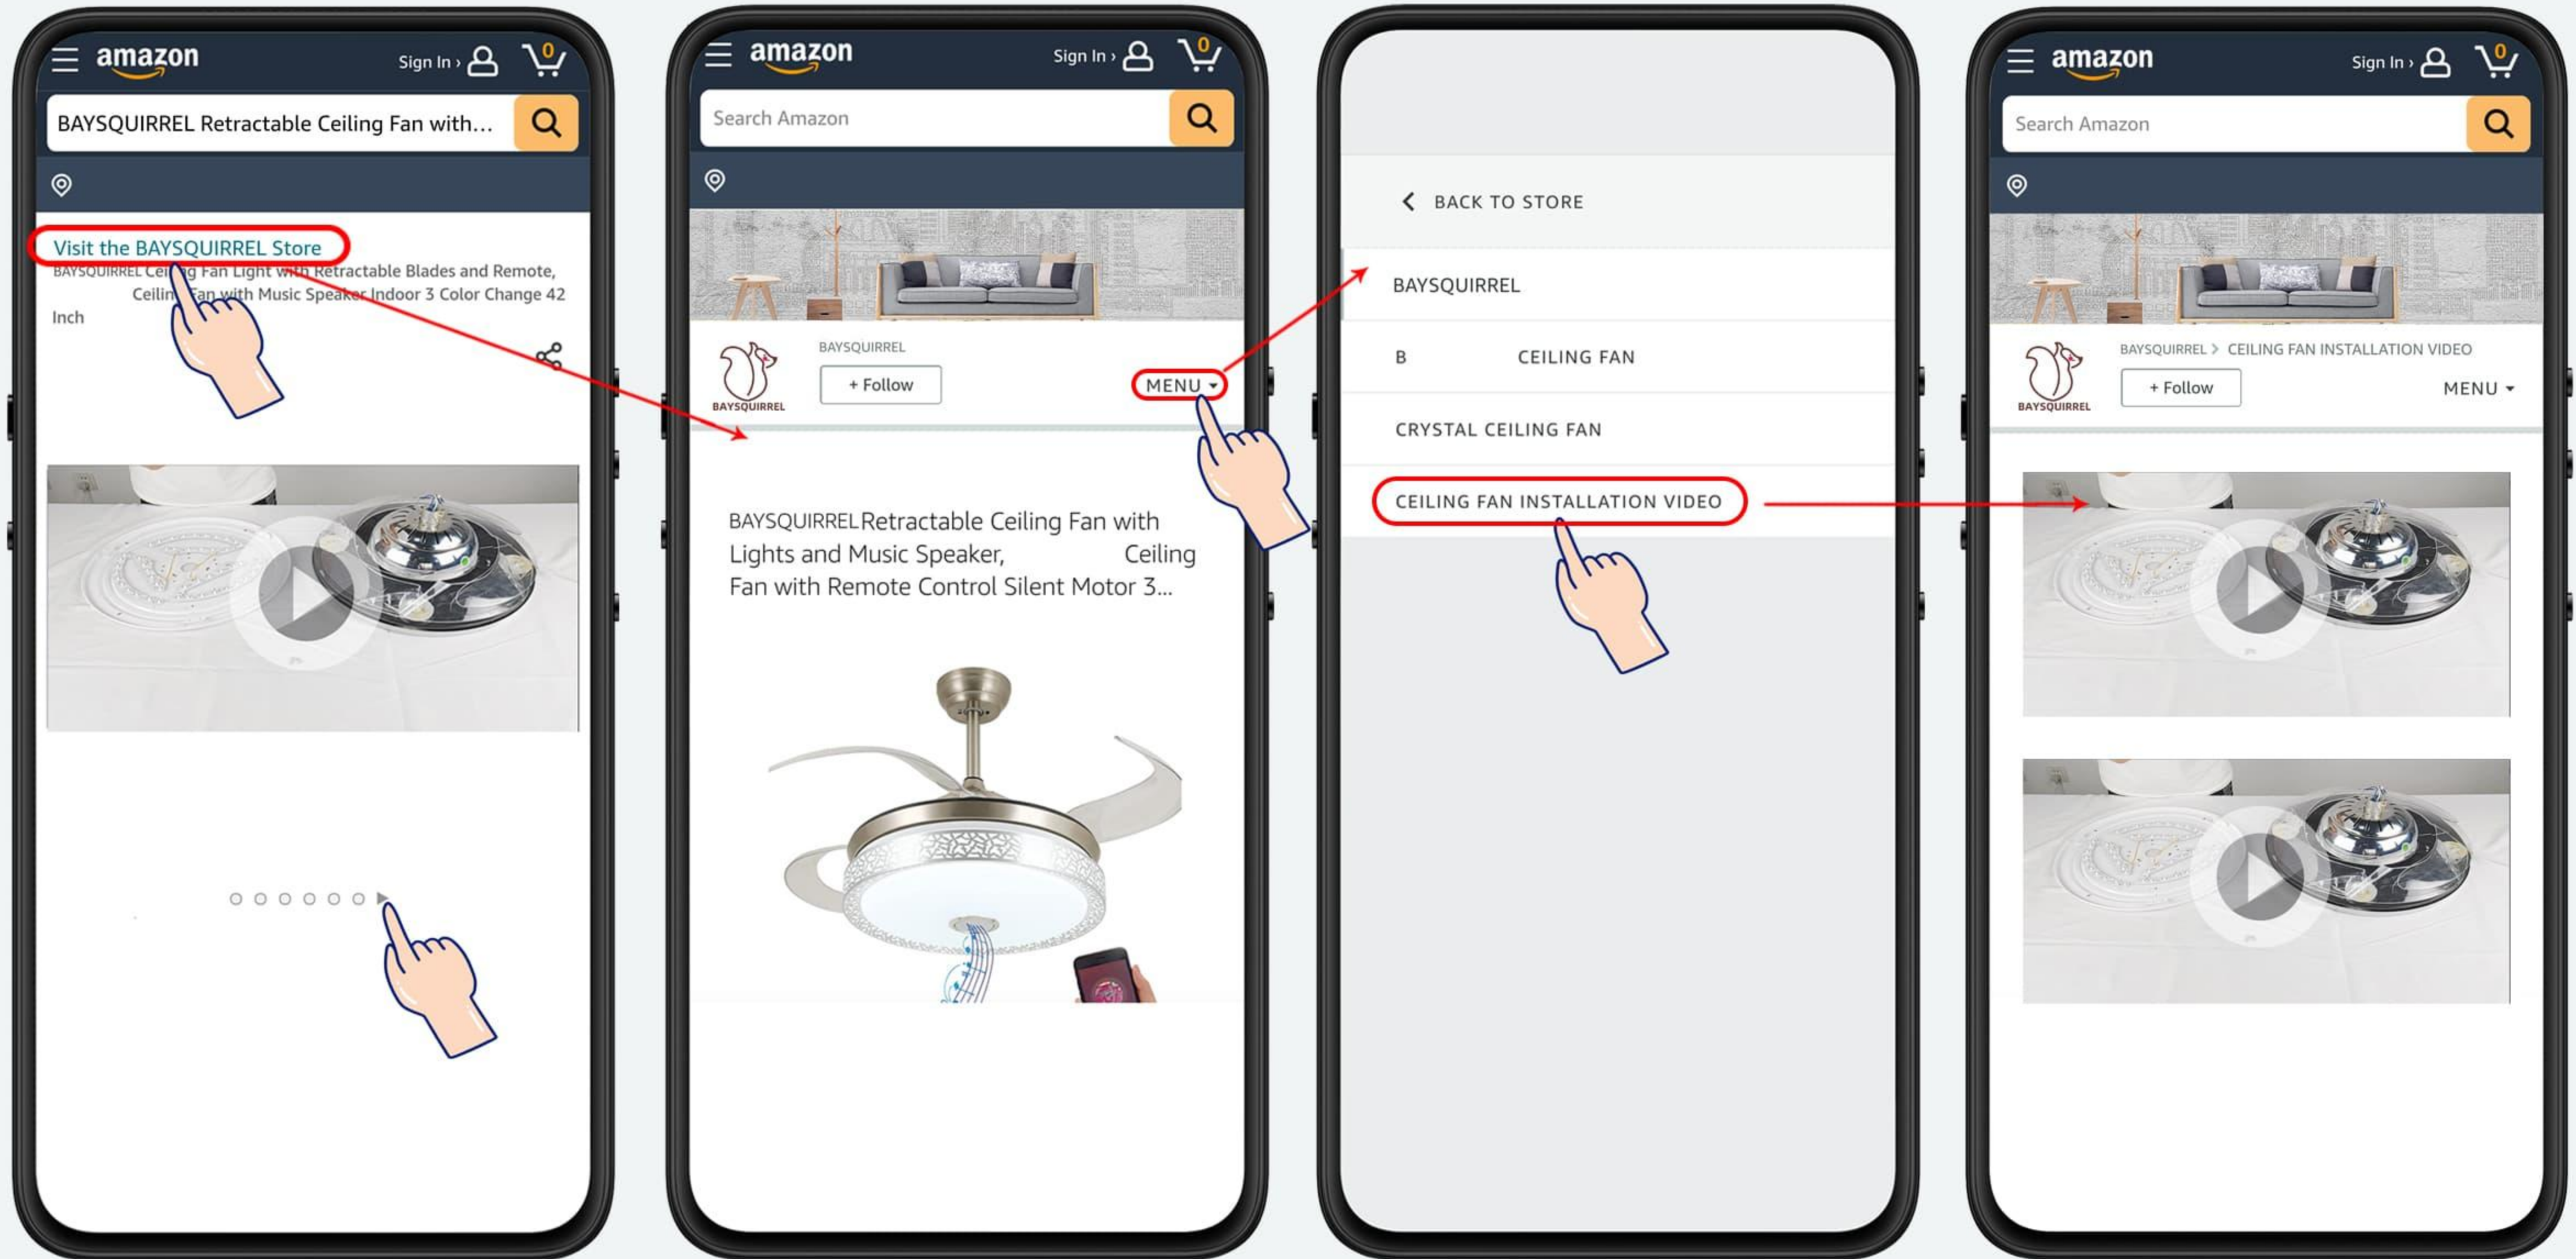

Please see the seventh picture on the product details page for the ceiling fan lamp installation video, or you can view it in the installation video section of our Amazon brand flagship store.

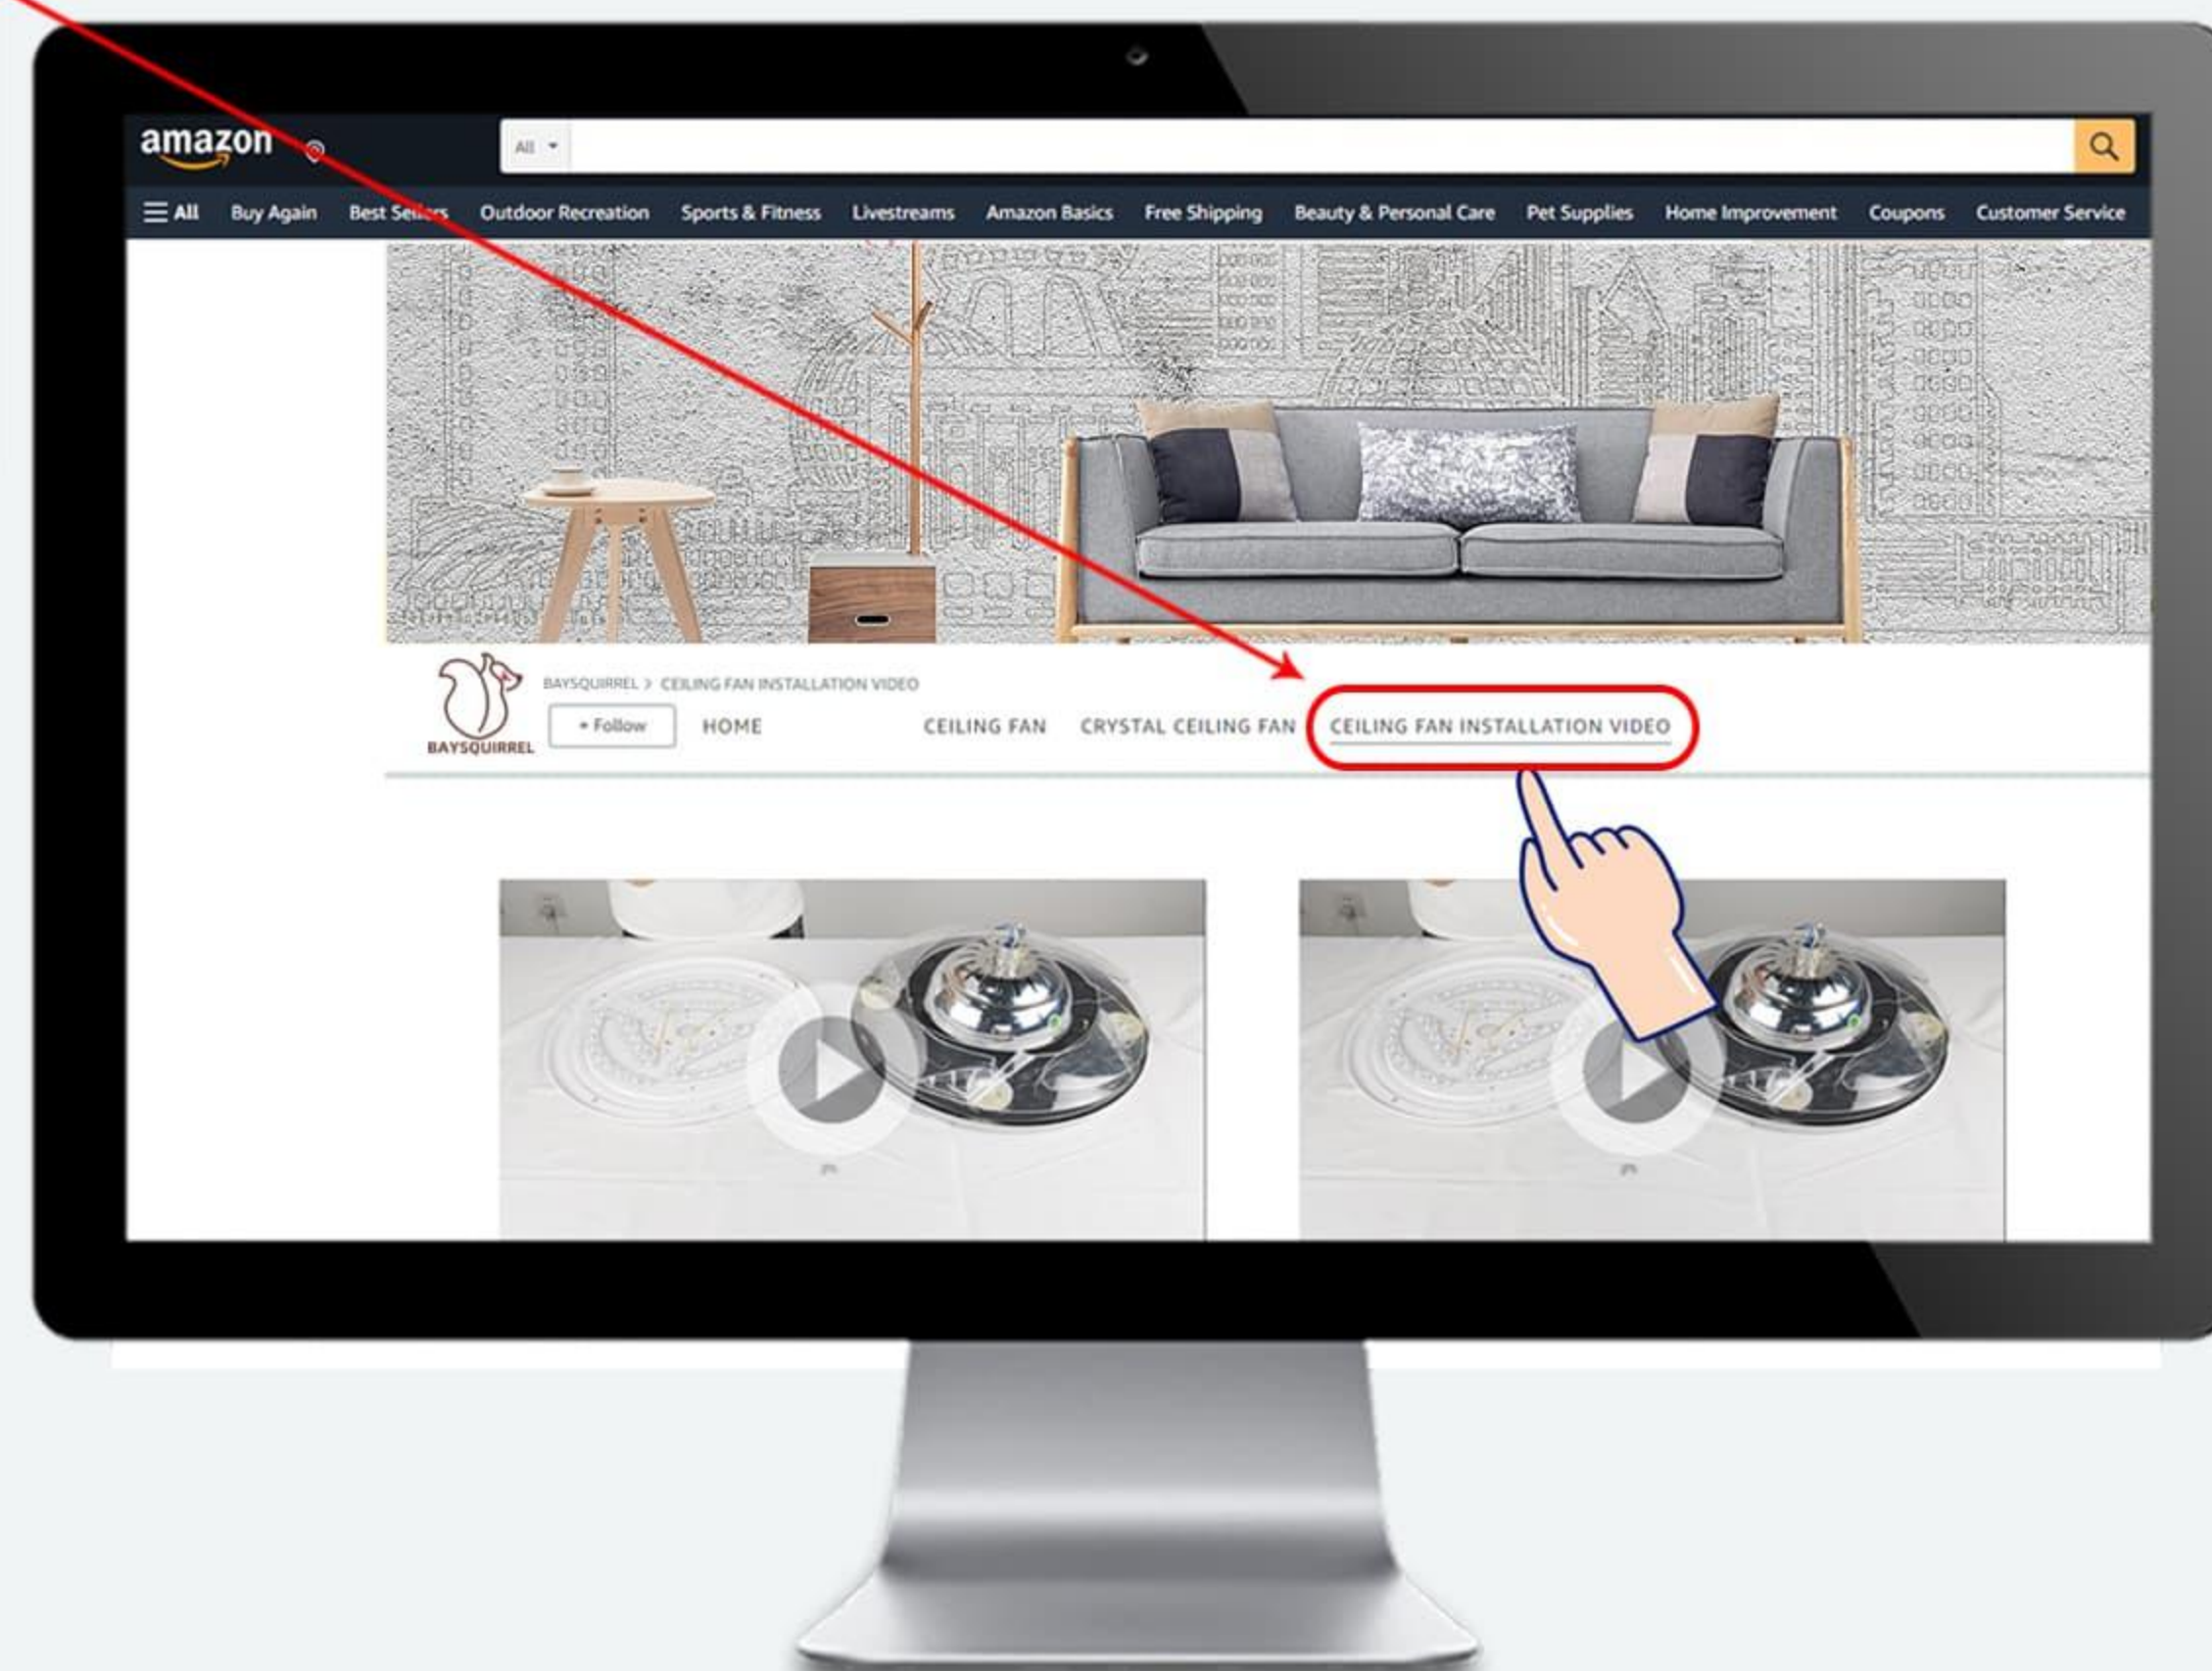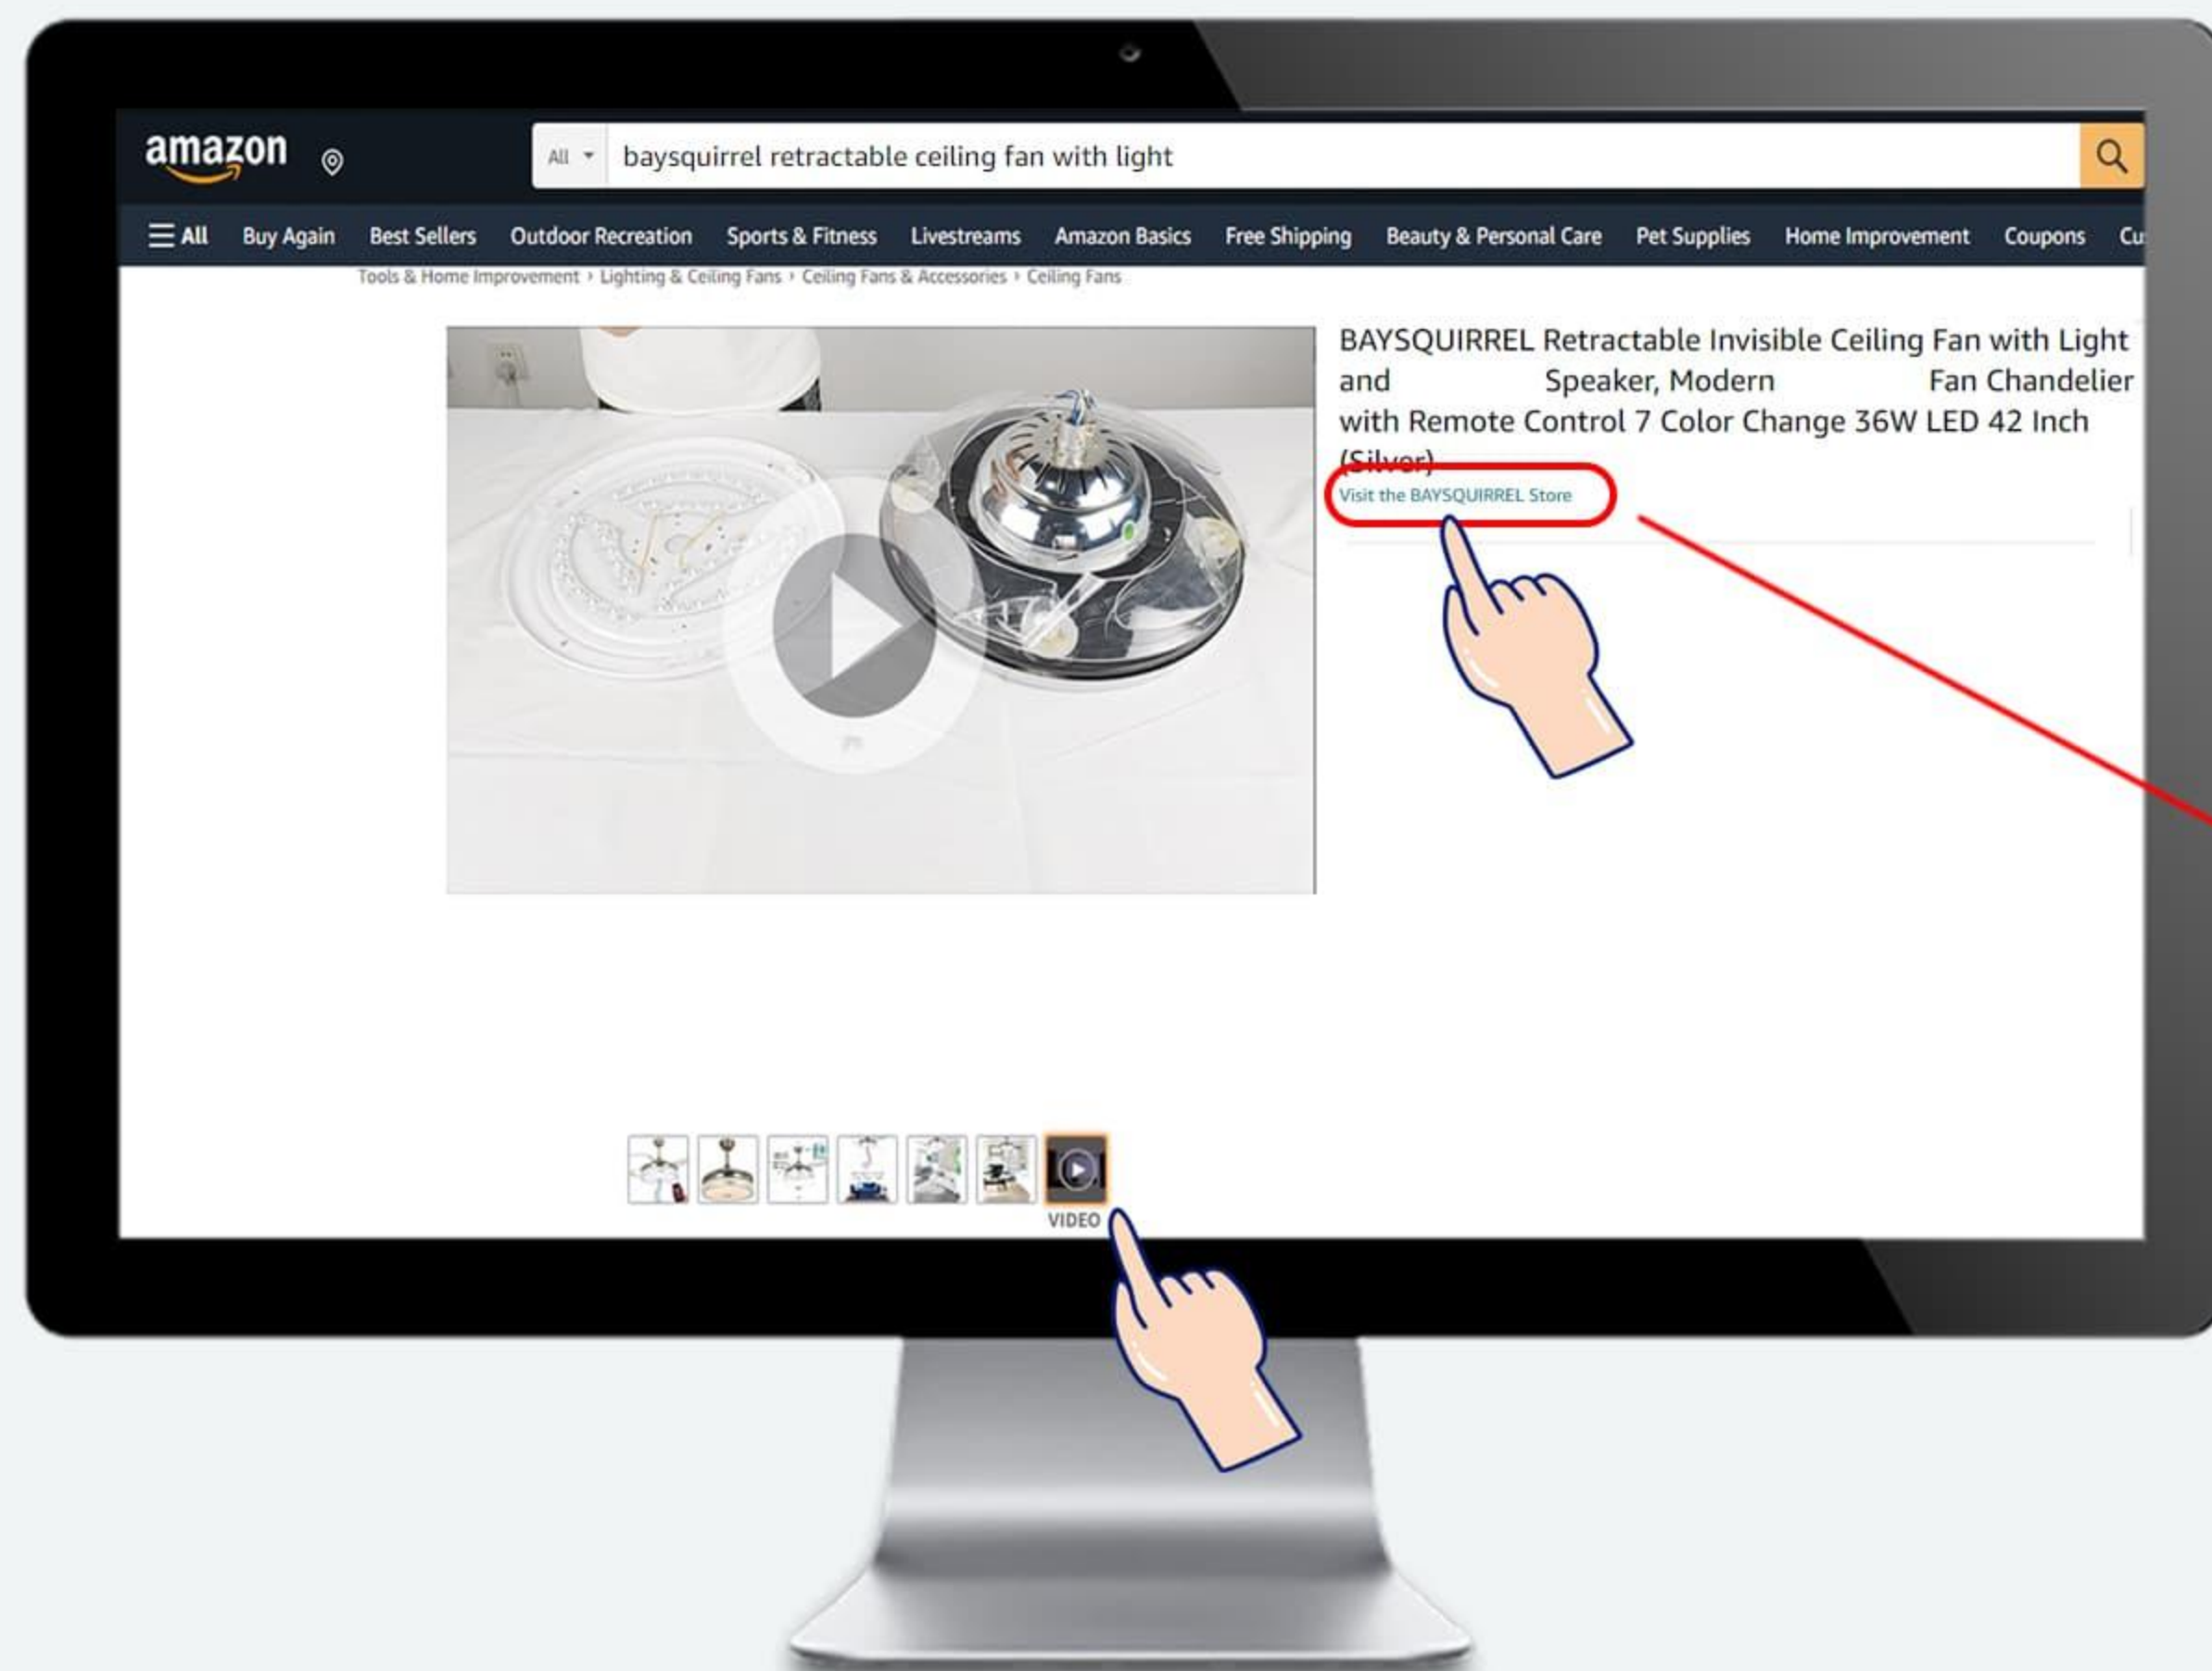

2 Please see the seventh picture on the product details page for the ceiling fan lamp installation video, or you can view it in the installation video section of our Amazon brand flagship store.

CEILING FAN INSTALLATION TOOL LIST



Electric Drill & 8mm Drill bit & Screwdriver Bit



Marker Pen



Wrench



Wire Stripper



Screwdriver



Test Electric Pen



Gloves & Electric Tape



Herringbone Ladder

CEILING FAN ACCESSORIES LIST



Mounting Bracket



Canopy



Coupling Cover




10" and 5" Downrod



Fan Motor & Fan Blades



Lampshade

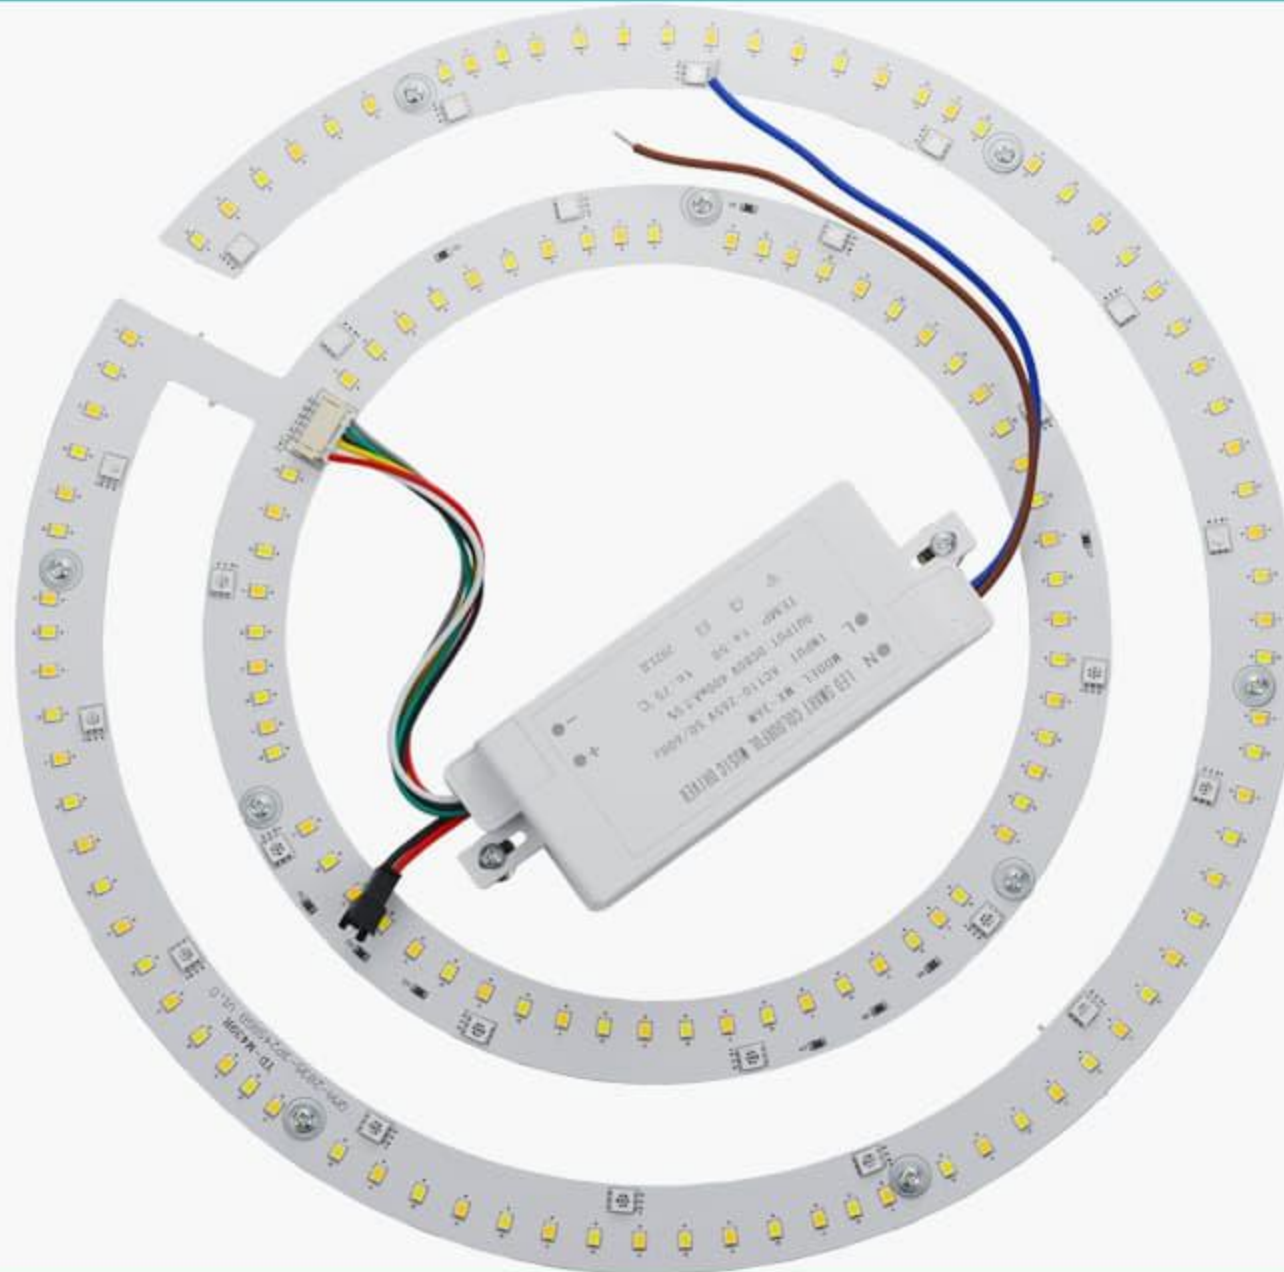

6 LED speaker driver & LED light source



Remote Receiver & Remote Control



Speaker & Screws & Nuts



Speaker Cover




Speaker Inner Cover



Wire Cover



Canopy Screws

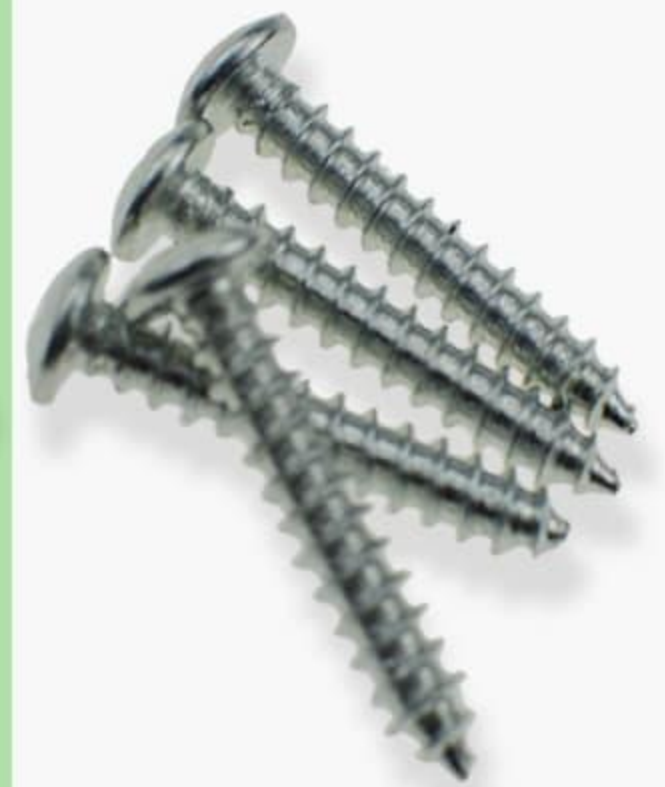

Wood
Screws


1.INSTALL THE SPEAKER IN THE LAMP SHADE



Speaker Cover


Put the speaker cover on the lampshade

8

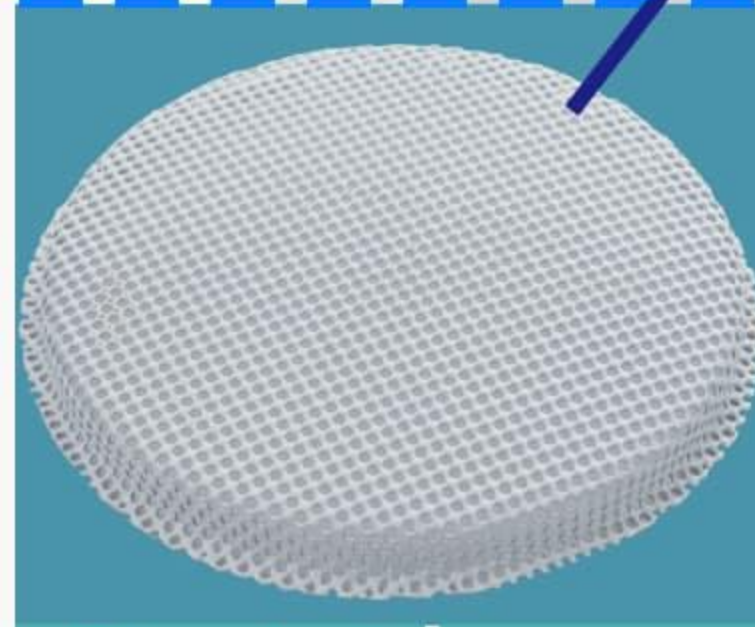


Speaker Inner Cover

Put the speaker inner cover from the inside of the Lampshade

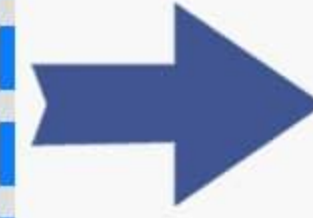

4 Screws

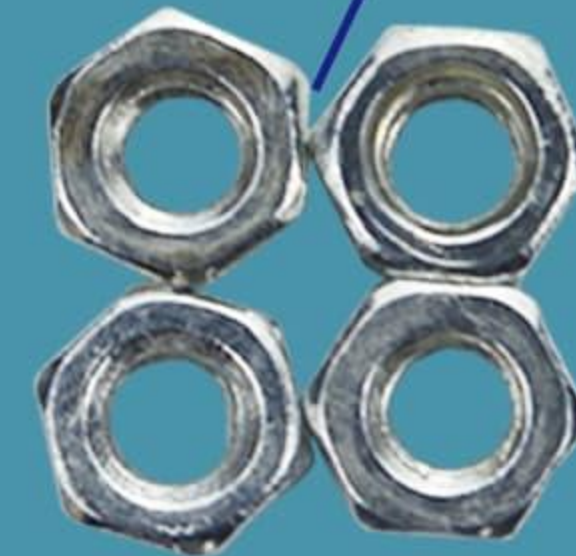

4 Nuts

Insert the screw from the outer hole of the speaker cover, tighten the nut and the screw, and then tighten the remaining three screws in turn


2.INSTALL THE LIGHT SOURCE, SPEAKER AND LAMPSHADE

Fan Motor

Screw




Unscrew the 4 screws on the motor with a screwdriver in turn

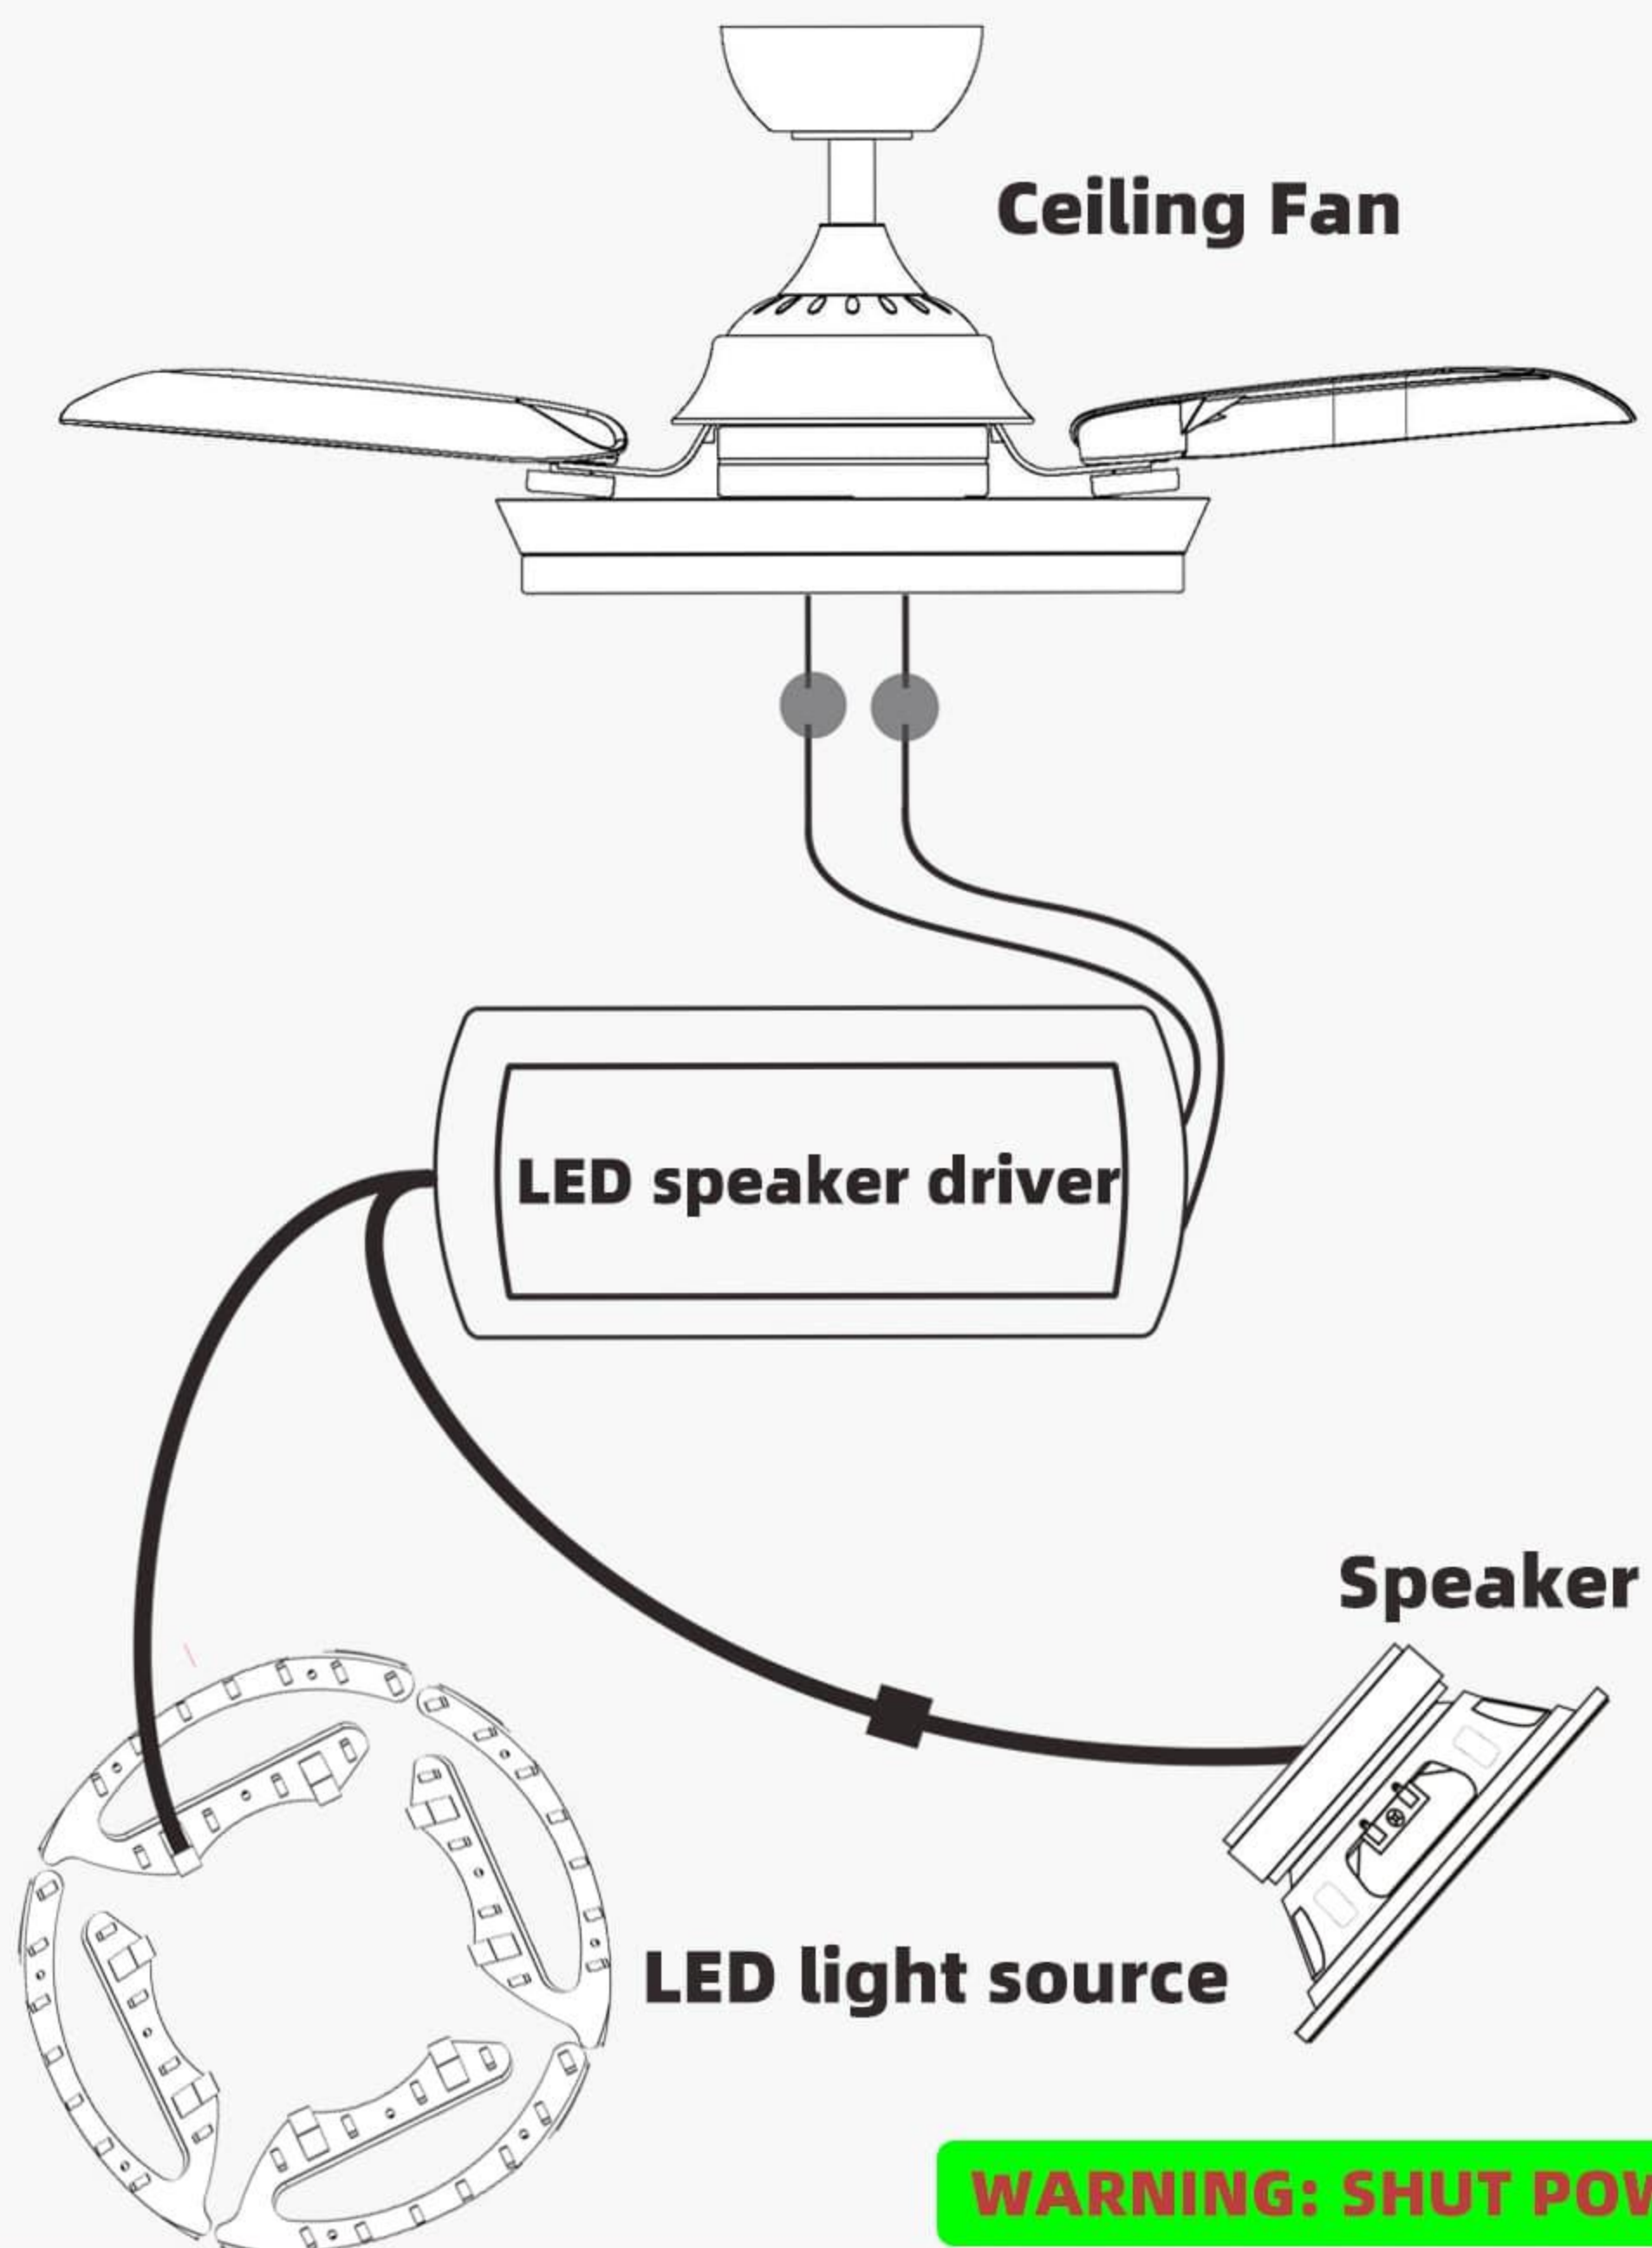

WARNING: SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER


Connect Led Speaker driver with the wires from bottom of motor, you can choose any two wires for connection each other, and connect the speaker interface on the LED Speaker driver with the interface on the speaker, Then connect the LED light source interface on the driver with the interface on the LED light source.

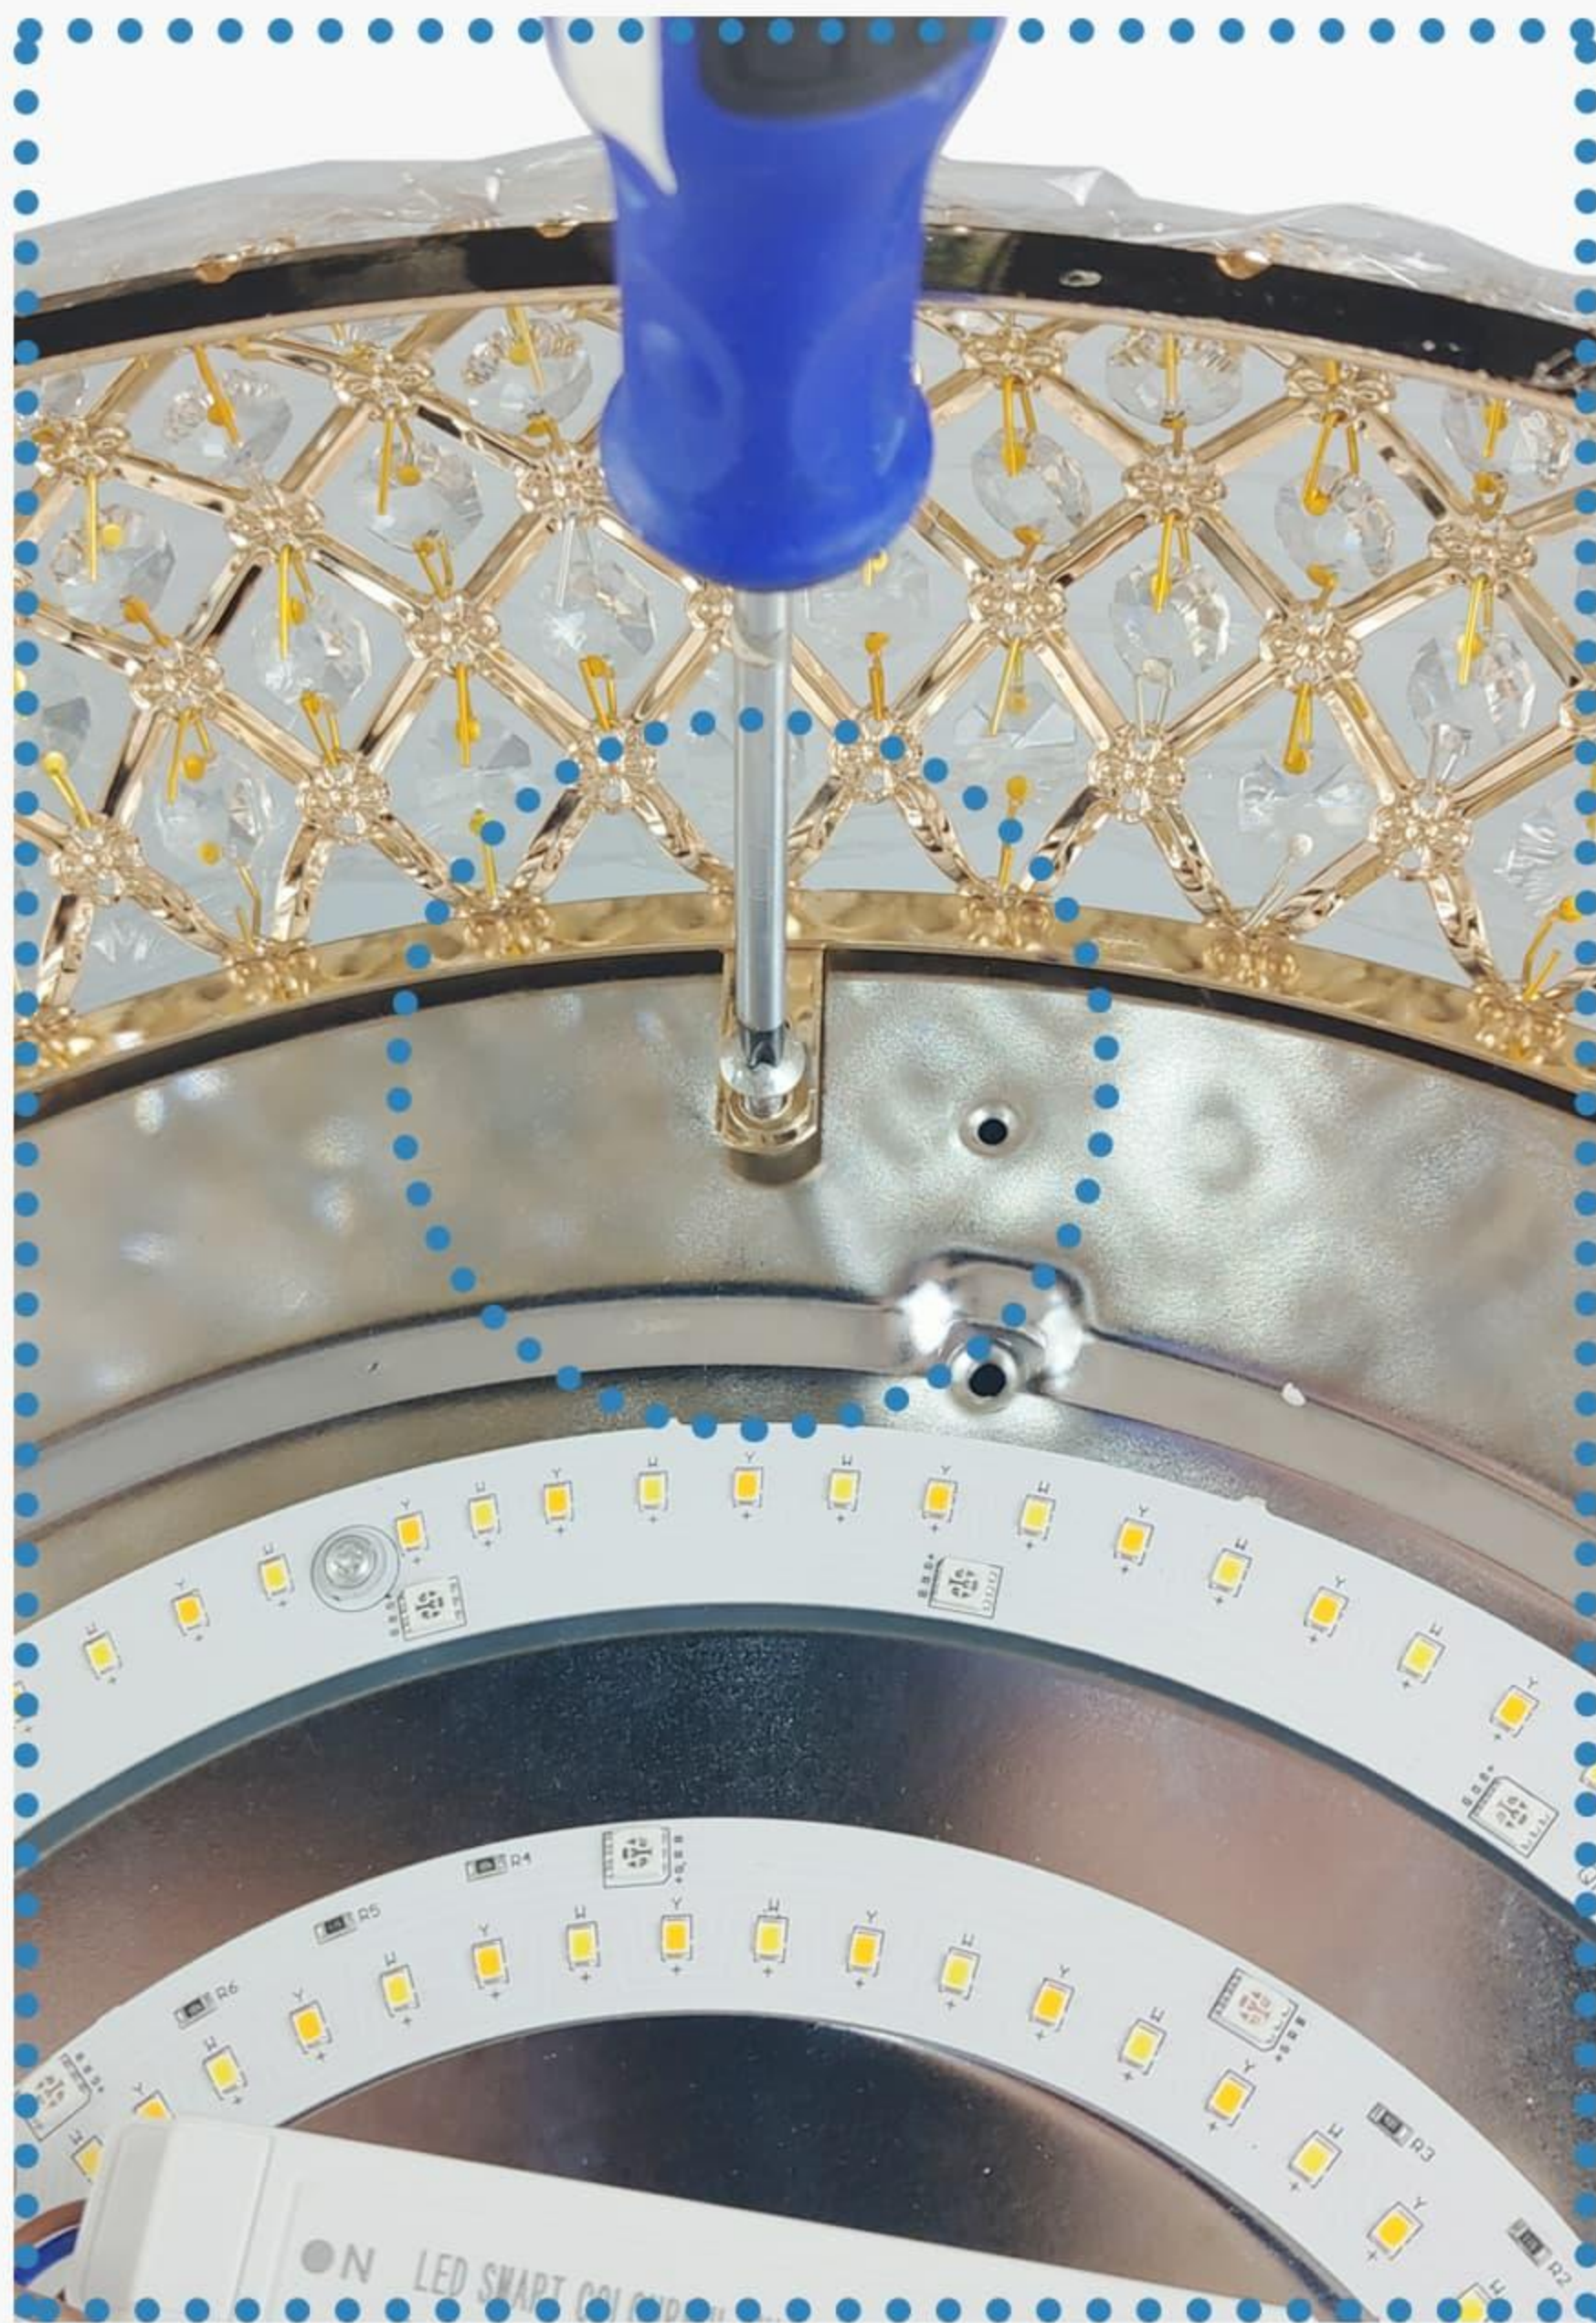


12

Use a screwdriver to tighten the four screws previously removed from the motor with the four holes of the lamp cover in turn.


3.INSTALL CEILING FAN DOWNROD ,COUPLING COVER AND CANOPY

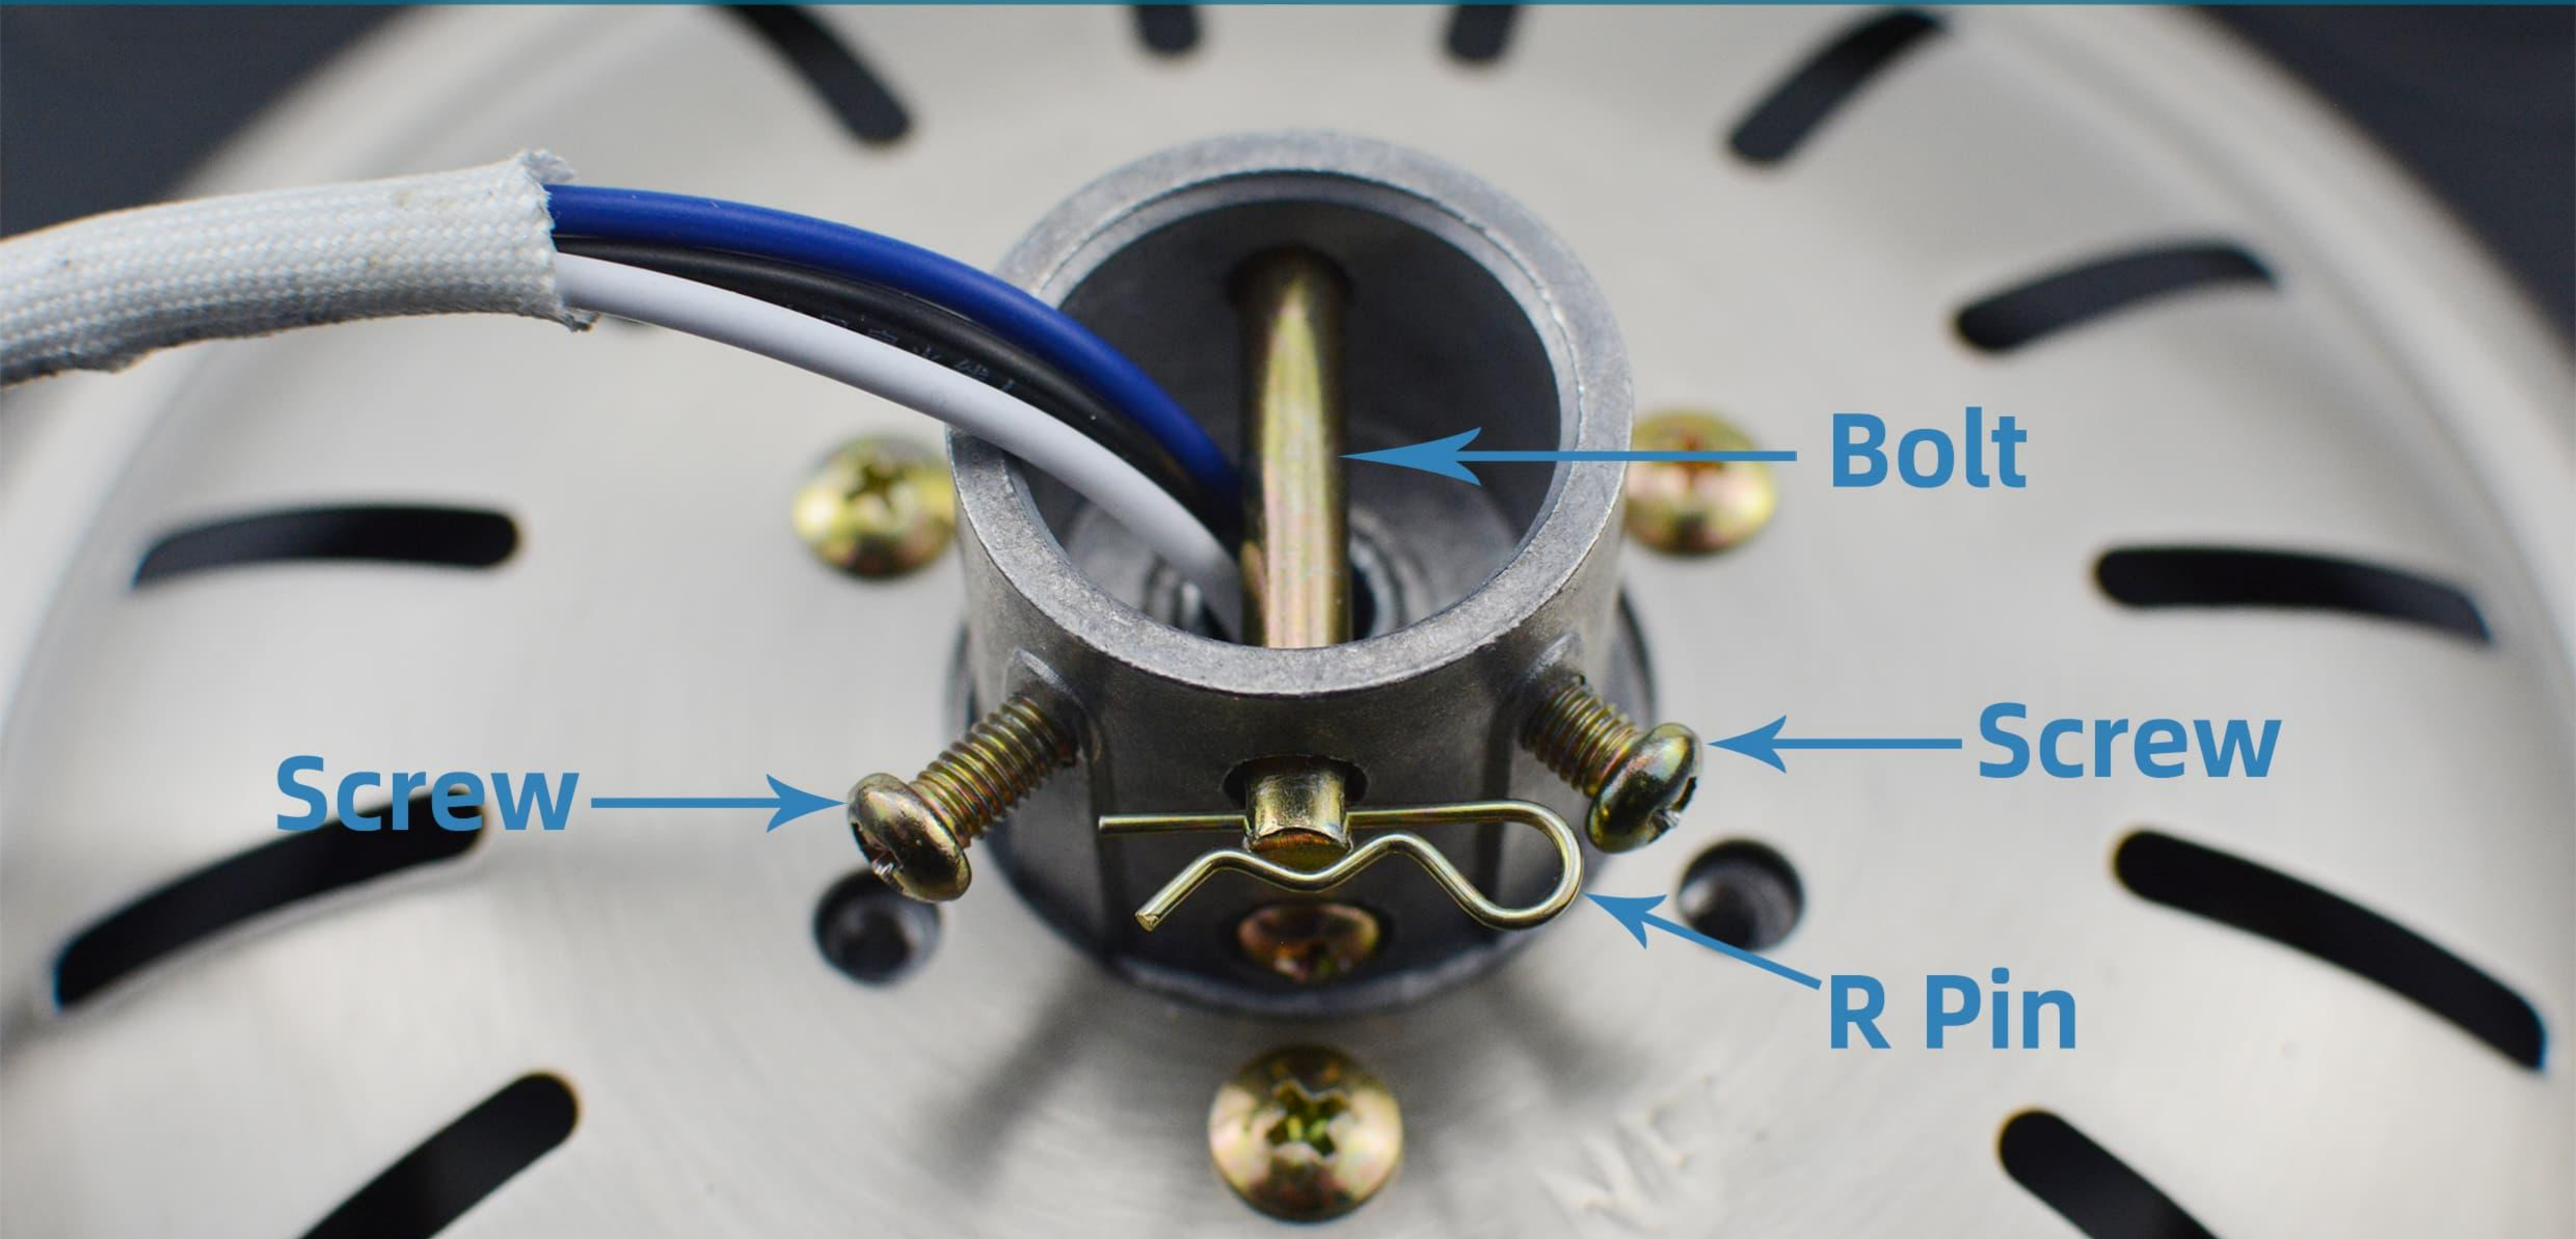

Remove the R pin from the motor and bolts, and loosen the screws on both sides

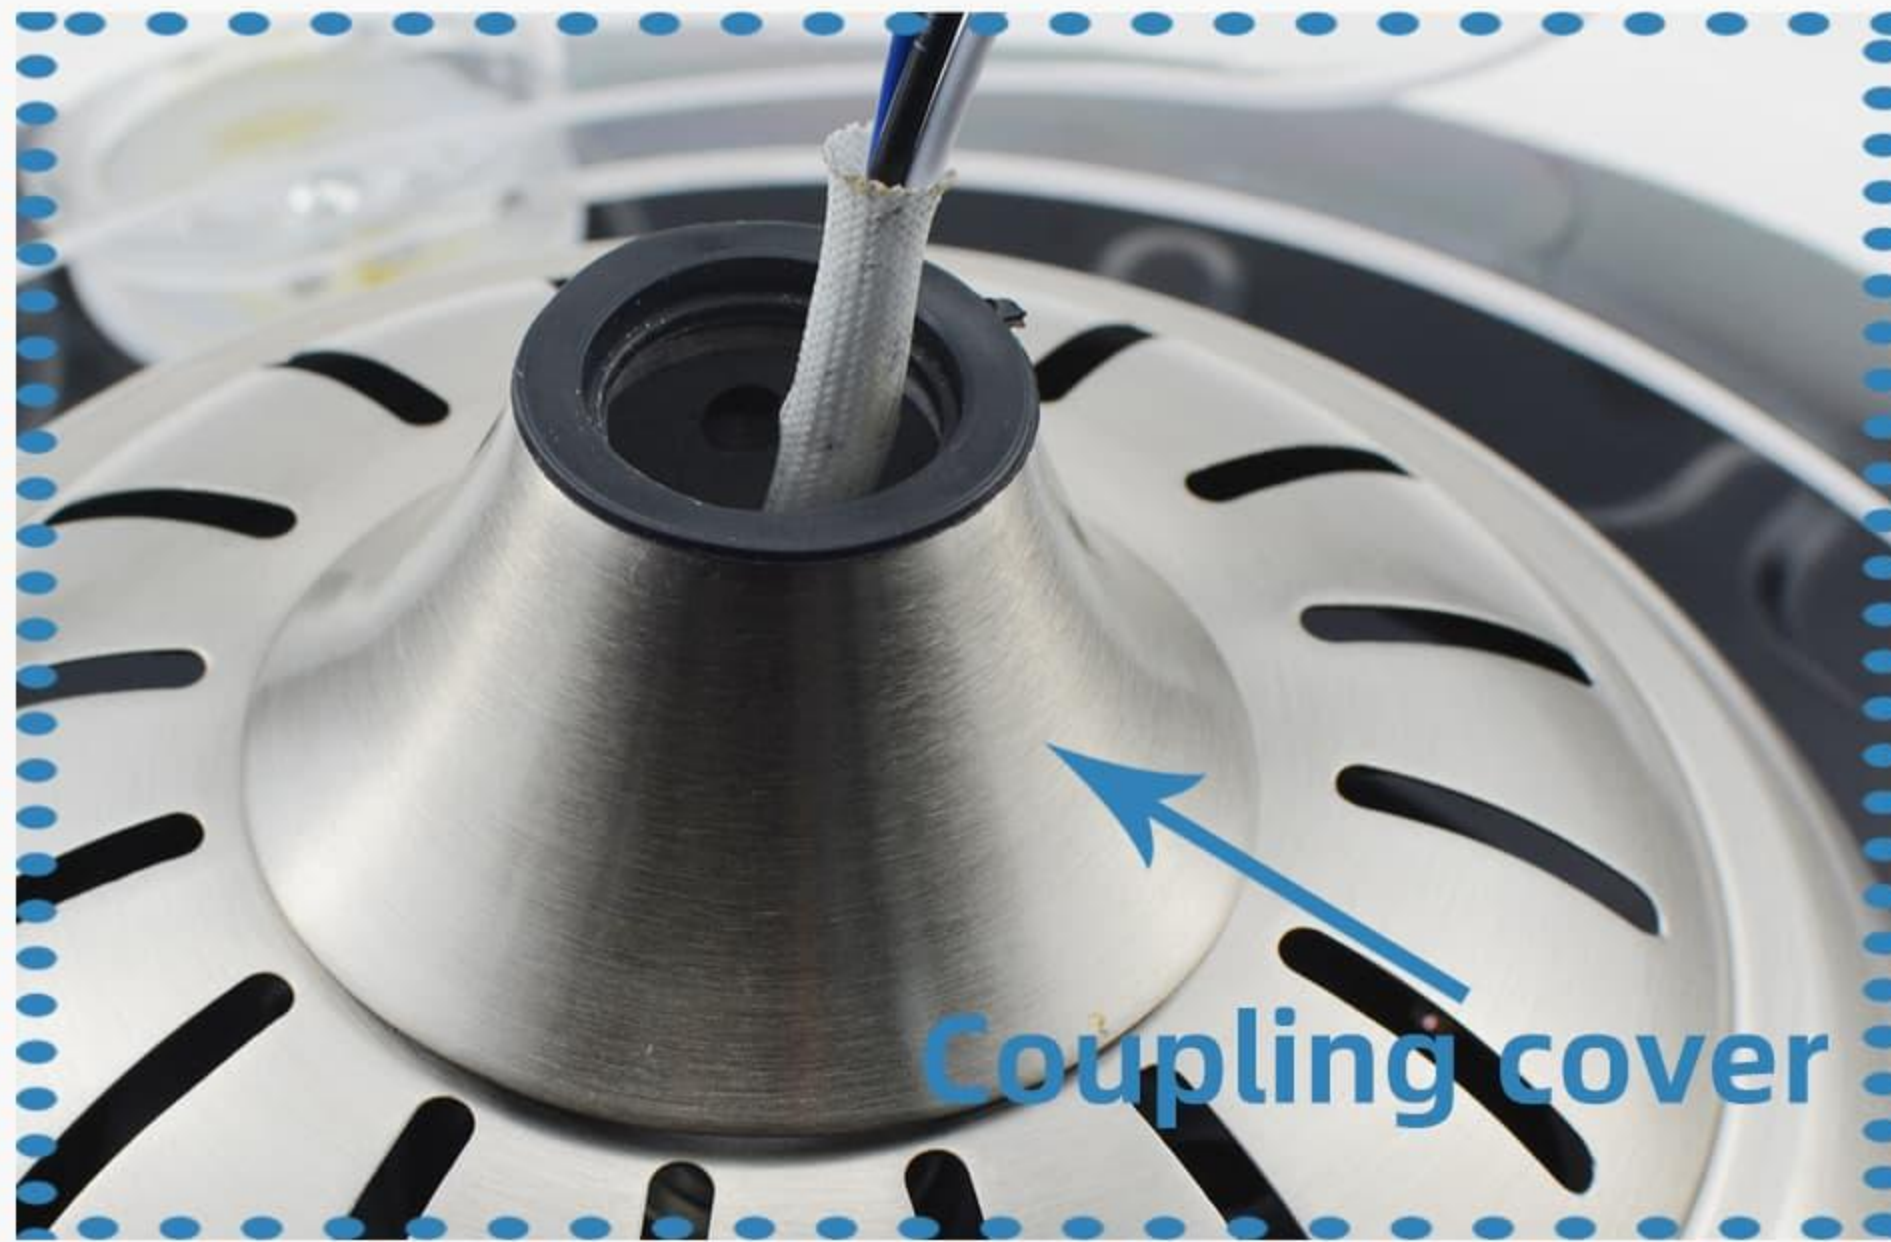

Pass the three wires of the motor through the Coupling cover, canopy and downrod in turn

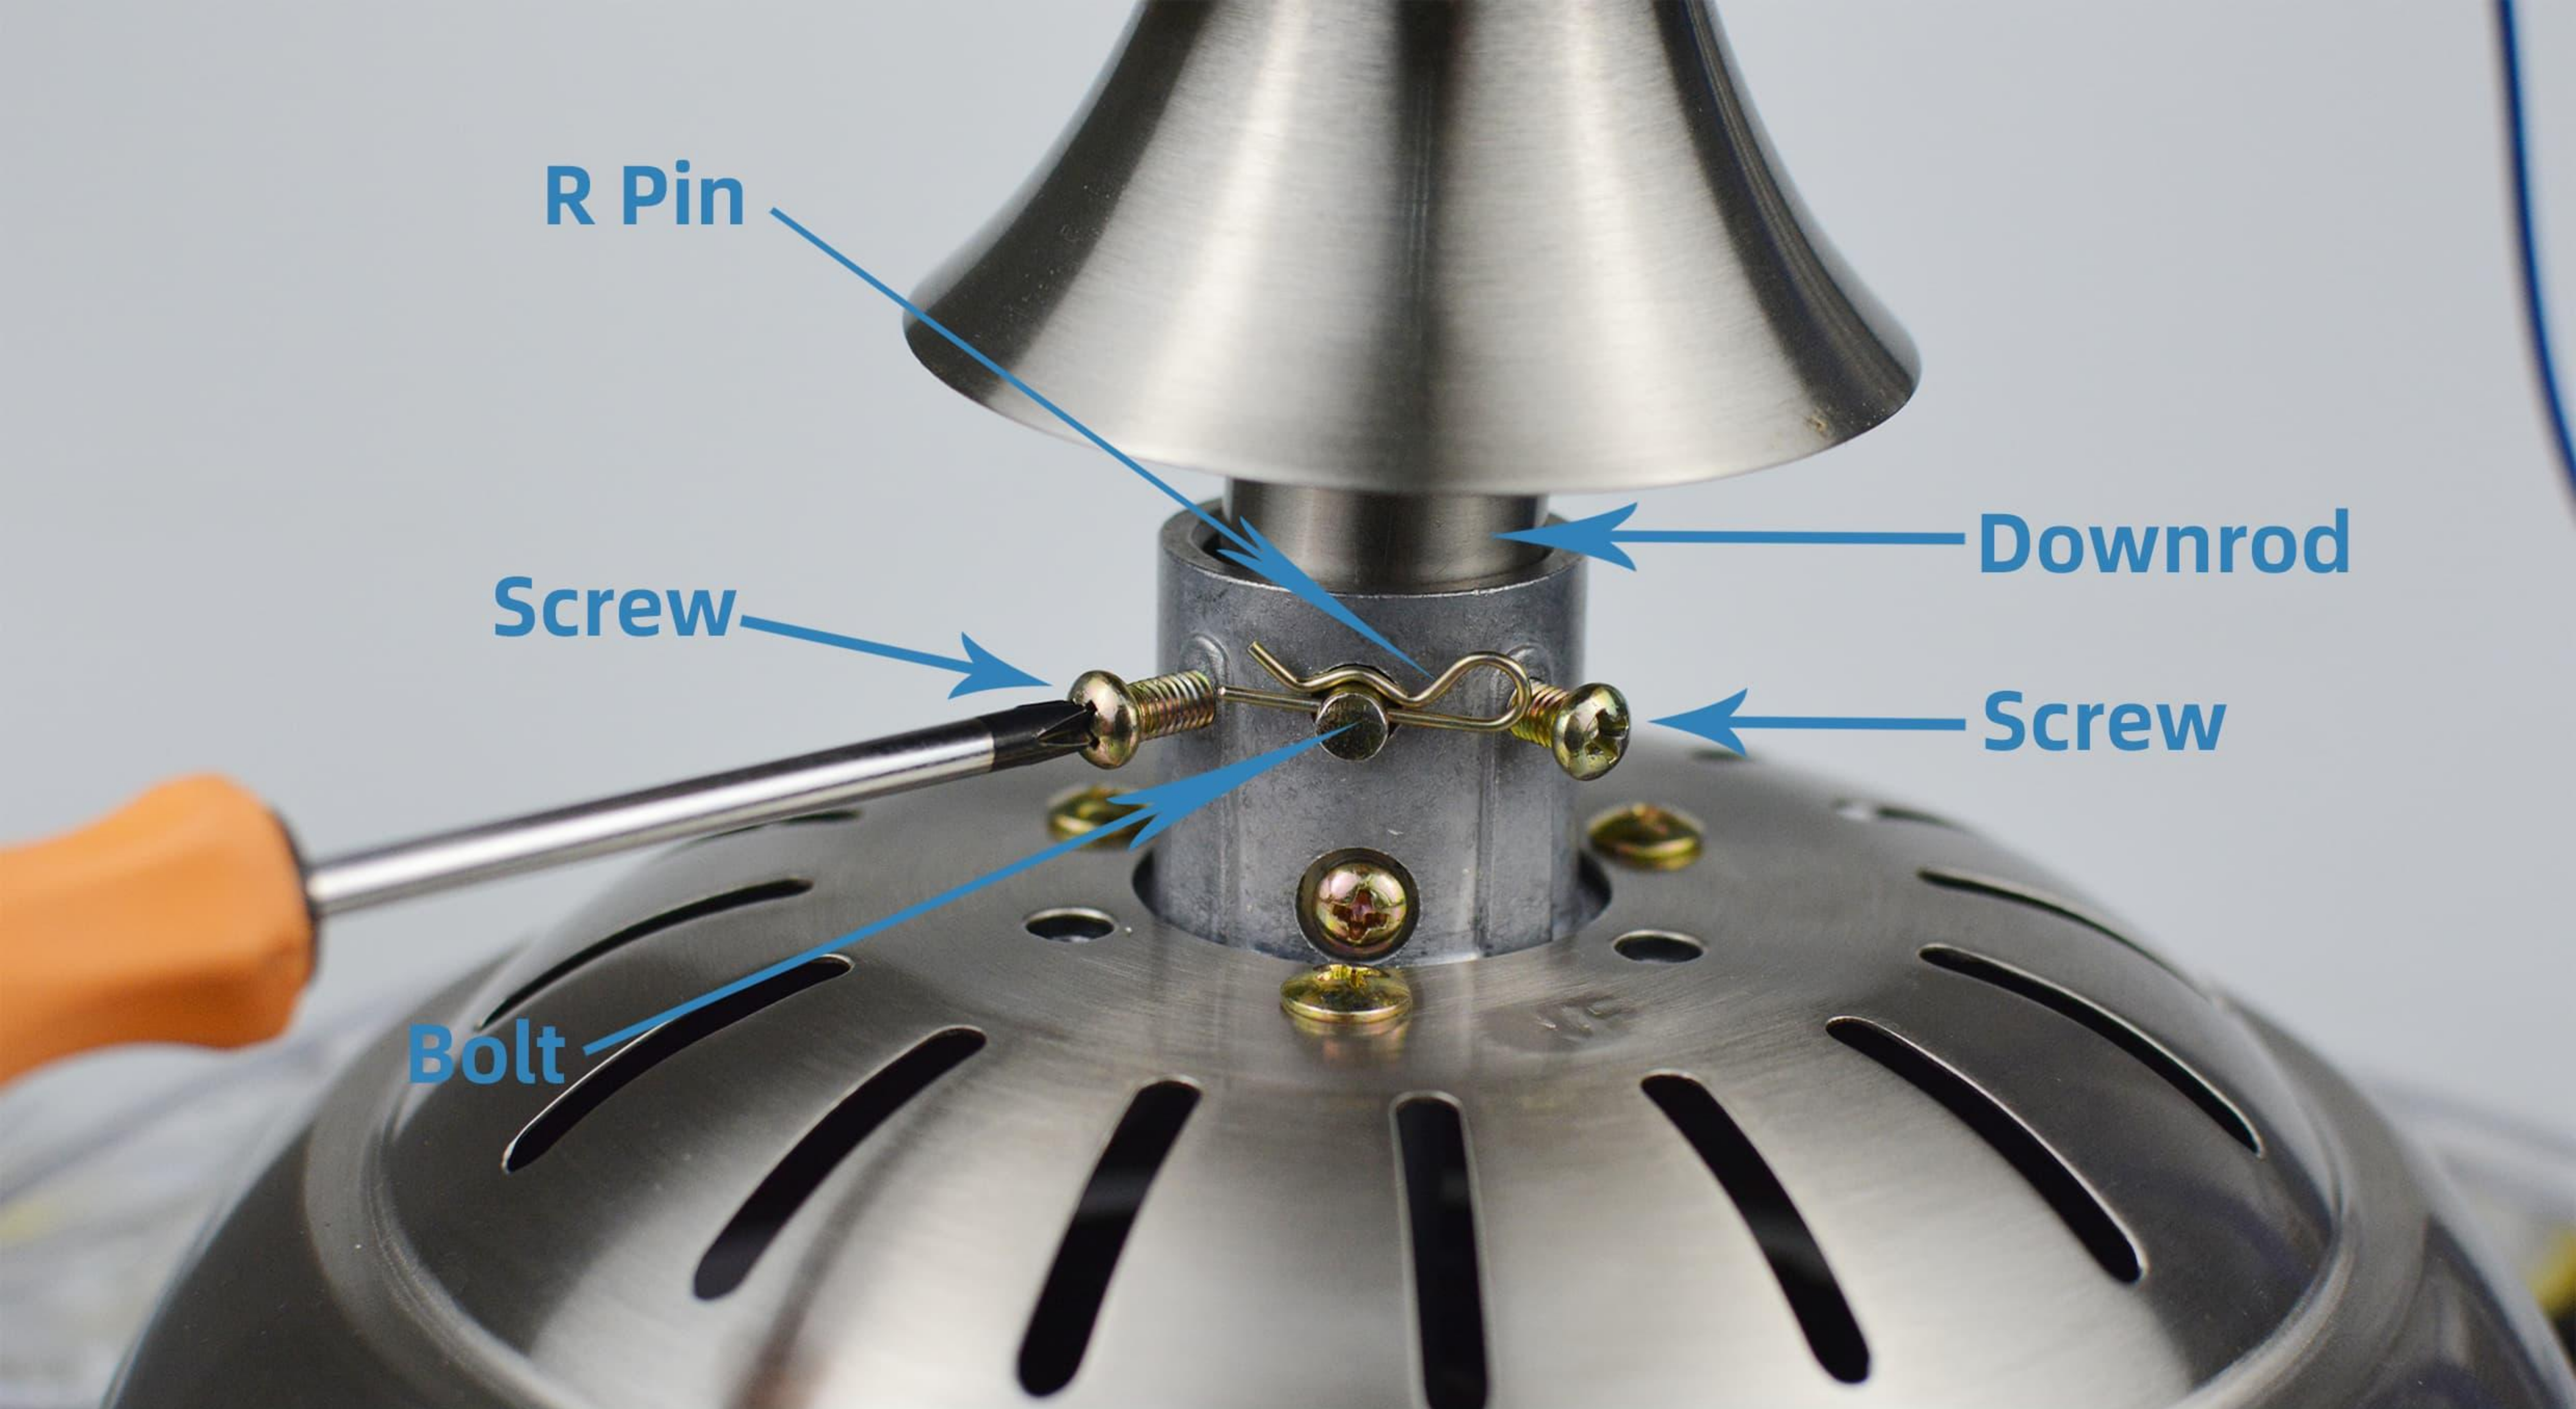

R Pin

Downrod

Screw

Screw

Bolt

Lift the coupling cover, pass the bolt out of the hole in the motor base, then insert the R pin into the bolt. Finally, tighten the 2 screws evenly from both sides, otherwise it will cause the fan to shake.

4.MOUNTING BRACKET INSTALLATION,INSTALL THE CEILING FAN TO THE MOUNTING BRACKET

CEMENT CEILING



Marker positioning hanger mounting bracket



Drill hole



Install expansion screws



Expansion screw inserted into the ceiling




Tighten the expansion screw with a wrench

16 Use a marker to mark the location of the screw holes on the ceiling, then use an electric impact drill to drill holes in the cement ceiling, insert the expansion screws on the Mounting bracket into the holes, and finally fix the expansion screws in the cement ceiling with a wrench.


WOODEN CEILING



Use an electric drill to screw 4 self-tapping screws into the wooden ceiling to fix the mounting bracket

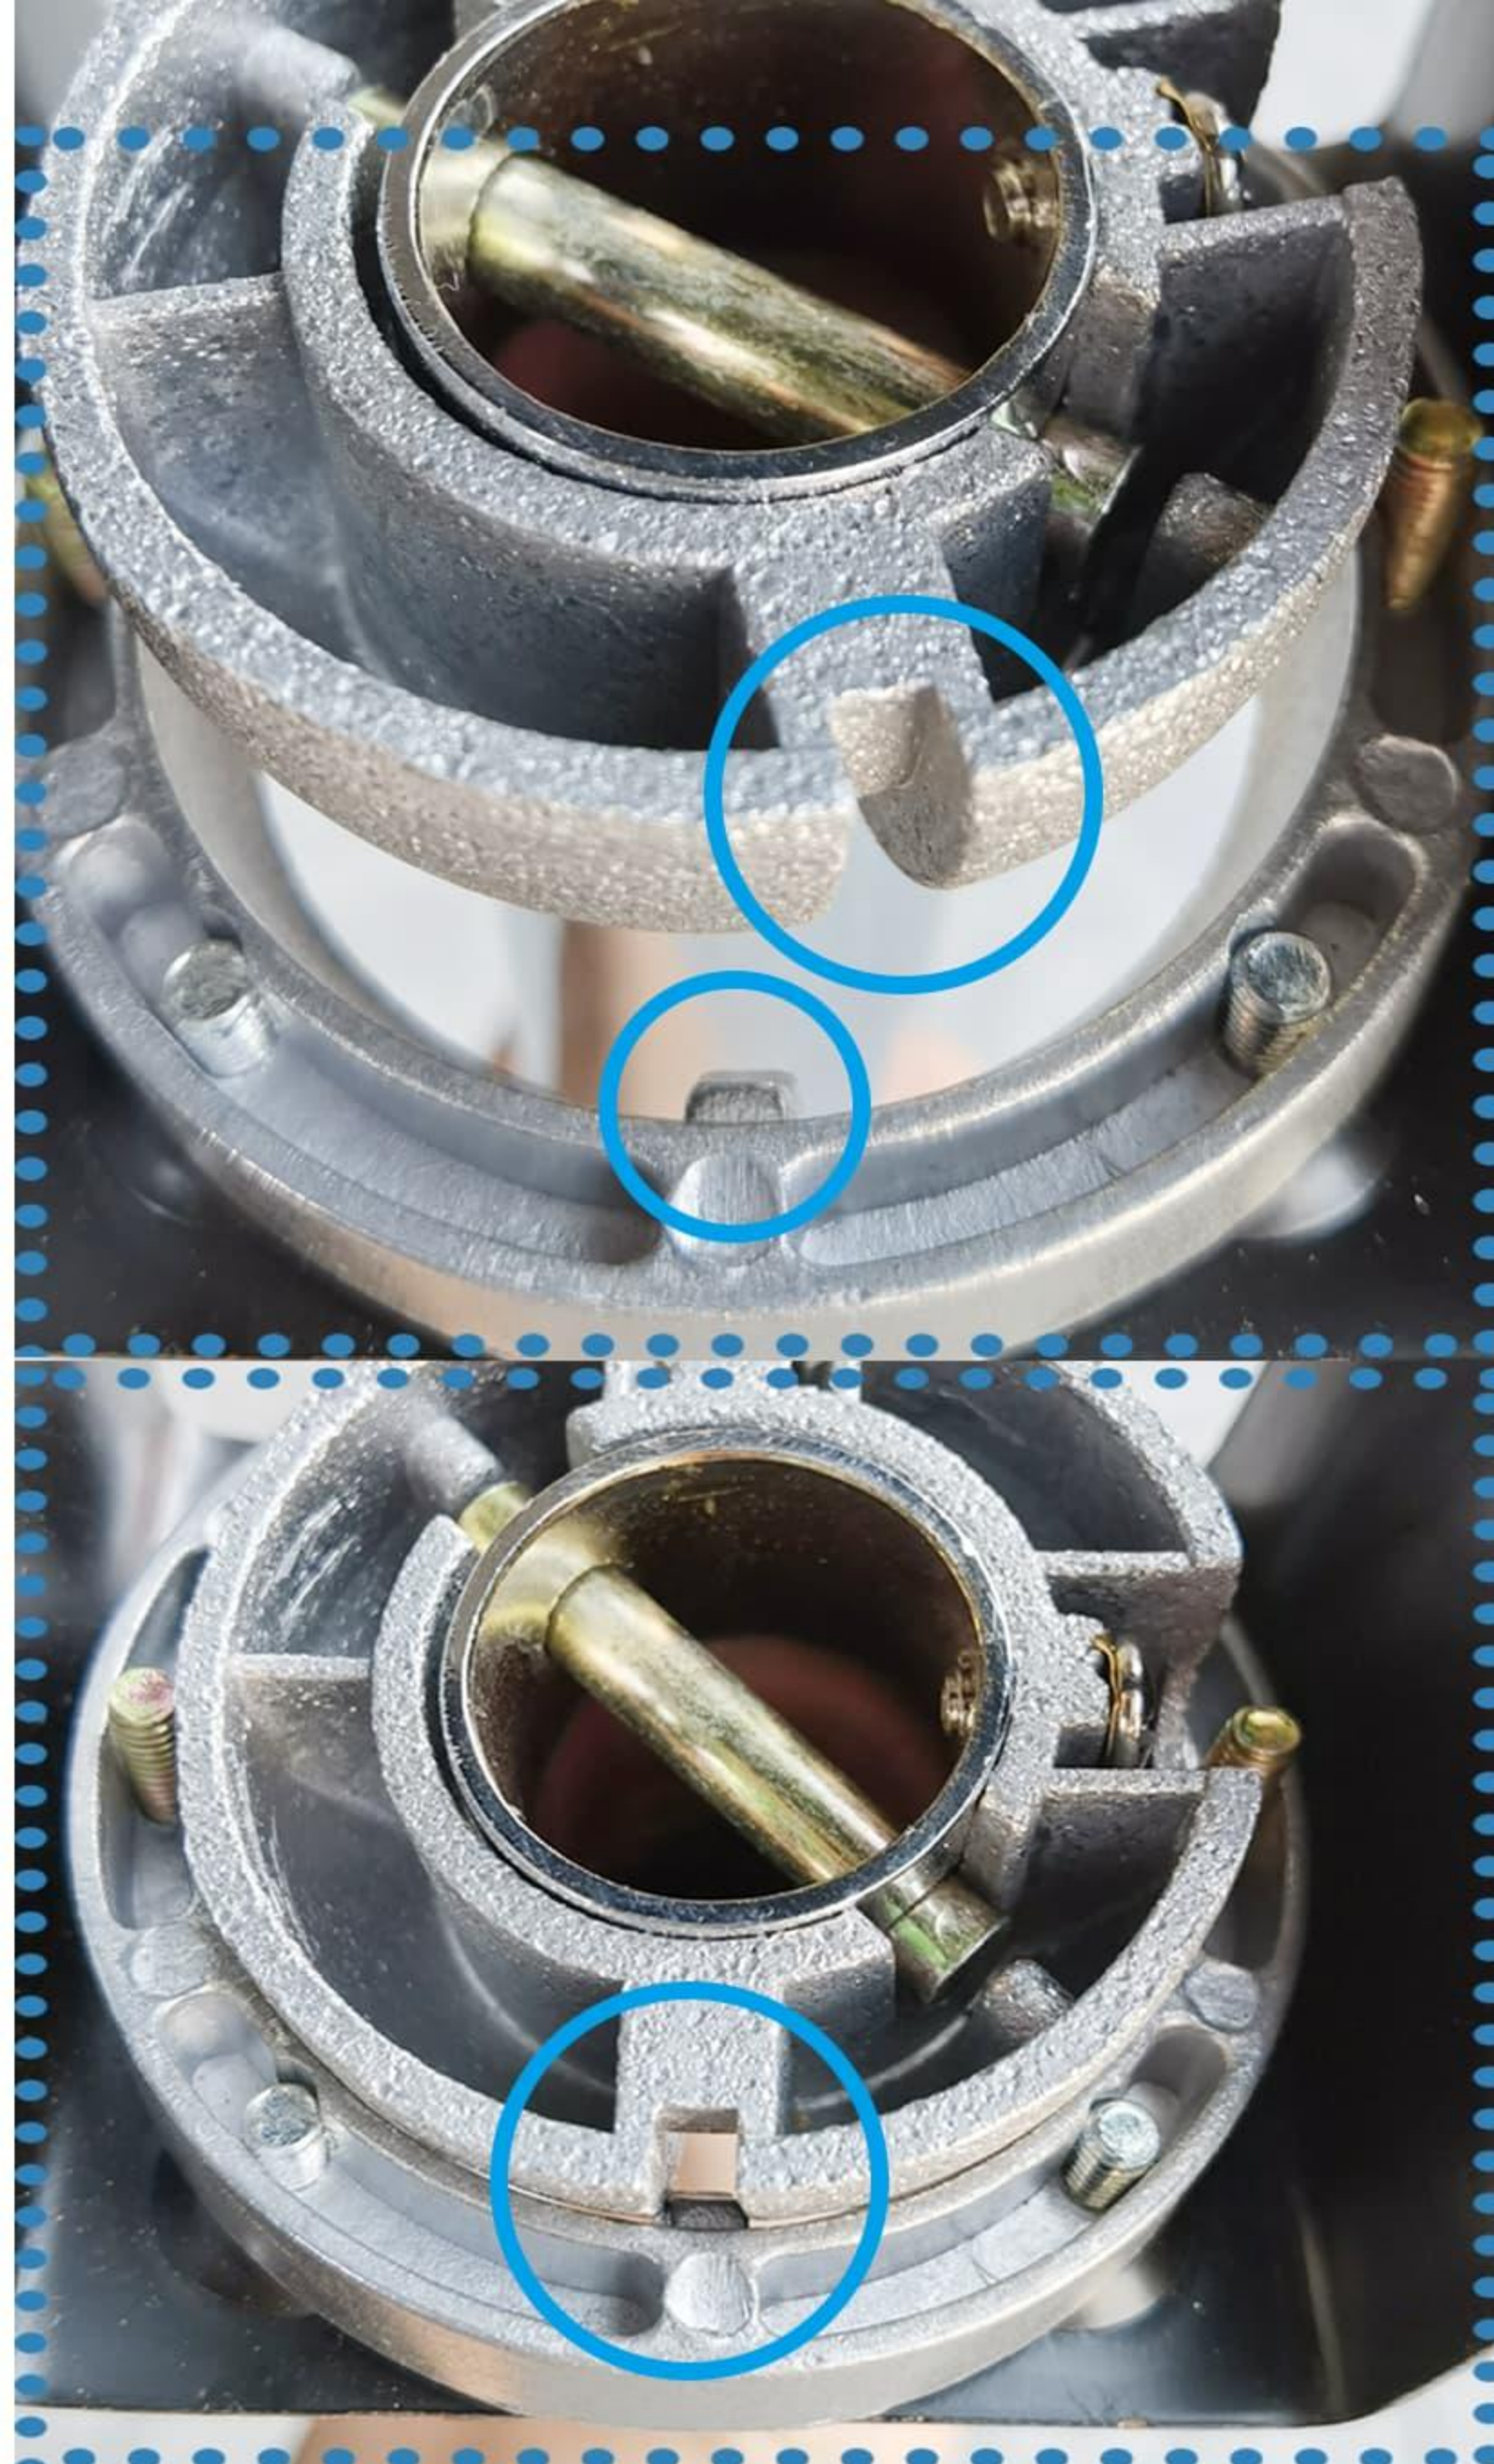

Mounting Bracket


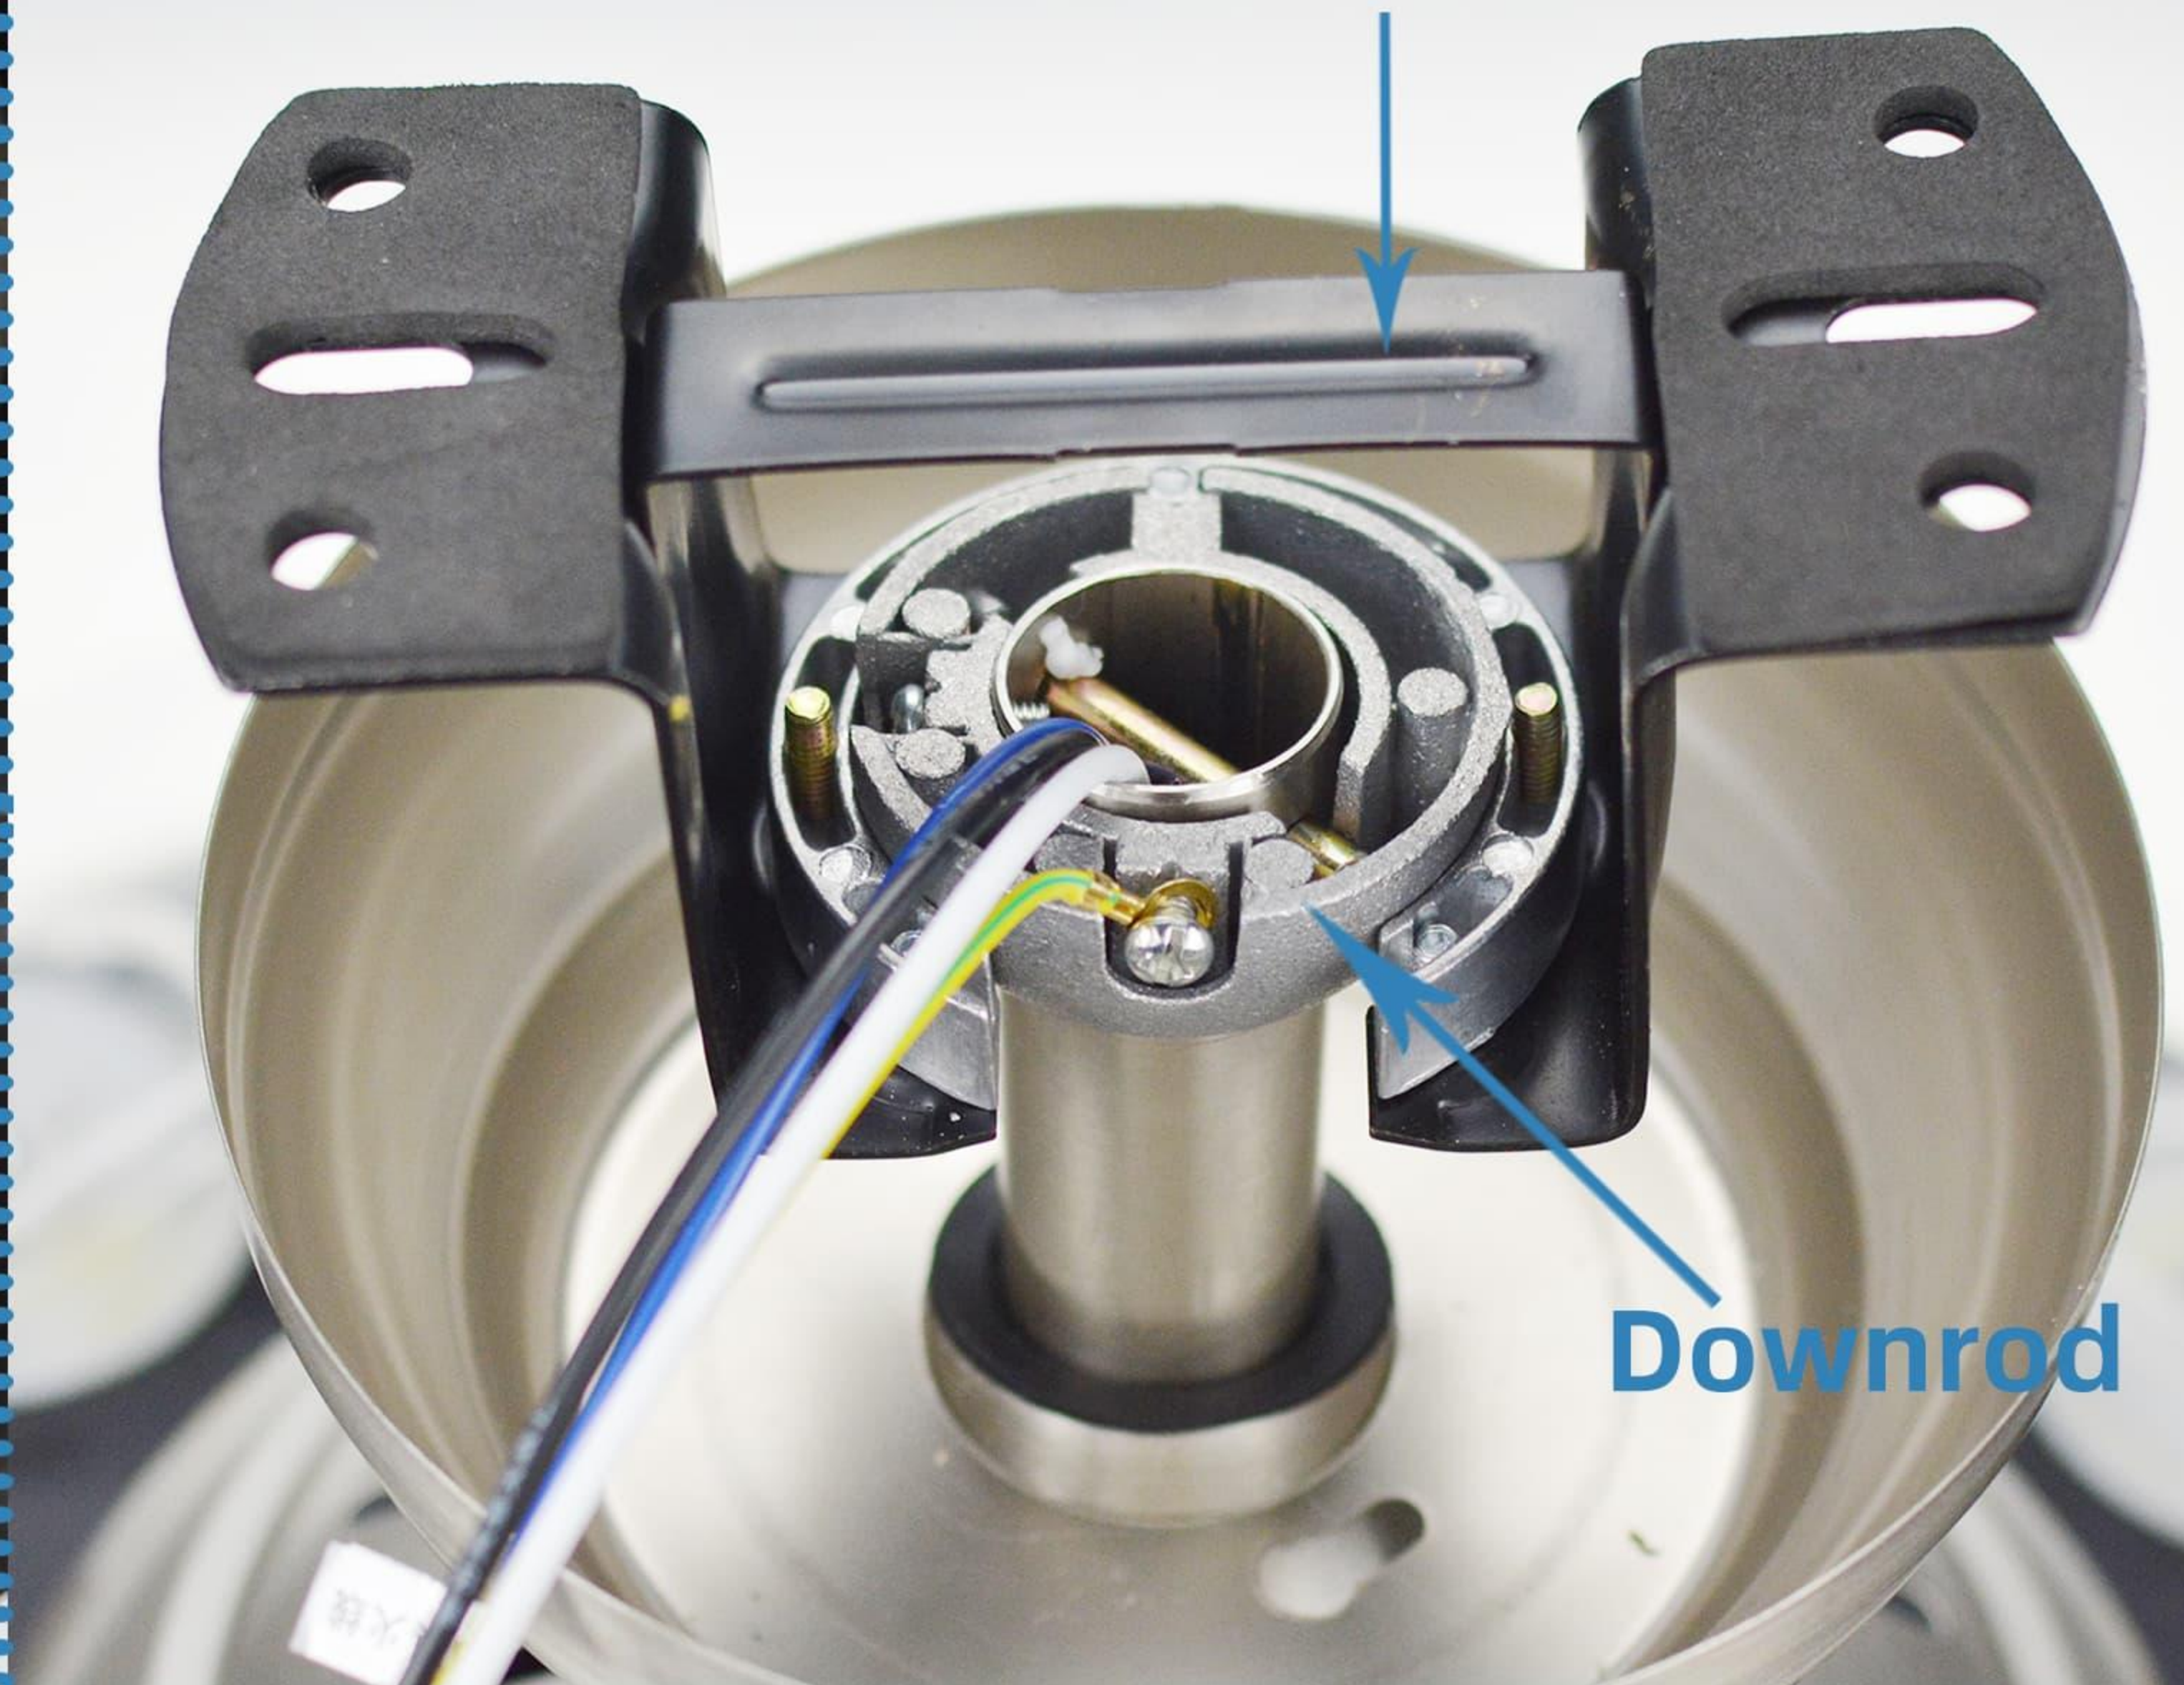


Downrod

18

Hang the motor to the ceiling mounting bracket, rotating the ball to mesh the groove of the ball with the bump of the hanger, the down rod must fix to the round hole, and confirm its stability, otherwise it will cause the fan to shake.

5.INSTALL THE REMOTE CONTROL RECEIVER

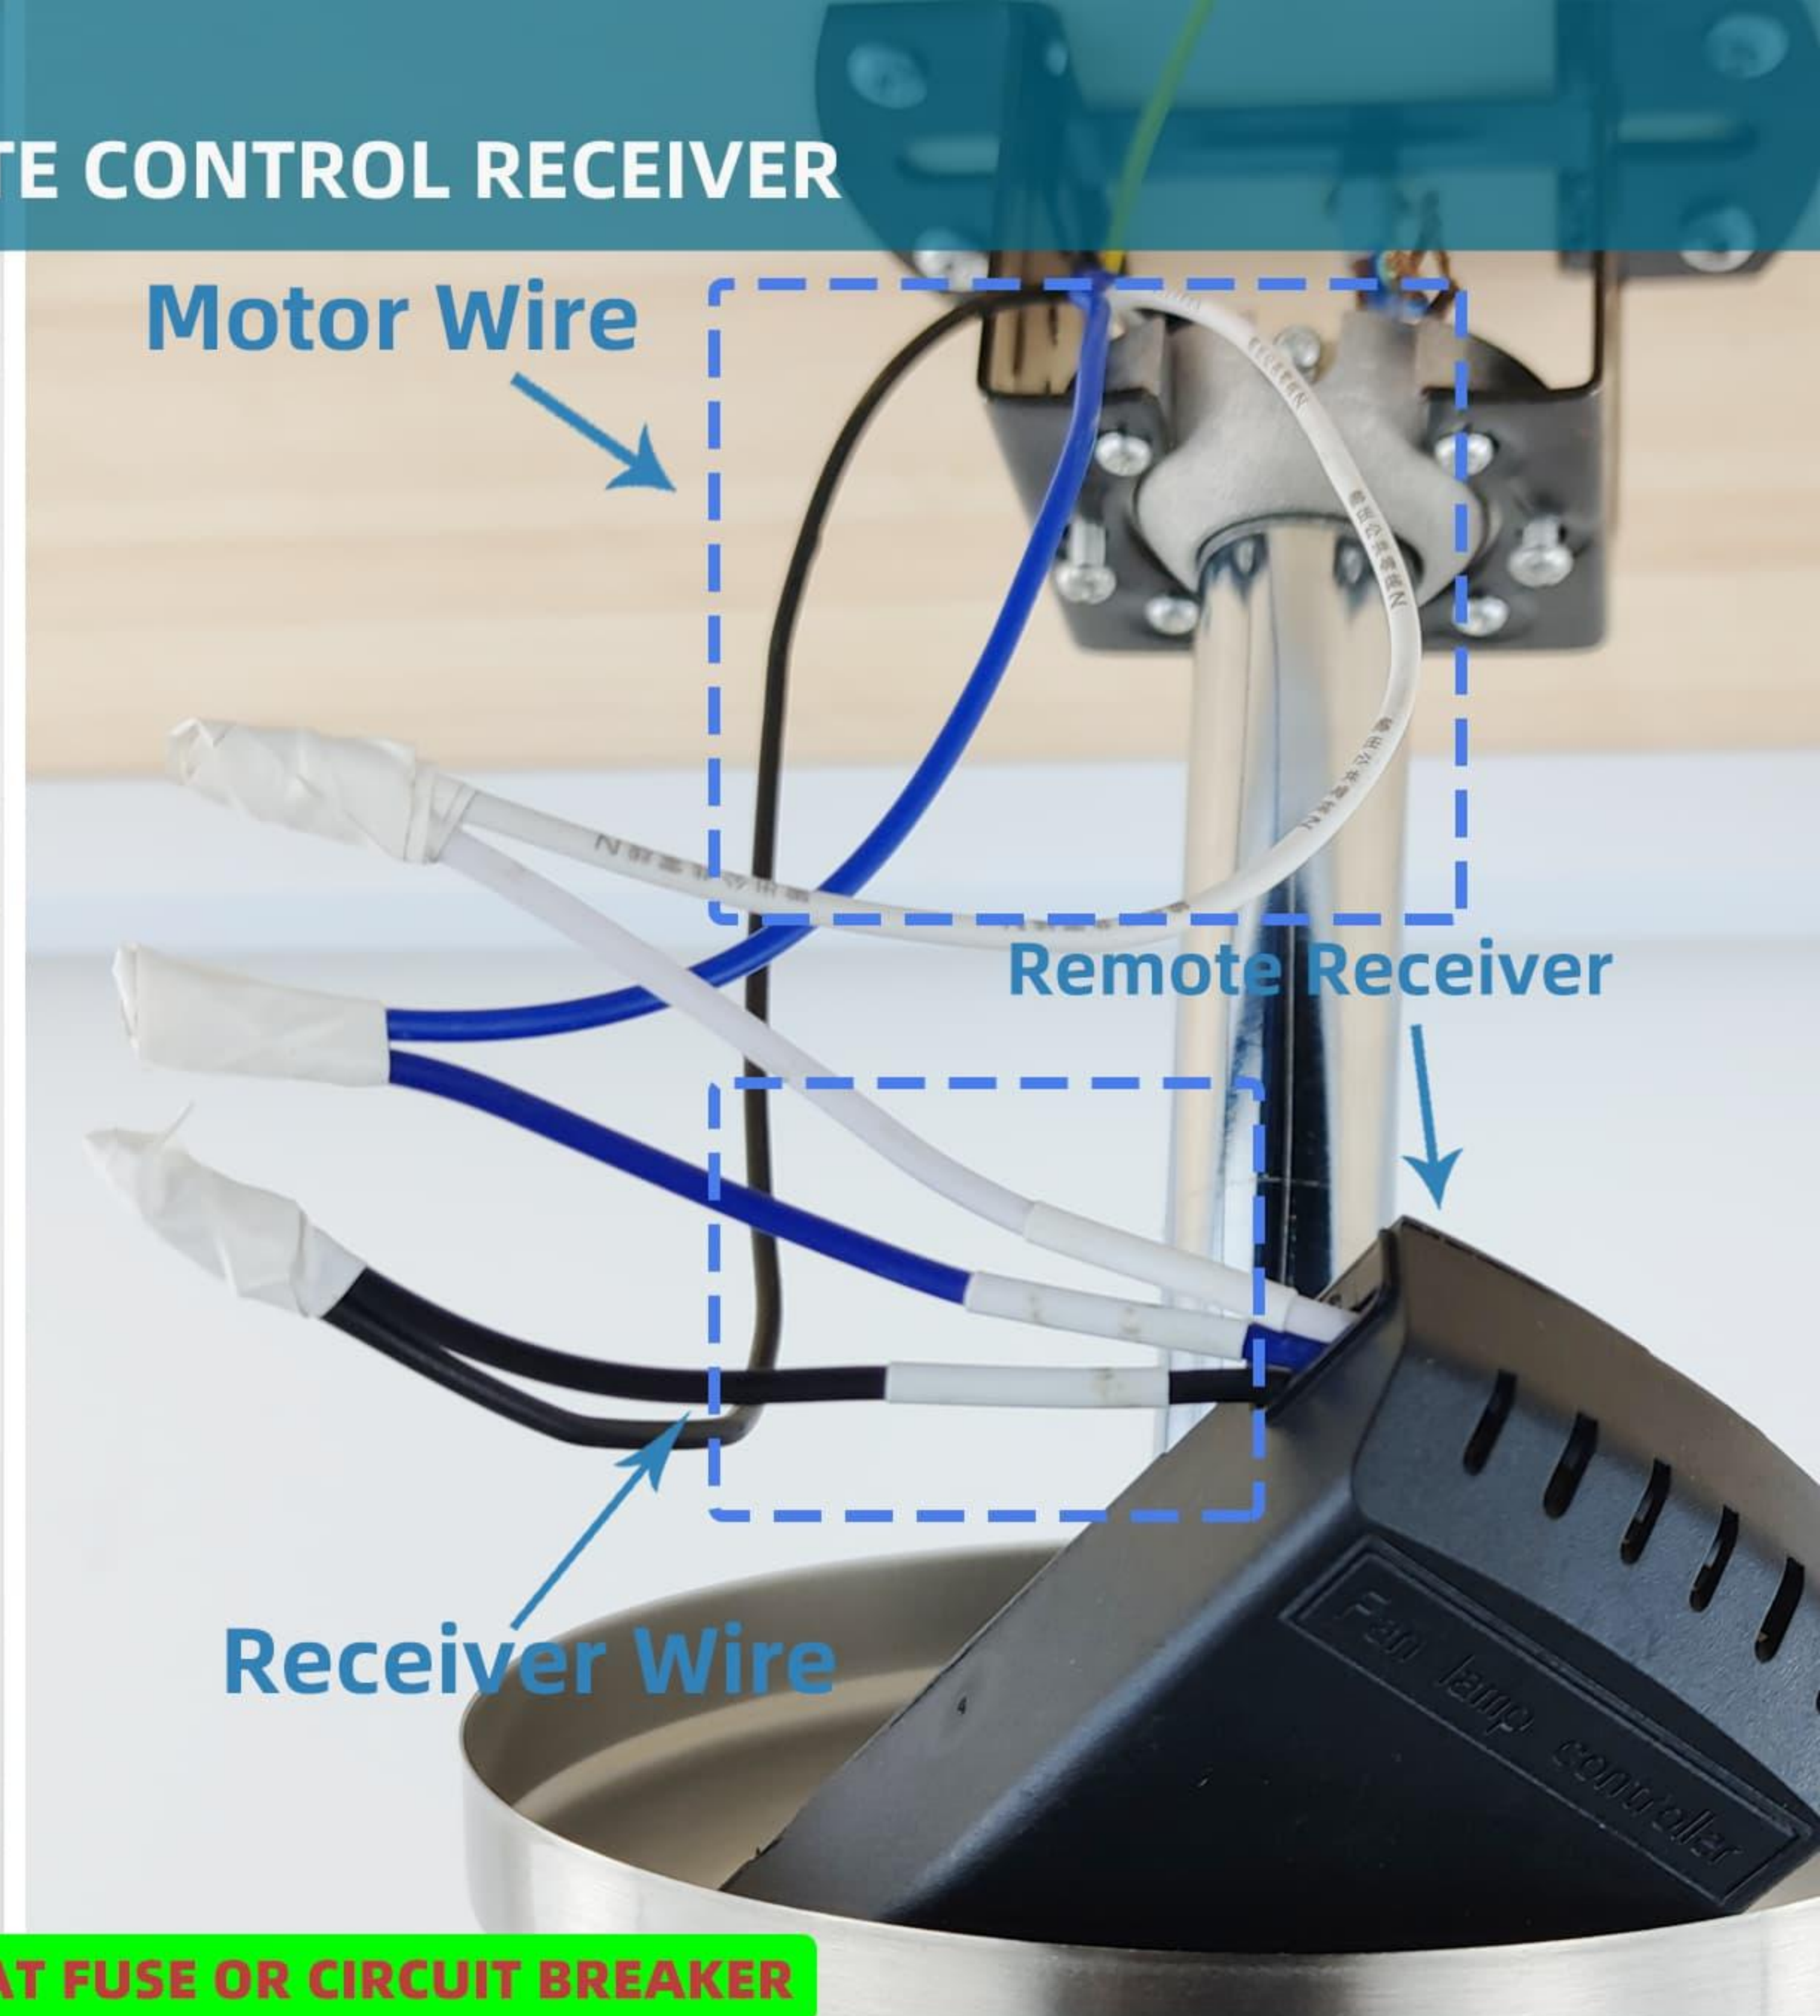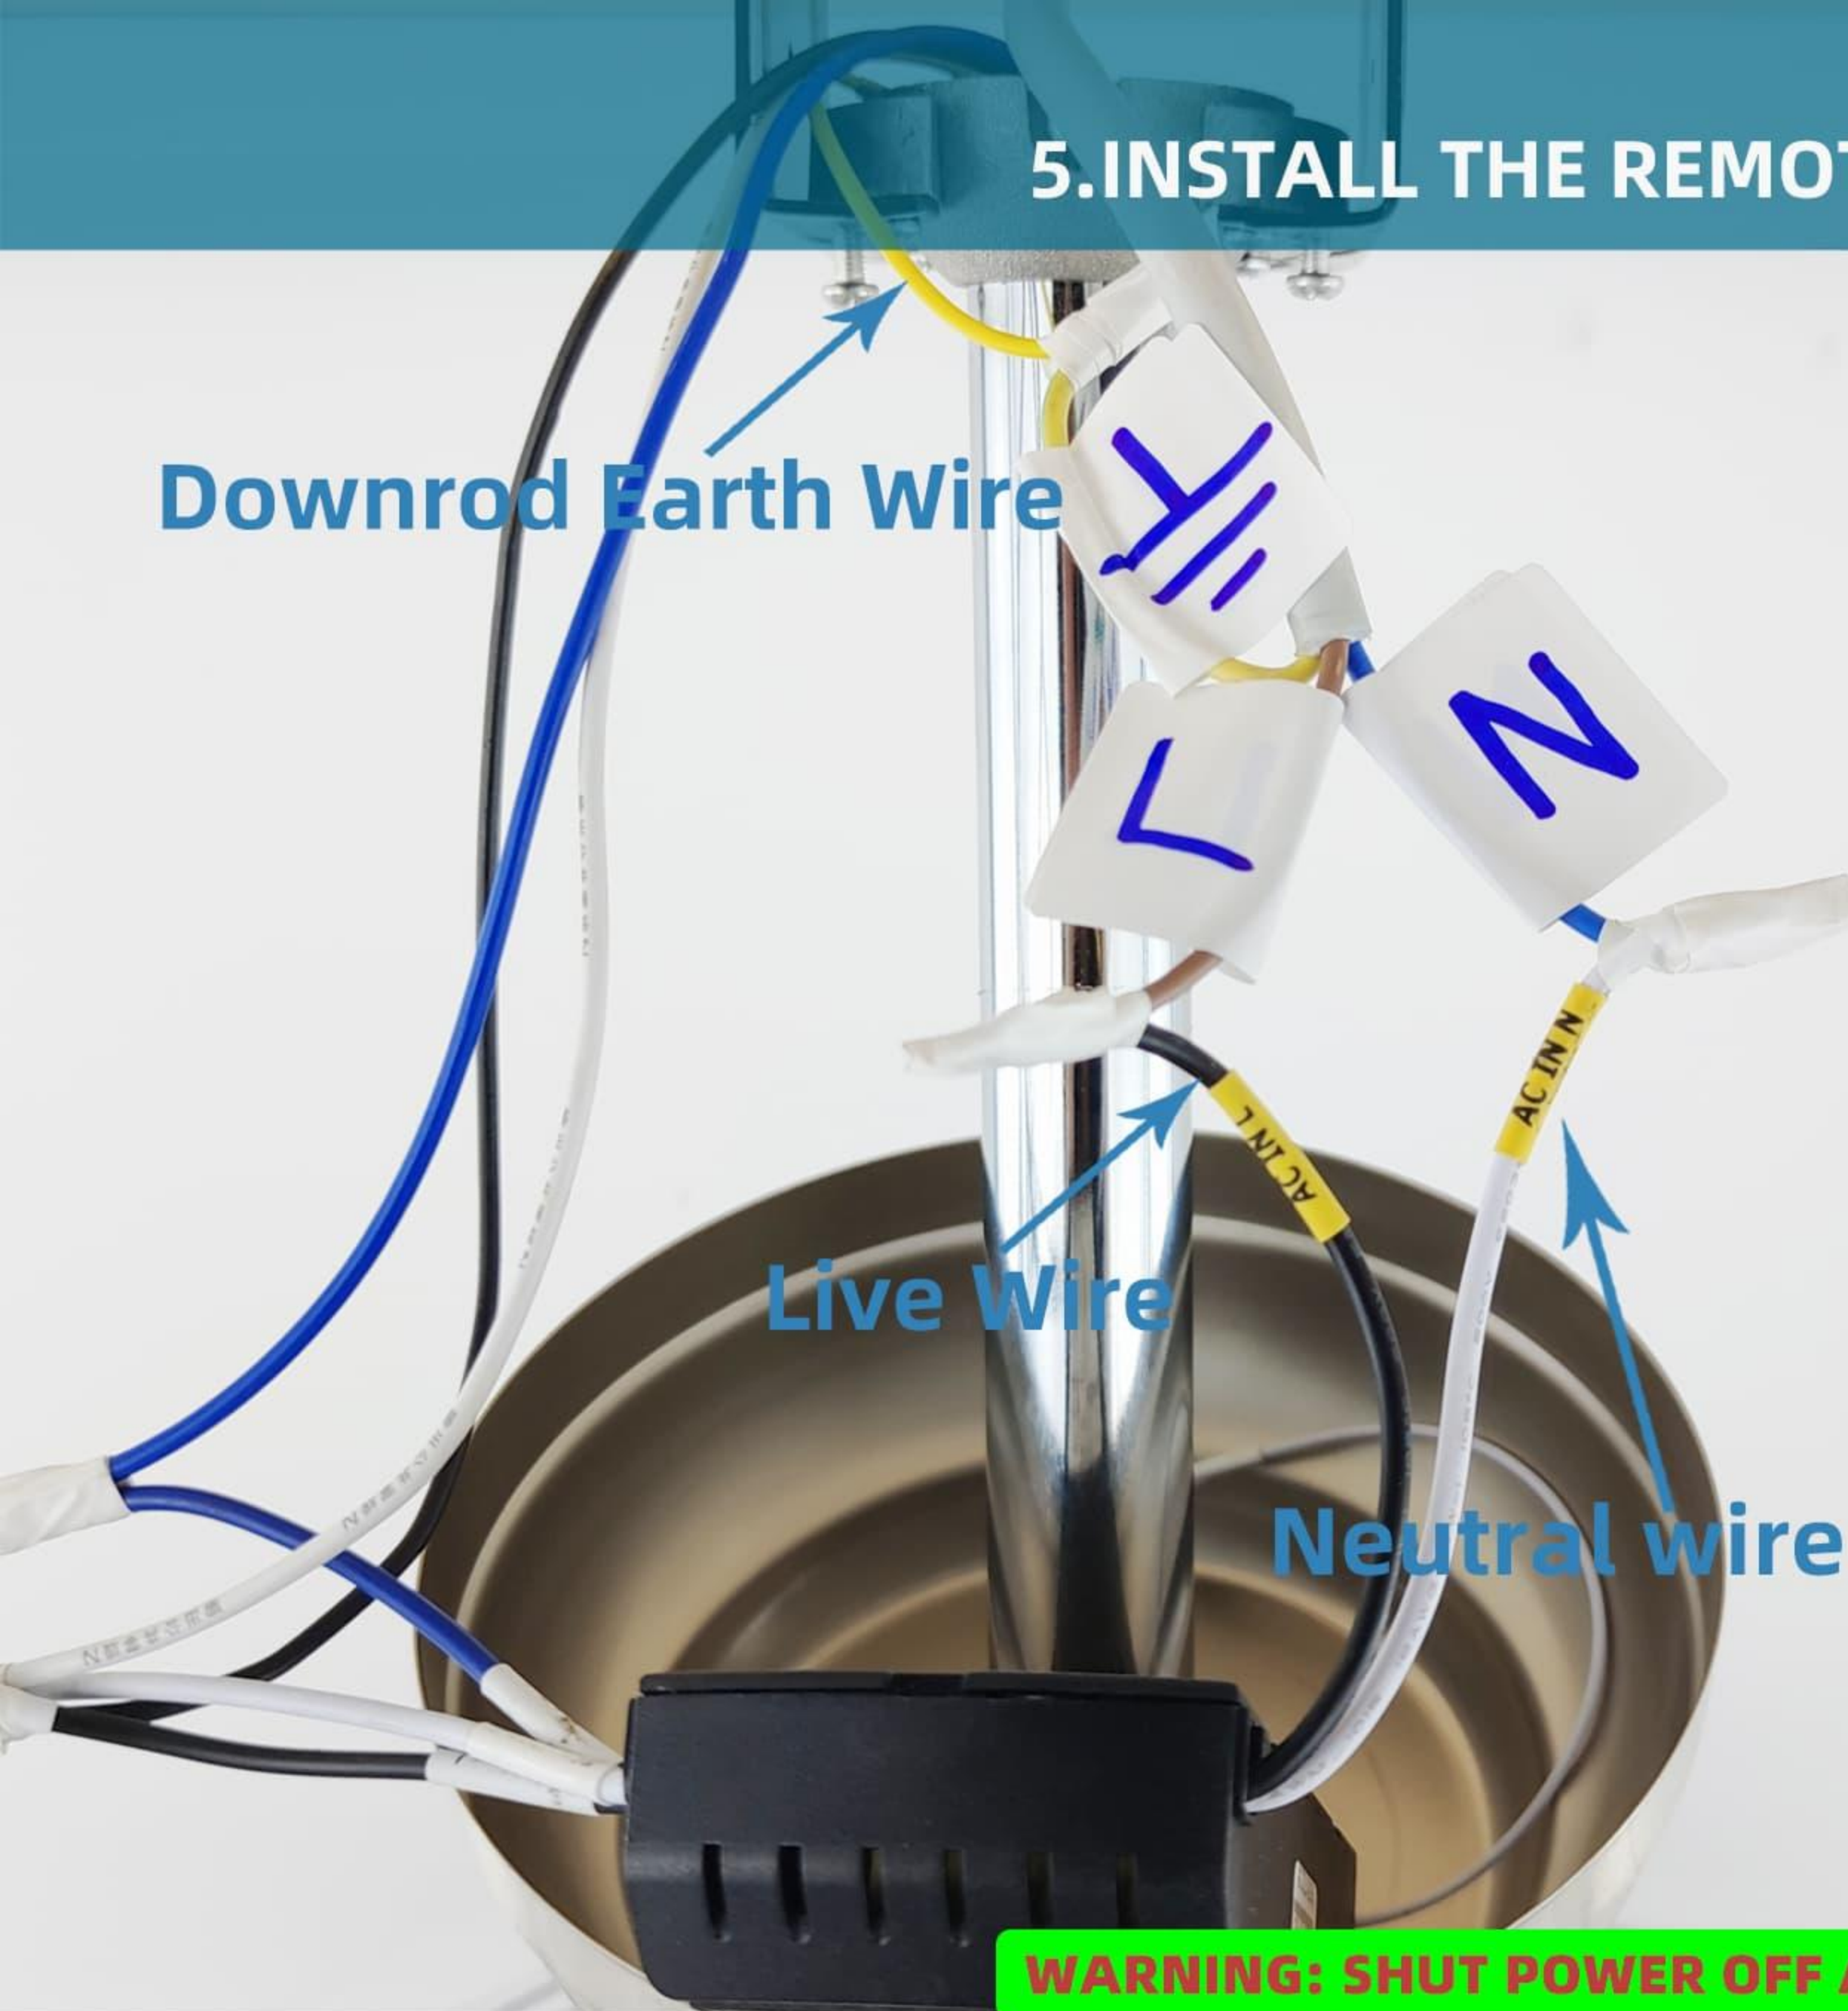

WARNING: SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

Connect the black wire of the receiver to the live wire of the ceiling, the white wire to the Neutral wire of the ceiling, and yellow wire on Downrod to the earth wire.

Connect the wire of the motor and the wire of the remote control receiver according to the color, and then put on the red wire protective cover.