


Test Mode: 24; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

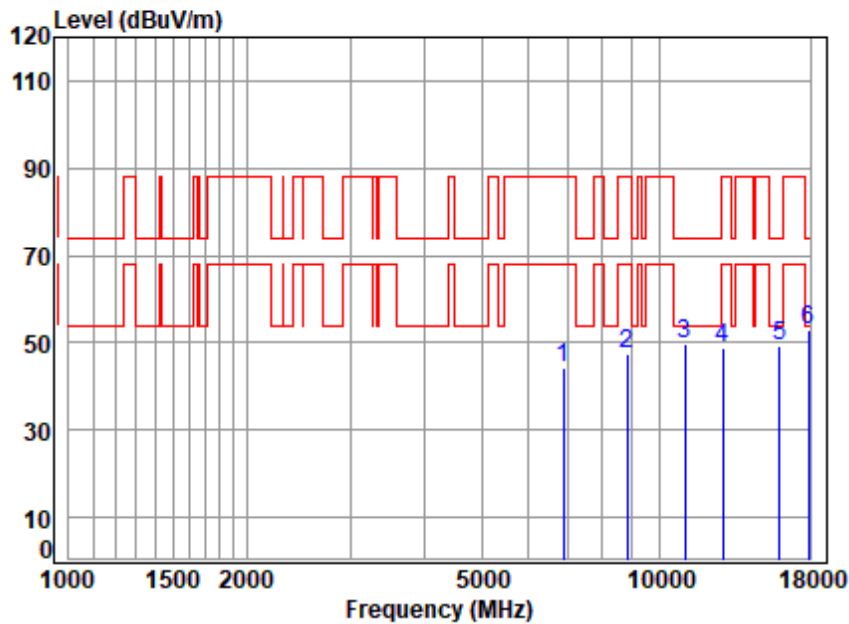

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6415 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6874.906	11.37	36.10	56.73	53.57	44.31	88.20	-43.89 Peak
2	8814.957	12.25	38.50	55.17	51.65	47.23	88.20	-40.97 Peak
3	11044.130	14.39	39.44	53.51	49.55	49.87	74.00	-24.13 peak
4	12830.000	15.53	40.33	54.38	47.11	48.59	88.20	-39.61 peak
5	15988.450	17.17	38.61	54.00	47.46	49.24	74.00	-24.76 peak
6	pp17896.250	18.69	43.08	54.48	45.73	53.02	74.00	-20.98 peak



Test Mode: 26; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

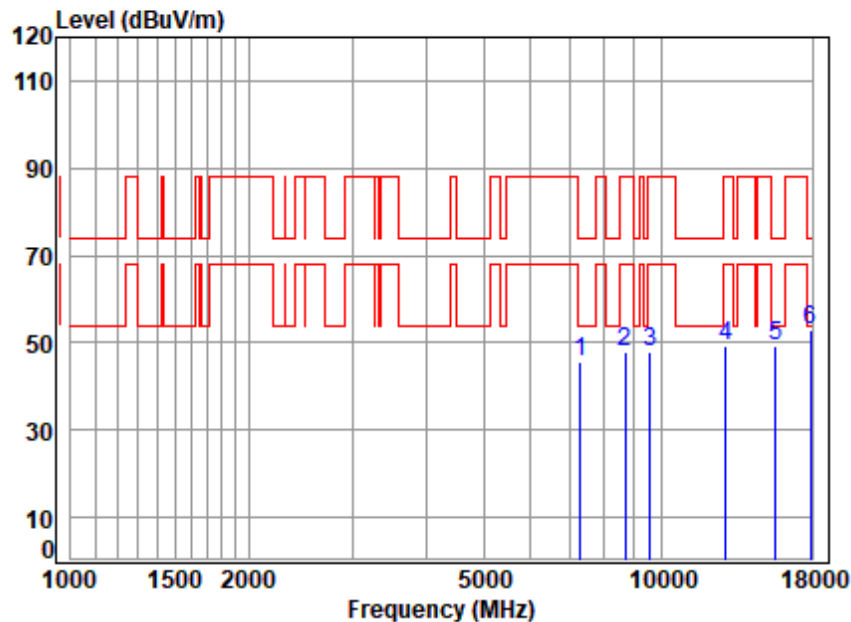

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7284.038	11.51	36.67	56.47	53.75	45.46	74.00	-28.54 peak
2	8688.480	12.08	38.55	55.28	52.52	47.87	88.20	-40.33 peak
3	9585.684	12.45	38.80	54.47	50.92	47.70	88.20	-40.50 peak
4	12870.000	15.69	40.37	54.41	47.42	49.07	88.20	-39.13 peak
5	15622.990	17.19	38.52	54.11	47.70	49.30	74.00	-24.70 peak
6	pp17896.250	18.69	43.08	54.48	45.53	52.82	74.00	-21.18 peak



Test Mode: 26; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

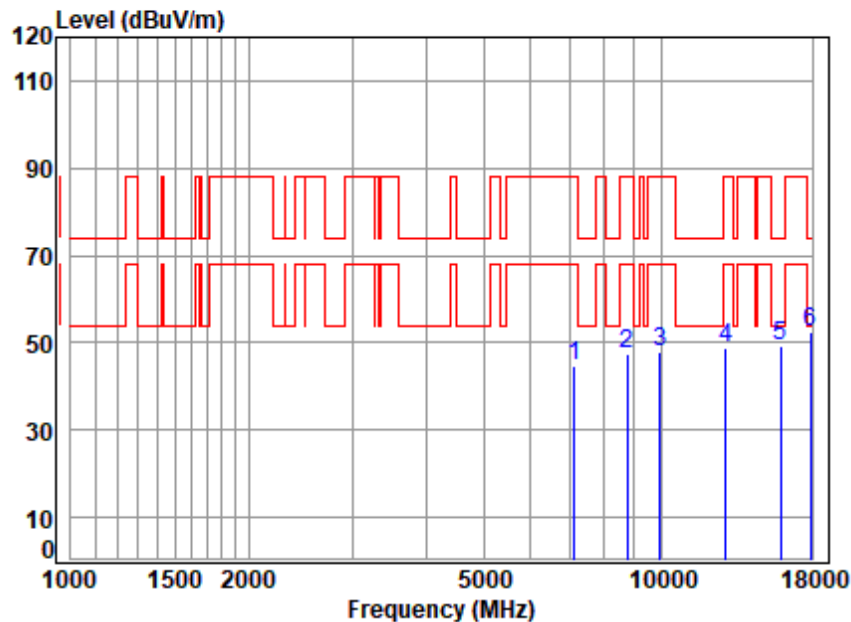

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7117.542	11.91	36.44	56.61	52.88	44.62	88.20 -43.58 peak
2	8738.852	12.15	38.52	55.24	52.09	47.52	88.20 -40.68 peak
3	9952.717	12.91	38.90	54.14	50.27	47.94	88.20 -40.26 peak
4	12870.000	15.69	40.37	54.41	47.20	48.85	88.20 -39.35 peak
5	15942.300	17.23	38.66	54.02	47.45	49.32	74.00 -24.68 peak
6	pp17896.250	18.69	43.08	54.48	45.21	52.50	74.00 -21.50 peak



Test Mode: 26; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

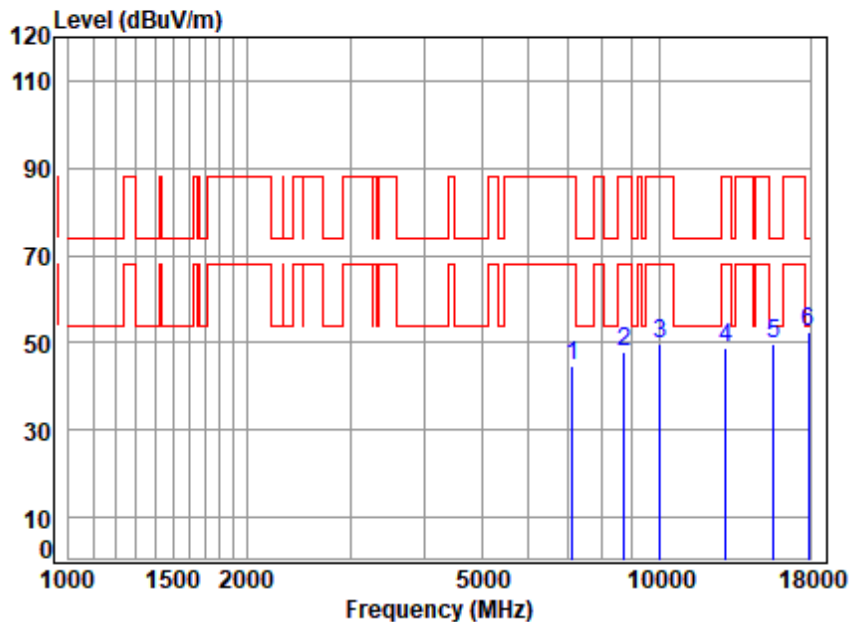

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7117.542	11.91	36.44	56.61	53.08	44.82	88.20	-43.38 peak
2	8713.630	12.11	38.57	55.26	52.57	47.99	88.20	-40.21 peak
3	10010.420	13.04	38.92	54.09	51.78	49.65	88.20	-38.55 peak
4	12950.000	15.85	40.35	54.47	47.29	49.02	88.20	-39.18 peak
5	15622.990	17.19	38.52	54.11	47.91	49.51	74.00	-24.49 peak
6	pp17896.250	18.69	43.08	54.48	45.11	52.40	74.00	-21.60 peak



Test Mode: 26; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

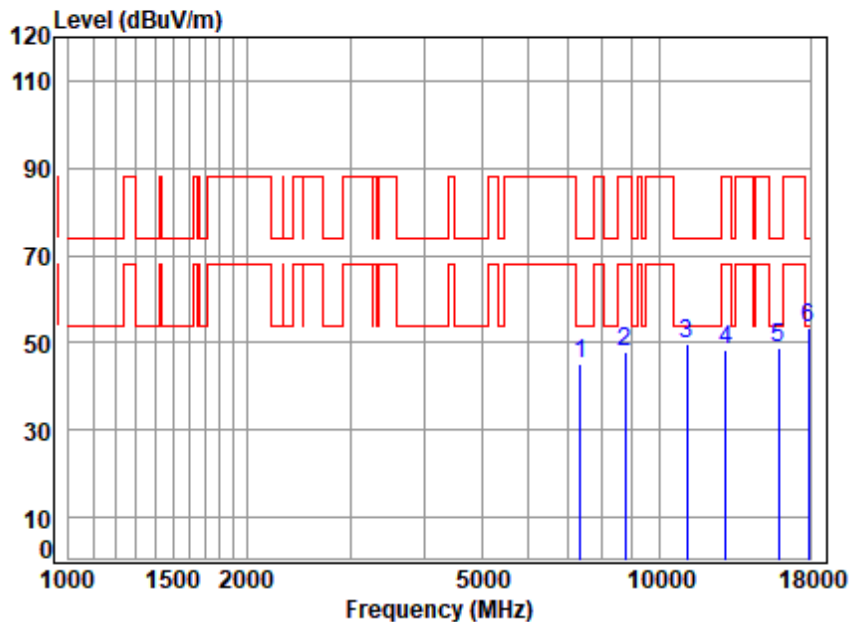

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7347.474	11.51	36.79	56.42	53.13	45.01	74.00	-28.99 peak
2	8764.146	12.19	38.50	55.21	52.22	47.70	88.20	-40.50 peak
3	11140.310	14.70	39.54	53.54	49.17	49.87	74.00	-24.13 peak
4	12950.000	15.85	40.35	54.47	46.67	48.40	88.20	-39.80 peak
5	15896.290	17.27	38.69	54.03	47.07	49.00	74.00	-25.00 peak
6	pp17896.250	18.69	43.08	54.48	46.24	53.53	74.00	-20.47 peak



Test Mode: 26; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

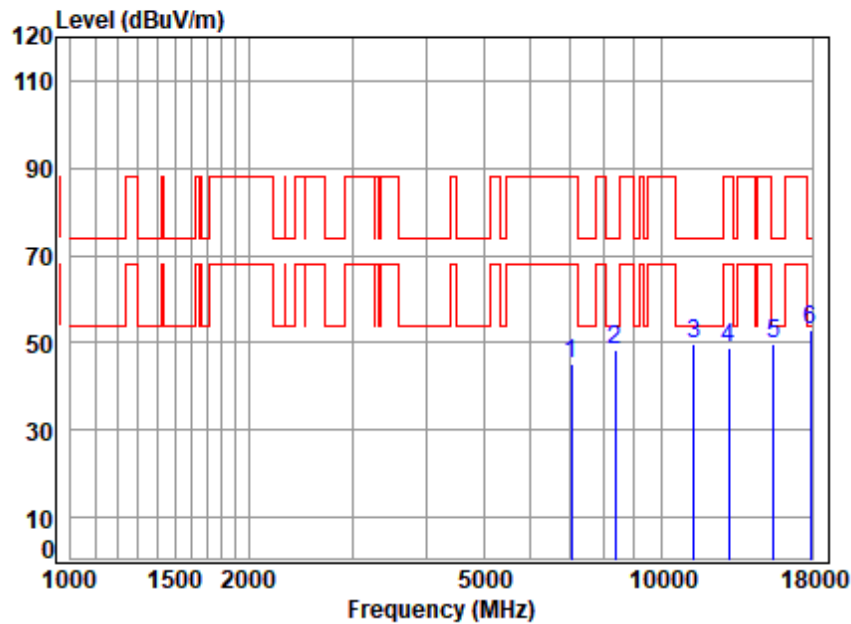

Condition: 3m HORIZONTAL

Job No : 02150AT

Mode : 6515 TX RSE

: Wi-Fi 6E 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7035.727	11.59	36.27	56.67	53.76	44.95	88.20	-43.25	peak
2	8368.069	11.67	38.66	55.57	53.70	48.46	74.00	-25.54	peak
3	11368.000	14.35	39.70	53.61	49.32	49.76	74.00	-24.24	peak
4	13030.000	15.79	40.30	54.50	47.17	48.76	88.20	-39.44	peak
5	15488.110	16.88	38.60	54.15	48.25	49.58	74.00	-24.42	peak
6	pp17896.250	18.69	43.08	54.48	45.41	52.70	74.00	-21.30	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 26; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

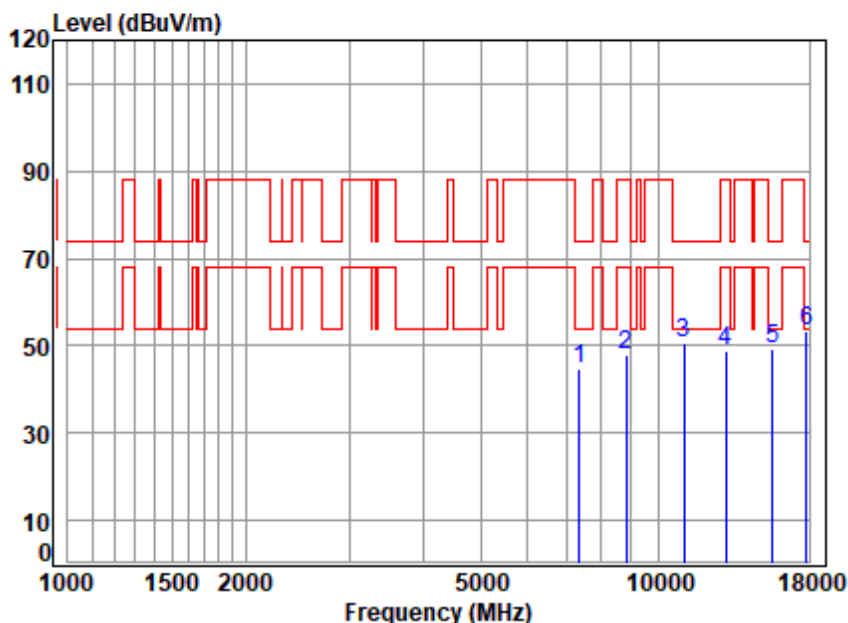

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6515 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7347.474	11.51	36.79	56.42	52.94	44.82	74.00	-29.18 peak
2	8814.957	12.25	38.50	55.17	52.18	47.76	88.20	-40.44 peak
3	11044.130	14.39	39.44	53.51	50.19	50.51	74.00	-23.49 peak
4	13030.000	15.79	40.30	54.50	47.15	48.74	88.20	-39.46 peak
5	15622.990	17.19	38.52	54.11	47.61	49.21	74.00	-24.79 peak
6	pp17844.590	18.62	42.77	54.47	46.31	53.23	74.00	-20.77 peak



Test Mode: 26; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

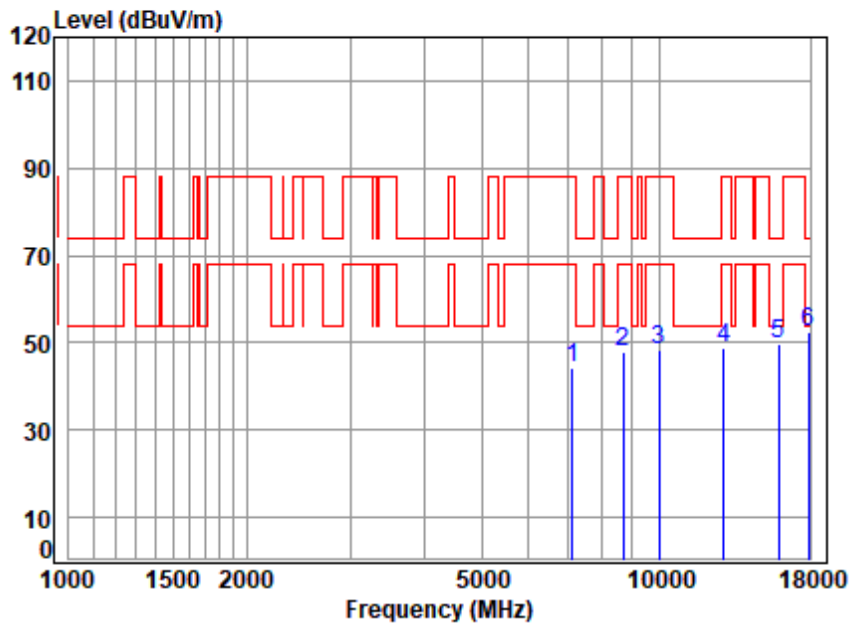

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7117.542	11.91	36.44	56.61	52.59	44.33	88.20	-43.87 peak
2	8688.480	12.08	38.55	55.28	52.51	47.86	88.20	-40.34 peak
3	9981.525	12.97	38.90	54.12	50.50	48.25	88.20	-39.95 peak
4	12870.000	15.69	40.37	54.41	47.38	49.03	88.20	-39.17 peak
5	15896.290	17.27	38.69	54.03	47.76	49.69	74.00	-24.31 peak
6	pp17896.250	18.69	43.08	54.48	45.37	52.66	74.00	-21.34 peak



Test Mode: 26; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

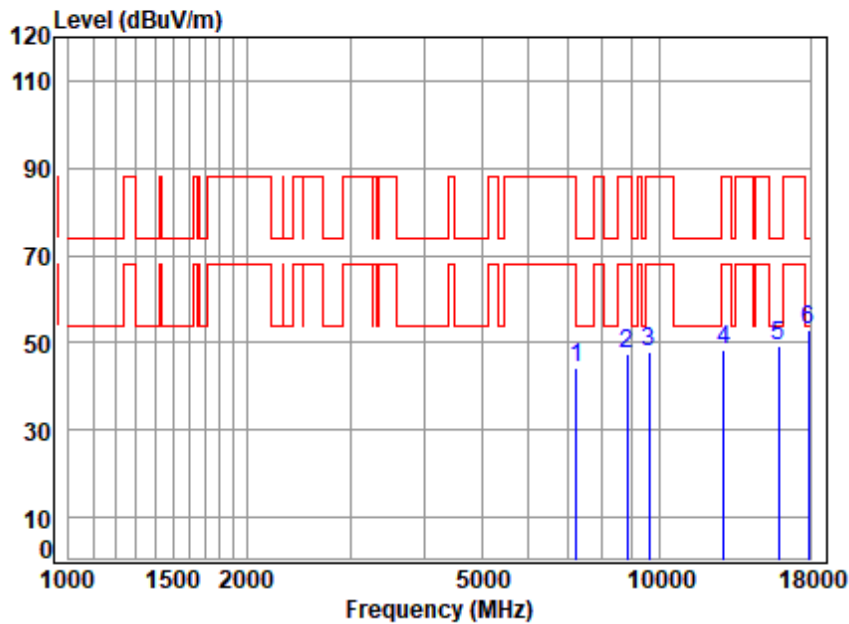

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6435 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7242.052	11.52	36.60	56.51	52.55	44.16	88.20	-44.04 peak
2	8814.957	12.25	38.50	55.17	51.95	47.53	88.20	-40.67 peak
3	9613.430	12.47	38.77	54.45	50.97	47.76	88.20	-40.44 peak
4	12870.000	15.69	40.37	54.41	46.80	48.45	88.20	-39.75 peak
5	15942.300	17.23	38.66	54.02	47.63	49.50	74.00	-24.50 peak
6	pp17896.250	18.69	43.08	54.48	45.42	52.71	74.00	-21.29 peak



Test Mode: 26; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

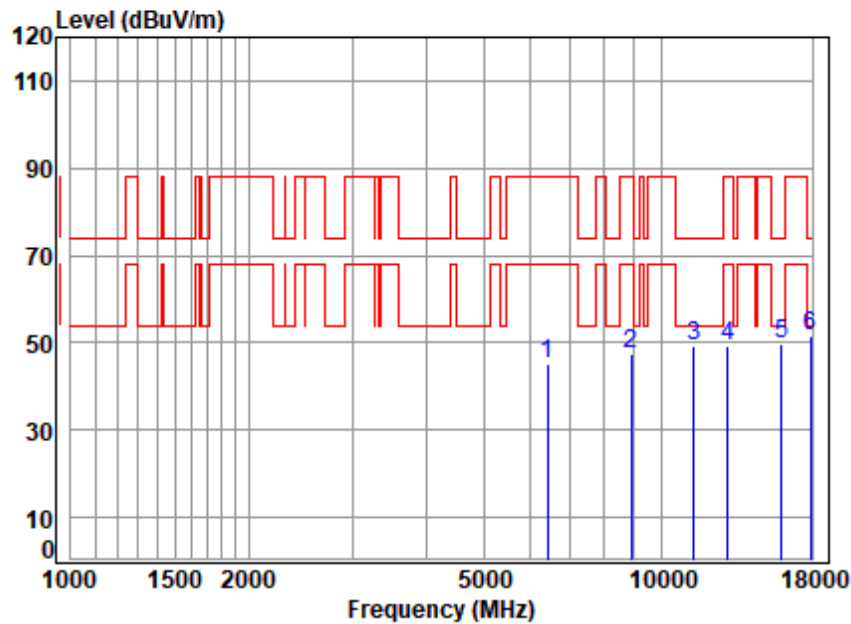

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6414.167	13.10	34.80	56.82	53.95	45.03	88.20	-43.17 peak
2	8891.725	12.22	38.58	55.10	51.94	47.64	88.20	-40.56 peak
3	11335.190	14.49	39.70	53.60	48.83	49.42	74.00	-24.58 peak
4	12950.000	15.85	40.35	54.47	47.42	49.15	88.20	-39.05 peak
5	15988.450	17.17	38.61	54.00	48.00	49.78	74.00	-24.22 peak
6	pp17896.250	18.69	43.08	54.48	44.35	51.64	74.00	-22.36 peak



Test Mode: 26; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

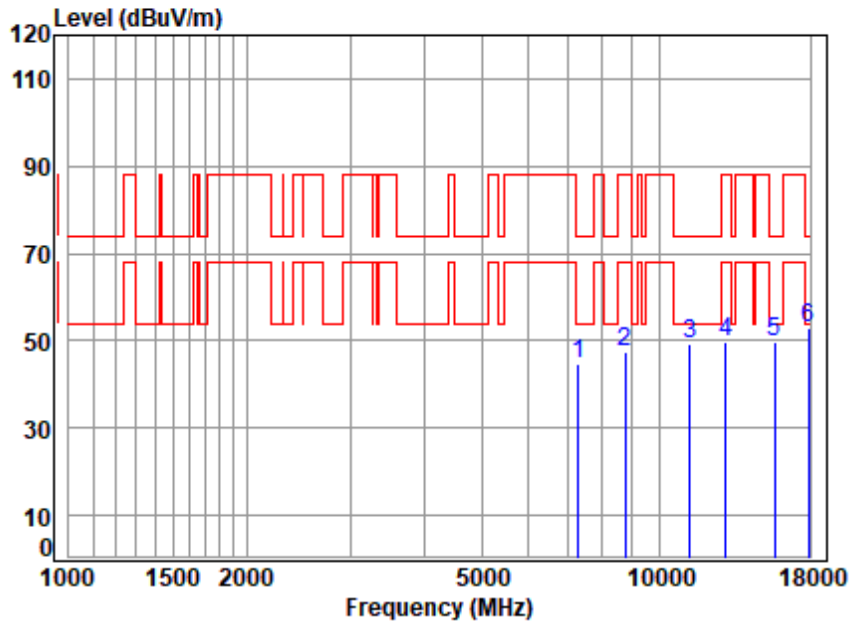

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6475 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7305.122	11.51	36.71	56.46	52.96	44.72	74.00	-29.28 peak
2	8738.852	12.15	38.52	55.24	52.24	47.67	88.20	-40.53 peak
3	11269.860	14.68	39.67	53.58	48.48	49.25	74.00	-24.75 peak
4	12950.000	15.85	40.35	54.47	48.03	49.76	88.20	-38.44 peak
5	15668.210	17.24	38.57	54.10	48.07	49.78	74.00	-24.22 peak
6	pp17896.250	18.69	43.08	54.48	45.80	53.09	74.00	-20.91 peak



Test Mode: 26; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

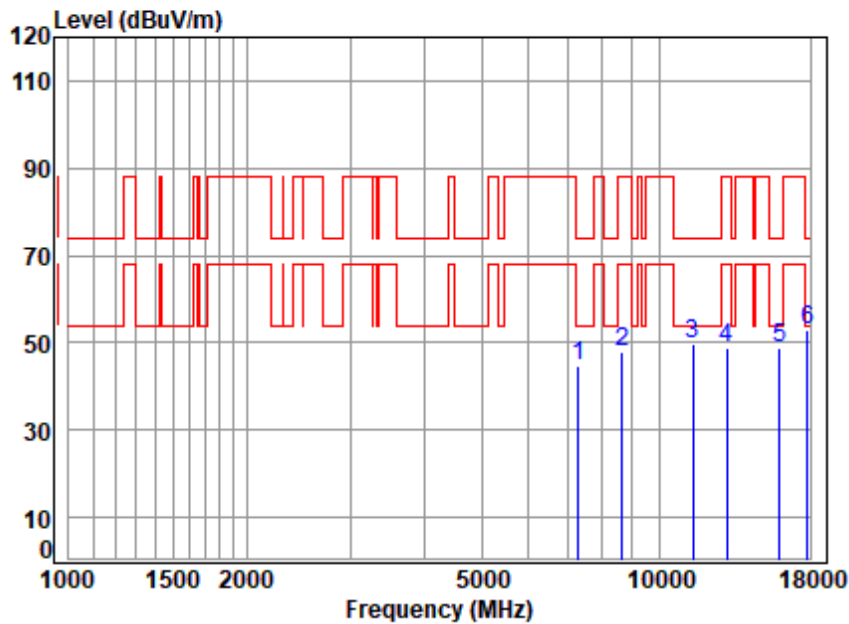

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6515 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7305.122	11.51	36.71	56.46	53.17	44.93	74.00	-29.07 peak
2	8663.404	12.04	38.45	55.30	52.65	47.84	88.20	-40.36 peak
3	11400.910	14.22	39.70	53.62	49.40	49.70	74.00	-24.30 peak
4	13030.000	15.79	40.30	54.50	47.39	48.98	88.20	-39.22 peak
5	15988.450	17.17	38.61	54.00	47.17	48.95	74.00	-25.05 peak
6	pp17844.590	18.62	42.77	54.47	46.17	53.09	74.00	-20.91 peak



Test Mode: 26; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

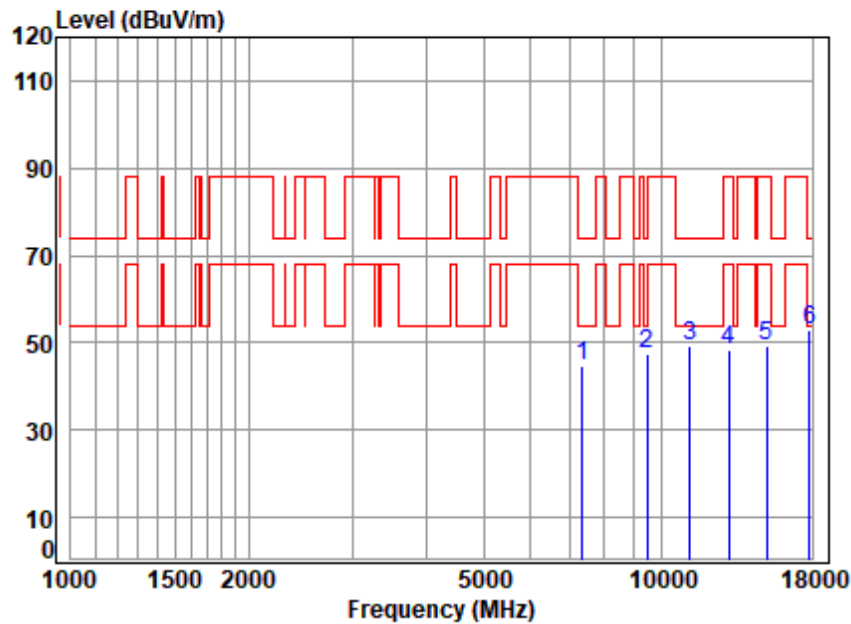

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6515 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7347.474	11.51	36.79	56.42	52.97	44.85	74.00	-29.15 peak
2	9448.149	12.43	38.80	54.60	50.81	47.44	74.00	-26.56 peak
3	11172.560	14.73	39.57	53.55	48.51	49.26	74.00	-24.74 peak
4	13030.000	15.79	40.30	54.50	46.93	48.52	88.20	-39.68 peak
5	15090.400	16.70	38.71	54.27	48.25	49.39	88.20	-38.81 peak
6	pp17844.590	18.62	42.77	54.47	46.01	52.93	74.00	-21.07 peak



Test Mode: 28; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

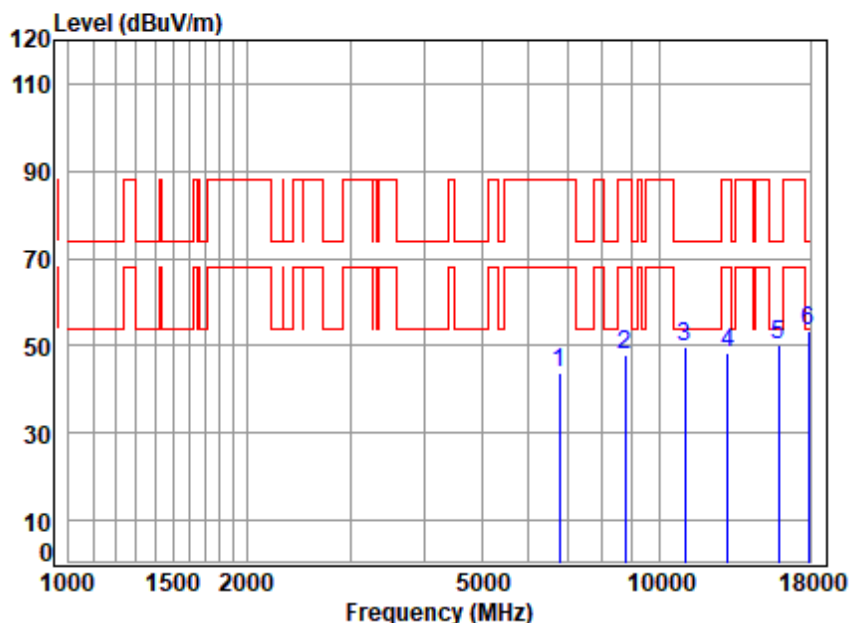

Condition: 3m HORIZONTAL

Job No : 02150AT

Mode : 6535 TX RSE

: Wi-Fi 6E 11a


	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6776.265	11.38	35.81	56.74	53.13	43.58	88.20 -44.62 Peak
2	8738.852	12.15	38.52	55.24	52.31	47.74	88.20 -40.46 peak
3	11044.130	14.39	39.44	53.51	49.25	49.57	74.00 -24.43 peak
4	13070.000	15.67	40.30	54.49	47.01	48.49	88.20 -39.71 peak
5	15942.300	17.23	38.66	54.02	48.47	50.34	74.00 -23.66 peak
6	pp17896.250	18.69	43.08	54.48	46.00	53.29	74.00 -20.71 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 28; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

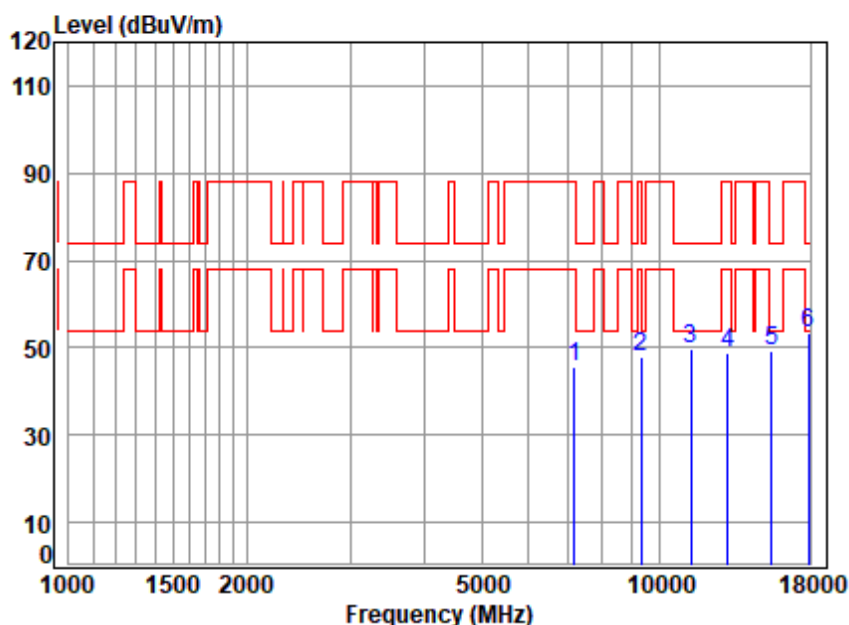

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6535 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7179.527	11.62	36.56	56.56	53.94	45.56	88.20	-42.64 peak
2	9312.588	12.19	38.80	54.72	51.78	48.05	74.00	-25.95 peak
3	11302.480	14.63	39.70	53.59	48.79	49.53	74.00	-24.47 peak
4	13070.000	15.67	40.30	54.49	47.45	48.93	88.20	-39.27 peak
5	15488.110	16.88	38.60	54.15	47.93	49.26	74.00	-24.74 peak
6	pp17896.250	18.69	43.08	54.48	45.93	53.22	74.00	-20.78 peak



Test Mode: 28; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

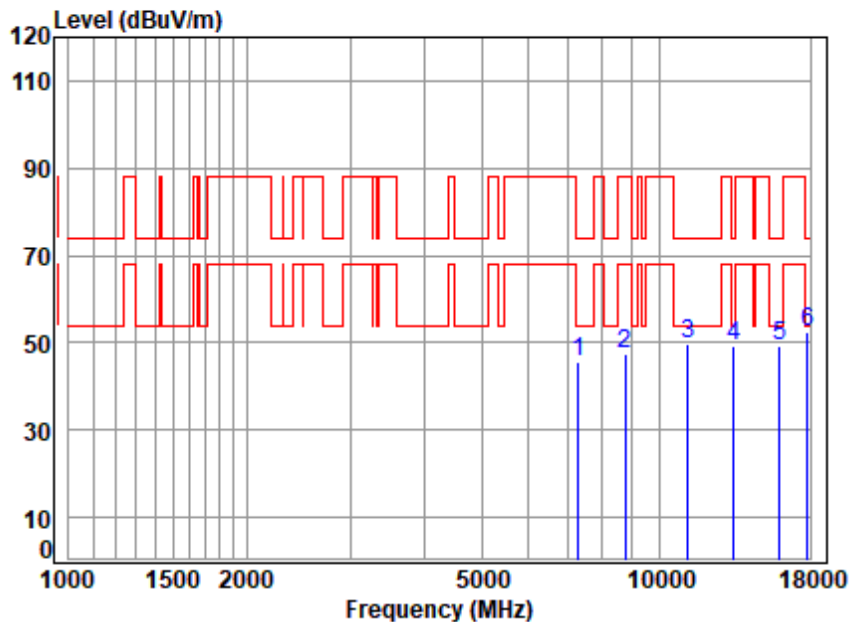

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6695 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7284.038	11.51	36.67	56.47	53.78	45.49	74.00	-28.51 peak
2	8764.146	12.19	38.50	55.21	52.15	47.63	88.20	-40.57 peak
3	11172.560	14.73	39.57	53.55	48.78	49.53	74.00	-24.47 peak
4	13390.000	15.97	40.30	54.46	47.33	49.14	74.00	-24.86 peak
5	15988.450	17.17	38.61	54.00	47.63	49.41	74.00	-24.59 peak
6	pp17844.590	18.62	42.77	54.47	45.49	52.41	74.00	-21.59 peak



Test Mode: 28; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

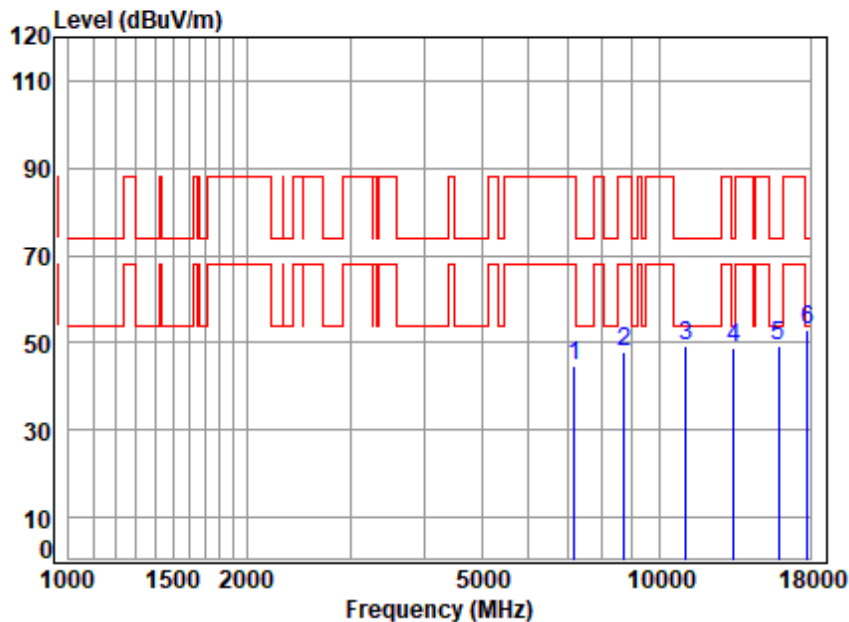

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6695 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7179.527	11.62	36.56	56.56	53.03	44.65	88.20	-43.55 peak
2	8713.630	12.11	38.57	55.26	52.40	47.82	88.20	-40.38 peak
3	11076.100	14.54	39.48	53.52	49.00	49.50	74.00	-24.50 peak
4	13390.000	15.97	40.30	54.46	46.86	48.67	74.00	-25.33 peak
5	15896.290	17.27	38.69	54.03	47.20	49.13	74.00	-24.87 peak
6	pp17844.590	18.62	42.77	54.47	45.87	52.79	74.00	-21.21 peak



Test Mode: 28; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

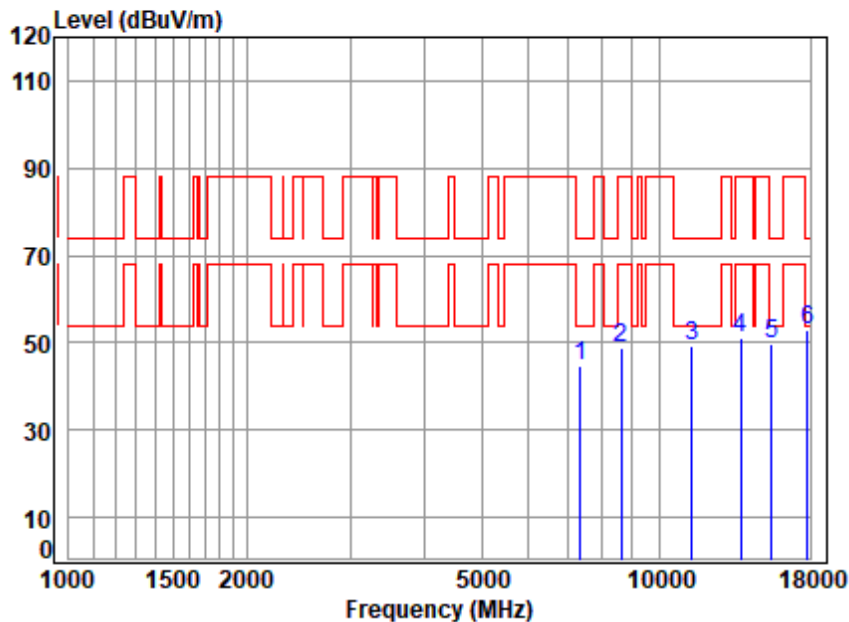

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6855 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7347.474	11.51	36.79	56.42	52.74	44.62	74.00	-29.38 peak
2	8613.468	11.98	38.47	55.35	53.86	48.96	88.20	-39.24 peak
3	11335.190	14.49	39.70	53.60	48.90	49.49	74.00	-24.51 peak
4	13710.000	16.36	39.99	54.43	49.04	50.96	88.20	-37.24 peak
5	15488.110	16.88	38.60	54.15	48.18	49.51	74.00	-24.49 peak
6	pp17793.090	18.61	42.45	54.46	46.50	53.10	74.00	-20.90 peak



Test Mode: 28; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

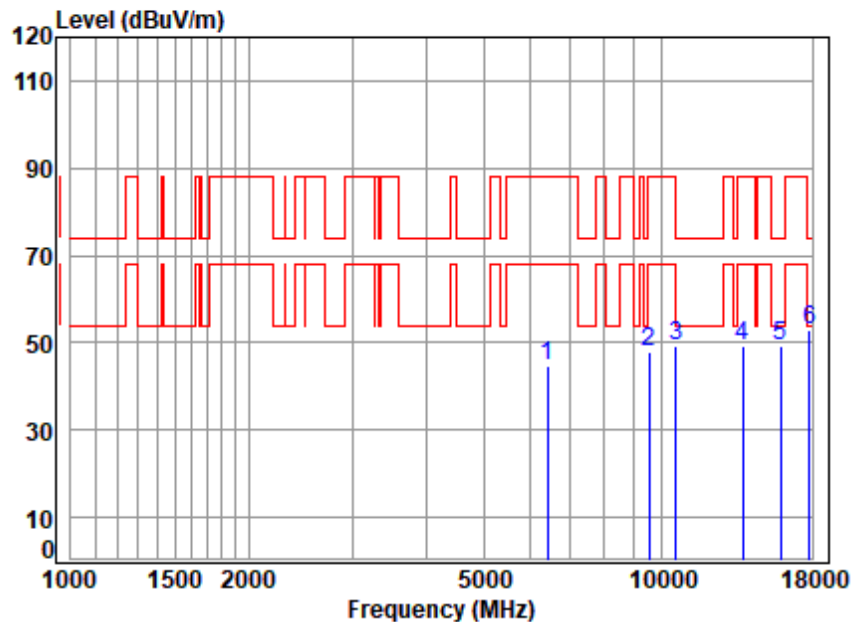

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6855 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6414.167	13.10	34.80	56.82	53.82	44.90	88.20	-43.30 peak
2	9530.432	12.52	38.84	54.52	50.89	47.73	88.20	-40.47 peak
3	10606.150	13.62	39.31	53.74	50.28	49.47	74.00	-24.53 peak
4	13710.000	16.36	39.99	54.43	47.20	49.12	88.20	-39.08 peak
5	15942.300	17.23	38.66	54.02	47.32	49.19	74.00	-24.81 peak
6	pp17844.590	18.62	42.77	54.47	45.92	52.84	74.00	-21.16 peak



Test Mode: 28; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

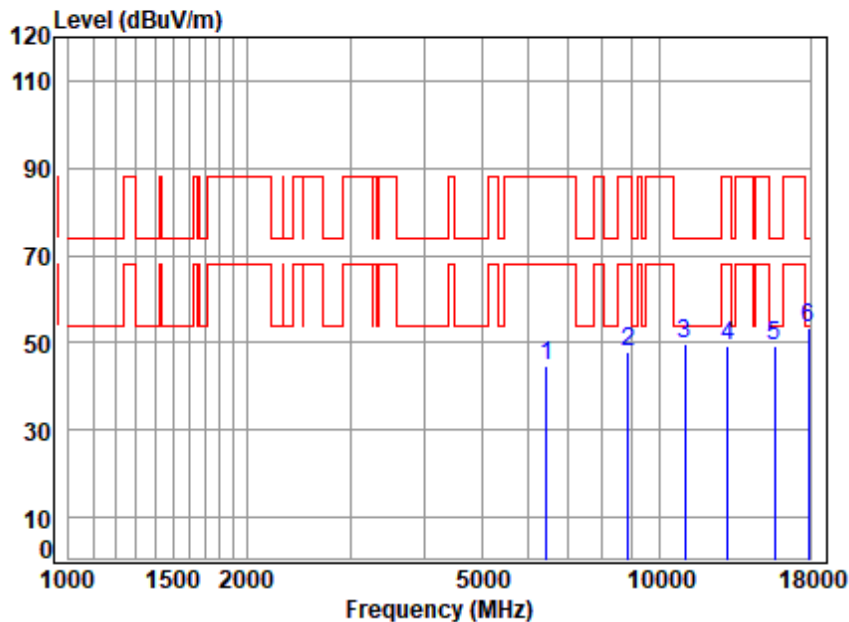

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6535 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6451.353	12.48	34.80	56.81	54.31	44.78	88.20	-43.42 peak
2	8866.062	12.23	38.53	55.12	52.31	47.95	88.20	-40.25 peak
3	11044.130	14.39	39.44	53.51	49.32	49.64	74.00	-24.36 peak
4	13070.000	15.67	40.30	54.49	47.80	49.28	88.20	-38.92 peak
5	15668.210	17.24	38.57	54.10	47.66	49.37	74.00	-24.63 peak
6	pp17896.250	18.69	43.08	54.48	46.22	53.51	74.00	-20.49 peak



Test Mode: 28; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

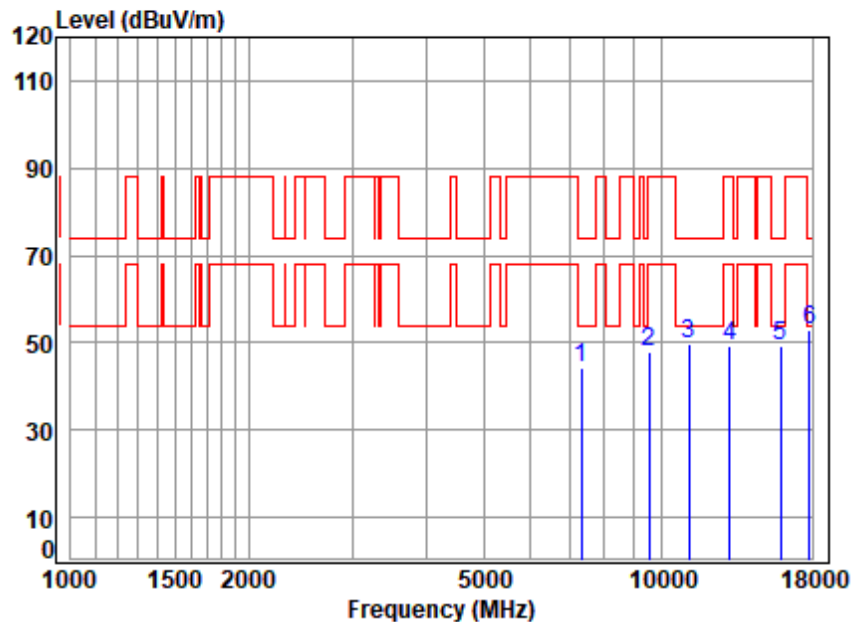

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6535 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7326.267	11.51	36.75	56.44	52.35	44.17	74.00	-29.83 peak
2	9530.432	12.52	38.84	54.52	50.89	47.73	88.20	-40.47 peak
3	11140.310	14.70	39.54	53.54	48.95	49.65	74.00	-24.35 peak
4	13070.000	15.67	40.30	54.49	47.85	49.33	88.20	-38.87 peak
5	15896.290	17.27	38.69	54.03	47.14	49.07	74.00	-24.93 peak
6	pp17793.090	18.61	42.45	54.46	46.23	52.83	74.00	-21.17 peak



Test Mode: 28; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

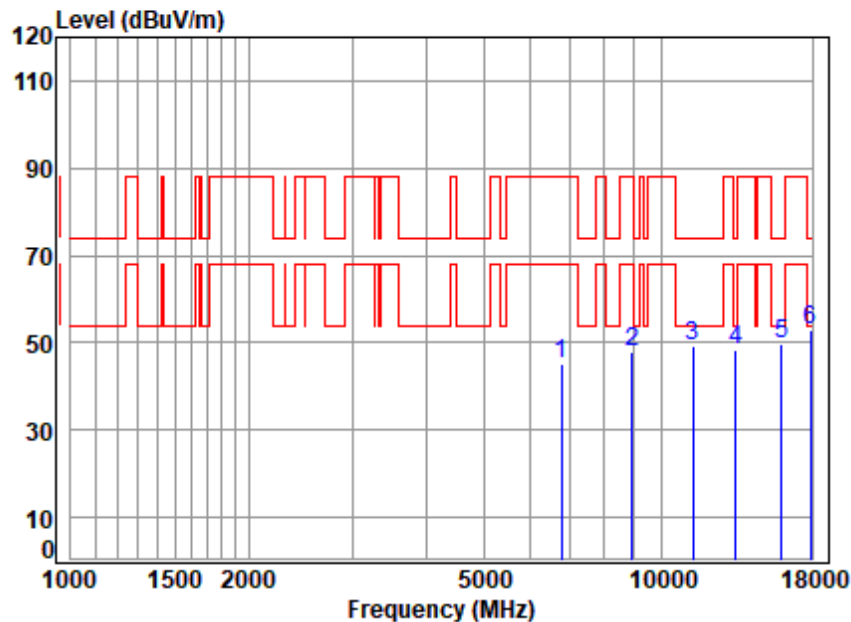

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6695 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6776.265	11.38	35.81	56.74	54.73	45.18	88.20	-43.02 peak
2	8917.462	12.21	38.57	55.07	52.05	47.76	88.20	-40.44 peak
3	11302.480	14.63	39.70	53.59	48.62	49.36	74.00	-24.64 peak
4	13390.000	15.97	40.30	54.46	46.77	48.58	74.00	-25.42 peak
5	15988.450	17.17	38.61	54.00	48.05	49.83	74.00	-24.17 peak
6	pp17896.250	18.69	43.08	54.48	45.67	52.96	74.00	-21.04 peak



Test Mode: 28; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

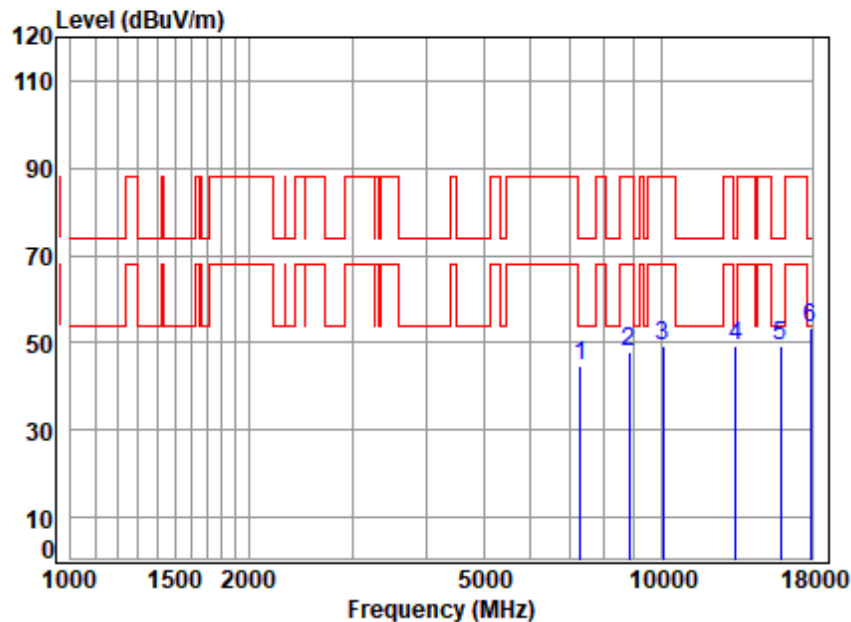

Condition: 3m VERTICAL

Job No : 02150AT

Mode : 6695 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7305.122	11.51	36.71	56.46	53.13	44.89	74.00	-29.11 peak
2	8814.957	12.25	38.50	55.17	52.55	48.13	88.20	-40.07 peak
3	10068.450	13.19	39.04	54.06	51.16	49.33	88.20	-38.87 peak
4	13390.000	15.97	40.30	54.46	47.44	49.25	74.00	-24.75 peak
5	15942.300	17.23	38.66	54.02	47.41	49.28	74.00	-24.72 peak
6	pp17896.250	18.69	43.08	54.48	46.25	53.54	74.00	-20.46 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500215005

Page: 319 of 354

Test Mode: 28; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

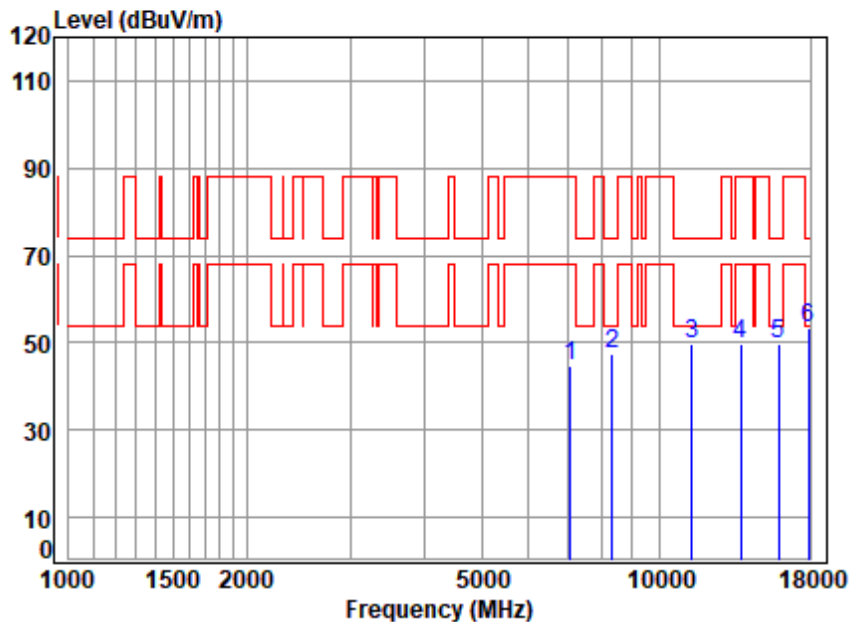

Condition: 3m HORIZONTAL

Job No : 02150AT

Mode : 6855 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7076.516	11.84	36.35	56.64	53.27	44.82	88.20	-43.38 peak
2	8319.836	11.73	38.22	55.61	53.27	47.61	74.00	-26.39 peak
3	11335.190	14.49	39.70	53.60	48.96	49.55	74.00	-24.45 peak
4	13710.000	16.36	39.99	54.43	47.76	49.68	88.20	-38.52 peak
5	15942.300	17.23	38.66	54.02	48.02	49.89	74.00	-24.11 peak
6	pp17896.250	18.69	43.08	54.48	46.05	53.34	74.00	-20.66 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 28; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

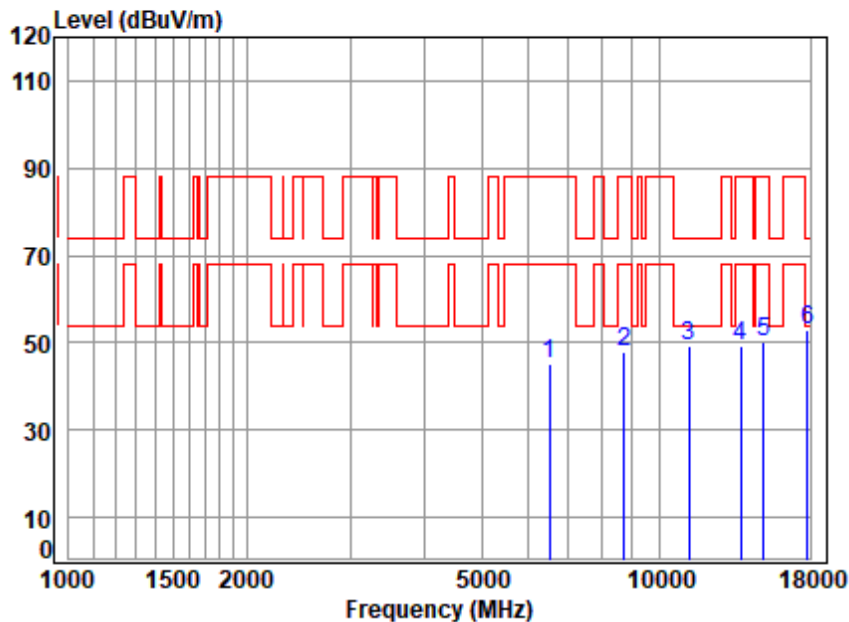

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6855 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6526.373	11.65	34.95	56.79	55.36	45.17	88.20	-43.03 peak
2	8713.630	12.11	38.57	55.26	52.38	47.80	88.20	-40.40 peak
3	11204.900	14.75	39.60	53.56	48.53	49.32	74.00	-24.68 peak
4	13710.000	16.36	39.99	54.43	47.16	49.08	88.20	-39.12 peak
5	15003.420	16.59	38.80	54.30	48.94	50.03	88.20	-38.17 peak
6	pp17844.590	18.62	42.77	54.47	46.11	53.03	74.00	-20.97 peak



Test Mode: 30; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

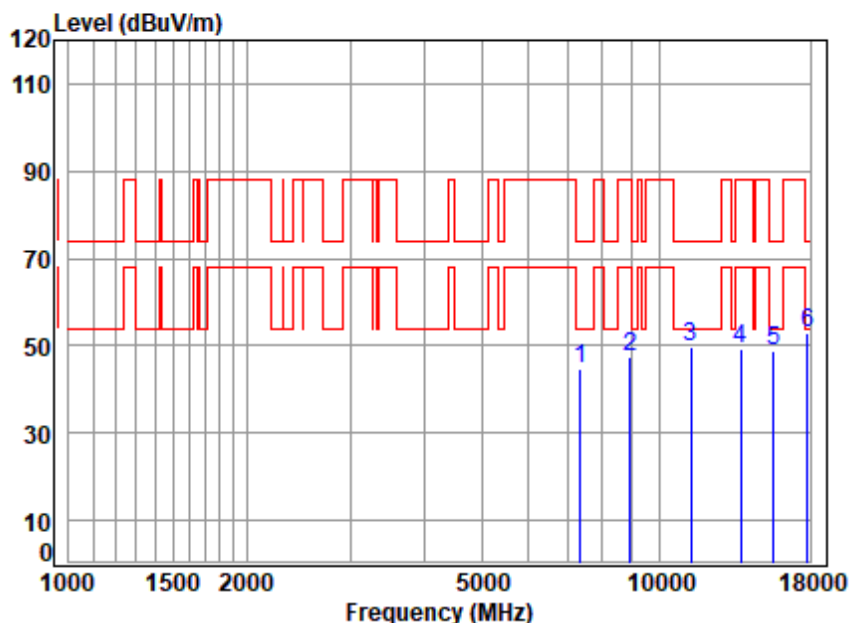

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6875 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7347.474	11.51	36.79	56.42	52.94	44.82	74.00	-29.18 peak
2	8917.462	12.21	38.57	55.07	51.76	47.47	88.20	-40.73 peak
3	11302.480	14.63	39.70	53.59	48.77	49.51	74.00	-24.49 peak
4	13750.000	16.18	39.95	54.43	47.50	49.20	88.20	-39.00 peak
5	15622.990	17.19	38.52	54.11	47.42	49.02	74.00	-24.98 peak
6	pp17844.590	18.62	42.77	54.47	45.83	52.75	74.00	-21.25 peak



Test Mode: 30; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

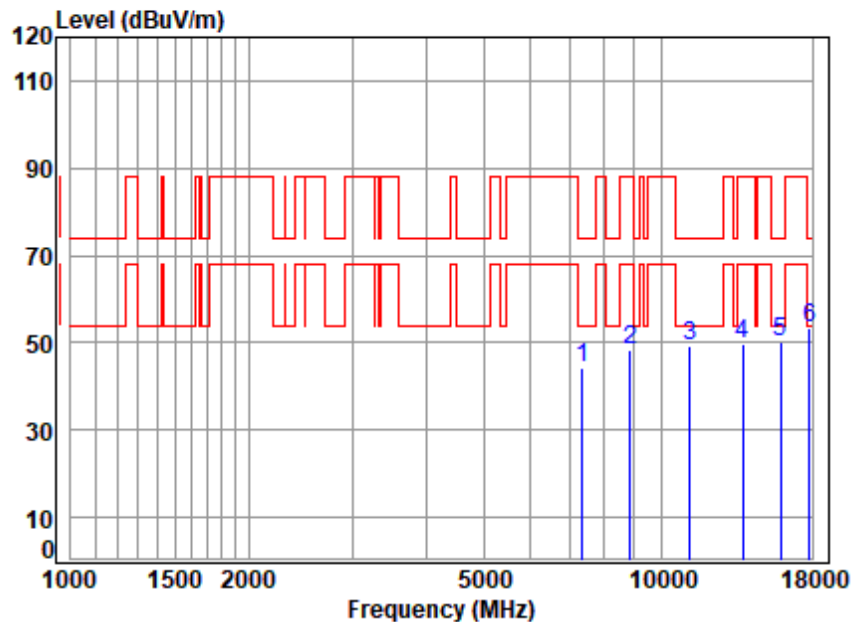

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6875 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7347.474	11.51	36.79	56.42	52.42	44.30	74.00	-29.70 peak
2	8840.473	12.24	38.50	55.14	52.73	48.33	88.20	-39.87 peak
3	11172.560	14.73	39.57	53.55	48.37	49.12	74.00	-24.88 peak
4	13750.000	16.18	39.95	54.43	48.18	49.88	88.20	-38.32 peak
5	15896.290	17.27	38.69	54.03	48.07	50.00	74.00	-24.00 peak
6	pp17844.590	18.62	42.77	54.47	46.57	53.49	74.00	-20.51 peak



Test Mode: 30; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

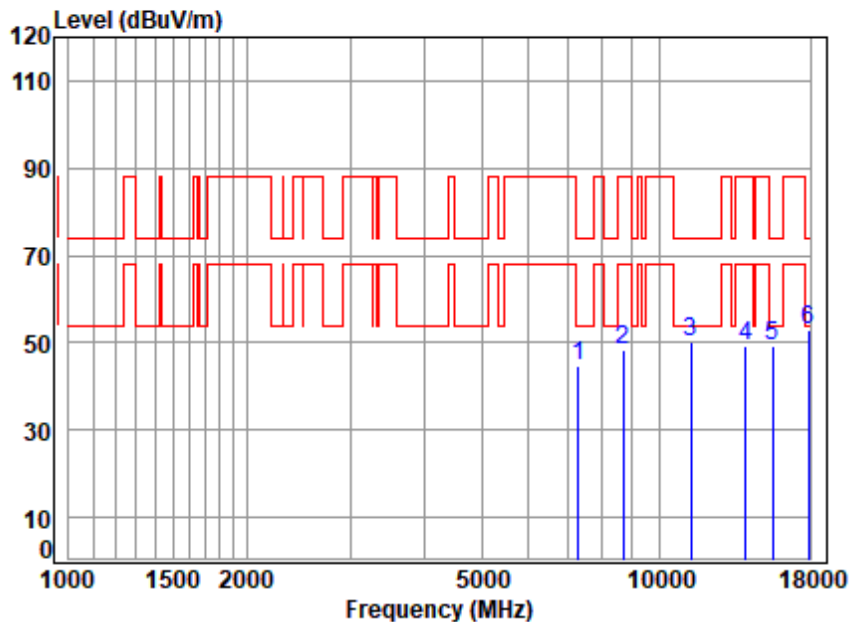

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6995 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7284.038	11.51	36.67	56.47	53.11	44.82	74.00	-29.18 peak
2	8688.480	12.08	38.55	55.28	52.83	48.18	88.20	-40.02 peak
3	11302.480	14.63	39.70	53.59	49.57	50.31	74.00	-23.69 peak
4	13990.000	16.42	39.90	54.40	47.15	49.07	88.20	-39.13 peak
5	15577.900	17.11	38.52	54.13	47.63	49.13	74.00	-24.87 peak
6	pp17896.250	18.69	43.08	54.48	45.63	52.92	74.00	-21.08 peak



Test Mode: 30; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

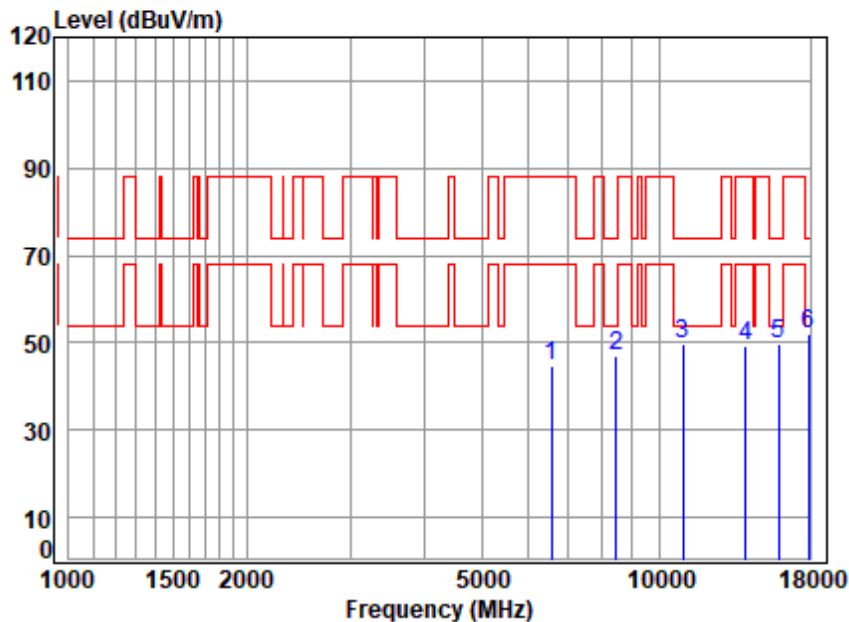

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6995 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6564.209	11.63	35.06	56.79	54.97	44.87	88.20	-43.33 peak
2	8440.945	11.91	38.44	55.50	52.08	46.93	74.00	-27.07 Peak
3	10948.780	14.06	39.35	53.53	49.96	49.84	74.00	-24.16 peak
4	13990.000	16.42	39.90	54.40	47.31	49.23	88.20	-38.97 peak
5	15896.290	17.27	38.69	54.03	47.86	49.79	74.00	-24.21 peak
6	pp17896.250	18.69	43.08	54.48	44.75	52.04	74.00	-21.96 peak



Test Mode: 30; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

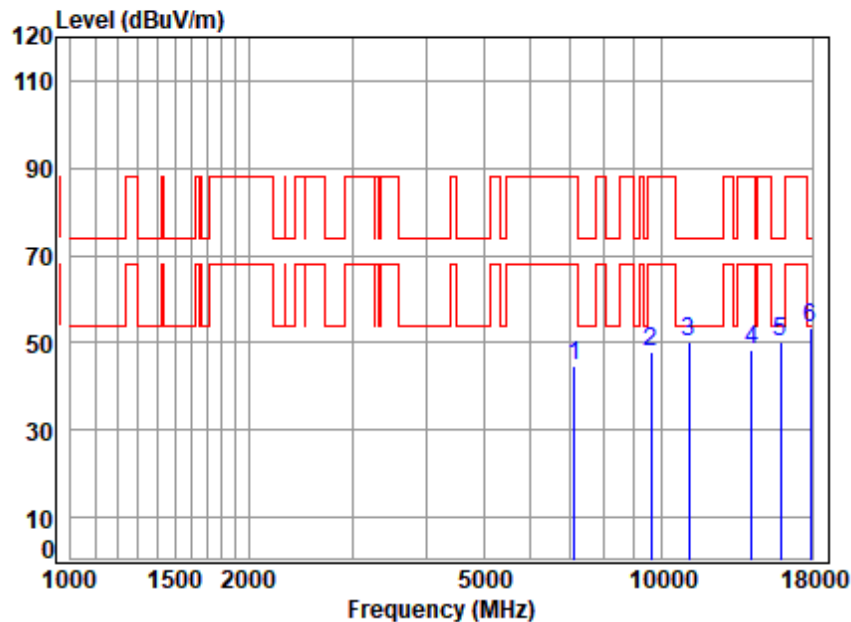

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 7115 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7117.542	11.91	36.44	56.61	52.82	44.56	88.20	-43.64 peak
2	9613.430	12.47	38.77	54.45	50.95	47.74	88.20	-40.46 peak
3	11140.310	14.70	39.54	53.54	49.30	50.00	74.00	-24.00 peak
4	14230.000	16.06	39.80	54.38	47.01	48.49	88.20	-39.71 peak
5	15942.300	17.23	38.66	54.02	48.45	50.32	74.00	-23.68 peak
6	pp17896.250	18.69	43.08	54.48	45.96	53.25	74.00	-20.75 peak



Test Mode: 30; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

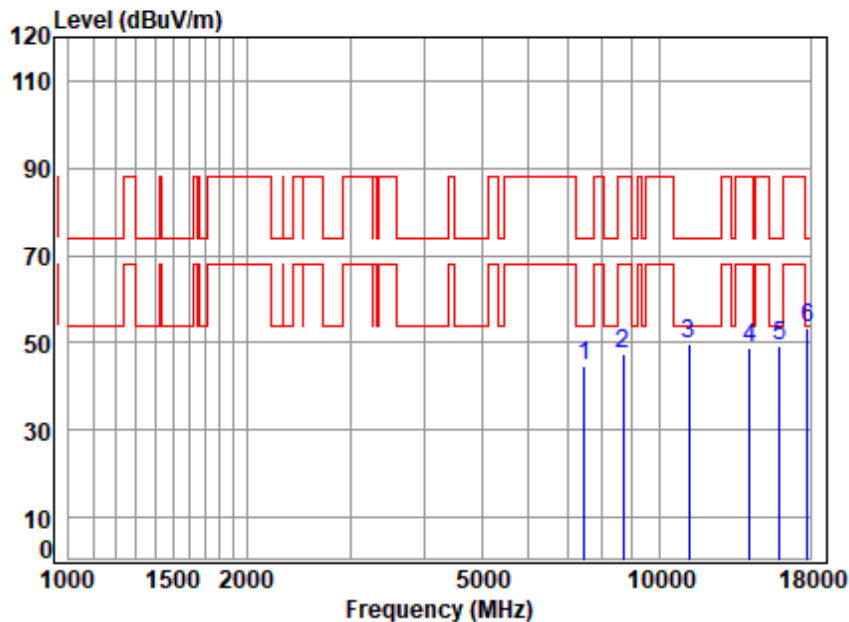

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 7115 TX RSE

: Wi-Fi 6E 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7454.429	11.35	36.80	56.34	52.91	44.72	74.00	-29.28 peak
2	8688.480	12.08	38.55	55.28	52.17	47.52	88.20	-40.68 peak
3	11204.900	14.75	39.60	53.56	49.00	49.79	74.00	-24.21 peak
4	14230.000	16.06	39.80	54.38	47.32	48.80	88.20	-39.40 peak
5	15988.450	17.17	38.61	54.00	47.37	49.15	74.00	-24.85 peak
6	pp17844.590	18.62	42.77	54.47	46.26	53.18	74.00	-20.82 peak



Test Mode: 30; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

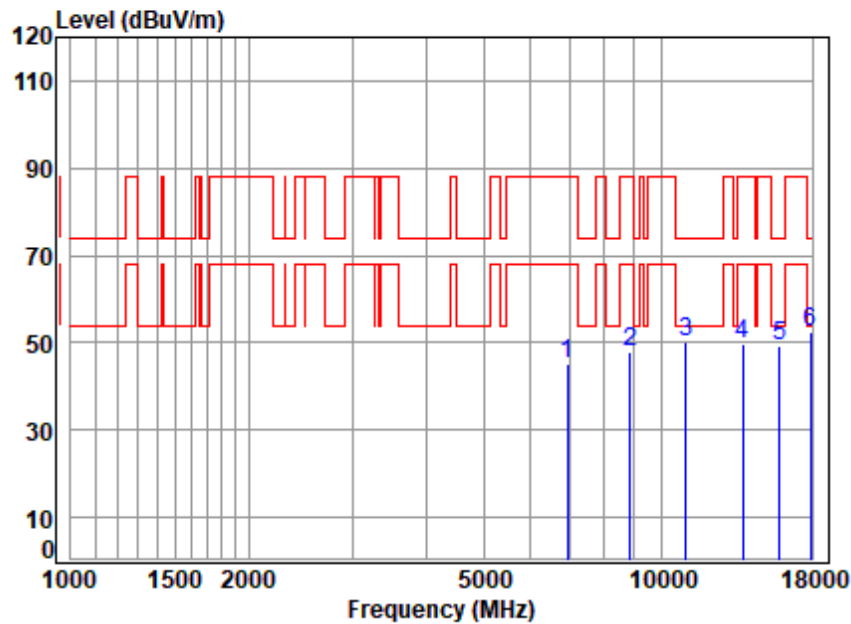

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6875 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6934.778	11.37	36.13	56.71	54.37	45.16	88.20	-43.04 peak
2	8866.062	12.23	38.53	55.12	52.18	47.82	88.20	-40.38 peak
3	11012.250	14.23	39.41	53.50	50.02	50.16	74.00	-23.84 peak
4	13750.000	16.18	39.95	54.43	47.96	49.66	88.20	-38.54 peak
5	15850.410	17.16	38.60	54.04	47.62	49.34	74.00	-24.66 peak
6	pp17896.250	18.69	43.08	54.48	45.21	52.50	74.00	-21.50 peak



Test Mode: 30; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

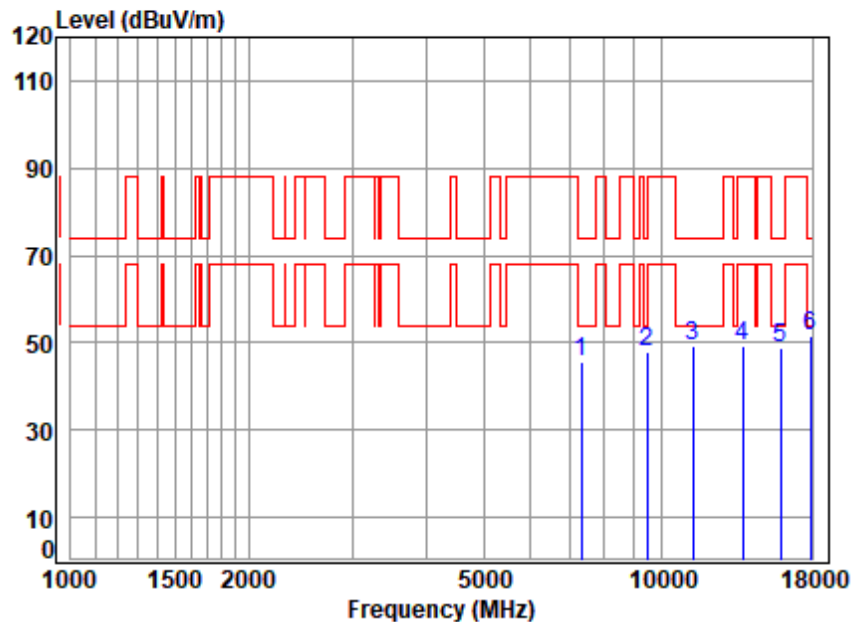

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6875 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7326.267	11.51	36.75	56.44	53.60	45.42	74.00	-28.58 peak
2	9448.149	12.43	38.80	54.60	51.12	47.75	74.00	-26.25 peak
3	11302.480	14.63	39.70	53.59	48.62	49.36	74.00	-24.64 peak
4	13750.000	16.18	39.95	54.43	47.57	49.27	88.20	-38.93 peak
5	15896.290	17.27	38.69	54.03	47.01	48.94	74.00	-25.06 peak
6	pp17896.250	18.69	43.08	54.48	44.34	51.63	74.00	-22.37 peak



Test Mode: 30; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

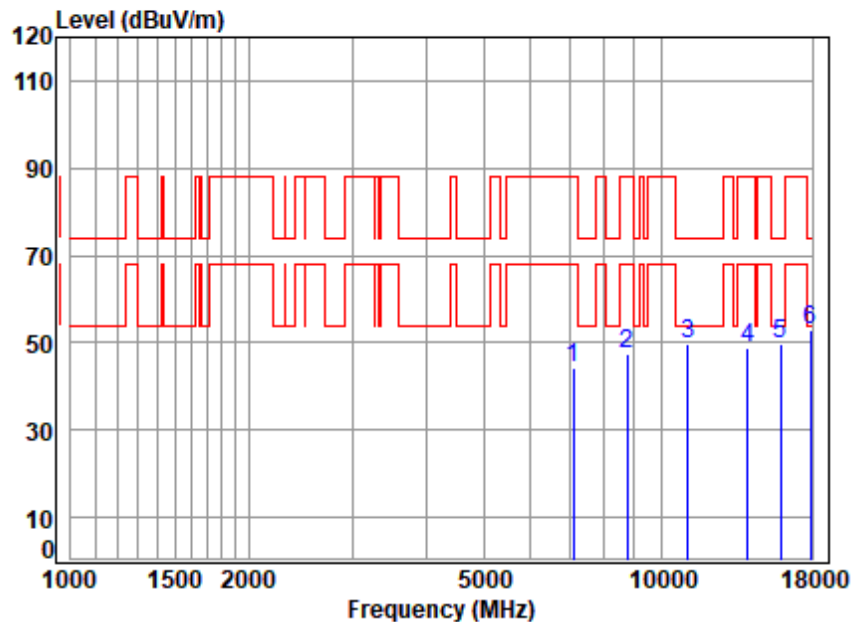

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 6995 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7096.999	11.97	36.39	56.62	52.54	44.28	88.20	-43.92 peak
2	8764.146	12.19	38.50	55.21	51.97	47.45	88.20	-40.75 peak
3	11108.160	14.67	39.51	53.53	48.96	49.61	74.00	-24.39 peak
4	13990.000	16.42	39.90	54.40	47.03	48.95	88.20	-39.25 peak
5	15942.300	17.23	38.66	54.02	47.77	49.64	74.00	-24.36 peak
6	pp17896.250	18.69	43.08	54.48	45.41	52.70	74.00	-21.30 peak



Test Mode: 30; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

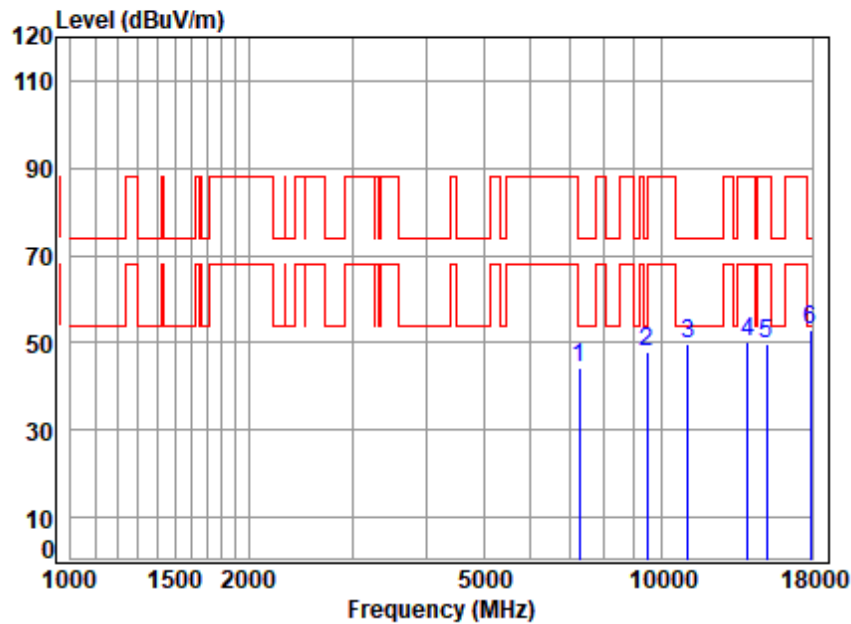

Condition: 3m VERTICAL

Job No : 02150AT


Mode : 6995 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7263.015	11.51	36.63	56.49	52.73	44.38	74.00	-29.62 peak
2	9475.497	12.50	38.85	54.57	51.00	47.78	74.00	-26.22 peak
3	11108.160	14.67	39.51	53.53	48.90	49.55	74.00	-24.45 peak
4	13990.000	16.42	39.90	54.40	48.37	50.29	88.20	-37.91 peak
5	15090.400	16.70	38.71	54.27	48.60	49.74	88.20	-38.46 peak
6	pp17896.250	18.69	43.08	54.48	45.59	52.88	74.00	-21.12 peak



Test Mode: 30; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

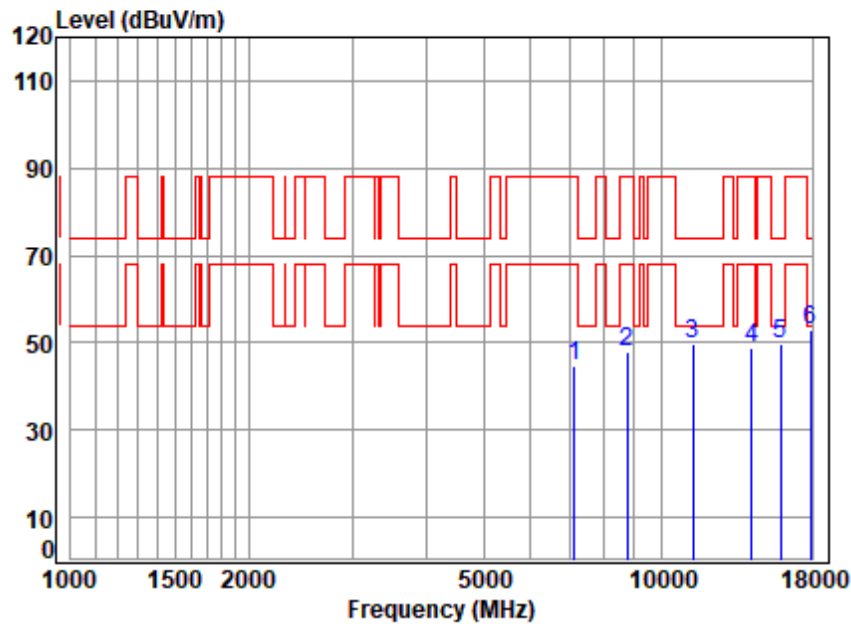

Condition: 3m HORIZONTAL

Job No : 02150AT


Mode : 7115 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7138.144	11.81	36.48	56.59	53.08	44.78	88.20	-43.42 peak
2	8738.852	12.15	38.52	55.24	52.46	47.89	88.20	-40.31 peak
3	11302.480	14.63	39.70	53.59	48.84	49.58	74.00	-24.42 peak
4	14230.000	16.06	39.80	54.38	47.51	48.99	88.20	-39.21 peak
5	15942.300	17.23	38.66	54.02	48.08	49.95	74.00	-24.05 peak
6	pp17896.250	18.69	43.08	54.48	45.82	53.11	74.00	-20.89 peak



Test Mode: 30; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

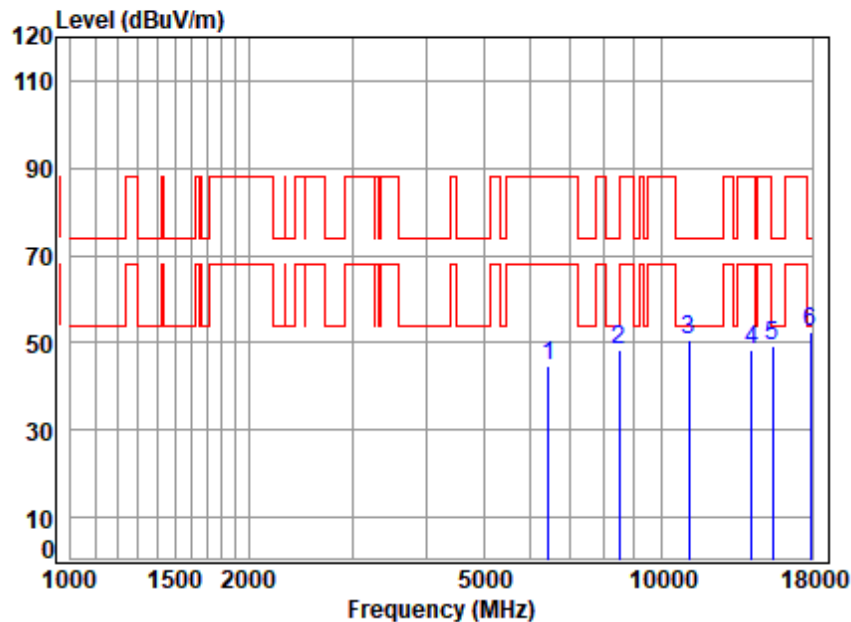

Condition: 3m VERTICAL

Job No : 02150AT

Mode : 7115 TX RSE

: Wi-Fi 6E 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6432.732	12.79	34.80	56.81	53.90	44.68	88.20	-43.52 peak
2	8489.882	12.24	38.32	55.46	53.29	48.39	74.00	-25.61 peak
3	11140.310	14.70	39.54	53.54	50.01	50.71	74.00	-23.29 peak
4	14230.000	16.06	39.80	54.38	47.08	48.56	88.20	-39.64 peak
5	15443.410	16.82	38.60	54.17	48.19	49.44	74.00	-24.56 peak
6	pp17896.250	18.69	43.08	54.48	45.18	52.47	74.00	-21.53 peak



7.6 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3
 Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.6.1 E.U.T. Operation

Operating Environment:




Temperature: 22.5 °C Humidity: 44.5 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	35	On mode, keep EUT working normally.



7.6.3 Test Setup Diagram

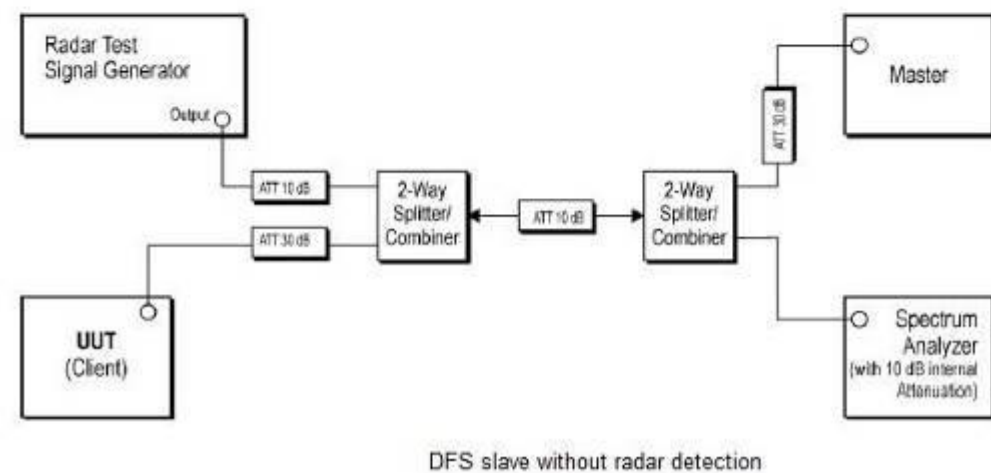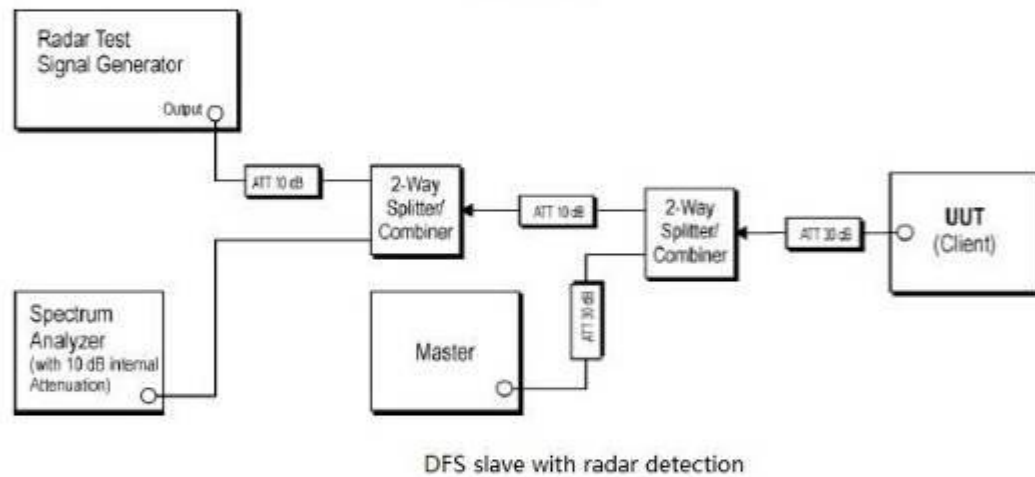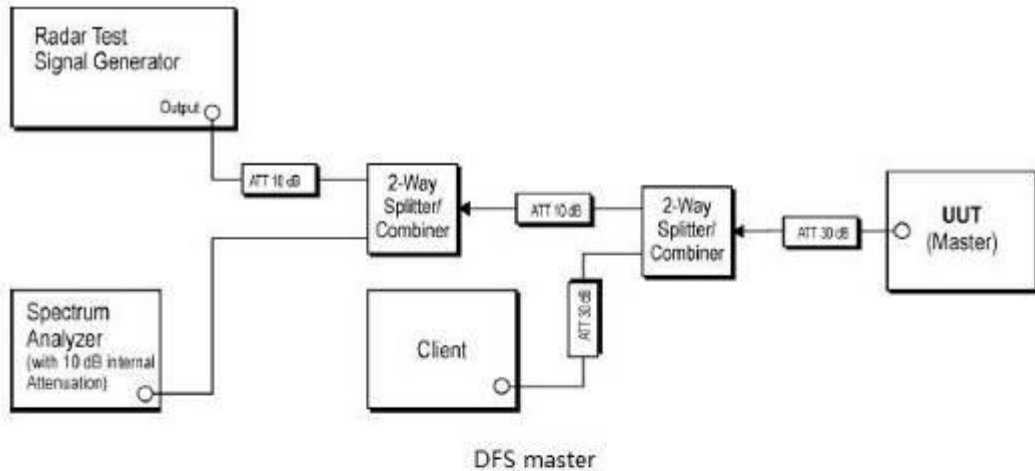

7.6.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.7 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
 Test Method: KDB 905462 D02 Section 7.8.3
 Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C Humidity: 44.5 % RH Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	35	On mode, keep EUT working normally.






Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Technical Services Co., Ltd. Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.7.3 Test Setup Diagram

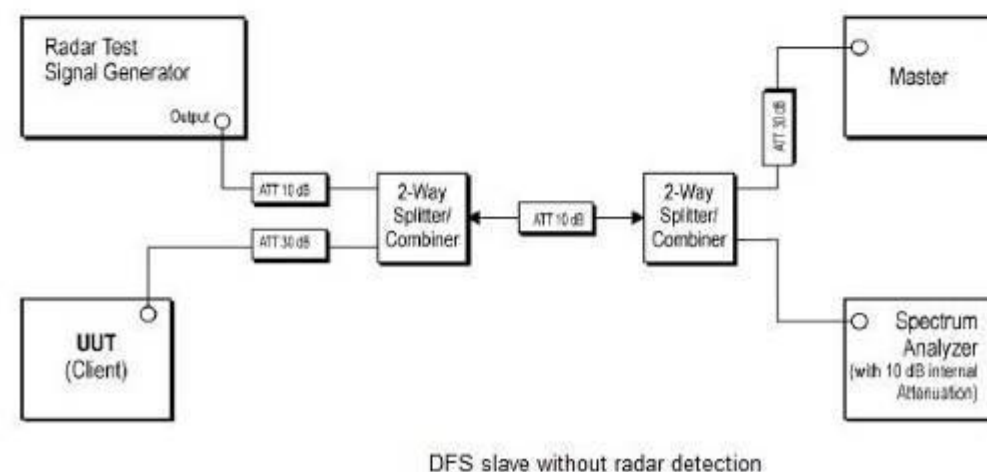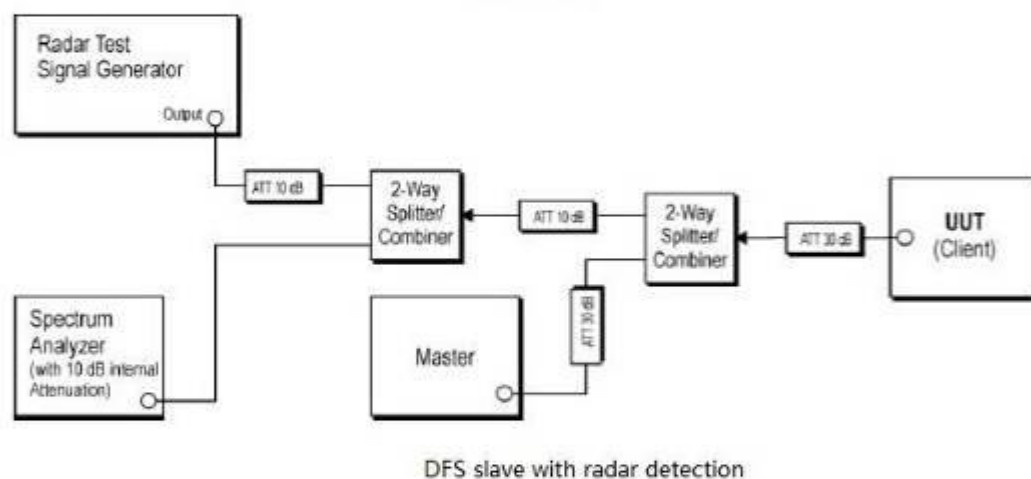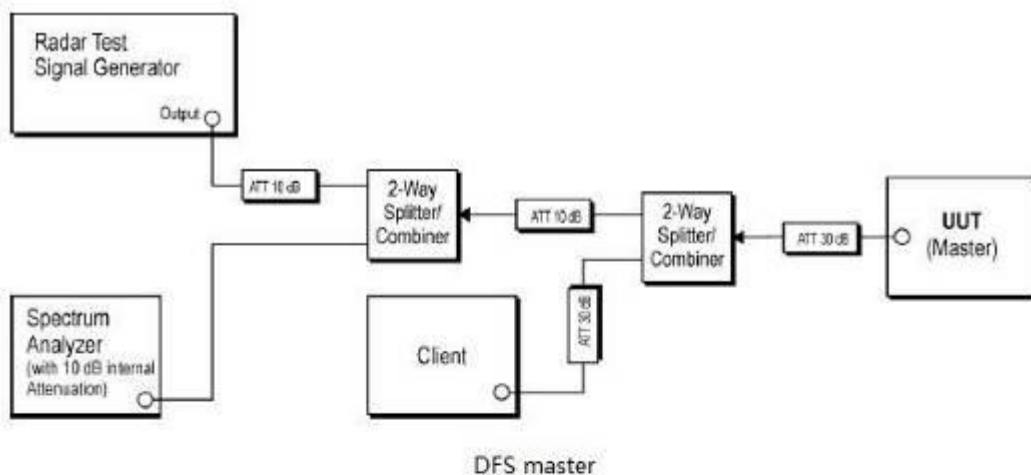

7.7.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Setup Photo for SZCR2505002150AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SZCR2505002150AT



10 Appendix

Note: Only the worst data are recorded.

1. Contention Based Protocol

1.1 Test Result

1.1.1 Duty Cycle_Band 5_Ant1

Ant1			
Mode	Freq. (MHz)	Incumbent Frequency (MHz)	Duty Cycle (%)
802.11be (EHT20)	6175	6175.000	17.54
802.11be (EHT320)	6105	5950.000	35.31
		6105.000	35.31
		6260.000	35.31

1.1.2 Contention Based Protocol_Detection Power_Band 5_Ant1

Ant1								
Mode	Freq. (MHz)	Incumbent Frequency (MHz)	EUT Status	Detected Power			Limit (dBm)	Verdict
				AWGN Power (dBm)	Antenna Gain (dBi)	Adjusted Power (dBm)		
802.11be (EHT20)	6175	6175.000	OFF	-64.53	3.0	-67.53	<=-62	Pass
			Minimal	-64.47	3.0	-67.47	<=-62	Pass
			ON	-65.47	3.0	-68.47	<=-62	Pass
802.11be (EHT320)	6105	5950.000	OFF	-63.81	3.0	-66.81	<=-62	Pass
			Minimal	-63.82	3.0	-66.82	<=-62	Pass
			ON	-64.82	3.0	-67.82	<=-62	Pass
		6105.000	OFF	-62.35	3.0	-65.35	<=-62	Pass
			Minimal	-62.36	3.0	-65.36	<=-62	Pass
			ON	-63.33	3.0	-66.33	<=-62	Pass
		6260.000	OFF	-62.82	3.0	-65.82	<=-62	Pass
			Minimal	-62.81	3.0	-65.81	<=-62	Pass
			ON	-63.82	3.0	-66.82	<=-62	Pass



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250500215005

Page: 341 of 354

1.1.3 Contention Based Protocol_Detection Probability_Band 5_Ant1

Ant1														
Mode	Freq. (MHz)	Incumbent Freq. (MHz)	1	2	3	4	5	6	7	8	9	10	Detected Probability (%)	Verdict
													Result	
802.11be (EHT20)	6175	6175.000	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	Pass
802.11be (EHT320)	6105	5950.000	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	Pass
		6105.000	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	Pass
		6260.000	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	100	Pass
Note1: CBP Detection Trials (Y=Detection, N=No Detection)														



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


1.2 Test Graph

1.2.1 Duty Cycle_Band 5_Ant1

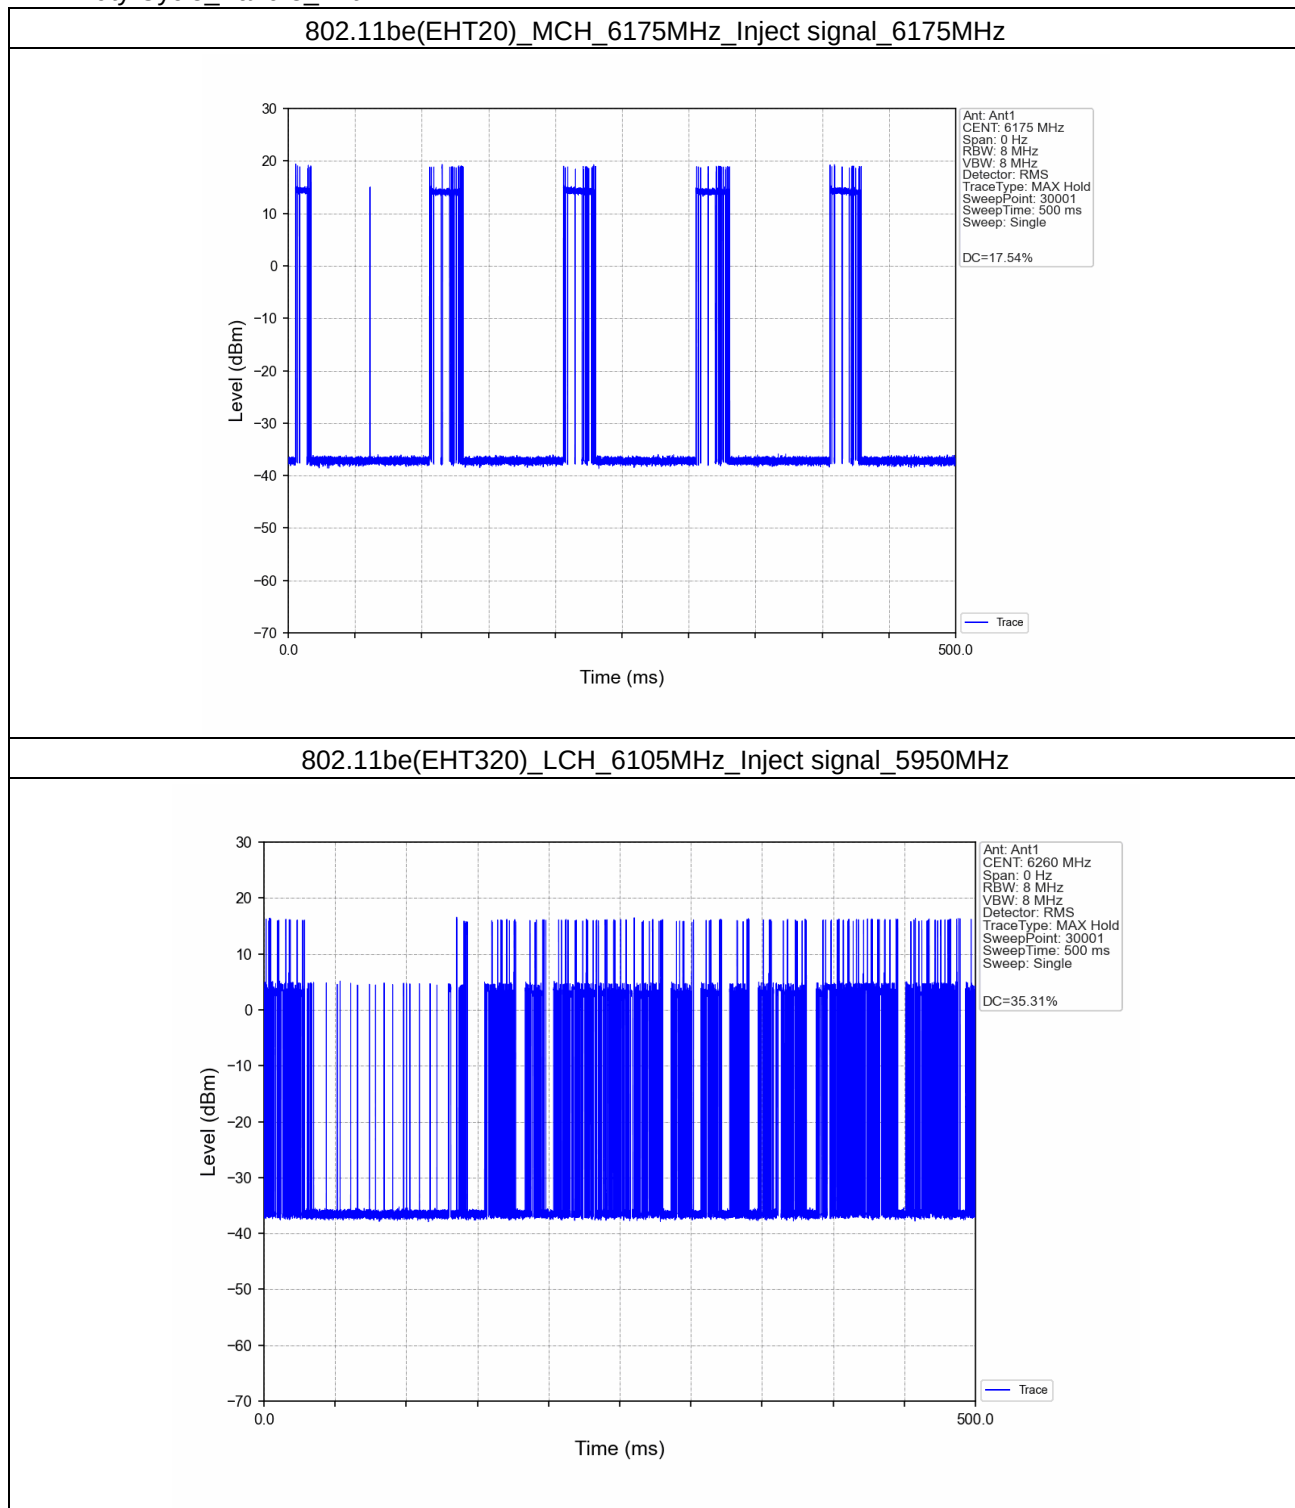


1.2.2 Contention Based Protocol_Detection Power_Band 5_Ant1


802.11be(EHT20)_MCH_6175MHz_Inject signal_6175MHz_Detection status_ON

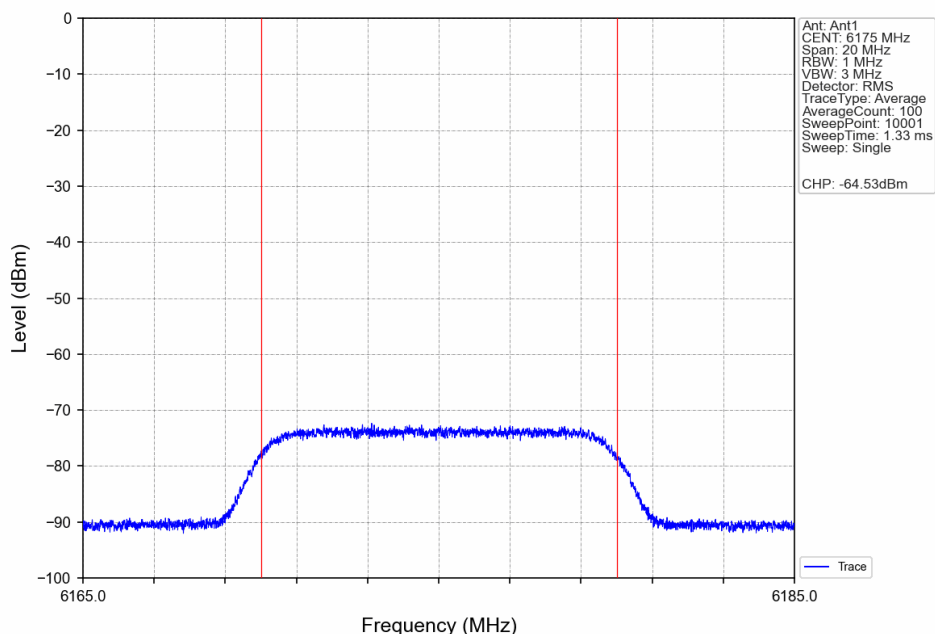


802.11be(EHT20)_MCH_6175MHz_Inject signal_6175MHz_Detection status_ON

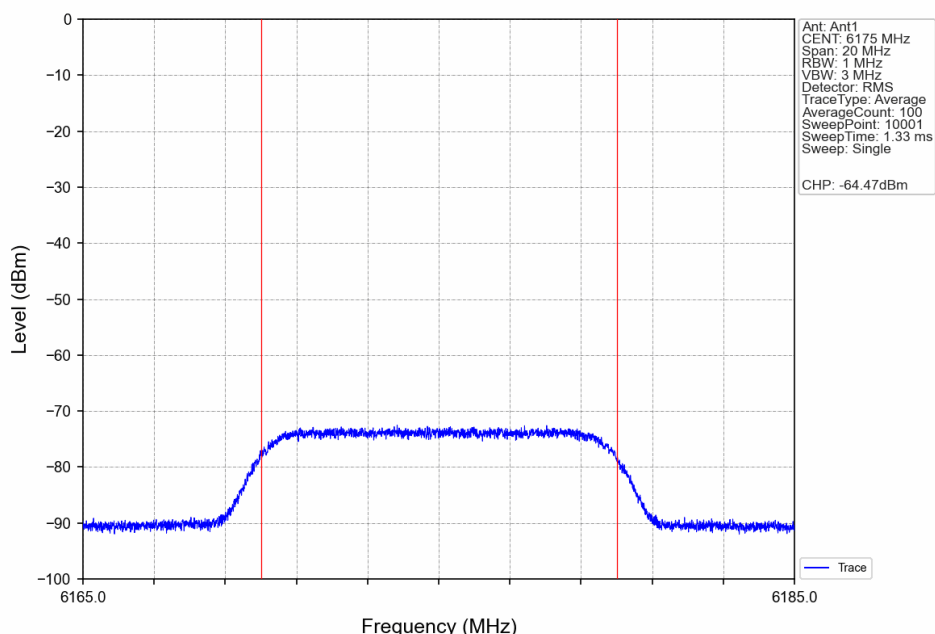


802.11be(EHT20)_MCH_6175MHz_Inject signal_6175MHz_Detection status_ON

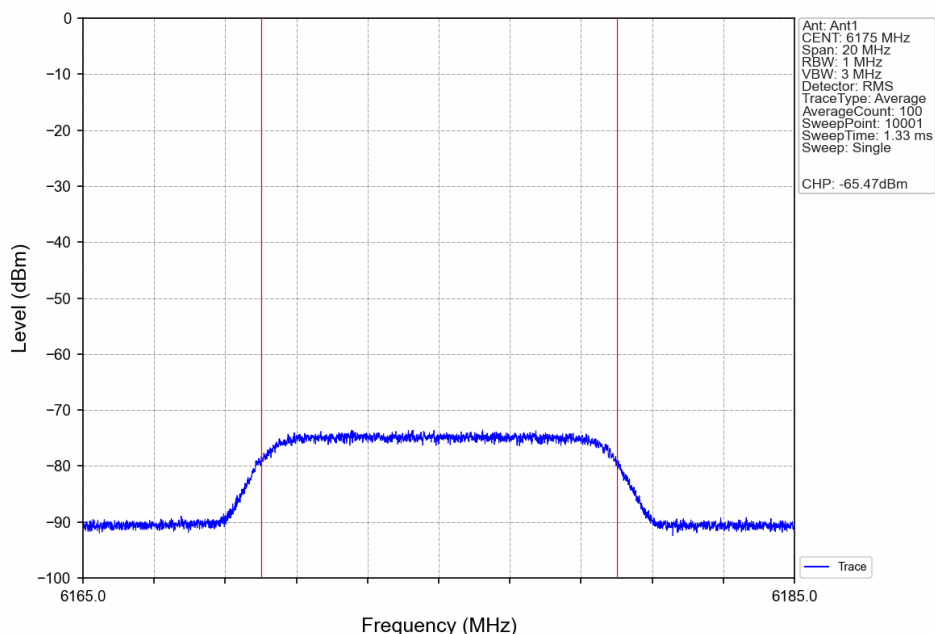


802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

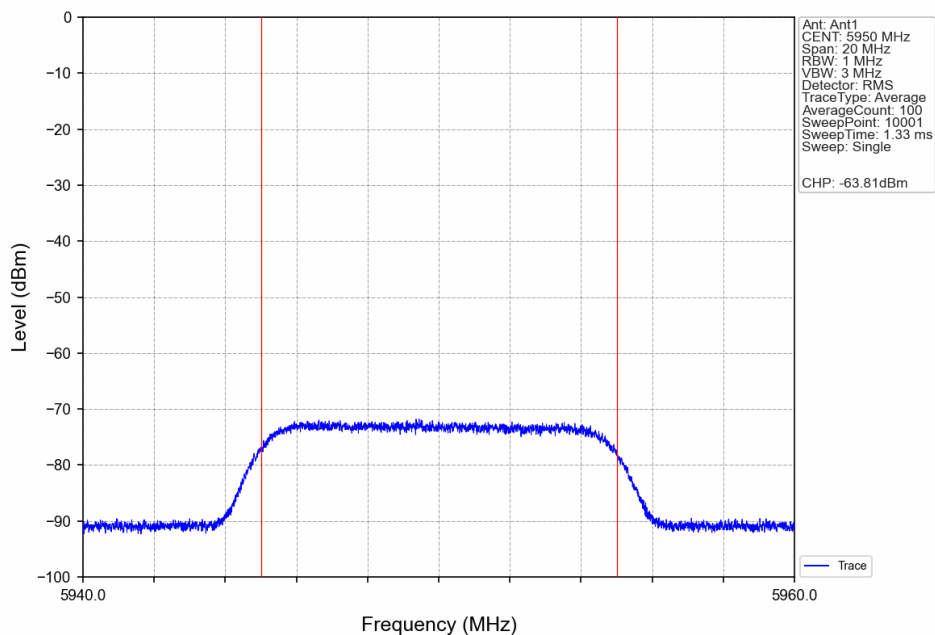


802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

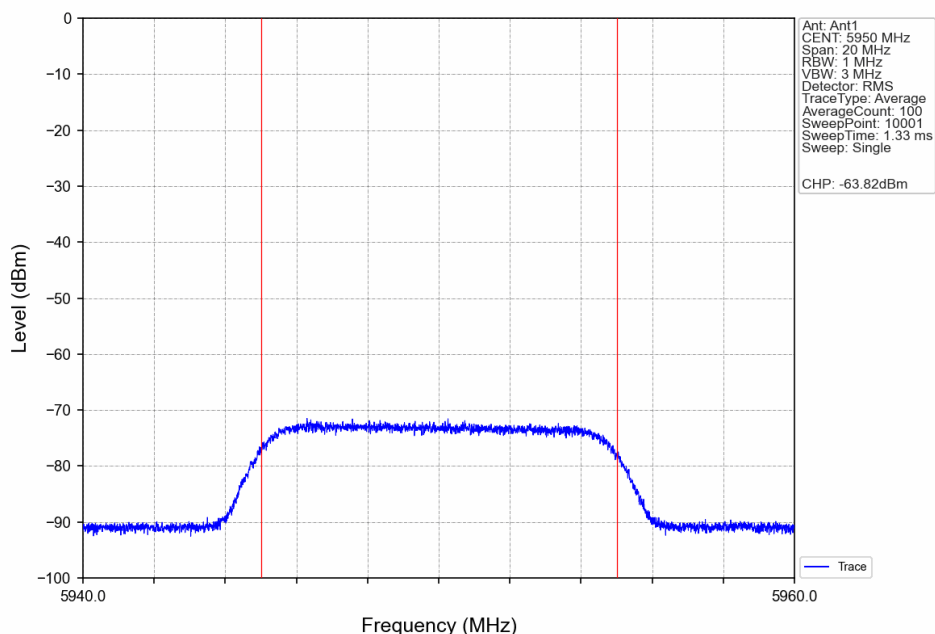


802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

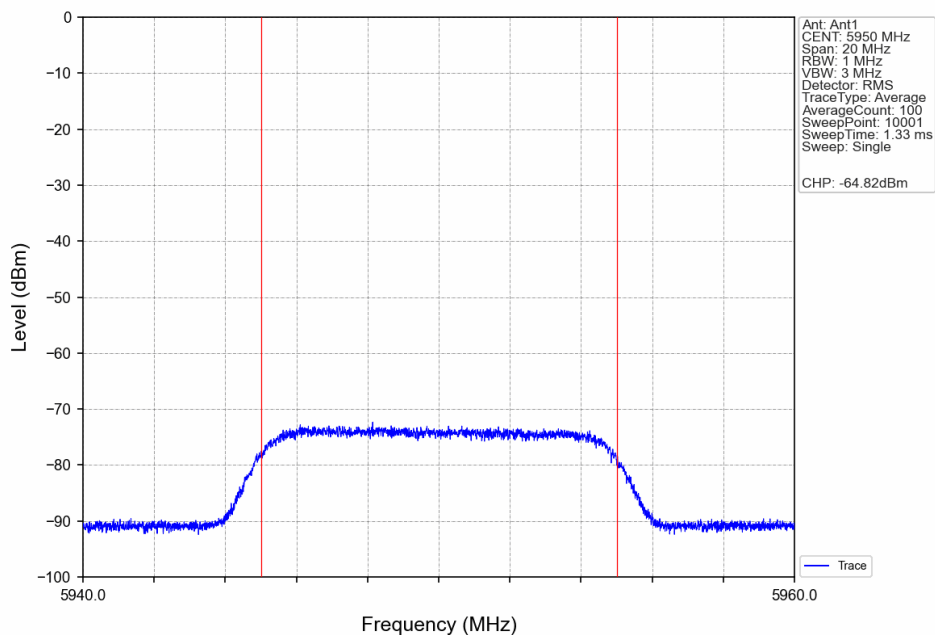


802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

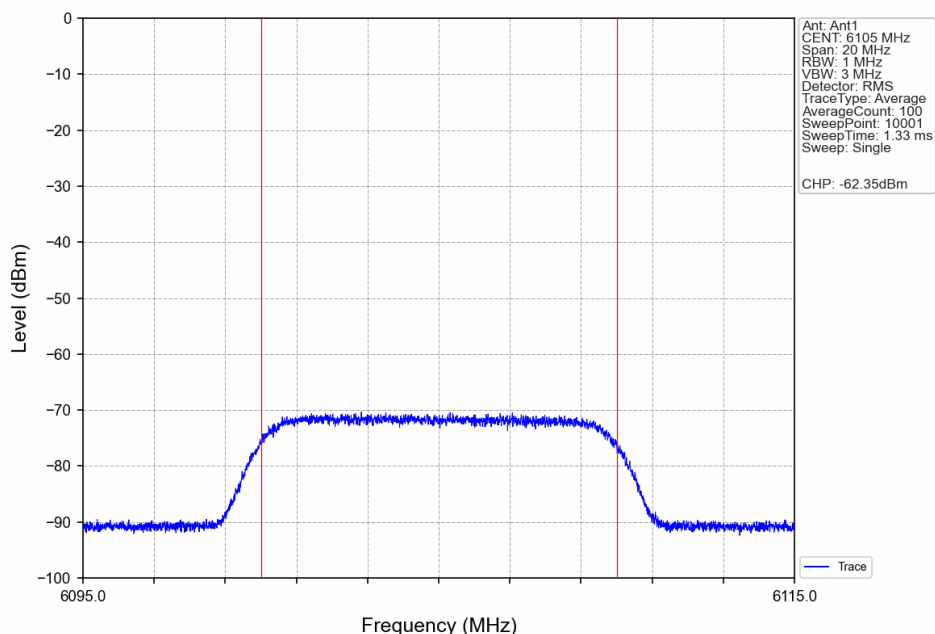


802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

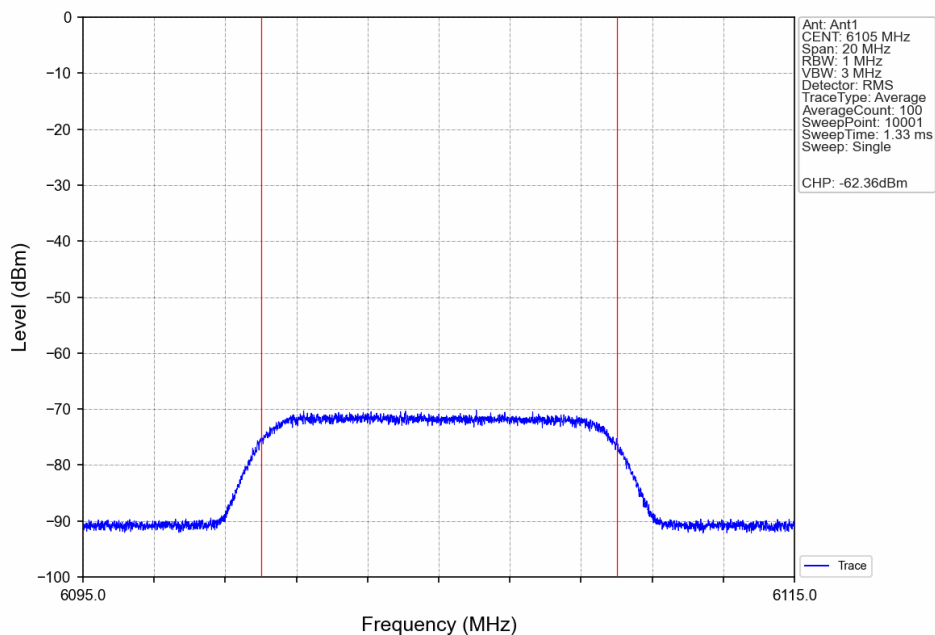

802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

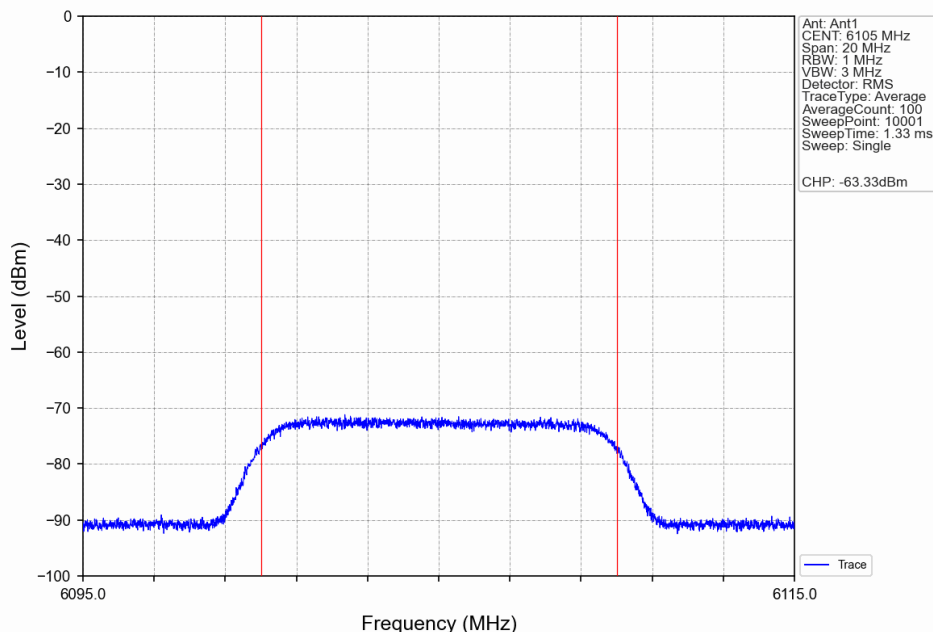

802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

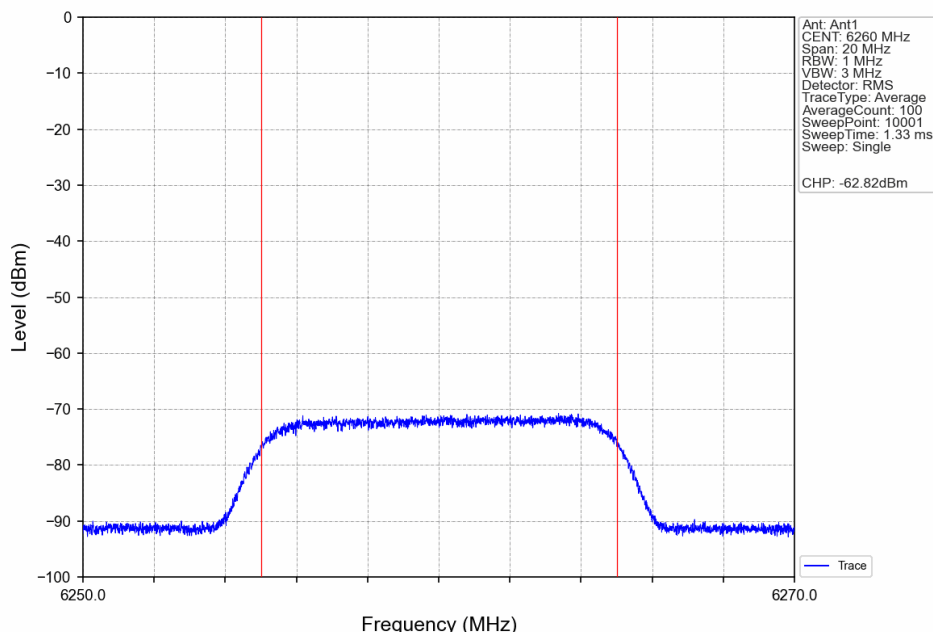


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

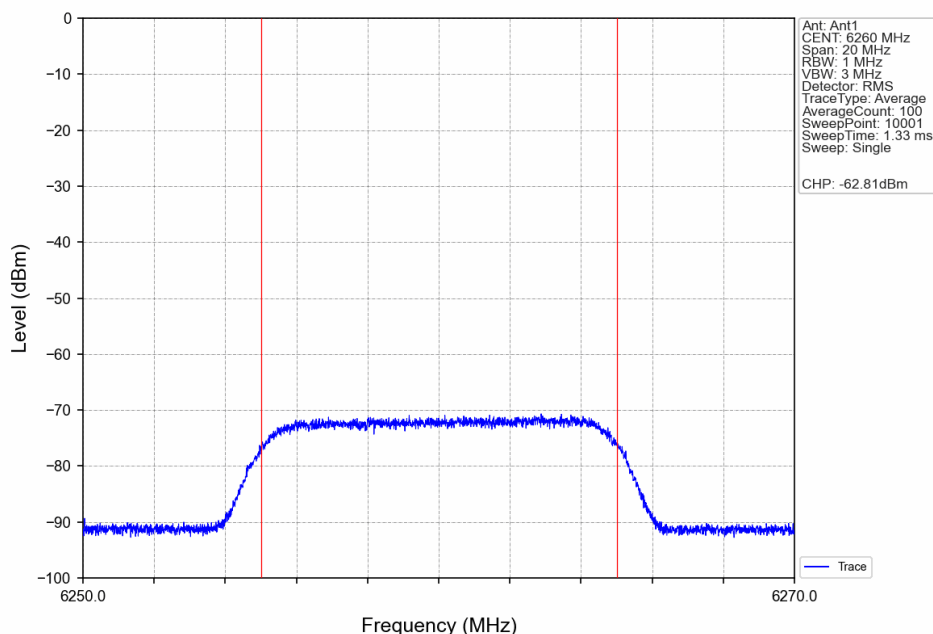


802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz_Detection status_ON

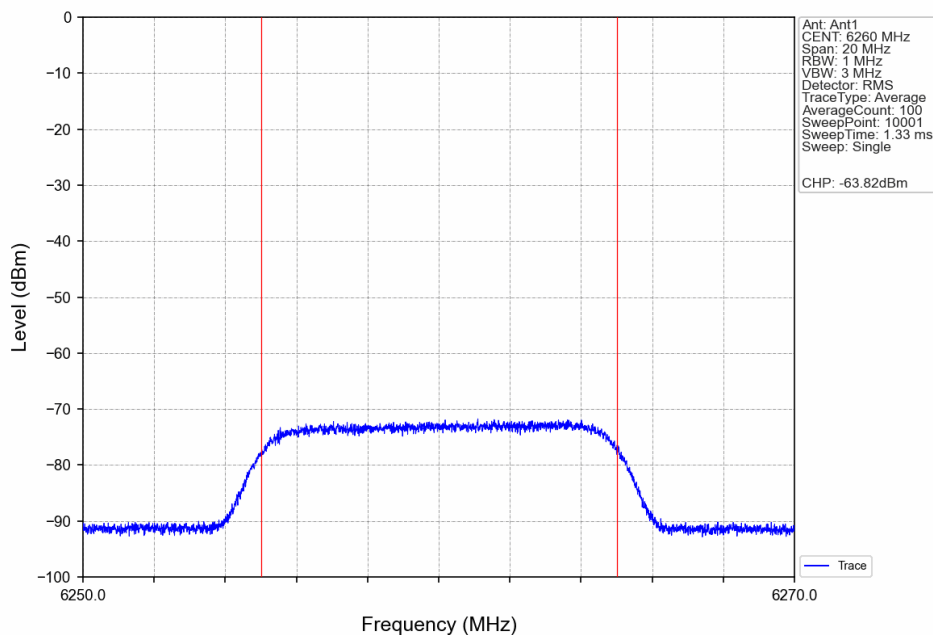


1.2.3 Contention Based Protocol_Detection Probability_Band 5_Ant1


802.11be(EHT20)_MCH_6175MHz_Inject signal_6175MHz

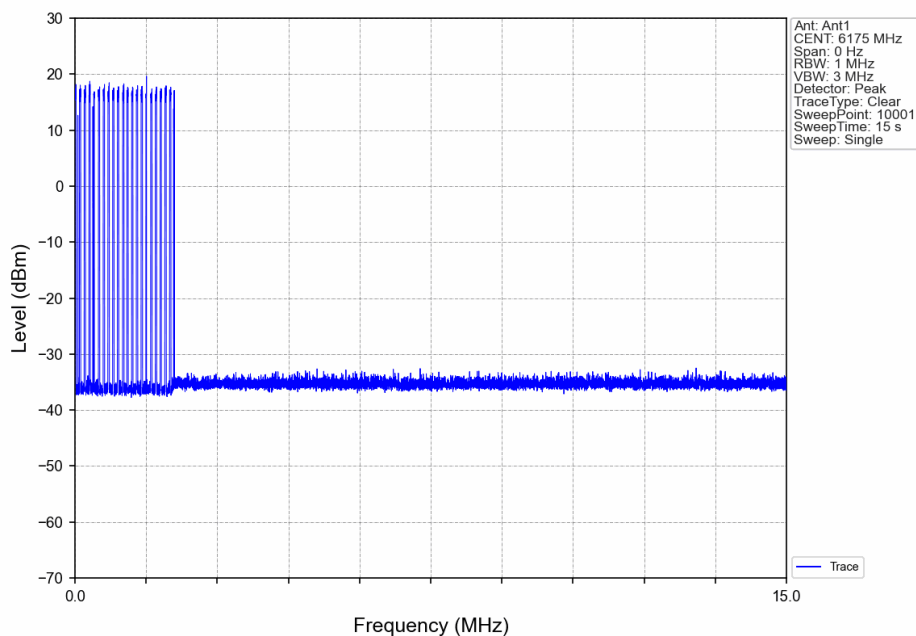


802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz

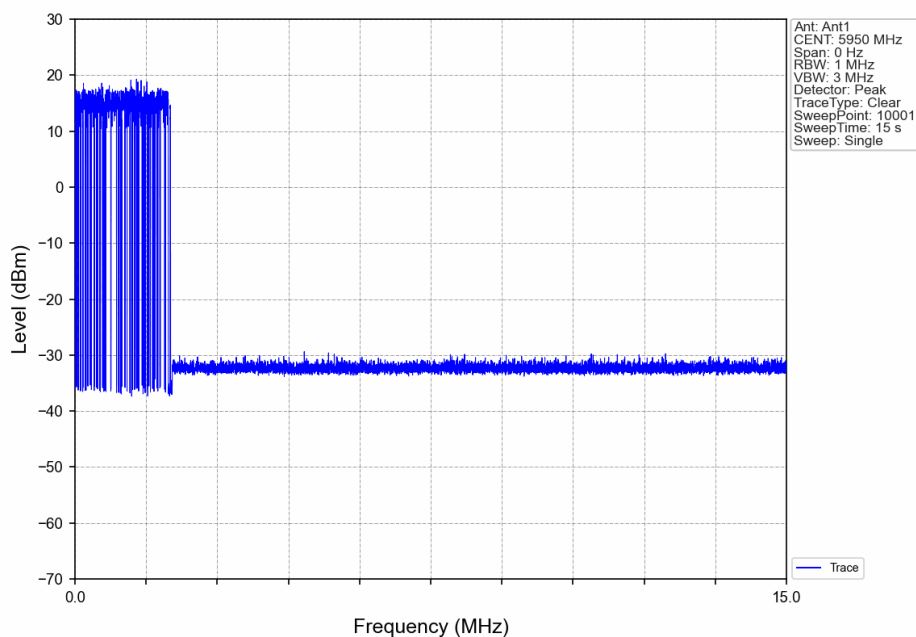

802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz

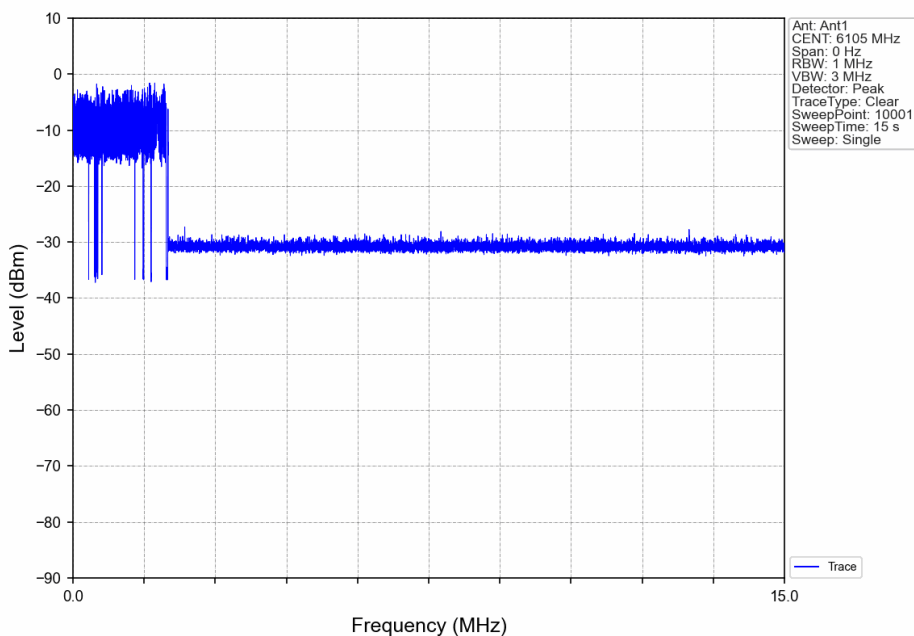

802.11be(EHT320)_LCH_6105MHz_Inject signal_6260MHz

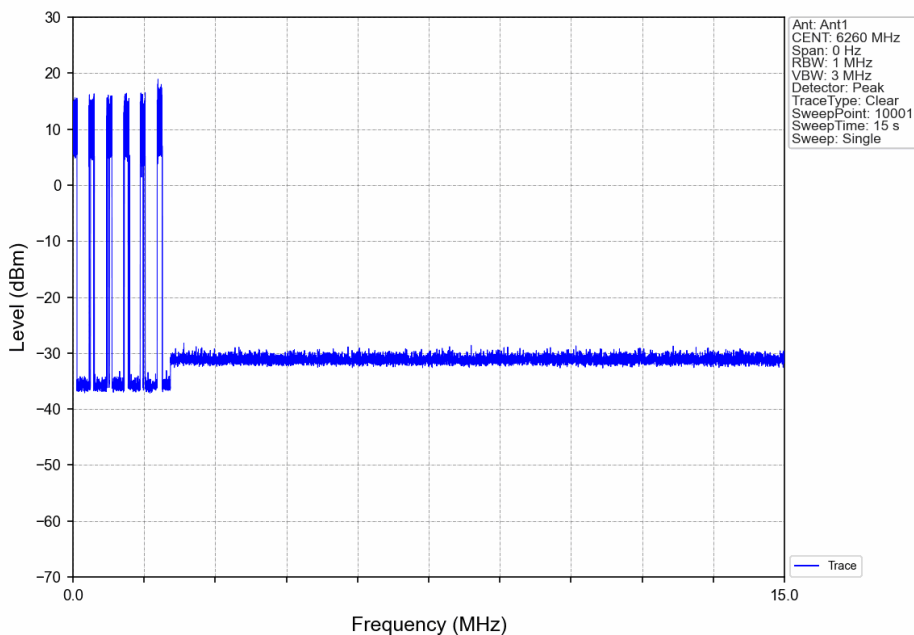

2. DFS

(DFS: Non-occupancy period; Channel Move Time; Channel Closing Transmission Time)


Note: All antennas type has been tested and we found the antenna 1 has the worst result.

Only record the worst test result.

Test plots as follows:

Radar Waveform Calibration Result

Radar Type 0


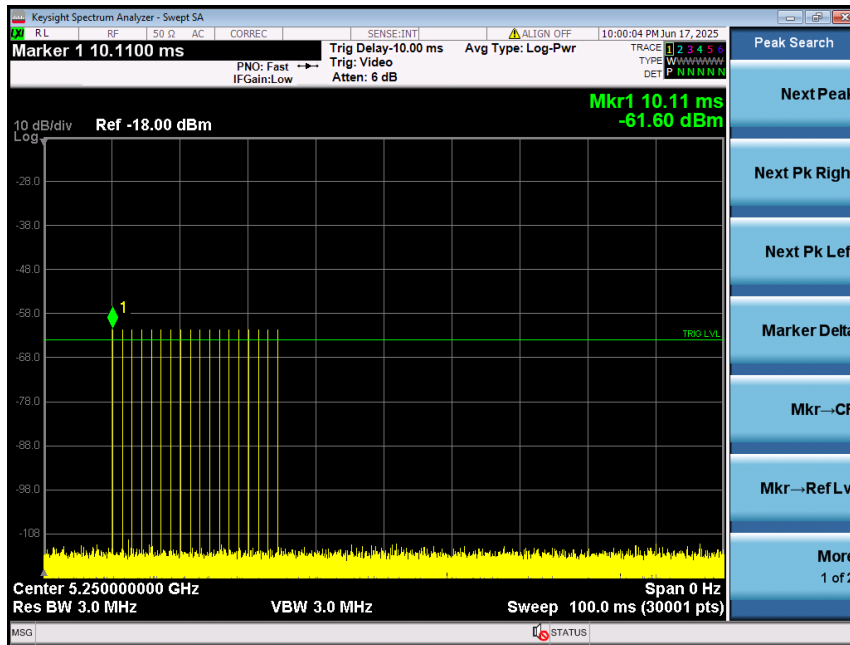


Test Data:



BW/Channel	Test Item	Test data	Limit	Results
160MHz/ 5250MHz	Non-occupancy period	Refer to test plots	>30 min	pass
	Channel Move Time	0.9734676s	<10 s	Pass
	Channel Closing Transmission Time	0.0099997s	<60ms	Pass

BW/Channel	Test Item	Test data	Limit	Results
160MHz/ 5570MHz	Non-occupancy period	Refer to test plots	>30 min	pass
	Channel Move Time	0.9804673s	<10 s	Pass
	Channel Closing Transmission Time	0.0089997s	<60ms	Pass


Test plots as follows(5250MHz):

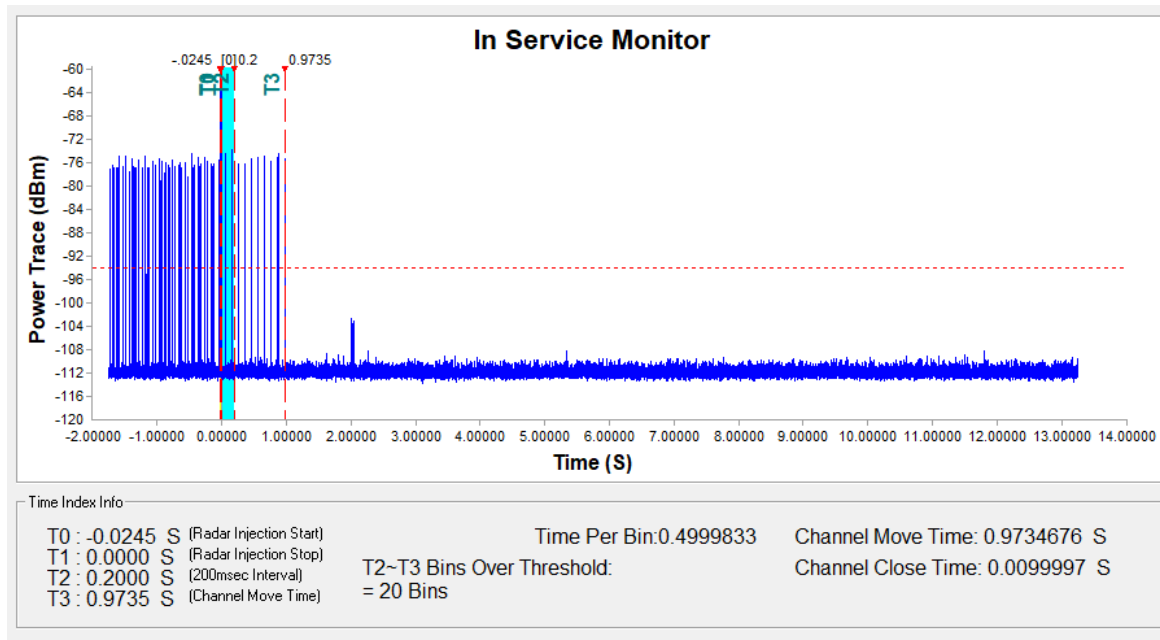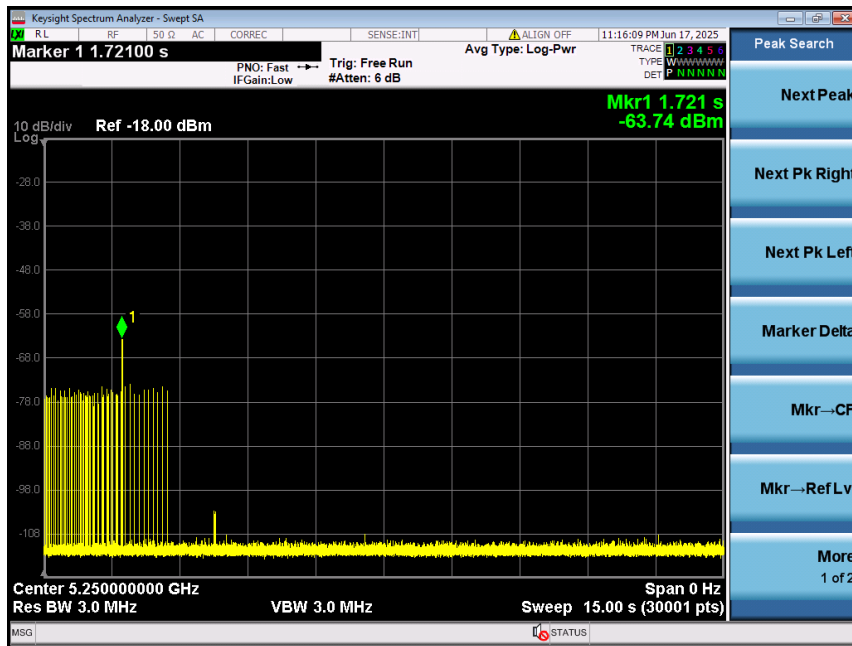

Test plots as follows(5570MHz):

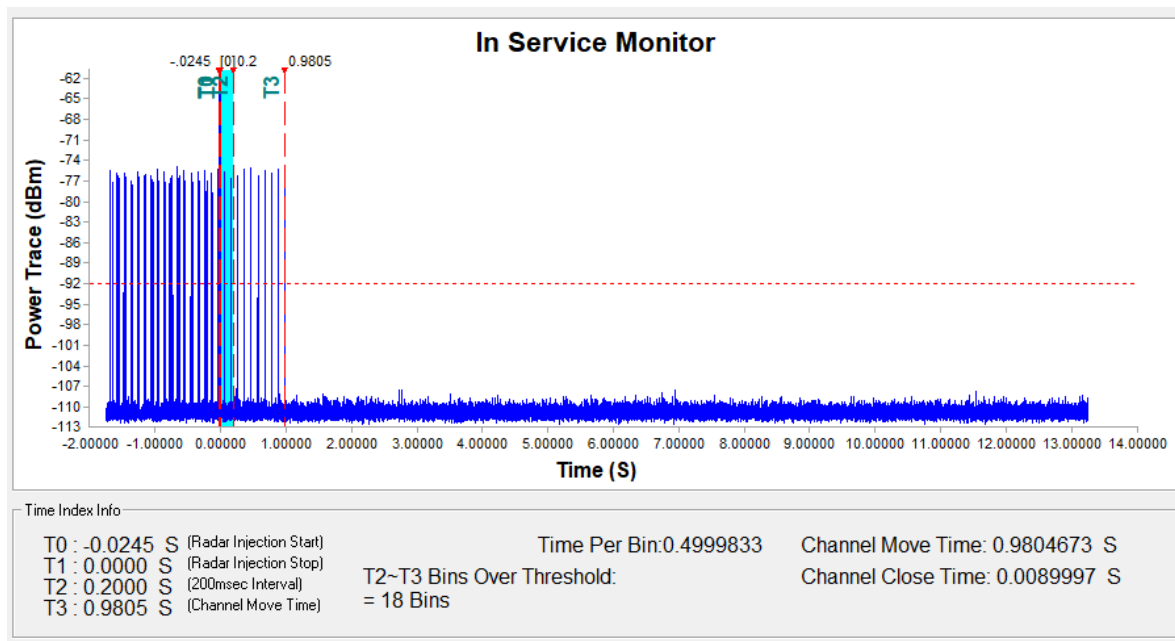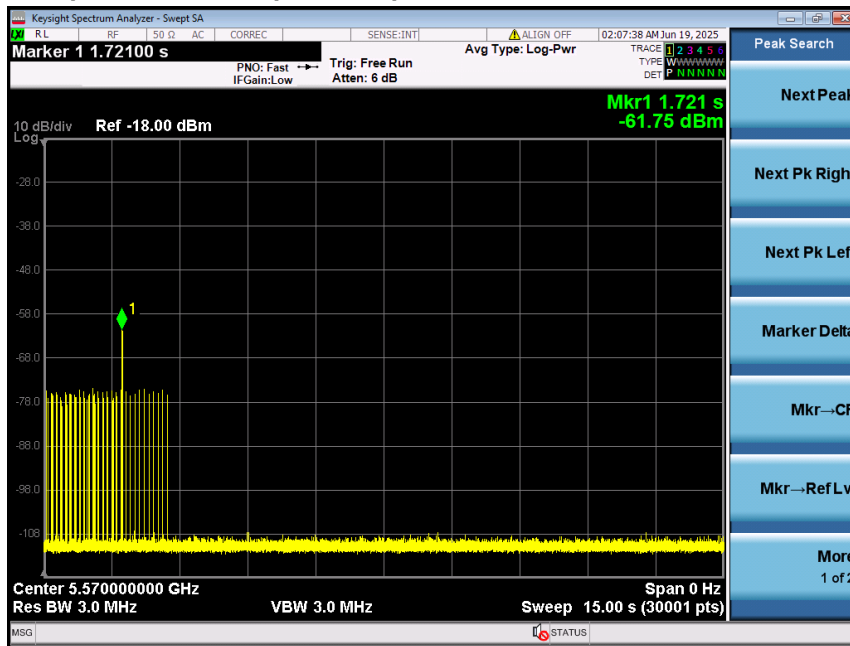

DC:

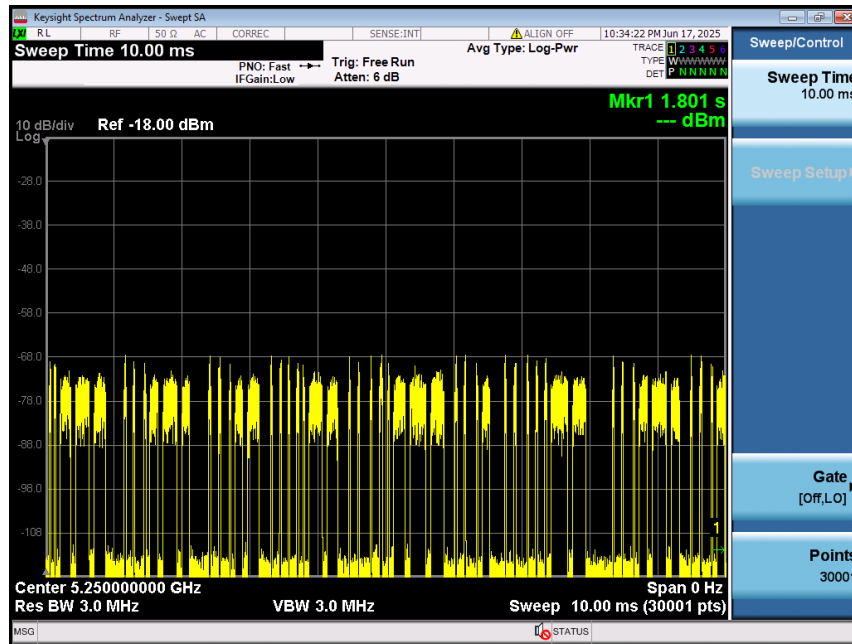

- End of the Report -