

Equipment : WLAN Module

Brand Name : DT Research Inc.

Model No. : 600B

FCC ID : YE3600B

Standard : 47 CFR FCC Part 15.407

Applicant : DT Research Inc.

Manufacturer 6F, NO.1, NingPo E. St., Taipei,

100 Taiwan, R.O.C.

Operate Mode : Client without radar detection

The product sample received on Mar. 09, 2013 and completely tested on Mar. 13, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC 06-96 Appendix and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Wayne Hsu / Assistant Manager

Page No. : 1 of 20

1190

Report No.: FZ322535

Report Version : Rev. 01

TEL: 886-3-327-3456 FAX: 886-3-327-0973

SPORTON INTERNATIONAL INC.



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Support Equipment	
1.3	Testing Applied Standards	
1.4	Testing Location Information	6
1.5	Measurement Uncertainty	6
2	TEST CONFIGURATION OF EUT	7
2.1	DFS and TPC Information	7
2.2	The Worst Case Measurement Configuration	7
3	DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT	8
3.1	General DFS Information	
3.2	Radar Test Waveform Calibration	10
3.3	In-service Monitoring	16
3.4	In-service Monitoring	17
4	TEST EQUIPMENT AND CALIBRATION DATA	20
APPE	ENDIX A. TEST PHOTOS	1

Report No.: FZ322535



Summary of Test Result

Report No.: FZ322535

	Conformance Test Specifications (FCC 06-96 Appendix)						
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result		
-	7.8.1	DFS: UNII Detection Bandwidth Measurement	N/A (Client w/o test)	80% of the 99% BW	N/A		
-	7.8.2.1	DFS: Initial Channel Availability Check Time	N/A (Client w/o test)	CAC ≥ 60 sec	N/A		
-	7.8.2.2	DFS: Radar Burst at the Beginning of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A		
-	7.8.2.3	DFS: Radar Burst at the End of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A		
3.3	7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	CMT < 10sec	CMT ≤ 10sec	Complied		
3.3	7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	CCTT < 60 ms	CCTT ≤ 60 ms starting at CMT 200ms	Complied		
3.3	7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	NOP > 30 min	NOP ≥ 30 min	Complied		
-	7.8.4	DFS: Statistical Performance Check	N/A (Client w/o test)	Table 5 - 7 (KDB 905462)	N/A		
-	5.8.1	DFS: Uniform Spreading	N/A (Client w/o this function)	Uniform Spreading for DFS Band	N/A		
3.1.4	8.1	User Access Restrictions	Manufacturer attestation NOT accessible to user	DFS controls	Complied		

SPORTON INTERNATIONAL INC. : 3 of 20
TEL: 886-3-327-3456 : Report Version : Rev. 01



Revision History

Report No.: FZ322535

ev. 01	Initial issue of report	Mar. 21, 2013

SPORTON INTERNATIONAL INC. : 4 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



1 General Description

1.1 Information

1.1.1 RF General Information

IEEE Std. 802.11	Channel Bandwidth (MHz)
a, n (HT20)	20
n (HT40)	40
802.11a/n uses a combination of OFDM-BPSK, QPSk	K, 16QAM, 64QAM modulation.

Report No.: FZ322535

1.1.2 Antenna Information

	Antenna Category
	Equipment placed on the market without antennas
\boxtimes	Integral antenna (antenna permanently attached)
	☐ Temporary RF connector provided
	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
	External antenna (dedicated antennas)
	☐ Single power level with corresponding antenna(s).
	☐ Multiple power level and corresponding antenna(s).

	Antenna General Information					
No.	Ant. Cat.	Ant. Type	Gain (dBi)			
1	Integral	PIFA	3.94 (Main)			
2	Integral	PIFA	2.76 (Aux)			
\boxtimes	For radiated tests, the DFS test should be performed with lowest antenna gain (regardless of antenna type).					

SPORTON INTERNATIONAL INC. : 5 of 20
TEL: 886-3-327-3456 : Report Version : Rev. 01

1.2 Support Equipment

	Support Equipment						
No.	Equipment	Brand Name	Model Name	FCC ID			
1	AP (Master)	3Com	WL-605	O9C-WL605			
2	NoteBook PC	Dell	Latitude E5510	DoC			

Report No.: FZ322535

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 06-96 Appendix
- FCC KDB 905462 5 GHz UNII DFS Compliance Procedures
- FCC KDB 443999 Approval of DFS UNII Devices

1.4 Testing Location Information

	Testing Location					
	HWA YA	ADE	D : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.			an Hsiang,
		TEL	:	: 886-3-327-3456		
Test Condition		T	est Site No.	Test Engineer	Test Environment	Test Date
DFS Site		DFS Site DF01-HY Ben Tseng 22.3°C / 62%		13-Mar13		

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item	Uncertainty	Limit	
Radio frequency	± 8.7 X 10 ⁻⁷	N/A	
RF output power, conducted	±0.63 dB	N/A	
All emissions, conducted	±0.83 dB	N/A	
All emissions, radiated	±2.87 dB	N/A	
Temperature	±0.8 °C	N/A	
Humidity	±3 %	N/A	
DC and low frequency voltages	±3 %	N/A	
Time	±1.42 %	N/A	

SPORTON INTERNATIONAL INC. : 6 of 20
TEL: 886-3-327-3456 Report Version : Rev. 01

2 Test Configuration of EUT

2.1 DFS and TPC Information

The DFS Related Operating Mode(s) of the Equipment						
☐ Master						
☐ Cilent with ra	dar detection					
	t radar detection					
Software / Firmv	vare Version	15.3.1.2				
Communication	Mode		☐ Frame Based			
IEEE Std. Frequency 802.11 Range (MHz)		TPC (Transmit Power Control)	Passive Scan			
a / n (HT20) 🛛 5250-5350		No	Yes			
n (HT40)		No	Yes			
	☐ 5600-5650	-	-			

Report No.: FZ322535

2.2 The Worst Case Measurement Configuration

	The Worst Case Mode for Following Conformance Tests		
Tests Item Dynamic Frequency Selection (DFS)			
Test Condition	Radiated measurement (Vertical Polarization)		
	Modulation Mode		
	HT20 / HT40		

SPORTON INTERNATIONAL INC. : 7 of 20
TEL: 886-3-327-3456 : Report Version : Rev. 01



3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

Table D.1: DFS requirement values		
Parameter	Value	
Non-occupancy period	Minimum 30 minutes	
Channel Availability Check Time	60 seconds	
Channel Move Time	10 seconds See Note 1.	
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2.	
U-NII Detection Bandwidth	Minimum 80% of the 99% power bandwidth See Note 3.	

Report No.: FZ322535

- Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:
 - For the Short pulse radar Test Signals this instant is the end of the Burst.
 - For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
 - For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.
- Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
- Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

Table D.2: Interference threshold values					
Maximum Transmit Power	Value (see note)				
≥ 200 milliwatt	-64 dBm				
< 200 milliwatt	-62 dBm				

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

SPORTON INTERNATIONAL INC. Page No. : 8 of 20
TEL: 886-3-327-3456 Report Version : Rev. 01

3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

	DFS Operational mode						
Requirement	Master	Client without radar detection	Client with radar detection				
Non-Occupancy Period	Yes	Not required	Yes				
DFS Detection Threshold	Yes	Not required	Yes				
Channel Availability Check Time	Yes	Not required	Not required				
Uniform Spreading	Yes	Not required	Not required				
U-NII Detection Bandwidth	Yes	Not required	Yes				

Report No.: FZ322535

3.1.3 Applicability of DFS Requirements during Normal Operation

	DFS Operational mode						
Requirement	Master	Client without radar detection	Client with radar detection				
DFS Detection Threshold	Yes	Not required	Yes				
Channel Closing Transmission Time	Yes	Yes	Yes				
Channel Move Time	Yes	Yes	Yes				
U-NII Detection Bandwidth	Yes	Not required	Yes				

3.1.4 User Access Restrictions

	User Access Restrictions														
\boxtimes	DFS	controls	(hardware	or	software)	related	to	radar	detection	are	NOT	accessible	to	the	user.
	Manu	facturer:	statement c	onfi	irming that	informa	tion	regard	ding the pa	aram	eters o	of the detect	ted	Rada	ar
	Wave	forms is	Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.												

3.1.5 Channel Loading/Data Streaming

\boxtimes	IP Based (Load Based) - stream the test file from the Master to the Client.						
	Performed NTIA approved WAV file. (EUT w/o video function application)						
	Performed NTIA approved MPEG2 file. (EUT with video function application)						
	Alternative streaming e.g., FTP with about 17 to 20% loading and submit proposal to FCC.						
	Frame Based - stream the test file from the Master to the Client.						
	fixed talk/listen ratio, set the ratio to 45%/55%						
NTI	NTIA test file refer as: http://ntiacsd.ntia.doc.gov/dfs/						

SPORTON INTERNATIONAL INC. : 9 of 20
TEL: 886-3-327-3456 : Report Version : Rev. 01

3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggrega	te (Radar Types 1-4)	80%	120	

Report No.: FZ322535

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per <i>Burst</i>	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length (12,000,000 / Burst_Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst_Count) (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

SPORTON INTERNATIONAL INC. Page No. : 10 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

3.2.3 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30


Report No.: FZ322535

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.


3.2.4 Master DFS Threshold Level

Master DFS Threshold Level							
DFS Threshold level: -61 dBm	at the antenna connector						
	in front of the antenna						
The Interference Radar Detection Threshold Level is (-62dBm) + {1 dB} = -61 dBm. That had been taker into account the master output power range and antenna gain.							

3.2.5 Calibration Setup

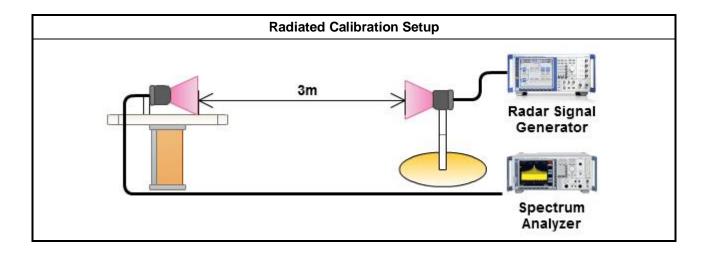

SPORTON INTERNATIONAL INC. Page No. : 11 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

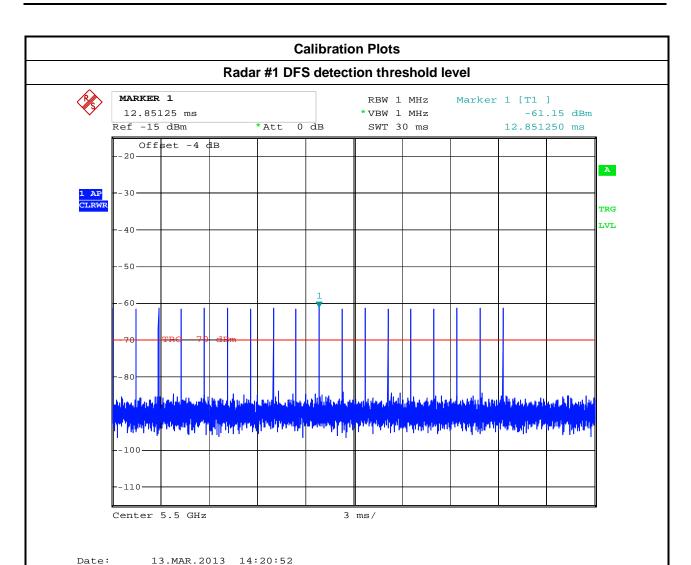

Report No.: FZ322535

: 12 of 20


: Rev. 01



3.2.6 Test Setup


A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

Report No.: FZ322535

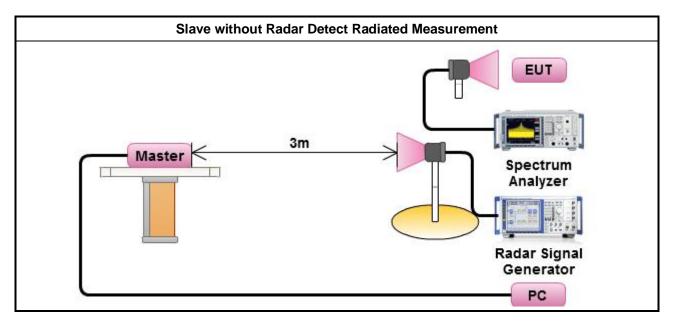


SPORTON INTERNATIONAL INC. Page No. : 13 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



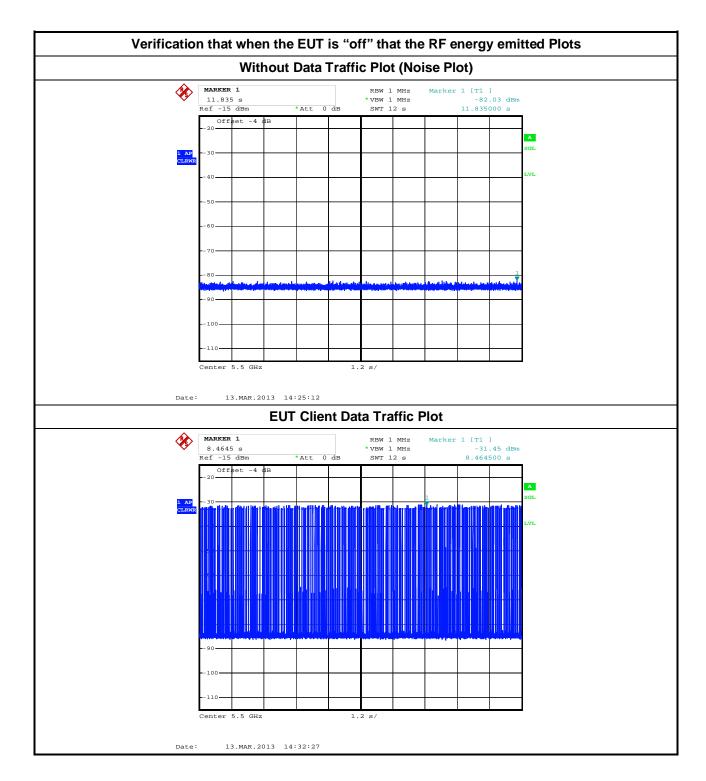

Report No.: FZ322535

SPORTON INTERNATIONAL INC. Page No. : 14 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01

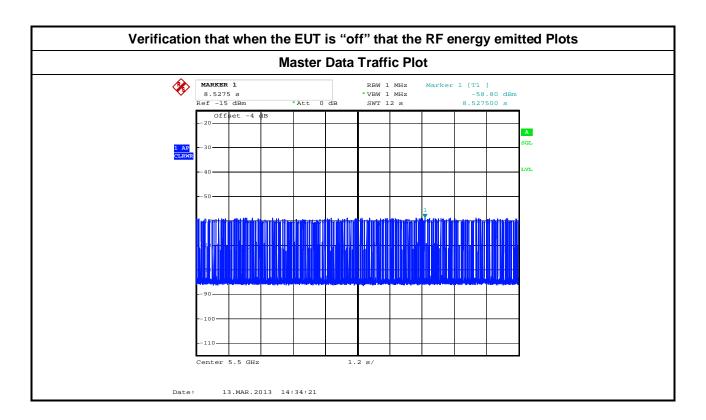

Report No.: FZ322535

: 15 of 20

: Rev. 01

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

In-service Monitoring Limit						
Channel Move Time	10 sec					
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.					
Non-occupancy period	Minimum 30 minutes					

Report No.: FZ322535

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method

- Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
- Refer as FCC 06-96 Appendix, clause 8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 10 sec plot needs to be reported for the Short Pulse Radar Types 1-4 and one for the Long Pulse Radar Type in a 22 sec plot. And zoom-in a 600 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
- Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.

SPORTON INTERNATIONAL INC. Page No. : 16 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



3.4 In-service Monitoring

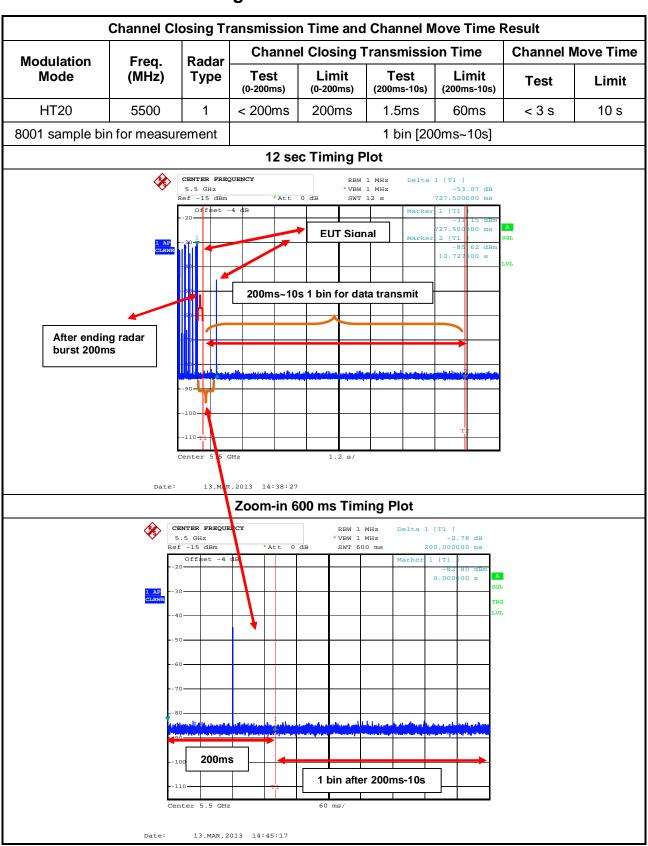

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 17 of 20 Report Version : Rev. 01

Report No.: FZ322535



Channel Closing Transmission Time and Channel Move Time Result Channel Closing Transmission Time Channel Move Time Modulation Radar Freq. Limit Test Mode (MHz) **Type** Test Limit Test Limit (200ms-10s) (200ms-10s) (0-200ms) (0-200ms) HT40 5510 1 < 200ms 200ms <3s10 s 0ms 60ms 1 bin [200ms~10s] 8001 sample bin for measurement 12 sec Timing Plot RBW 1 MHz TIME LINE 2 Marker 2 [T1] 10.506 s Ref -15 dBm *Att 0 dB SWT 12 s 10.506000 s Offset -4 dB 00.00 **EUT Signal** 00 ms 200ms~10s 0 bin for data transmit After ending radar burst 200ms 13.MAR.2013 16:35:44 Zoom-in 600 ms Timing Plot CENTER FREQUE RBW 1 MHz Delta 1 [T1] 5.51 GHz Ref -15 dBm *VBW 1 MHz 0.00 200ms 0 bin after 200ms-10s 13.MAR.2013 16:39:07

Report No.: FZ322535

SPORTON INTERNATIONAL INC. Page No. : 18 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



	Non-Occupano	y Period Result						
Modulation	From (MIII-)	Non-Occupancy Period						
Mode	Freq. (MHz)	Measured	Limit	Result				
HT20	5500	>30min	30min	Complied				
·	2000 sec	Γiming Plot		•				
	CENTER FREQUENCY 5.5 GHz Ref -15 dBm *Att 0 dB Offset -4 dB CLRWR 40 -50 -60 -70 -80 -90	Marker 1	[T1] -83.20 dBm 1.826500 ks [T1] -32.05 dBm 2.500000 s [T1] -51.22 M 1.000000 LVL					
	#110 Center 5.5 GHz	200 s/	r2					

Report No.: FZ322535

SPORTON INTERNATIONAL INC. : 19 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 7	100645	9kHz ~ 7GHz	Mar. 29, 2012	DFS01-HY
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Oct. 03, 2012	DFS01-HY
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	302338	1GHz ~ 26.5GHz	Dec. 04, 2012	DFS01-HY
RF Cable-10m	HUBER+SUHNER	SUCOFLEX_104	302345	1GHz ~ 26.5GHz	Dec. 04, 2012	DFS01-HY
Horn Antenna	COM-POWER	AH-118	10094	1GHz ~ 18GHz	Feb 21, 2013	DFS01-HY
Horn Antenna	ETS	3115	6744	1GHz ~ 18GHz	Mar. 23, 2012	DFS01-HY

Report No.: FZ322535

Note: Calibration Interval of instruments listed above is one year.

SPORTON INTERNATIONAL INC. Page No. : 20 of 20 TEL: 886-3-327-3456 Report Version : Rev. 01