



# Hearing Aid Compatibility (HAC) RF Emissions Test Report

APPLICANT : CT Asia  
EQUIPMENT : WCDMA/GSM smartphone  
BRAND NAME : Blu  
MODEL NAME : Elite3.8  
FCC ID : YHLBLUELITE  
STANDARD : FCC 47 CFR §20.19  
ANSI C63.19-2007  
M CATEGORY : M3

The product was received on May 02, 2012 and completely tested on Jun. 13, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



Table of Contents

Revision History.....3
1. Statement of Compliance.....4
2. Administration Data.....5
2.1 Testing Laboratory.....5
2.2 Applicant.....5
2.3 Manufacturer.....5
2.4 Application Details.....5
3. General Information.....6
3.1 Description of Device Under Test (DUT).....6
3.2 Product Photos.....7
3.3 Applied Standards.....7
3.4 Test Conditions.....8
3.4.1 Ambient Condition.....8
3.4.2 Test Configuration.....8
4. Hearing Aid Compliance (HAC).....8
4.1 Introduction.....8
5. HAC RF Emission Measurement Setup.....9
5.1 E-Field and H-Field Probe System.....10
5.1.1 E-Field Probe Specification.....10
5.1.2 H-Field Probe Description.....10
5.1.3 Probe Tip Description.....11
5.2 DATA Acquisition Electronics (DAE).....12
5.3 Robot.....13
5.4 Measurement Server.....13
5.5 Phone Positioner.....14
5.6 Test Arch Phantom.....14
5.7 Data Storage and Evaluation.....15
5.7.1 Data Storage.....15
5.7.2 Data Evaluation.....15
5.8 Test Equipment List.....17
6. Uncertainty Assessment.....18
7. HAC RF Emission Measurement Evaluation.....20
7.1 Purpose of System Performance Check.....20
7.2 System Setup.....20
7.3 Validation Results.....21
8. RF Field Probe Modulation Factor.....22
9. Description for DUT Testing Position.....26
10. RF Emissions Test Procedure.....28
11. HAC RF Emission Test Results.....29
11.1 Conducted Power (Unit: dBm).....29
11.2 E-Field Emission.....29
11.3 H-Field Emission.....30
12. References.....31
Appendix A. Plots of System Performance Check
Appendix B. Plots of RF Emission Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Product Photos
Appendix E. Test Setup Photos





### 1. Statement of Compliance

The maximum results of RF Emission of Hearing Aid Compliance (HAC) found during testing for the **CT Asia; DUT: WCDMA/GSM smartphone; Brand Name: Blu; Model Name: Elite3.8** are follows:

| Band         | HAC RF Emission Test Result |        | M Rating |
|--------------|-----------------------------|--------|----------|
| GSM850       | E-Field (V/m)               | 157.5  | M3       |
|              | H-Field (A/m)               | 0.371  | M4       |
| GSM1900      | E-Field (V/m)               | 56.274 | M3       |
|              | H-Field (A/m)               | 0.172  | M3       |
| WCDMA Band V | E-Field (V/m)               | 63.677 | M4       |
|              | H-Field (A/m)               | 0.107  | M4       |

They are in compliance with HAC limits (HAC Rated category M3) specified in guidelines FCC 47 CFR §20.19 and ANSI Standard ANSI C63.19.

**Results Summary : M Category = M3 (ANSI C63.19-2007)**



## 2. Administration Data

### 2.1 Testing Laboratory

|                    |  |
|--------------------|--|
| Test Site          | SPORTON INTERNATIONAL (KUNSHAN) INC.   |
| Test Site Location | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.<br>TEL: +86-0512-5790-0158<br>FAX: +86-0512-5790-0958 |
| Test Site No.      | <b>Sporton Site No. :</b><br>SAR01-KS  |

### 2.2 Applicant

|              |   |
|--------------|---|
| Company Name | CT Asia   |
| Address      | RMA2011, 20/F, GOLDEN CENTRAL TOWER, NO.3037# JINTIAN ROAD, FUTIAN DISTRICT |

### 2.3 Manufacturer

|              |  |
|--------------|--|
| Company Name | Beijing Tianyu Communication Equipment Co., Ltd.   |
| Address      | NO.55, Jiachang 2 road, OPTO-Mechatronics Industrial Park, Tongzhou district, Beijing 101111 |

### 2.4 Application Details

|                                |               |
|--------------------------------|---------------|
| Date of Receipt of Application | May 02, 2012  |
| Date of Start during the Test  | Jun. 13, 2012 |
| Date of End during the Test    | Jun. 13, 2012 |

### 3. General Information

#### 3.1 Description of Device Under Test (DUT)

| Product Feature & Specification |   |
|---------------------------------|---|
| DUT Type                        | WCDMA/GSM smartphone  |
| Brand Name                      | Blu   |
| Model Name                      | Elite3.8  |
| FCC ID                          | YHLBLUELITE   |
| Tx Frequency                    | GSM850 : 824.2 MHz ~ 848.8 MHz<br>GSM1900 : 1850.2 MHz ~ 1909.8 MHz<br>WCDMA Band V : 826.4 MHz ~ 846.6 MHz |
| Rx Frequency                    | GSM850 : 869.2 MHz ~ 893.8 MHz<br>GSM1900 : 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V : 871.4 MHz ~ 891.6 MHz |
| Maximum Output Power to Antenna | GSM850 : 32.20 dBm<br>GSM1900 : 29.06 dBm<br>WCDMA Band V : 22.74 dBm                                       |
| Antenna Type                    | Fixed Internal Antenna  |
| HW Version                      | P3.1  |
| SW Version                      | TBW591227_834F_V2029  |
| Type of Modulation              | GSM : GMSK<br>WCDMA : QPSK (Uplink)   |
| DUT Stage                       | Identical Prototype   |

#### List of Accessory:

| Specification of Accessory |              |               |
|----------------------------|--------------|---------------|
| Battery                    | Brand Name   | BLU           |
|                            | Model Name   | C525106160T   |
|                            | Power Rating | 3.7V, 1600mAh |
|                            | Type         | Li-ion        |

**Remark:** The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

#### List of air interfaces / frequency bands

| Air Interface | Band (MHz) | Voice/Data | C 63.19-2007 Tested | Concurrent connections | Reduced Power 20.19 (c)(1) |
|---------------|------------|------------|---------------------|------------------------|----------------------------|
| GSM           | 850,1900   | Voice      | Yes                 | WLAN, BT               | No                         |
| WCDMA         | 850        | Voice      | Yes                 | WLAN, BT               | No                         |
| WLAN          | 2450       | Data (*)   | No                  | GSM, WCDMA, BT         | No                         |
| BT            | 2450       | Data (*)   | No                  | GSM, WCDMA, WLAN       | No                         |

#### Note:

- (\*): The voice function maybe be activated via 3<sup>rd</sup> party software application.
- Per KDB 285076 D01 7)a), during RF test, concurrent transmission is disabled.



**3.2 Product Photos**

Refer to Appendix D.

**3.3 Applied Standards**

The ANSI Standard ANSI C63.19-2007 represents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

The following AWF factors shall be used for the standard transmission protocols:

| Standard        | Technology          | AWF (dB) |
|-----------------|---------------------|----------|
| TIA/EIA/IS-2000 | CDMA                | 0        |
| TIA/EIA-136     | TDMA (50 Hz)        | 0        |
| J-STD-007       | GSM (217)           | -5       |
| T1/T1P1/3GPP    | UMTS (WCDMA)        | 0        |
| iDENTM          | TDMA (22 and 11 Hz) | 0        |

Table 3.1 Articulation Weighting Factor (AWF)

| Category            | Telephone RF Parameters |     |                    |                   |
|---------------------|-------------------------|-----|--------------------|-------------------|
|                     | Near Field              | AWF | E-Field Emissions  | H-Field Emissions |
| <b>&lt; 960 MHz</b> |                         |     |                    |                   |
| Category M1         | 0                       |     | 631.0 – 1122.0 V/m | 1.91 – 3.39 A/m   |
|                     | -5                      |     | 473.2 – 841.4 V/m  | 1.43 – 2.54 A/m   |
| Category M2         | 0                       |     | 354.8 – 631.0 V/m  | 1.07 – 1.91 A/m   |
|                     | -5                      |     | 266.1 – 473.2 V/m  | 0.80 – 1.43 A/m   |
| Category M3         | 0                       |     | 199.5 – 354.8 V/m  | 0.6 – 1.07 A/m    |
|                     | -5                      |     | 149.6 – 266.1 V/m  | 0.45 – 0.80 A/m   |
| Category M4         | 0                       |     | < 199.5 V/m        | < 0.60 A/m        |
|                     | -5                      |     | < 149.6 V/m        | < 0.45 A/m        |
| <b>&gt; 960 MHz</b> |                         |     |                    |                   |
| Category M1         | 0                       |     | 199.5 – 354.8 V/m  | 0.60 – 1.07 A/m   |
|                     | -5                      |     | 149.6 – 266.1 V/m  | 0.45 – 0.80 A/m   |
| Category M2         | 0                       |     | 112.2 – 199.5 V/m  | 0.34 – 0.60 A/m   |
|                     | -5                      |     | 84.1 – 149.6 V/m   | 0.25 – 0.45 A/m   |
| Category M3         | 0                       |     | 63.1 – 112.2 V/m   | 0.19 – 0.34 A/m   |
|                     | -5                      |     | 47.3 – 84.1 V/m    | 0.14 – 0.25 A/m   |
| Category M4         | 0                       |     | < 63.1 V/m         | < 0.19 A/m        |
|                     | -5                      |     | < 47.3 V/m         | < 0.14 A/m        |

Table 3.2 Telephone near-field categories in linear units



**3.4 Test Conditions**

**3.4.1 Ambient Condition**

|                     |             |
|---------------------|-------------|
| Ambient Temperature | 20 to 24 °C |
| Humidity            | < 60 %      |

**3.4.2 Test Configuration**


The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. Measurements were performed on the low, middle and high channels of both bands. The DUT was set from the emulator to radiate maximum output power during all tests.

**4. Hearing Aid Compliance (HAC)**

**4.1 Introduction**

The federal communication commission (FCC) adopted ANSI C63.19 as HAC test standard.

## 5. HAC RF Emission Measurement Setup

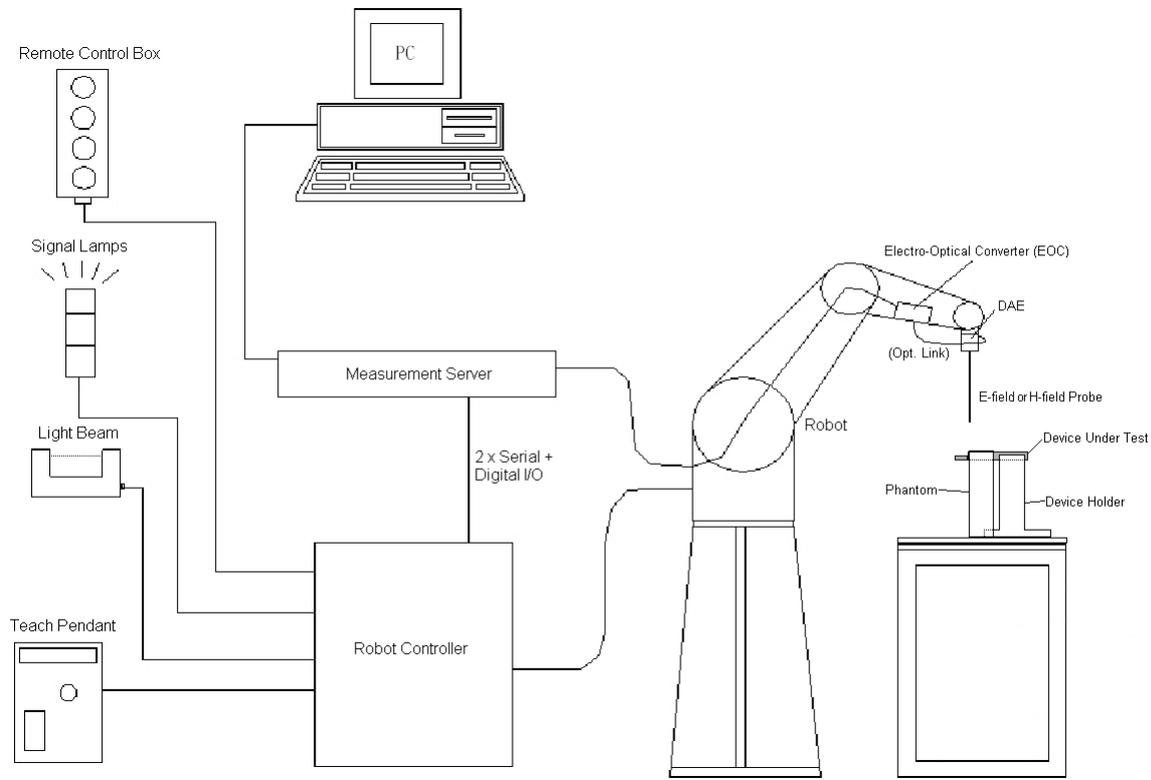

**Fig 5.1 SPEAG DASY4 or DASY5 System Configurations**

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- A device holder
- Dipole for evaluating the proper functioning of the system
- Test Arch Phantom

Detail component information are described in the following sub-clauses.

**5.1 E-Field and H-Field Probe System**

The HAC measurement is conducted with the dosimetric probe ER3DV6 and H3DV6 (manufactured by SPEAG). The probe is specially designed and calibrated. This probe has a built in optical surface detection system to prevent from collision with DUT.

**5.1.1 E-Field Probe Specification**

<ER3DV6>

|                      |  |
|----------------------|--|
| <b>Construction</b>  | One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges                              |
| <b>Calibration</b>   | In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )  |
| <b>Frequency</b>     | 100 MHz to 6 GHz; Linearity: $\pm 2.0$ dB (100 MHz to 3 GHz)   |
| <b>Directivity</b>   | $\pm 0.2$ dB in air (rotation around probe axis)<br>$\pm 0.4$ dB in air (rotation normal to probe axis)                      |
| <b>Dynamic Range</b> | 2 V/m to 1000 V/m (M3 or better device readings fall well below diode compression point)                                     |
| <b>Linearity</b>     | $\pm 0.2$ dB   |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 16 mm)<br>Tip diameter: 8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.5 mm |



**Fig 5.2 Photo of E-field Probe**

**5.1.2 H-Field Probe Description**

<H3DV6>

|                             |   |
|-----------------------------|---|
| <b>Construction</b>         | Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges |
| <b>Frequency</b>            | 200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ ); Output linearized  |
| <b>Directivity</b>          | $\pm 0.25$ dB (spherical isotropy error)  |
| <b>Dynamic Range</b>        | 10 m A/m to 2 A/m at 1 GHz (M3 or better device readings fall well below diode compression point)   |
| <b>Dimensions</b>           | Overall length: 330 mm (Tip: 40 mm)<br>Tip diameter: 6 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 3 mm                                |
| <b>E-Field Interference</b> | $< 10\%$ at 3 GHz (for plane wave)  |



**Fig 5.3 Photo of H-field Probe**

5.1.3 Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10%/per mm).

Magnetic field sensors are measuring the integral of the H-field across their sensor area surrounded by the loop. They are calibrated in a precise, homogeneous field. When measuring a gradient field, the result will be very close to the field in the center of the loop which is equivalent to the value of a homogeneous field equivalent to the center value. But it will be different from the field at the field at the border of the loop.

Consequently, two sensors with different loop diameters – both calibrated ideally – would give different results when measuring from the edge of the probe sensor elements. The behavior for electrically small E-field sensors is equivalent. See below for distance plots from a WD which show the conservative nature of field readings at the probe element center vs. measurements at the sensor end:

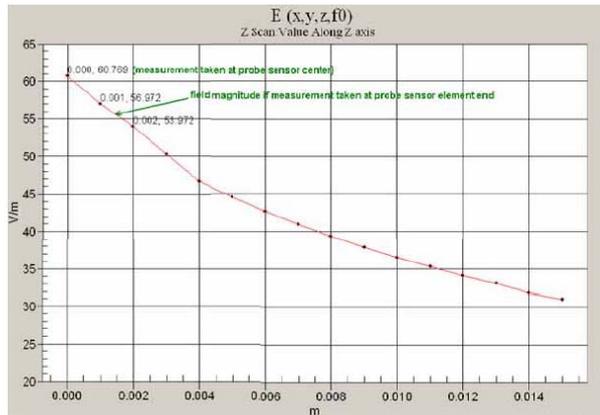


Fig 5.4 Z-Axis Scan at maximum point above a typical wireless device for E-field

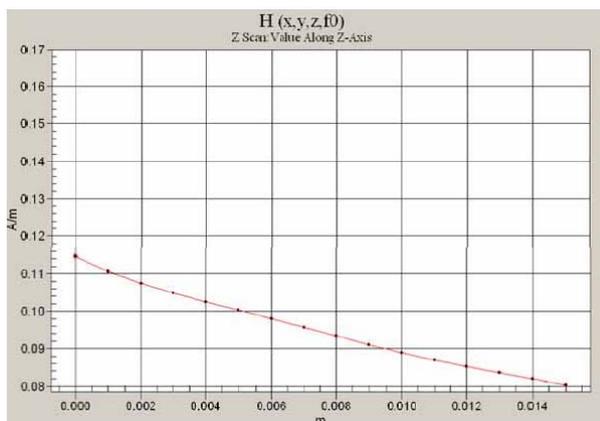


Fig 5.5 Z-Axis Scan at maximum point above a typical wireless device for H-field

The magnetic field loops of the H3D probes are concentric, with the center 3mm from the tip for H3DV6. Their radius is 1.9 mm.

The electric field probes have a more irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in the HAC uncertainty budget ("sensor displacement"). Their geometric center is at 2.5 mm from the tip, and the element ends are 1.1 mm closer to the tip.

**Where:**

Peak Field = Peak field (in dB V/m or dB A/m)

Raw = Raw field measurement from the measurement system (in V/m or A/m).

PMF = Probe Modulation Factor (in Linear units). See Chapter 8 of test report.

## **5.2 DATA Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.6 Photo of DAE**

### **5.3 Robot**

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



**Fig 5.7 Photo of DASY5**

### **5.4 Measurement Server**

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



**Fig 5.8 Photo of Server for DASY5**

### 5.5 Phone Positioner

The phone positioner shown in Fig. 5.11 is used to adjust DUT to the suitable position.



Fig 5.9 Phone Positioner

### 5.6 Test Arch Phantom

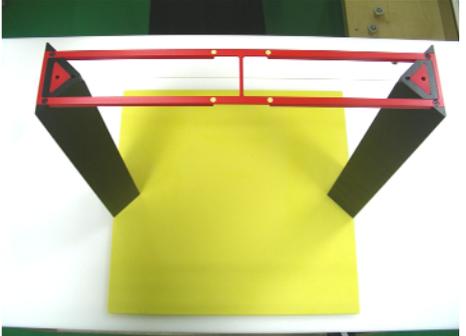
|                              |   |  |
|------------------------------|---|--|
| <p><b>Construction :</b></p> | <p>Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.</p> |  |
| <p><b>Dimensions :</b></p>   | <p>370 x 370 x 370 mm</p>   |  |

Fig 5.10 Photo of Arch Phantom



5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

|                            |                           |   |
|----------------------------|---------------------------|---|
| <b>Probe parameters :</b>  | - Sensitivity             | Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub> |
|                            | - Conversion factor       | ConvF <sub>i</sub>  |
|                            | - Diode compression point | dcp <sub>i</sub>  |
| <b>Device parameters :</b> | - Frequency               | f   |
|                            | - Crest factor            | cf  |
| <b>Media parameters :</b>  | - Conductivity            | σ   |
|                            | - Density                 | ρ   |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as :

V\_i = U\_i + U\_i^2 \* (cf / dcp\_i)

- with V<sub>i</sub> = compensated signal of channel i, (i = x, y, z)
- U<sub>i</sub> = input signal of channel i, (i = x, y, z)
- cf = crest factor of exciting field (DASY parameter)
- dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } \mathbf{E}_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } \mathbf{H}_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel  $i$ , ( $i = x, y, z$ )

$\text{Norm}_i$  = sensor sensitivity of channel  $i$ , ( $i = x, y, z$ ),  $\mu\text{V}/(\text{V}/\text{m})^2$  for E-field Probes

$\text{ConvF}$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel  $i$  in V/m

$H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$\mathbf{E}_{\text{tot}} = \sqrt{\mathbf{E}_x^2 + \mathbf{E}_y^2 + \mathbf{E}_z^2}$$

The primary field data are used to calculate the derived field units.

The measurement/integration time per point, as specified by the system manufacturer is > 500 ms. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of < 5 ms. In the current implementation, DASYS waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.



5.8 Test Equipment List

| Manufacturer | Name of Equipment               | Type/Model | Serial Number | Calibration   |               |
|--------------|---------------------------------|------------|---------------|---------------|---------------|
|              |                                 |            |               | Last Cal.     | Due Date      |
| SPEAG        | Dipole                          | CD835V3    | 1045          | Jun. 14, 2012 | Jun. 13, 2013 |
| SPEAG        | Dipole                          | CD1880V3   | 1038          | Jun. 14, 2012 | Jun. 13, 2013 |
| SPEAG        | Data Acquisition Electronics    | DAE4       | 1210          | Nov. 18, 2011 | Nov. 17, 2012 |
| SPEAG        | probe                           | ER3DV6     | 2476          | Nov. 21, 2011 | Nov. 20, 2012 |
| SPEAG        | Probe                           | H3DV6      | 6300          | Nov. 22, 2011 | Nov. 21, 2012 |
| SPEAG        | Phone Positioner                | N/A        | N/A           | NCR           | NCR           |
| Agilent      | Wireless Communication Test Set | E5515C     | GB47050646    | Aug. 18, 2011 | Aug. 17, 2012 |
| R&S          | Signal Generator                | SMR40      | 100455        | Dec. 30, 2011 | Dec. 29, 2012 |
| AR           | Amplifier                       | 551G4      | 333096        | NCR           | NCR           |
| Agilent      | Power Meter                     | E4416A     | MY45101555    | Aug. 23, 2011 | Aug. 22, 2012 |
| Agilent      | Power Sensor                    | E9327A     | MY44421198    | Aug. 23, 2011 | Aug. 22, 2012 |
| ARRA         | Power Divider                   | A3200-2    | N/A           | NA            | NA            |
| MCL          | Attenuation                     | BW-S10W5   | N/A           | NA            | NA            |
| R&S          | Spectrum Analyzer               | FSP30      | 101399        | Jun. 01, 2012 | May 31, 2013  |

Table 5.1 Test Equipment List

## 6. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 6.1.

| Uncertainty Distributions          | Normal             | Rectangular | Triangular | U-Shape |
|------------------------------------|--------------------|-------------|------------|---------|
| Multi-plying Factor <sup>(a)</sup> | 1/k <sup>(b)</sup> | 1/√3        | 1/√6       | 1/√2    |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 6.1 Multiplying Factions for Various Distributions**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 6.2.



| Error Description                    | Uncertainty Value (±%) | Probability Distribution | Divisor | Ci (E) | Ci (H) | Standard Uncertainty (E) | Standard Uncertainty (H) |
|--------------------------------------|------------------------|--------------------------|---------|--------|--------|--------------------------|--------------------------|
| <b>Measurement System</b>            |                        |                          |         |        |        |                          |                          |
| Probe Calibration                    | 5.1                    | Normal                   | 1       | 1      | 1      | ± 5.1 %                  | ± 5.1 %                  |
| Axial Isotropy                       | 4.7                    | Rectangular              | √3      | 1      | 1      | ± 2.7 %                  | ± 2.7 %                  |
| Sensor Displacement                  | 16.5                   | Rectangular              | √3      | 1      | 0.145  | ± 9.5 %                  | ± 1.4 %                  |
| Test Arch                            | 7.2                    | Rectangular              | √3      | 1      | 0      | ± 4.1 %                  | ± 0.0 %                  |
| Linearity                            | 4.7                    | Rectangular              | √3      | 1      | 1      | ± 2.7 %                  | ± 2.7 %                  |
| Scaling to Peak Envelope Power       | 0.0                    | Rectangular              | √3      | 1      | 1      | ± 0.0 %                  | ± 0.0 %                  |
| System Detection Limit               | 1.0                    | Rectangular              | √3      | 1      | 1      | ± 0.6 %                  | ± 0.6 %                  |
| Readout Electronics                  | 0.3                    | Normal                   | 1       | 1      | 1      | ± 0.3 %                  | ± 0.3 %                  |
| Response Time                        | 0.8                    | Rectangular              | √3      | 1      | 1      | ± 0.5 %                  | ± 0.5 %                  |
| Integration Time                     | 2.6                    | Rectangular              | √3      | 1      | 1      | ± 1.5 %                  | ± 1.5 %                  |
| RF Ambient Conditions                | 3.0                    | Rectangular              | √3      | 1      | 1      | ± 1.7 %                  | ± 1.7 %                  |
| RF Reflections                       | 12.0                   | Rectangular              | √3      | 1      | 1      | ± 6.9 %                  | ± 6.9 %                  |
| Probe Positioner                     | 1.2                    | Rectangular              | √3      | 1      | 0.67   | ± 0.7 %                  | ± 0.5 %                  |
| Probe Positioning                    | 4.7                    | Rectangular              | √3      | 1      | 0.67   | ± 2.7 %                  | ± 1.8 %                  |
| Extrap. and Interpolation            | 1.0                    | Rectangular              | √3      | 1      | 1      | ± 0.6 %                  | ± 0.6 %                  |
| <b>Test Sample Related</b>           |                        |                          |         |        |        |                          |                          |
| Device Positioning Vertical          | 4.7                    | Rectangular              | √3      | 1      | 0.67   | ± 2.7 %                  | ± 1.8 %                  |
| Device Positioning Lateral           | 1.0                    | Rectangular              | √3      | 1      | 1      | ± 0.6 %                  | ± 0.6 %                  |
| Device Holder and Phantom            | 2.4                    | Rectangular              | √3      | 1      | 1      | ± 1.4 %                  | ± 1.4 %                  |
| Power Drift                          | 5.0                    | Rectangular              | √3      | 1      | 1      | ± 2.9 %                  | ± 2.9 %                  |
| <b>Phantom and Setup Related</b>     |                        |                          |         |        |        |                          |                          |
| Phantom Thickness                    | 2.4                    | Rectangular              | √3      | 1      | 0.67   | ± 1.4 %                  | ± 0.9 %                  |
| <b>Combined Standard Uncertainty</b> |                        |                          |         |        |        | ± 15.2 %                 | ± 10.8 %                 |
| <b>Coverage Factor for 95 %</b>      |                        |                          |         |        |        | K = 2                    |                          |
| <b>Expanded Uncertainty</b>          |                        |                          |         |        |        | ± 30.4 %                 | ± 21.6 %                 |

Table 6.2 Uncertainty Budget of DASYS

## 7. HAC RF Emission Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the test Arch and a corresponding distance holder.

### 7.1 Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal HAC measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 7.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the arch phantom. The equipment setup is shown below:

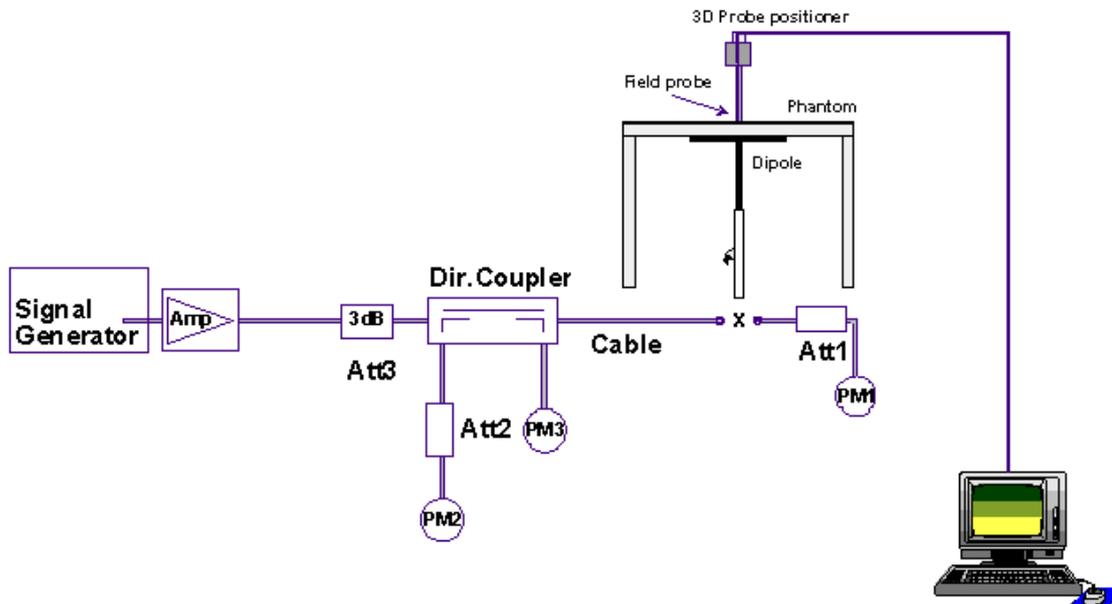


Fig. 7.1 System Setup of System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.



**Fig 7.2 Dipole Setup**

**7.3 Validation Results**

Comparing to the original E-field or H-field value provided by SPEAG, the validation data should be within its specification of 25 %. Table 7.1 shows the target value and measured value. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to appendix A of this report.


| Frequency (MHz) | Input Power (dBm) | Target Value (V/m) | E-Field 1 (V/m) | E-Field 2 (V/m) | Average Value (V/m) | Deviation (%) | Date          |
|-----------------|-------------------|--------------------|-----------------|-----------------|---------------------|---------------|---------------|
| 835             | 20                | 167.6              | 165             | 158.3           | 161.65              | -3.55         | Jun. 13, 2012 |
| 1880            | 20                | 139.9              | 136.7           | 133.5           | 135.1               | -3.43         | Jun. 13, 2012 |
| Frequency (MHz) | Input Power (dBm) | Target Value (A/m) | H-Field (A/m)   |                 | Deviation (%)       | Date          |               |
| 835             | 20                | 0.455              | 0.464           |                 | 1.98                | Jun. 13, 2012 |               |
| 1880            | 20                | 0.463              | 0.450           |                 | -2.87               | Jun. 13, 2012 |               |

**Table 7.1 Test Results of System Validation**

**Note: Deviation = ((E or H-field Result) - (Target field)) / (Target field) \* 100%**

### 8. RF Field Probe Modulation Factor

A calibration shall be made of the modulation response of the probe and its instrumentation chain. This calibration shall be performed with the field probe, attached to the instrumentation that is to be used with it during the measurement. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude. The field level of the test signals shall be more than 10 dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated field shall be applied to the readings taken of modulated fields of the specified type.

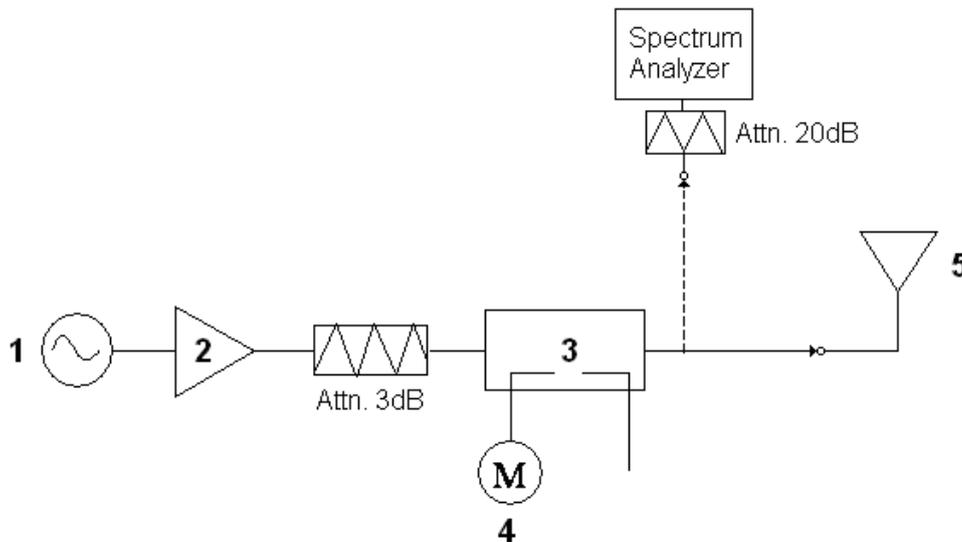

**Fig. 8.1 System Calibration**

This was done using the following procedure:

1. Fixing the probe in a set location relative to a field generating device.
2. Illuminate the probe with a CW signal at the intended measurement frequency.
3. Record the reading of the probe measurement system of the CW signal.
4. Determine the level of the CW signal being used to drive the field generating device.
5. Substitute a signal using the same modulation as that used by the intended WD for the CW signal.
6. Set the peak amplitude during transmission of the modulated signal to equal the amplitude of the CW signal.
7. Record the reading of the probe measurement system of the modulated signal.
8. The ratio of the CW to modulated signal reading is the modulation factor.
9. Repeat 2~8 steps at intended measurement frequency for both E and H field probe.



PMF Measurement Summary:

For GSM


| Frequency (MHz) | Functions | E-field | H-field | PMF     |         |
|-----------------|-----------|---------|---------|---------|---------|
|                 |           | V/m     | A/m     | E-field | H-field |
| 835             | CW        | 742.0   | 3.459   | -       | -       |
| 835             | AM 80%    | 416.0   | 1.450   | 1.78    | 2.39    |
| 835             | GSM       | 251.0   | 1.197   | 2.96    | 2.89    |
| 1880            | CW        | 436.0   | 3.072   | -       | -       |
| 1880            | AM 80%    | 271.6   | 1.166   | 1.61    | 2.63    |
| 1880            | GSM       | 163.2   | 1.063   | 2.67    | 2.89    |

For WCDMA


| Frequency (MHz) | Functions | E-field | H-field | PMF     |         |
|-----------------|-----------|---------|---------|---------|---------|
|                 |           | V/m     | A/m     | E-field | H-field |
| 835             | CW        | 308.0   | 0.718   | -       | -       |
| 835             | AM 80%    | 186.4   | 0.411   | 1.65    | 1.75    |
| 835             | WCDMA     | 282.3   | 0.691   | 1.09    | 1.04    |




Zero span Spectrum Plots for RF Field Probe Modulation Factor  
For GSM

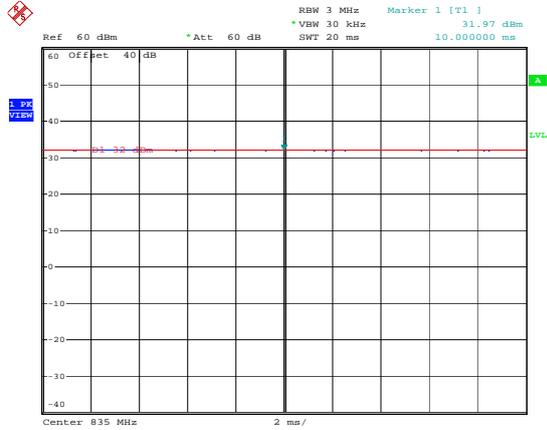


835MHz - CW

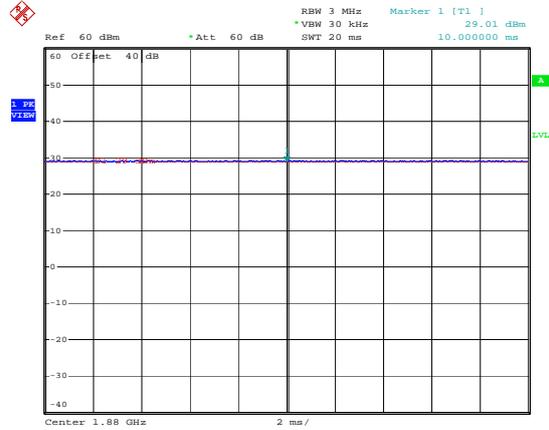


1880MHz - CW

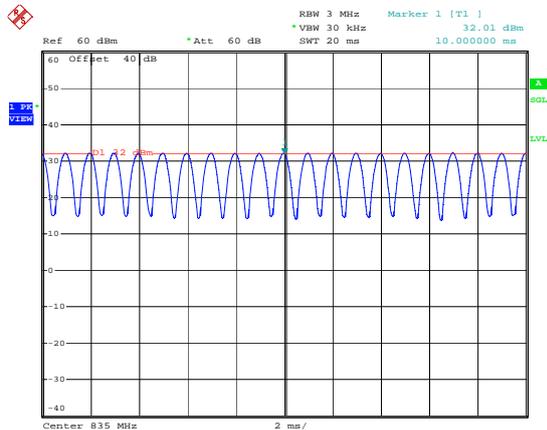


835MHz - 80% AM

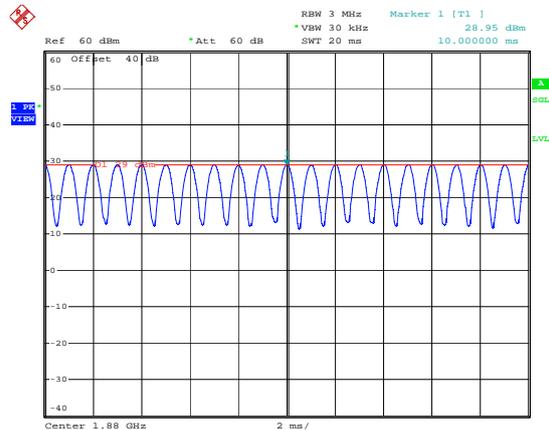

1880MHz - 80% AM

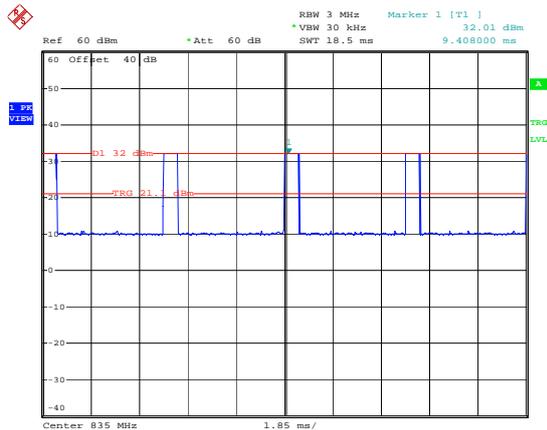


835MHz - GSM

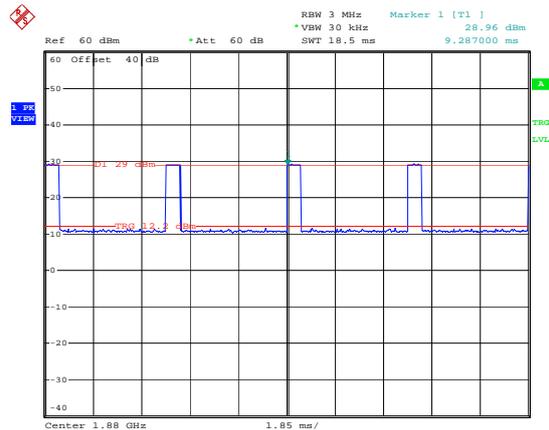


1880MHz - GSM




For WCDMA

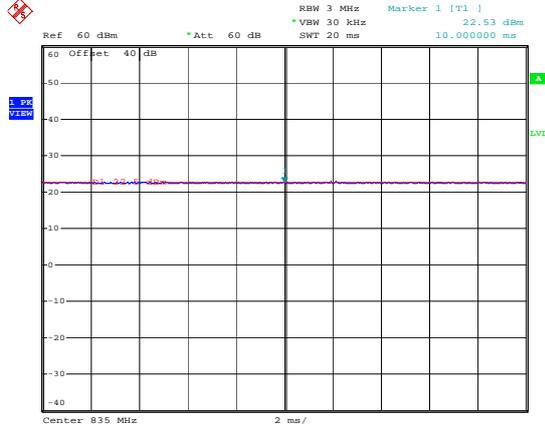

835MHz - CW

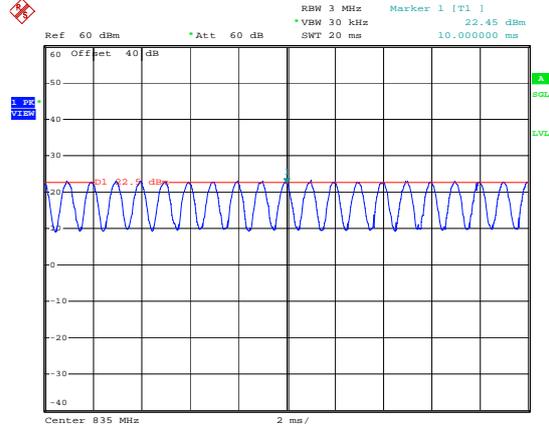

835MHz - 80% AM

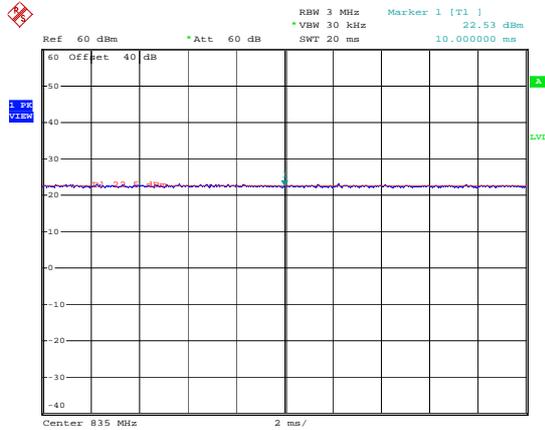

835MHz - WCDMA

### 9. Description for DUT Testing Position

The DUT was put on device holder and adjusted to the accurate and reliable position. Please refer to Appendix E for the Setup photographs.

Fig. 9.1 illustrate the references and reference plane that shall be used in a typical DUT emissions measurement. The principle of this section is applied to DUT with similar geometry.

- The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the DUT.
- The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the DUT handset, which, in normal handset use, rest against the ear.
- The measurement plane is parallel to, and 15 mm in front of, the reference plane.



Fig 9.1 A typical DUT reference and plane for HAC measurements

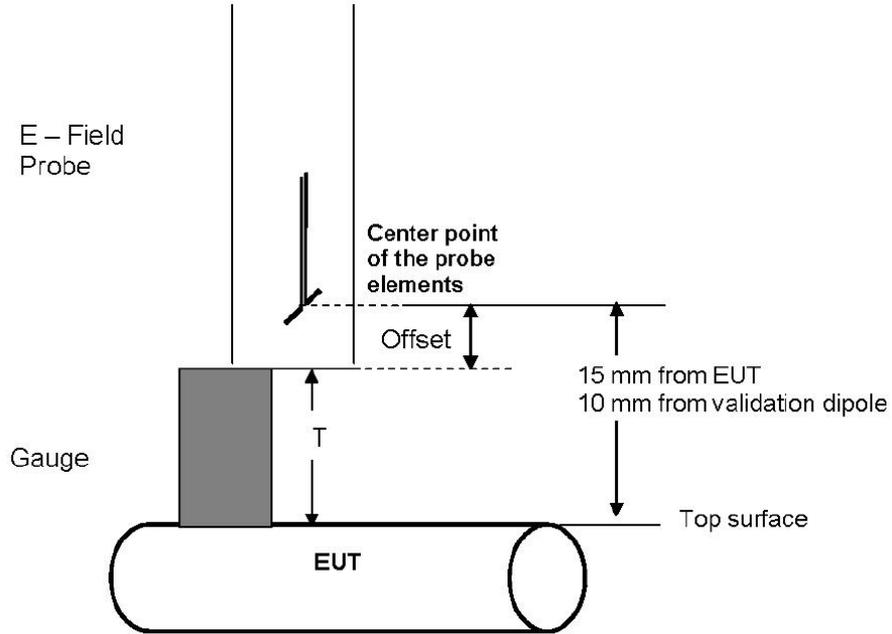


Fig. 9.2 Gauge block with E-field probe

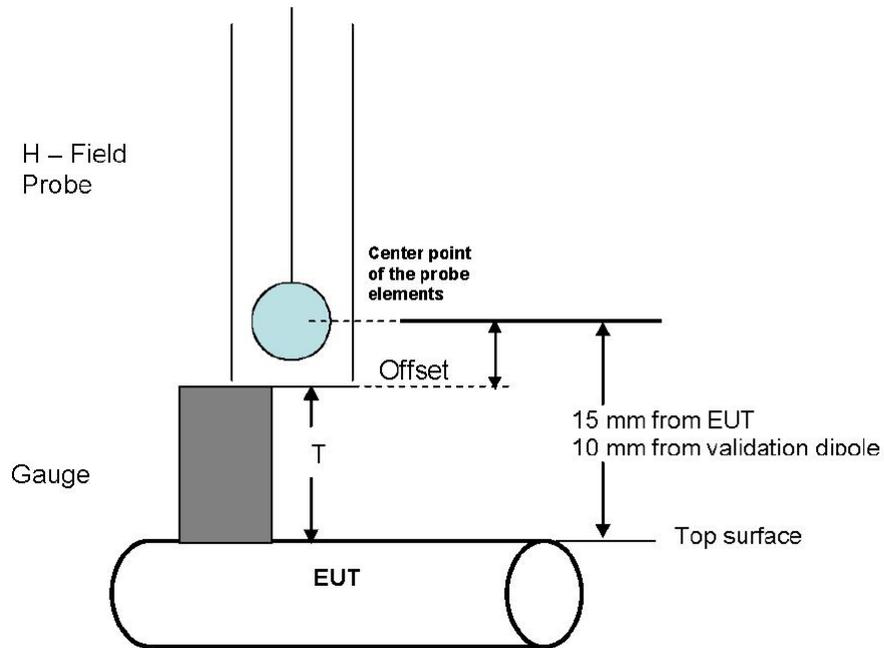


Fig. 9.3 Gauge block with H-field probe



## **10. RF Emissions Test Procedure**

The following illustrate a typical RF emissions test scan over a wireless communications device:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. DUT is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The DUT operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The DUT audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 5 mm increments in the 5 x 5 cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location.
9. Steps 1 ~ 8 were done for both the E and H-Field measurements.



**11. HAC RF Emission Test Results**

**11.1 Conducted Power (Unit: dBm)**

| Band            | GSM850 |              |       | GSM1900 |        |              |
|-----------------|--------|--------------|-------|---------|--------|--------------|
| Channel         | 128    | 189          | 251   | 512     | 661    | 810          |
| Frequency (MHz) | 824.2  | 836.4        | 848.8 | 1850.2  | 1880.0 | 1909.8       |
| GSM             | 32.15  | <b>32.20</b> | 32.19 | 28.66   | 28.83  | <b>29.06</b> |

| Band            | WCDMA Band V |              |       |
|-----------------|--------------|--------------|-------|
| Channel         | 4132         | 4182         | 4233  |
| Frequency (MHz) | 826.4        | 836.4        | 846.6 |
| RMC 12.2K       | 22.69        | <b>22.74</b> | 22.70 |

**11.2 E-Field Emission**

| Plot No. | Band                | Mode            | Channel     | PMF         | Peak E-Field (V/m) | M-Rating  |
|----------|---------------------|-----------------|-------------|-------------|--------------------|-----------|
| #01      | GSM850              | GSM             | 128         | 2.96        | 147.2              | M4        |
| #02      | <b>GSM850</b>       | <b>GSM</b>      | <b>189</b>  | <b>2.96</b> | <b>157.5</b>       | <b>M3</b> |
| #03      | GSM850              | GSM             | 251         | 2.96        | 156.9              | M3        |
| #04      | <b>GSM1900</b>      | <b>GSM</b>      | <b>512</b>  | <b>2.67</b> | <b>56.274</b>      | <b>M3</b> |
| #05      | GSM1900             | GSM             | 661         | 2.67        | 54.990             | M3        |
| #06      | GSM1900             | GSM             | 810         | 2.67        | 53.884             | M3        |
| #07      | WCDMA Band V        | RMC12.2K        | 4132        | 1.09        | 51.229             | M4        |
| #08      | WCDMA Band V        | RMC12.2K        | 4182        | 1.09        | 59.005             | M4        |
| #09      | <b>WCDMA Band V</b> | <b>RMC12.2K</b> | <b>4233</b> | <b>1.09</b> | <b>63.677</b>      | <b>M4</b> |



11.3 H-Field Emission

| Plot No. | Band                | Mode            | Channel     | PMF         | Peak H-Field (A/m) | M-Rating  |
|----------|---------------------|-----------------|-------------|-------------|--------------------|-----------|
| #01      | GSM850              | GSM             | 128         | 2.89        | 0.318              | M4        |
| #02      | GSM850              | GSM             | 189         | 2.89        | 0.337              | M4        |
| #03      | <b>GSM850</b>       | <b>GSM</b>      | <b>251</b>  | <b>2.89</b> | <b>0.371</b>       | <b>M4</b> |
| #04      | GSM1900             | GSM             | 512         | 2.89        | 0.170              | M3        |
| #05      | <b>GSM1900</b>      | <b>GSM</b>      | <b>661</b>  | <b>2.89</b> | <b>0.172</b>       | <b>M3</b> |
| #06      | GSM1900             | GSM             | 810         | 2.89        | 0.166              | M3        |
| #07      | <b>WCDMA Band V</b> | <b>RMC12.2K</b> | <b>4132</b> | <b>1.04</b> | <b>0.107</b>       | <b>M4</b> |
| #08      | WCDMA Band V        | RMC12.2K        | 4182        | 1.04        | 0.088              | M4        |
| #09      | WCDMA Band V        | RMC12.2K        | 4233        | 1.04        | 0.094              | M4        |

Remark:

1. The volume was adjusted to maximum level and the backlight turned off during RF Emission testing.
2. There is no special HAC mode software on this DUT.
3. Test Engineer : Fulu Hu



## **12. References**

- [1] ANSI C63.19-2007, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 8 June 2007
- [2] SPEAG DASY System Handbook



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.

**HAC\_E\_Dipole\_835\_120613**

**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**E Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 165.0 V/m

Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 110.6 V/m; Power Drift = 0.03 dB

**Average value of Total=(165.0+158.3) /2 = 161.65 V/m)**

Peak E-field in V/m



|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>163.0 M4</b>  | Grid 2<br><b>165.0 M4</b>  | Grid 3<br><b>157.5 M4</b>  |
| Grid 4<br><b>80.348 M4</b> | Grid 5<br><b>80.757 M4</b> | Grid 6<br><b>80.320 M4</b> |
| Grid 7<br><b>158.1 M4</b>  | Grid 8<br><b>158.3 M4</b>  | Grid 9<br><b>149.1 M4</b>  |

**Cursor:**

Total = 165.0 V/m

E Category: M4

Location: 1, -78, 4.7 mm

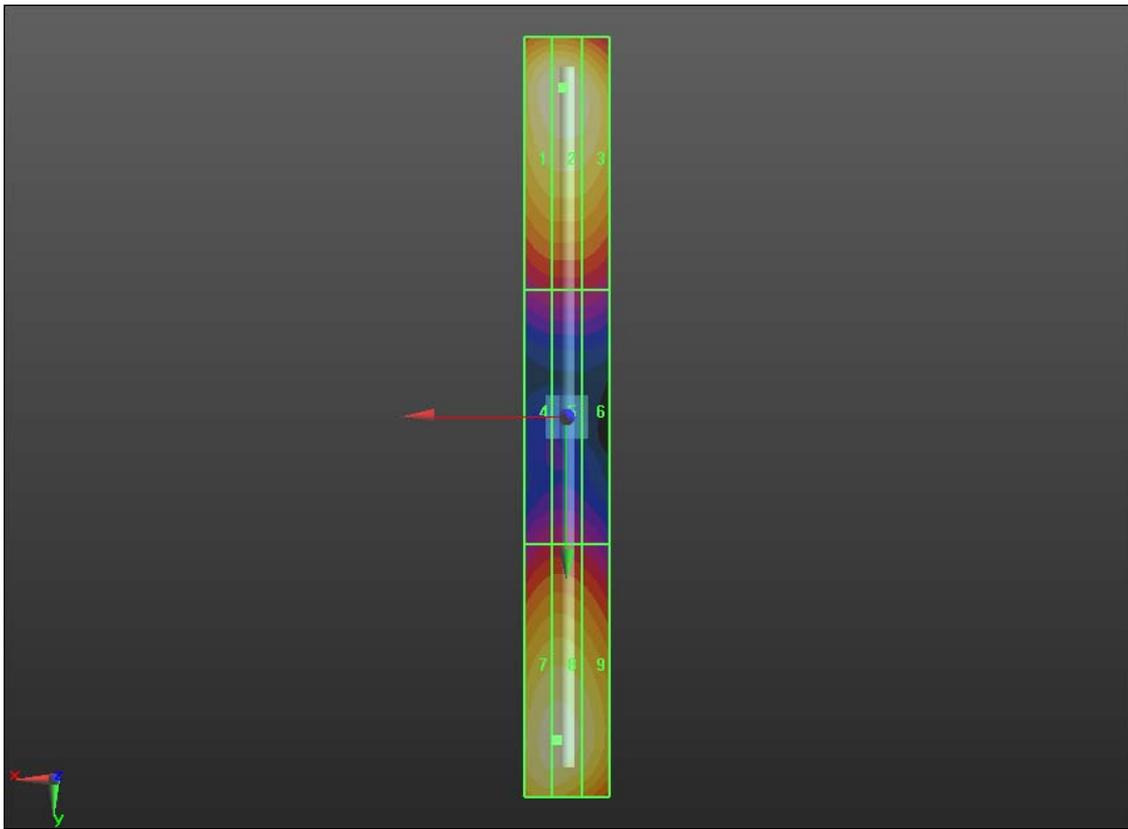

0 dB = 165.0V/m

**HAC\_E\_Dipole\_1880\_120613**

**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 136.7 V/m

Probe Modulation Factor = 1.000

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 134.9 V/m; Power Drift = -0.02 dB

**Average value of Total=(136.7+133.5) /2 = 135.1 V/m)**

Peak E-field in V/m


|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>132.3 M2</b>  | Grid 2<br><b>136.7 M2</b>  | Grid 3<br><b>132.4 M2</b>  |
| Grid 4<br><b>89.289 M3</b> | Grid 5<br><b>92.933 M3</b> | Grid 6<br><b>91.469 M3</b> |
| Grid 7<br><b>130.6 M2</b>  | Grid 8<br><b>133.5 M2</b>  | Grid 9<br><b>131.0 M2</b>  |

**Cursor:**

Total = 136.7 V/m

E Category: M2

Location: 0, -38.5, 4.7 mm

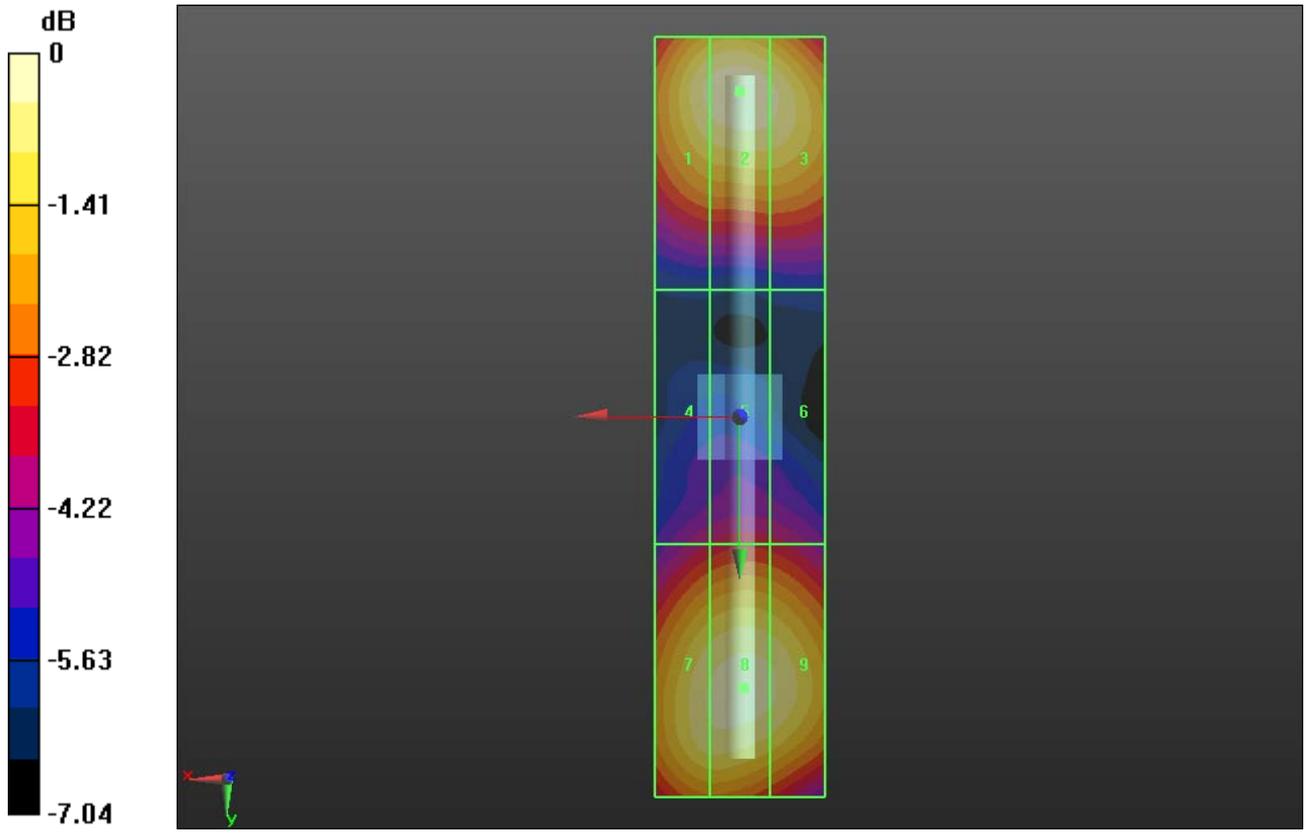

0 dB = 136.7V/m

**HAC\_H\_Dipole\_835\_120613**

**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**H Scan - measurement distance from the probe sensor center to CD835 Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1.000

Reference Value = 0.492 A/m; Power Drift = 0.0083 dB

**Maximum value of peak Total field = 0.464 A/m**

Peak H-field in A/m



|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.391 M4</b> | Grid 2<br><b>0.408 M4</b> | Grid 3<br><b>0.391 M4</b> |
| Grid 4<br><b>0.442 M4</b> | Grid 5<br><b>0.464 M4</b> | Grid 6<br><b>0.446 M4</b> |
| Grid 7<br><b>0.392 M4</b> | Grid 8<br><b>0.416 M4</b> | Grid 9<br><b>0.399 M4</b> |

**Cursor:**

Total = 0.464 A/m

H Category: M4

Location: 0, 0.5, 4.7 mm

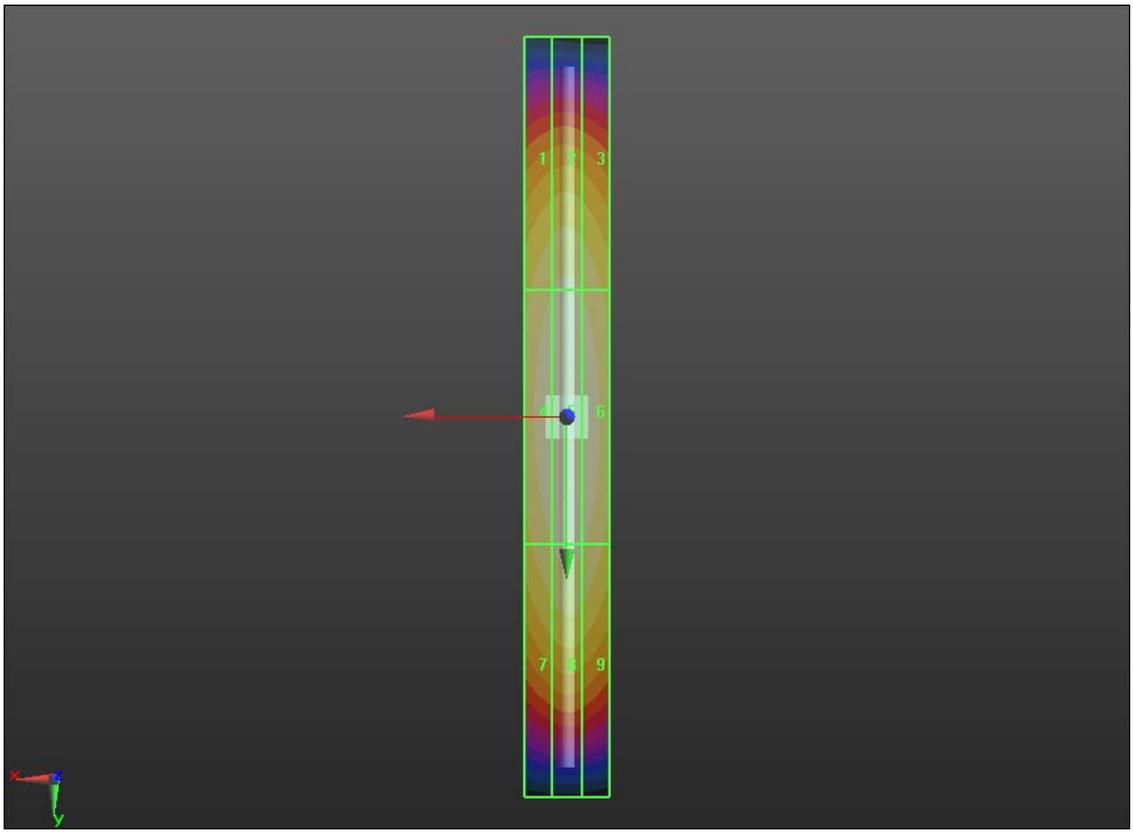

0 dB = 0.460A/m

**HAC\_H\_Dipole\_1880\_120613**

**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**H Scan - measurement distance from the probe sensor center to CD1880 Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm

Probe Modulation Factor = 1.000

Reference Value = 0.474 A/m; Power Drift = 0.0019 dB

Maximum value of peak Total field = 0.450 A/m

Peak H-field in A/m



|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.399 M2</b> | Grid 2<br><b>0.415 M2</b> | Grid 3<br><b>0.400 M2</b> |
| Grid 4<br><b>0.432 M2</b> | Grid 5<br><b>0.450 M2</b> | Grid 6<br><b>0.434 M2</b> |
| Grid 7<br><b>0.387 M2</b> | Grid 8<br><b>0.404 M2</b> | Grid 9<br><b>0.390 M2</b> |

**Cursor:**

Total = 0.450 A/m

H Category: M2

Location: 0, -2.5, 4.7 mm

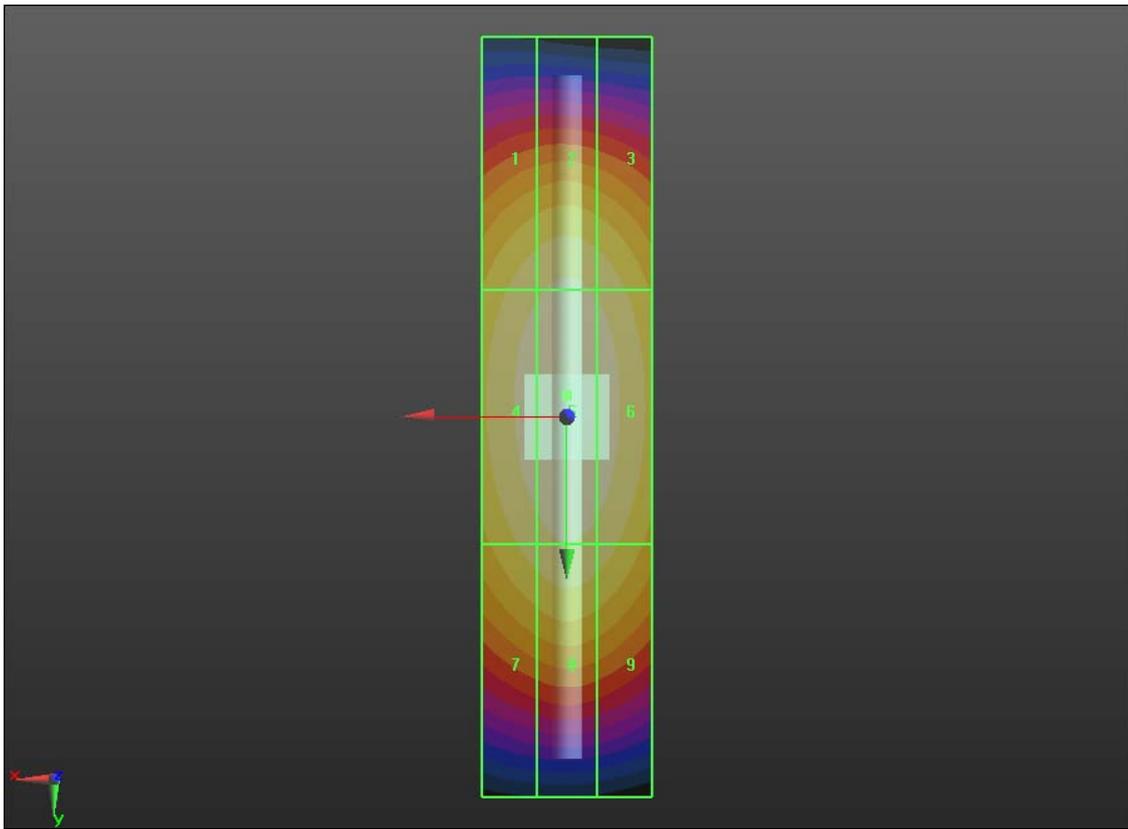

0 dB = 0.450A/m



## ***Appendix B. Plots of RF Emission Measurement***

The plots are shown as follows.

**#01 RF\_GSM850\_Ch128(E)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch128/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 147.2 V/m

Probe Modulation Factor = 2.960

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 64.951 V/m; Power Drift = 0.0063 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak E-field in V/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>133.0 M4</b> | Grid 2<br><b>141.3 M4</b> | Grid 3<br><b>131.1 M4</b> |
| Grid 4<br><b>140.5 M4</b> | Grid 5<br><b>147.2 M4</b> | Grid 6<br><b>135.7 M4</b> |
| Grid 7<br><b>140.2 M4</b> | Grid 8<br><b>146.2 M4</b> | Grid 9<br><b>135.5 M4</b> |

**Cursor:**

Total = 147.2 V/m

E Category: M4

Location: 0.5, 5, 8.7 mm

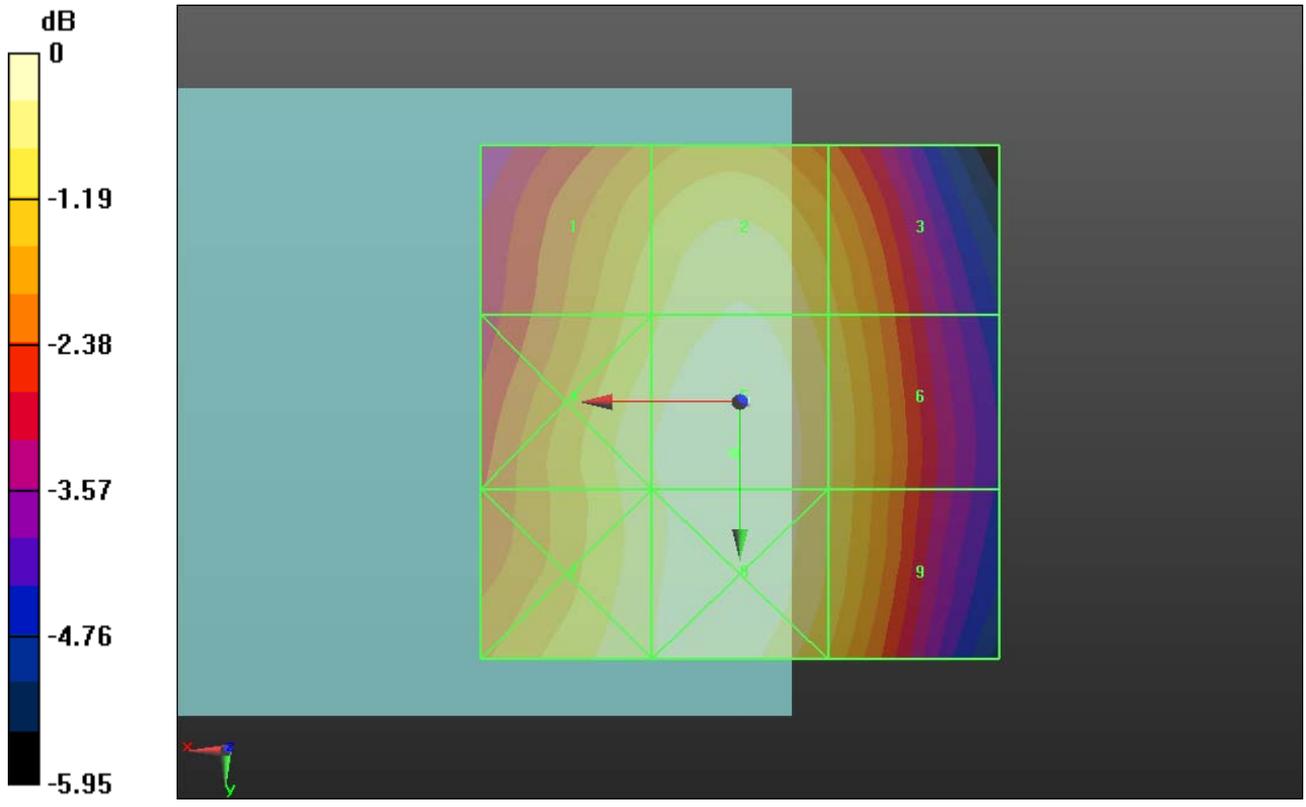

0 dB = 147.2V/m

**#02 RF\_GSM850\_Ch189(E)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch189/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 157.5 V/m

Probe Modulation Factor = 2.960

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.337 V/m; Power Drift = 0.0018 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>142.3 M4</b> | Grid 2<br><b>150.1 M3</b> | Grid 3<br><b>139.1 M4</b> |
| Grid 4<br><b>149.6 M3</b> | Grid 5<br><b>157.5 M3</b> | Grid 6<br><b>145.1 M4</b> |
| Grid 7<br><b>151.7 M3</b> | Grid 8<br><b>156.4 M3</b> | Grid 9<br><b>144.3 M4</b> |

**Cursor:**

Total = 157.5 V/m

E Category: M3

Location: 0.5, 5.5, 8.7 mm

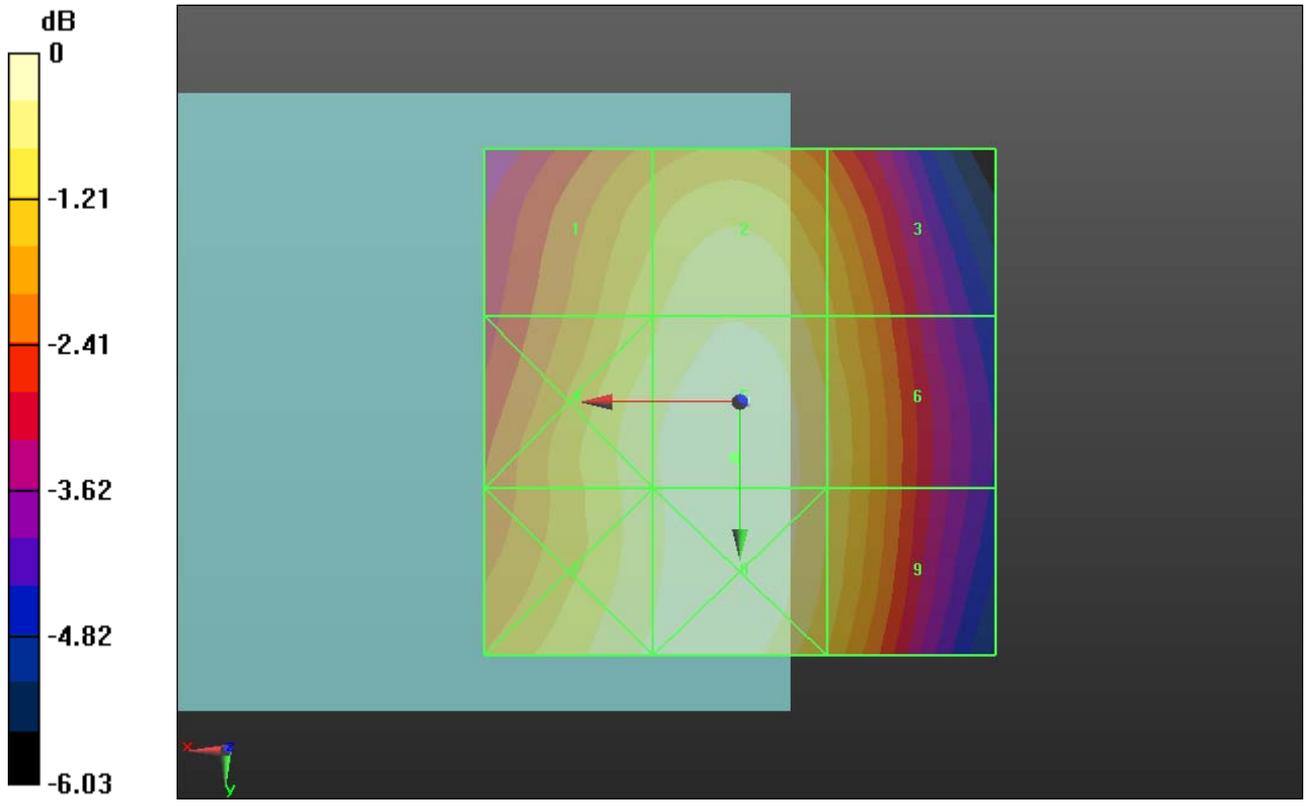

0 dB = 157.5V/m

**#03 RF\_GSM850\_Ch251(E)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch251/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 156.9 V/m

Probe Modulation Factor = 2.960

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.156 V/m; Power Drift = 0.03 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>142.4 M4</b> | Grid 2<br><b>150.4 M3</b> | Grid 3<br><b>139.4 M4</b> |
| Grid 4<br><b>150.3 M3</b> | Grid 5<br><b>156.9 M3</b> | Grid 6<br><b>144.6 M4</b> |
| Grid 7<br><b>151.6 M3</b> | Grid 8<br><b>155.8 M3</b> | Grid 9<br><b>144.4 M4</b> |

**Cursor:**

Total = 156.9 V/m

E Category: M3

Location: 0.5, 5, 8.7 mm

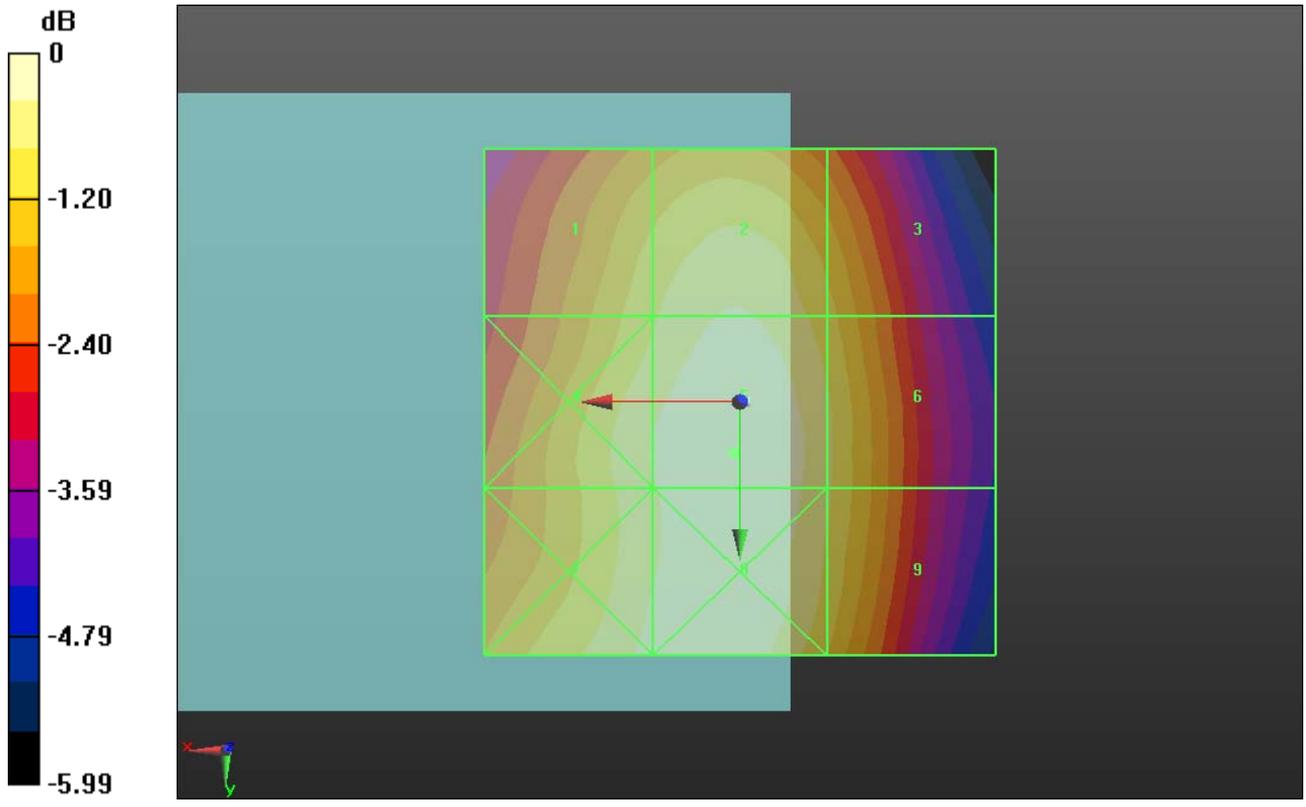

0 dB = 156.9V/m

**#04 RF\_GSM1900\_Ch512(E)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch512/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 56.274 V/m

Probe Modulation Factor = 2.670

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 20.130 V/m; Power Drift = -0.0086 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m


|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>44.245 M4</b> | Grid 2<br><b>37.692 M4</b> | Grid 3<br><b>38.107 M4</b> |
| Grid 4<br><b>39.303 M4</b> | Grid 5<br><b>56.274 M3</b> | Grid 6<br><b>55.848 M3</b> |
| Grid 7<br><b>56.621 M3</b> | Grid 8<br><b>69.243 M3</b> | Grid 9<br><b>66.193 M3</b> |

**Cursor:**

Total = 69.243 V/m

E Category: M3

Location: -2.5, 25, 8.7 mm

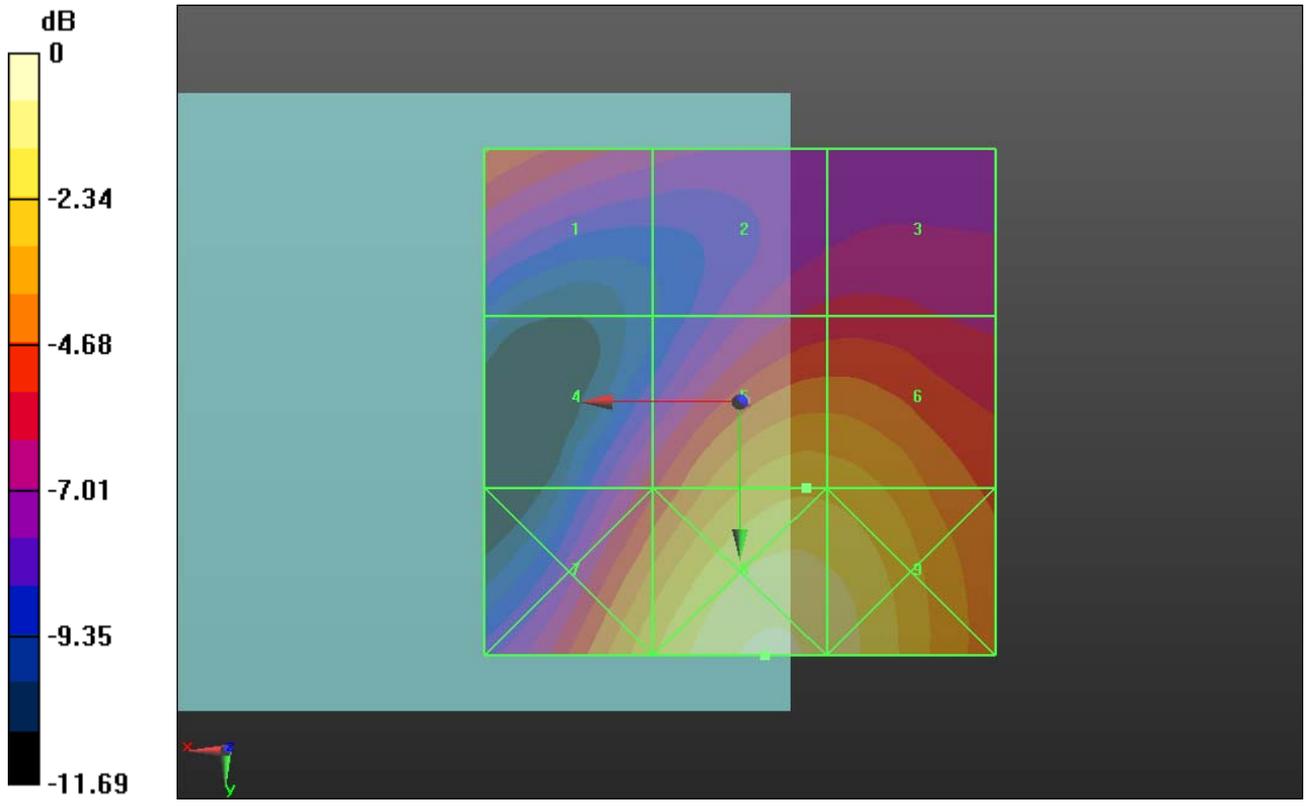

0 dB = 74.690V/m

**#05 RF\_GSM1900\_Ch66(E)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch661/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 54.990 V/m

Probe Modulation Factor = 2.670

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.527 V/m; Power Drift = -0.03 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m


|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>43.765 M4</b> | Grid 2<br><b>36.795 M4</b> | Grid 3<br><b>36.683 M4</b> |
| Grid 4<br><b>38.371 M4</b> | Grid 5<br><b>54.990 M3</b> | Grid 6<br><b>54.574 M3</b> |
| Grid 7<br><b>55.446 M3</b> | Grid 8<br><b>68.518 M3</b> | Grid 9<br><b>65.674 M3</b> |

**Cursor:**

Total = 68.518 V/m

E Category: M3

Location: -3, 25, 8.7 mm

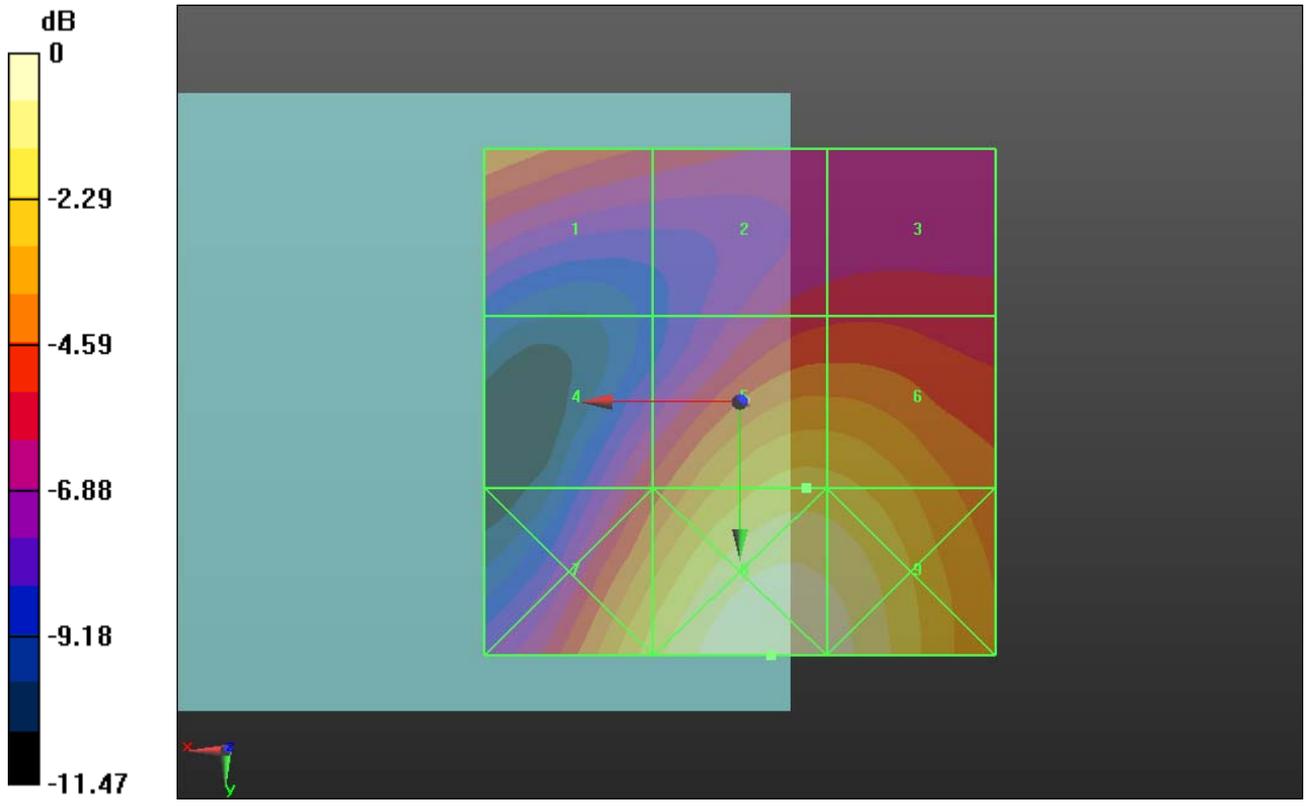

0 dB = 68.520V/m

**#06 RF\_GSM1900\_Ch810(E)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 53.844 V/m

Probe Modulation Factor = 2.670

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 19.196 V/m; Power Drift = -0.01 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak E-field in V/m


|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>40.570 M4</b> | Grid 2<br><b>36.787 M4</b> | Grid 3<br><b>37.315 M4</b> |
| Grid 4<br><b>36.064 M4</b> | Grid 5<br><b>53.844 M3</b> | Grid 6<br><b>53.668 M3</b> |
| Grid 7<br><b>50.149 M3</b> | Grid 8<br><b>64.777 M3</b> | Grid 9<br><b>63.064 M3</b> |

**Cursor:**

Total = 64.777 V/m

E Category: M3

Location: -4.5, 25, 8.7 mm

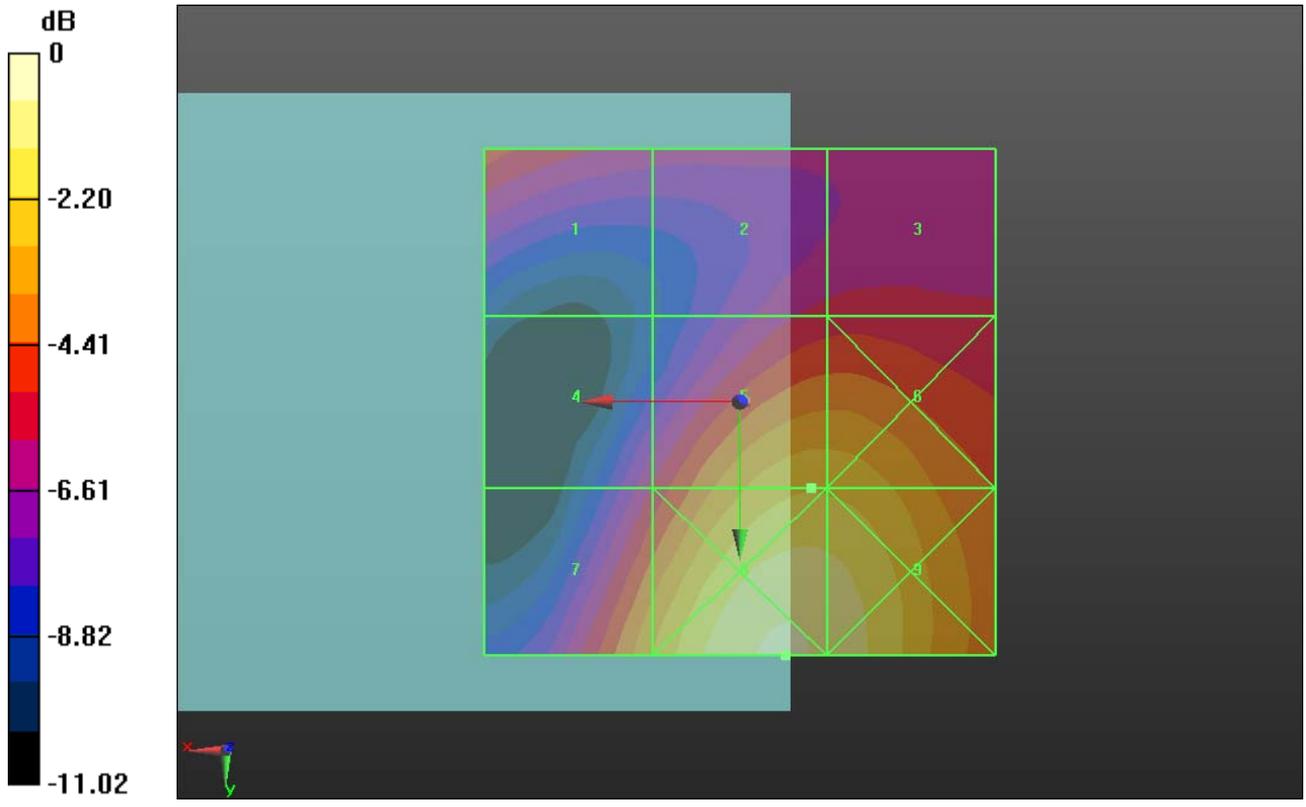

0 dB = 69.870V/m

**#07 RF\_WCDMA V\_RMC12.2K\_Ch4132(E)**

**DUT: 250202A**

Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 51.229 V/m

Probe Modulation Factor = 1.090

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 59.775 V/m; Power Drift = 0.02 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m


|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>45.433 M4</b> | Grid 2<br><b>49.154 M4</b> | Grid 3<br><b>46.996 M4</b> |
| Grid 4<br><b>47.922 M4</b> | Grid 5<br><b>51.229 M4</b> | Grid 6<br><b>48.808 M4</b> |
| Grid 7<br><b>48.544 M4</b> | Grid 8<br><b>50.804 M4</b> | Grid 9<br><b>48.581 M4</b> |

**Cursor:**

Total = 51.229 V/m

E Category: M4

Location: -1, 5, 8.7 mm

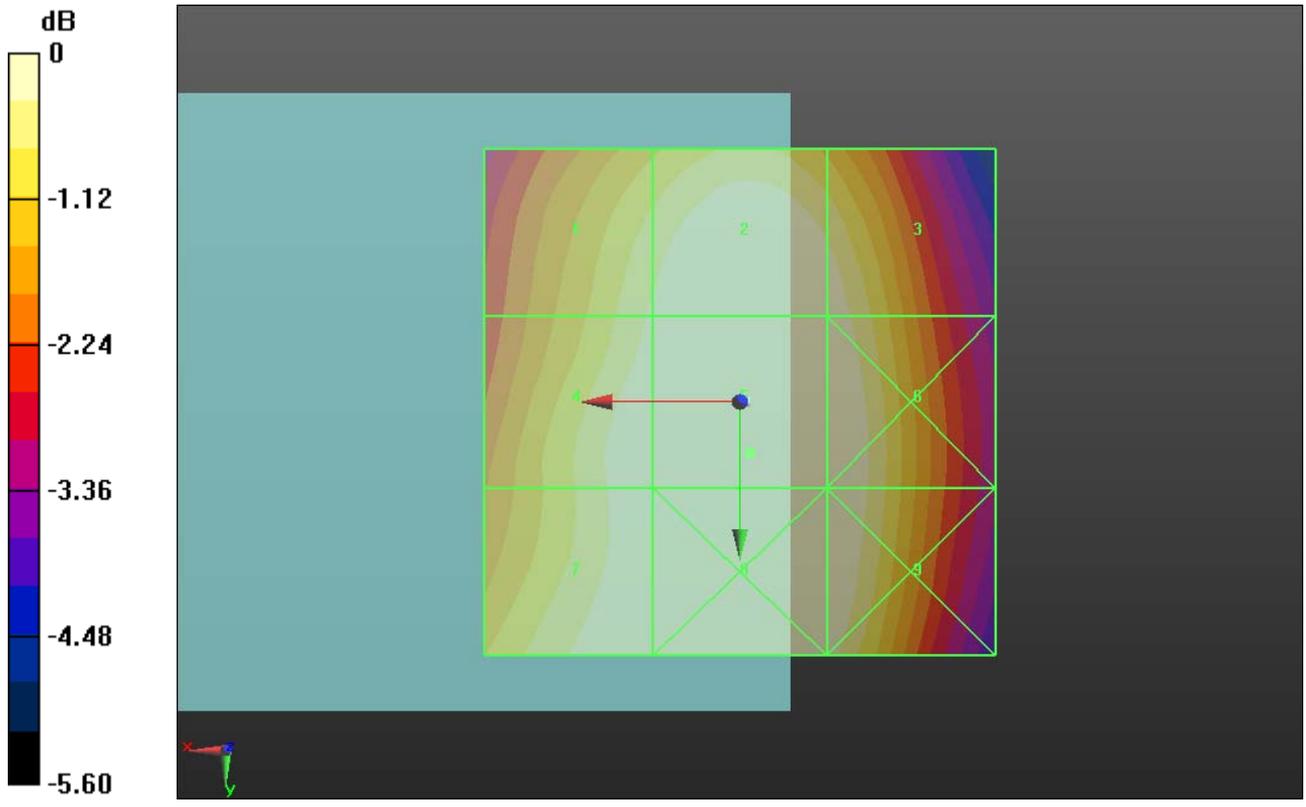

0 dB = 47.000V/m

**#08 RF\_WCDMA V\_RMC12.2K\_Ch4182(E)**

**DUT: 250202A**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 59.005 V/m

Probe Modulation Factor = 1.090

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.439 V/m; Power Drift = -0.03 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m


|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>52.704 M4</b> | Grid 2<br><b>56.571 M4</b> | Grid 3<br><b>54.068 M4</b> |
| Grid 4<br><b>55.740 M4</b> | Grid 5<br><b>59.005 M4</b> | Grid 6<br><b>56.317 M4</b> |
| Grid 7<br><b>56.531 M4</b> | Grid 8<br><b>58.740 M4</b> | Grid 9<br><b>56.123 M4</b> |

**Cursor:**

Total = 59.005 V/m

E Category: M4

Location: -3, 5.5, 8.7 mm

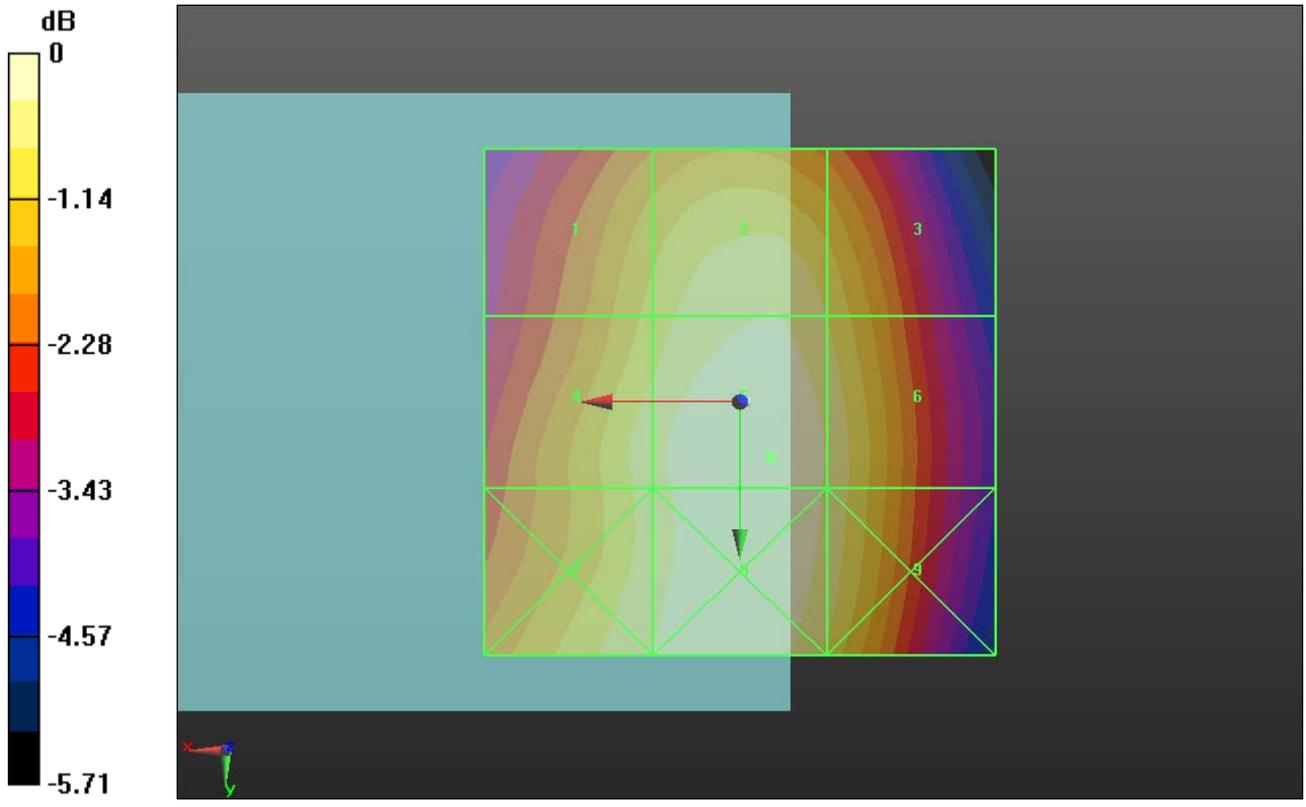

0 dB = 59.010V/m

**#09 RF\_WCDMA V\_RMC12.2K\_Ch4233(E)**

**DUT: 250202A**

Communication System: UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: ER3DV6 - SN2476; ConvF(1, 1, 1); Calibrated: 2011-11-21
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 63.677 V/m

Probe Modulation Factor = 1.090

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 74.382 V/m; Power Drift = -0.02 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m


|                            |                            |                            |
|----------------------------|----------------------------|----------------------------|
| Grid 1<br><b>56.348 M4</b> | Grid 2<br><b>60.835 M4</b> | Grid 3<br><b>57.985 M4</b> |
| Grid 4<br><b>59.880 M4</b> | Grid 5<br><b>63.677 M4</b> | Grid 6<br><b>60.511 M4</b> |
| Grid 7<br><b>60.949 M4</b> | Grid 8<br><b>63.463 M4</b> | Grid 9<br><b>60.287 M4</b> |

**Cursor:**

Total = 63.677 V/m

E Category: M4

Location: -1, 6, 8.7 mm

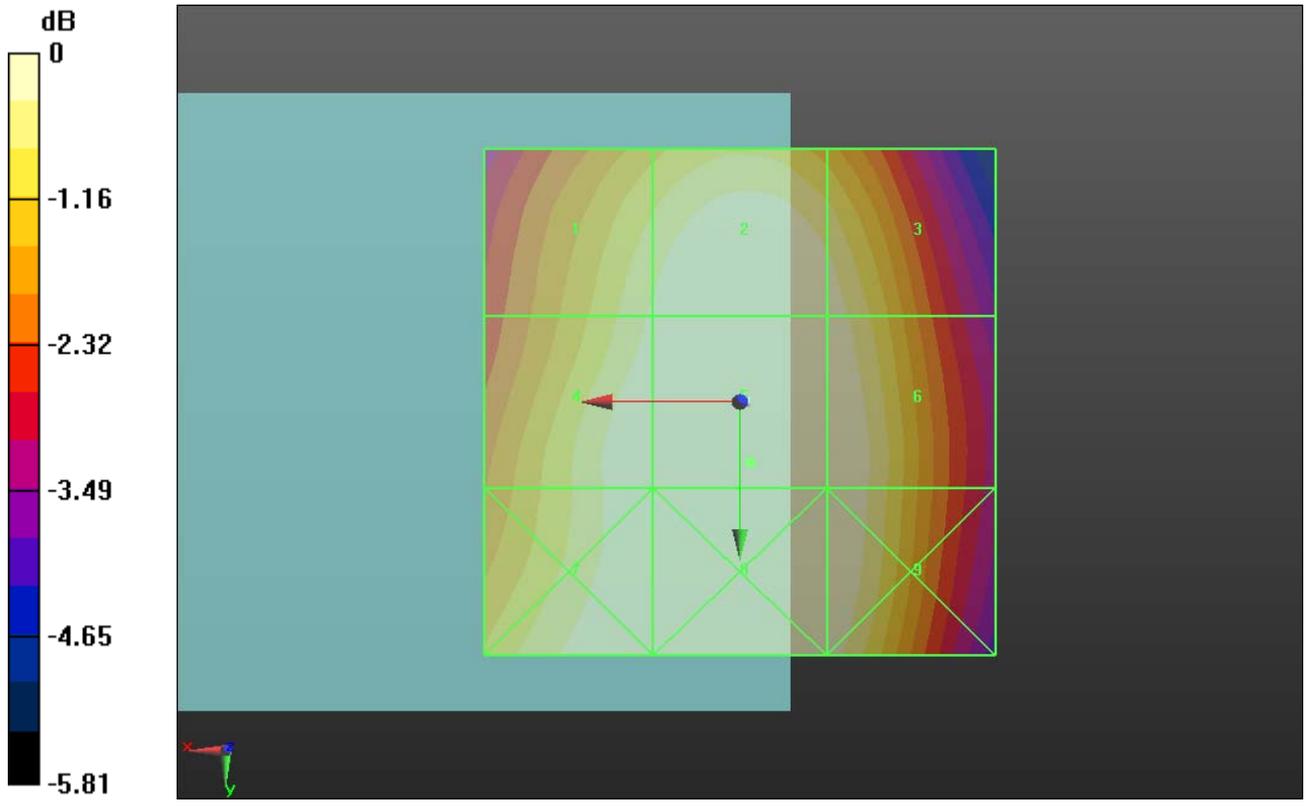

0 dB = 58.420V/m

**#01 RF\_GSM850\_CH128(H)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch128/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.318 A/m

Probe Modulation Factor = 2.890

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.058 A/m; Power Drift = -0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.309 M4</b> | Grid 2<br><b>0.216 M4</b> | Grid 3<br><b>0.129 M4</b> |
| Grid 4<br><b>0.294 M4</b> | Grid 5<br><b>0.209 M4</b> | Grid 6<br><b>0.126 M4</b> |
| Grid 7<br><b>0.318 M4</b> | Grid 8<br><b>0.221 M4</b> | Grid 9<br><b>0.137 M4</b> |

**Cursor:**

Total = 0.318 A/m

H Category: M4

Location: 25, 25, 8.7 mm

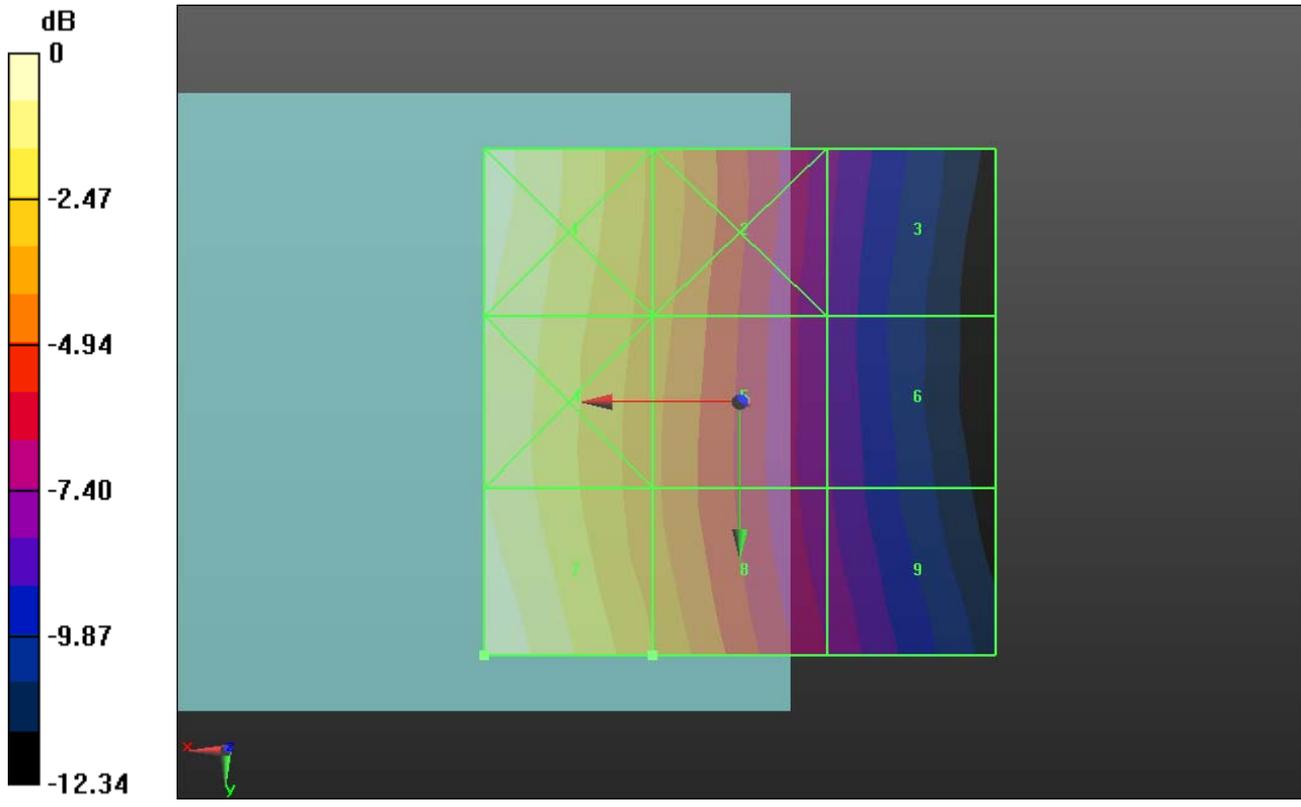

0 dB = 0.320A/m

**#02 RF\_GSM850\_Ch189(H)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch189/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.337 A/m

Probe Modulation Factor = 2.890

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.061 A/m; Power Drift = 0.01 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m



|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.330 M4</b> | Grid 2<br><b>0.230 M4</b> | Grid 3<br><b>0.136 M4</b> |
| Grid 4<br><b>0.314 M4</b> | Grid 5<br><b>0.221 M4</b> | Grid 6<br><b>0.131 M4</b> |
| Grid 7<br><b>0.337 M4</b> | Grid 8<br><b>0.230 M4</b> | Grid 9<br><b>0.141 M4</b> |

**Cursor:**

Total = 0.337 A/m

H Category: M4

Location: 25, 25, 8.7 mm

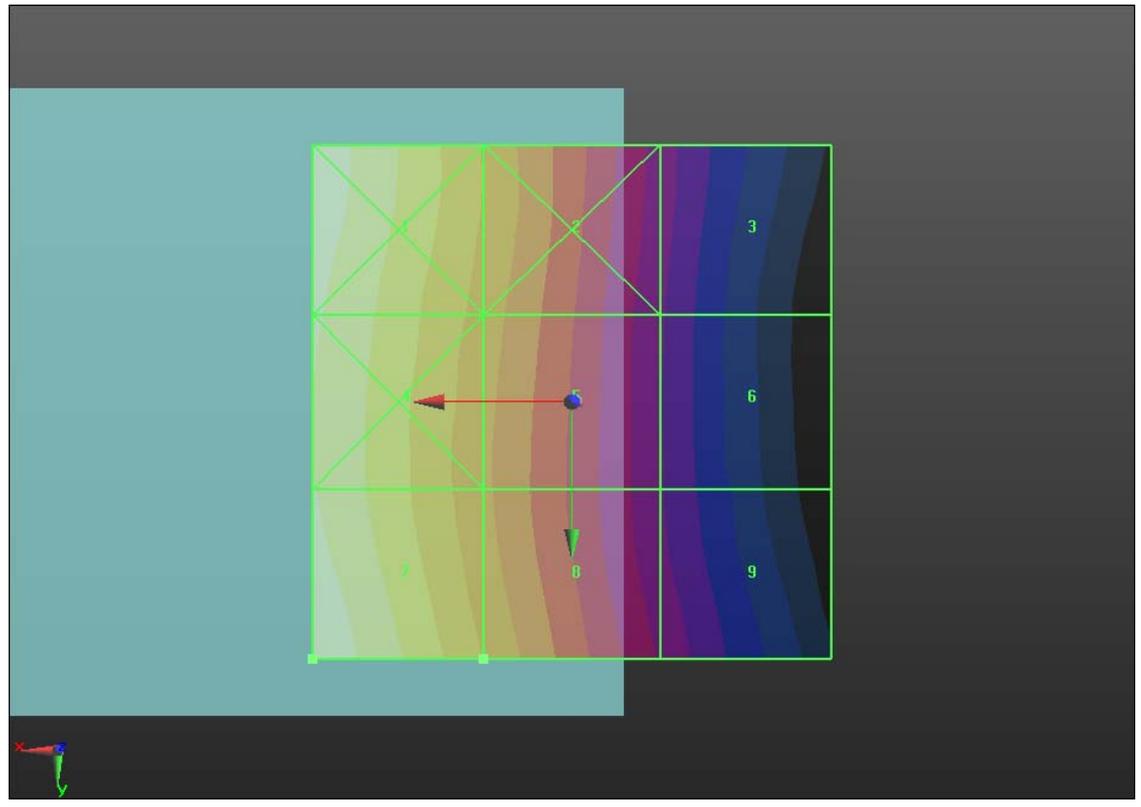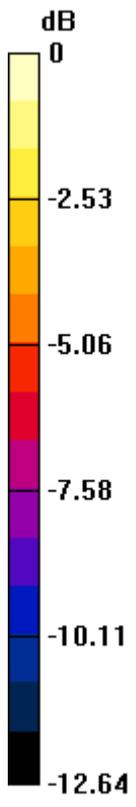

0 dB = 0.340A/m

**#03 RF\_GSM850\_Ch251(H)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch251/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.371 A/m

Probe Modulation Factor = 2.890

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.067 A/m; Power Drift = -0.0056 dB

**Hearing Aid Near-Field Category: M4 (AWF -5 dB)**

Peak H-field in A/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.366 M4</b> | Grid 2<br><b>0.254 M4</b> | Grid 3<br><b>0.152 M4</b> |
| Grid 4<br><b>0.347 M4</b> | Grid 5<br><b>0.244 M4</b> | Grid 6<br><b>0.145 M4</b> |
| Grid 7<br><b>0.371 M4</b> | Grid 8<br><b>0.254 M4</b> | Grid 9<br><b>0.154 M4</b> |

**Cursor:**

Total = 0.371 A/m

H Category: M4

Location: 25, 25, 8.7 mm

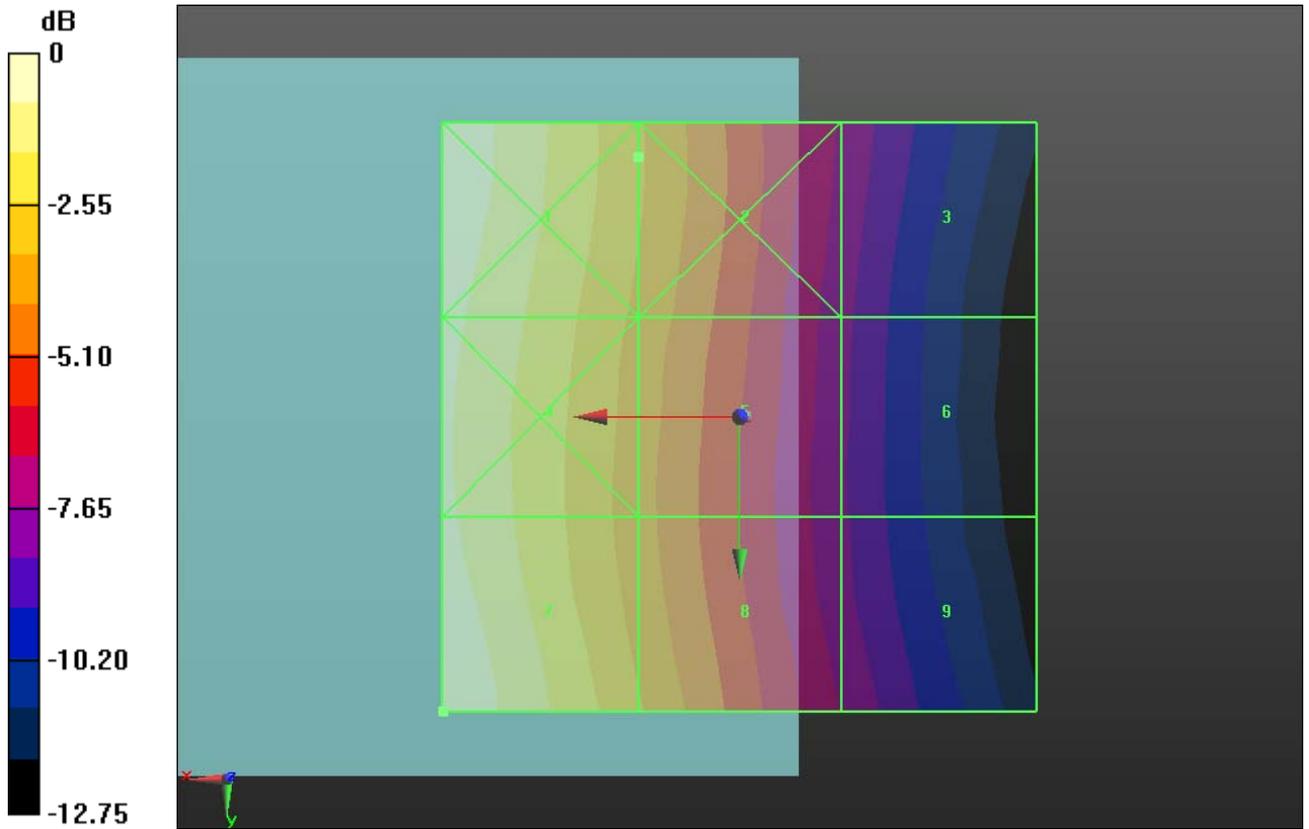

0 dB = 0.370A/m

**#04 RF\_GSM1900\_Ch512(H)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch512/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.170 A/m

Probe Modulation Factor = 2.890

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.063 A/m; Power Drift = 0.02 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak H-field in A/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.156 M3</b> | Grid 2<br><b>0.162 M3</b> | Grid 3<br><b>0.150 M3</b> |
| Grid 4<br><b>0.159 M3</b> | Grid 5<br><b>0.162 M3</b> | Grid 6<br><b>0.149 M3</b> |
| Grid 7<br><b>0.213 M3</b> | Grid 8<br><b>0.170 M3</b> | Grid 9<br><b>0.130 M4</b> |

**Cursor:**

Total = 0.213 A/m

H Category: M3

Location: 25, 25, 8.7 mm

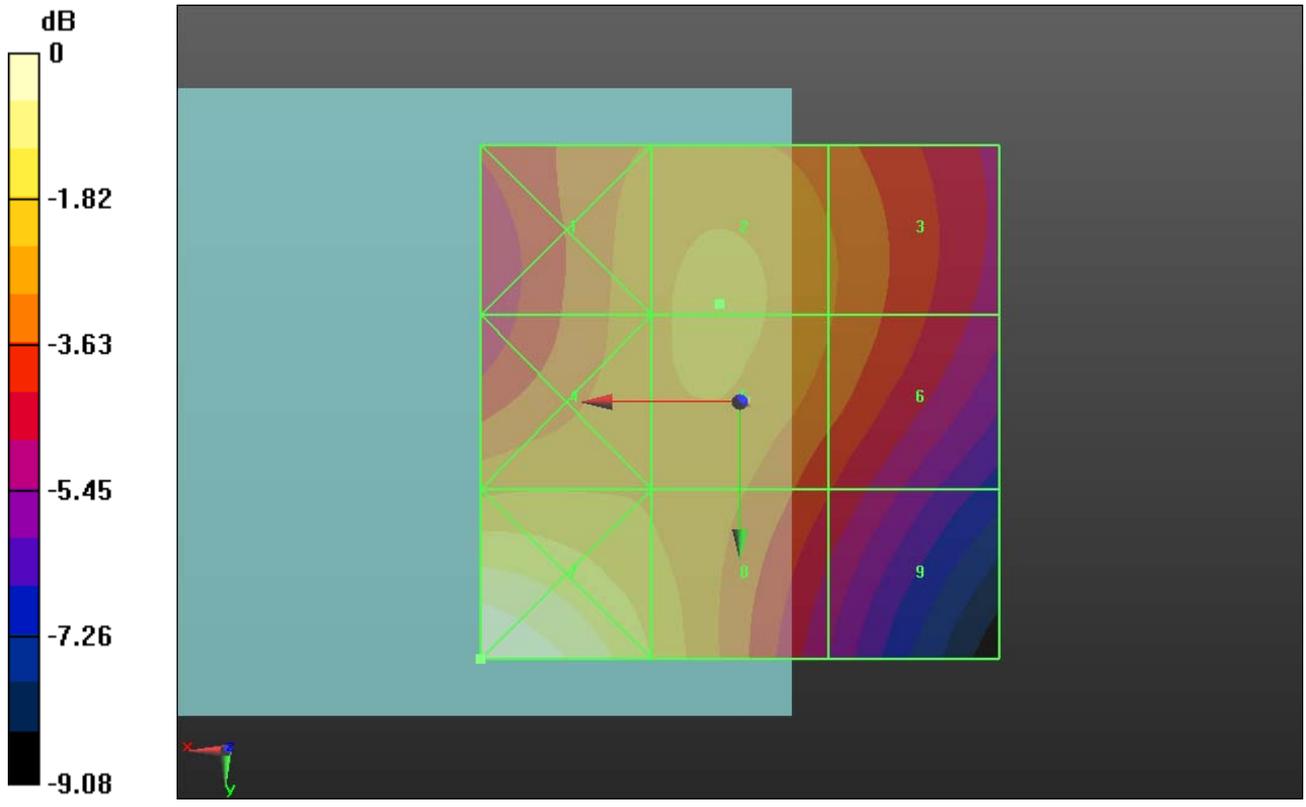

0 dB = 0.210A/m

**#05 RF\_GSM1900\_Ch661(H)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch661/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.172 A/m

Probe Modulation Factor = 2.890

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.063 A/m; Power Drift = -0.0087 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak H-field in A/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.155 M3</b> | Grid 2<br><b>0.163 M3</b> | Grid 3<br><b>0.154 M3</b> |
| Grid 4<br><b>0.159 M3</b> | Grid 5<br><b>0.162 M3</b> | Grid 6<br><b>0.153 M3</b> |
| Grid 7<br><b>0.218 M3</b> | Grid 8<br><b>0.172 M3</b> | Grid 9<br><b>0.132 M4</b> |

**Cursor:**

Total = 0.218 A/m

H Category: M3

Location: 25, 25, 8.7 mm

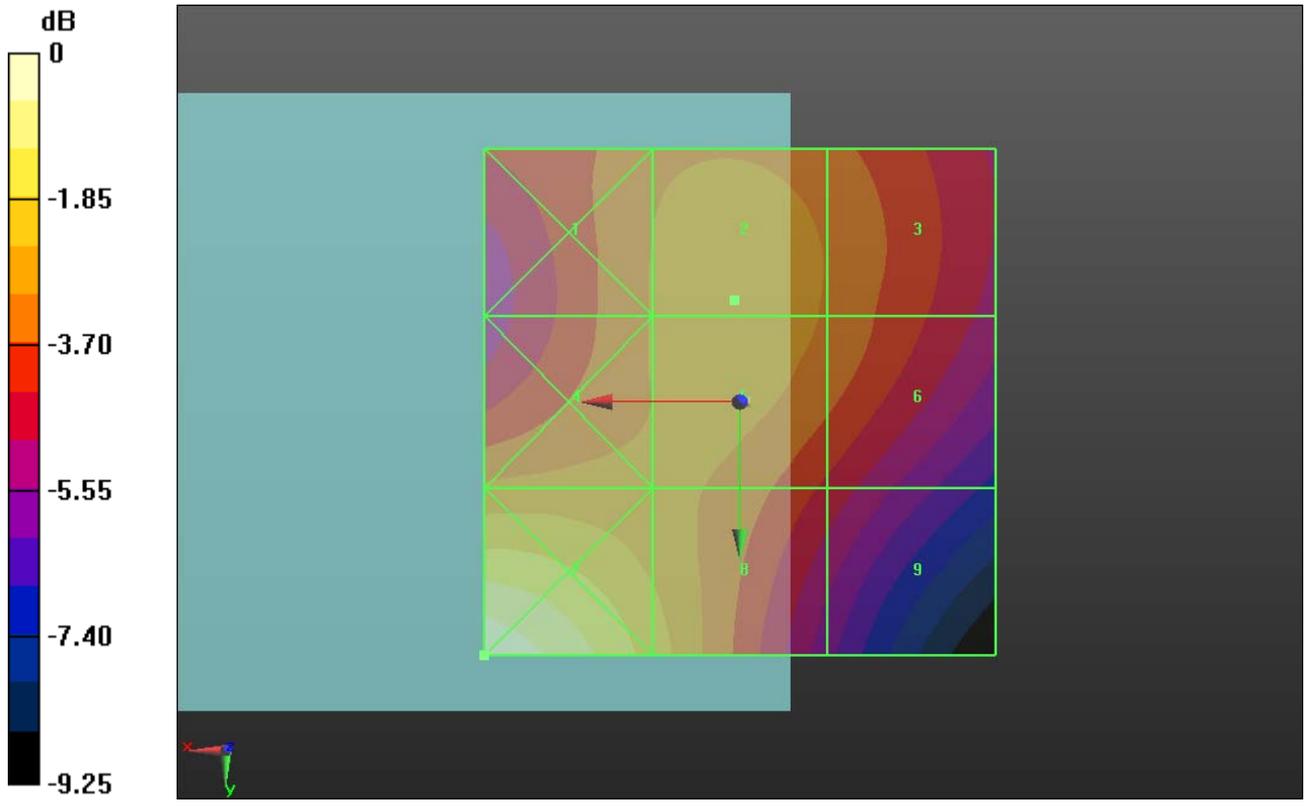

0 dB = 0.220A/m

**#06 RF\_GSM1900\_Ch810(H)**

**DUT: 250202A**

Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch810/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.166 A/m

Probe Modulation Factor = 2.890

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.059 A/m; Power Drift = 0.05 dB

**Hearing Aid Near-Field Category: M3 (AWF -5 dB)**

Peak H-field in A/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.149 M3</b> | Grid 2<br><b>0.155 M3</b> | Grid 3<br><b>0.148 M3</b> |
| Grid 4<br><b>0.152 M3</b> | Grid 5<br><b>0.155 M3</b> | Grid 6<br><b>0.147 M3</b> |
| Grid 7<br><b>0.206 M3</b> | Grid 8<br><b>0.166 M3</b> | Grid 9<br><b>0.126 M4</b> |

**Cursor:**

Total = 0.206 A/m

H Category: M3

Location: 25, 25, 8.7 mm

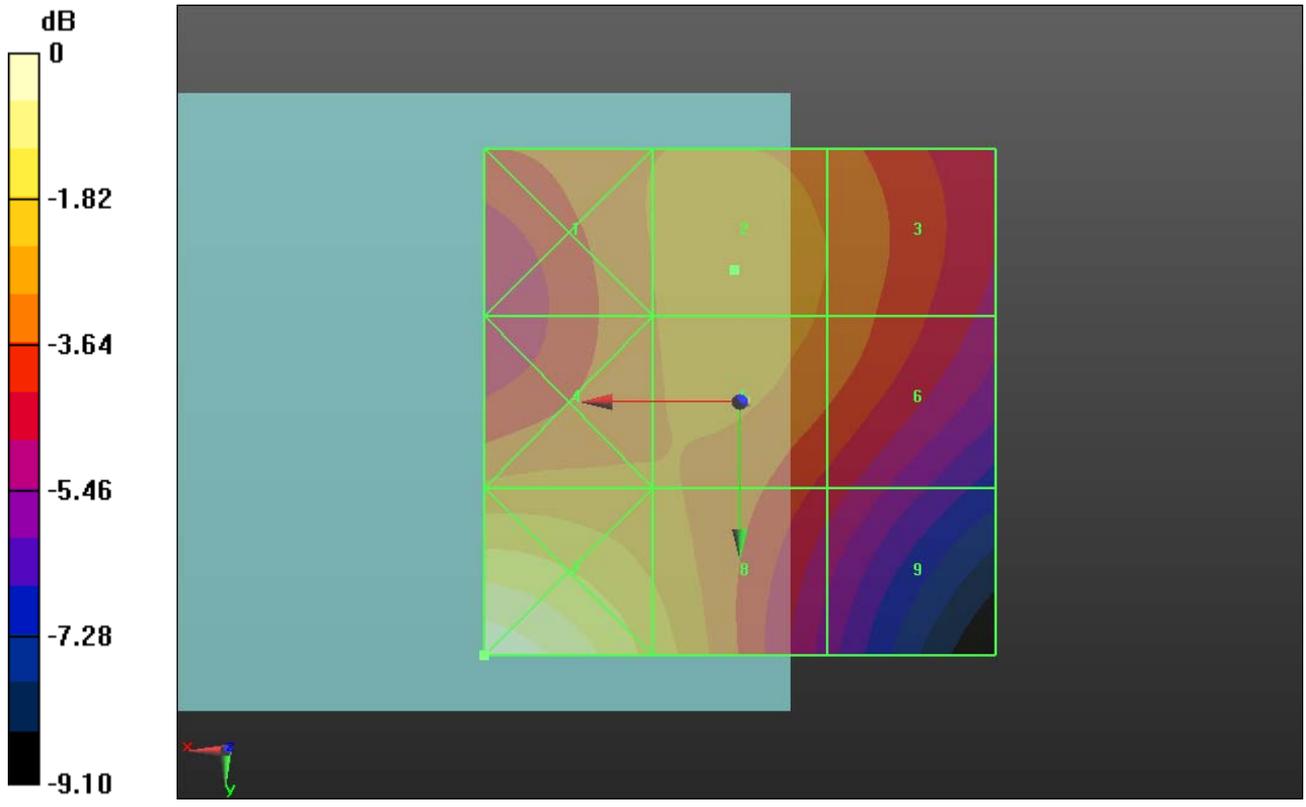

0 dB = 0.210A/m

**#07 RF\_WCDMA V\_RMC12.2K\_Ch4132(H)**

**DUT: 250202A**

Communication System: UMTS; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch4132/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.107 A/m

Probe Modulation Factor = 1.040

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.057 A/m; Power Drift = 0.0077 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.107 M4</b> | Grid 2<br><b>0.076 M4</b> | Grid 3<br><b>0.047 M4</b> |
| Grid 4<br><b>0.102 M4</b> | Grid 5<br><b>0.073 M4</b> | Grid 6<br><b>0.045 M4</b> |
| Grid 7<br><b>0.111 M4</b> | Grid 8<br><b>0.078 M4</b> | Grid 9<br><b>0.049 M4</b> |

**Cursor:**

Total = 0.111 A/m

H Category: M4

Location: 25, 25, 8.7 mm

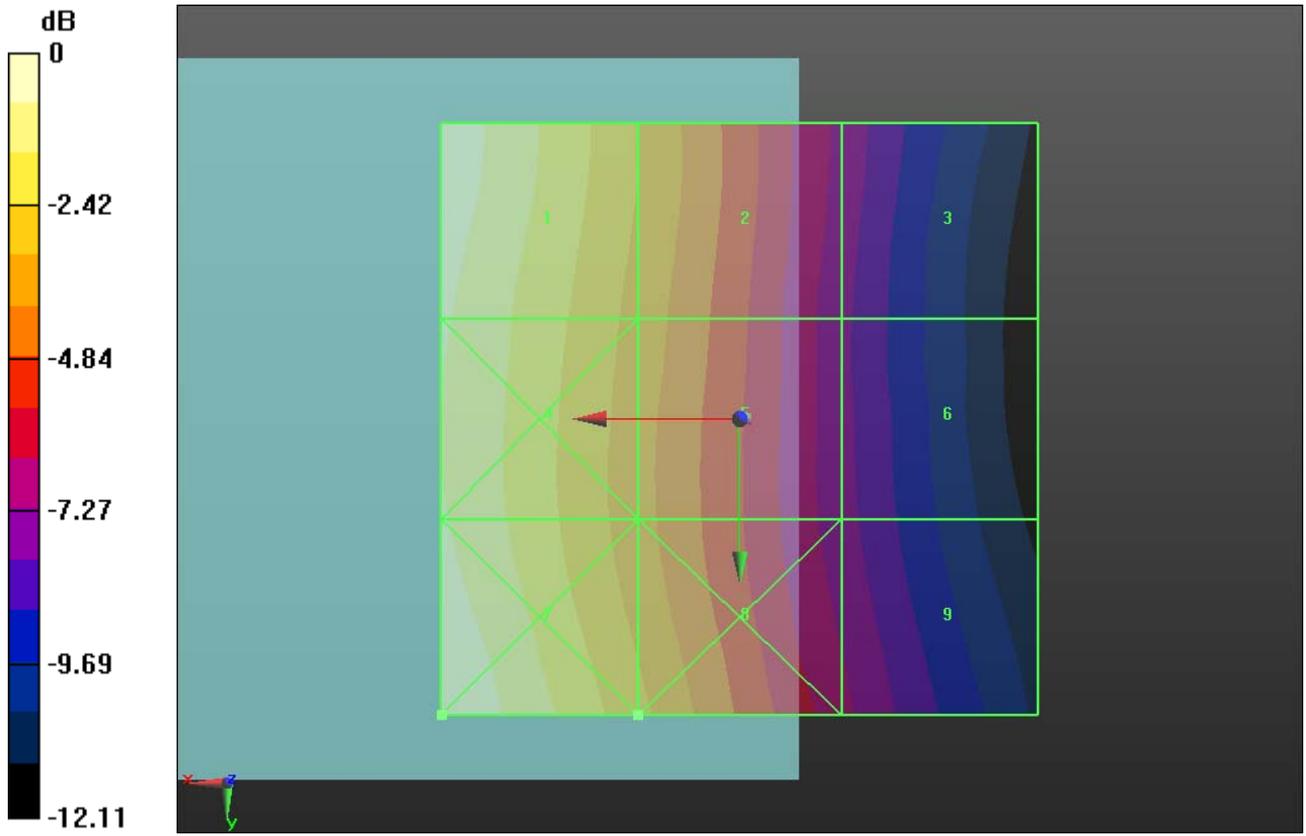

0 dB = 0.110A/m

**#08 RF\_WCDMA V\_RMC12.2K\_Ch4182(H)**

**DUT: 250202A**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.088 A/m

Probe Modulation Factor = 1.040

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.064 A/m; Power Drift = 0.02 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m



|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.123 M4</b> | Grid 2<br><b>0.087 M4</b> | Grid 3<br><b>0.053 M4</b> |
| Grid 4<br><b>0.116 M4</b> | Grid 5<br><b>0.083 M4</b> | Grid 6<br><b>0.050 M4</b> |
| Grid 7<br><b>0.125 M4</b> | Grid 8<br><b>0.088 M4</b> | Grid 9<br><b>0.055 M4</b> |

**Cursor:**

Total = 0.125 A/m

H Category: M4

Location: 25, 25, 8.7 mm

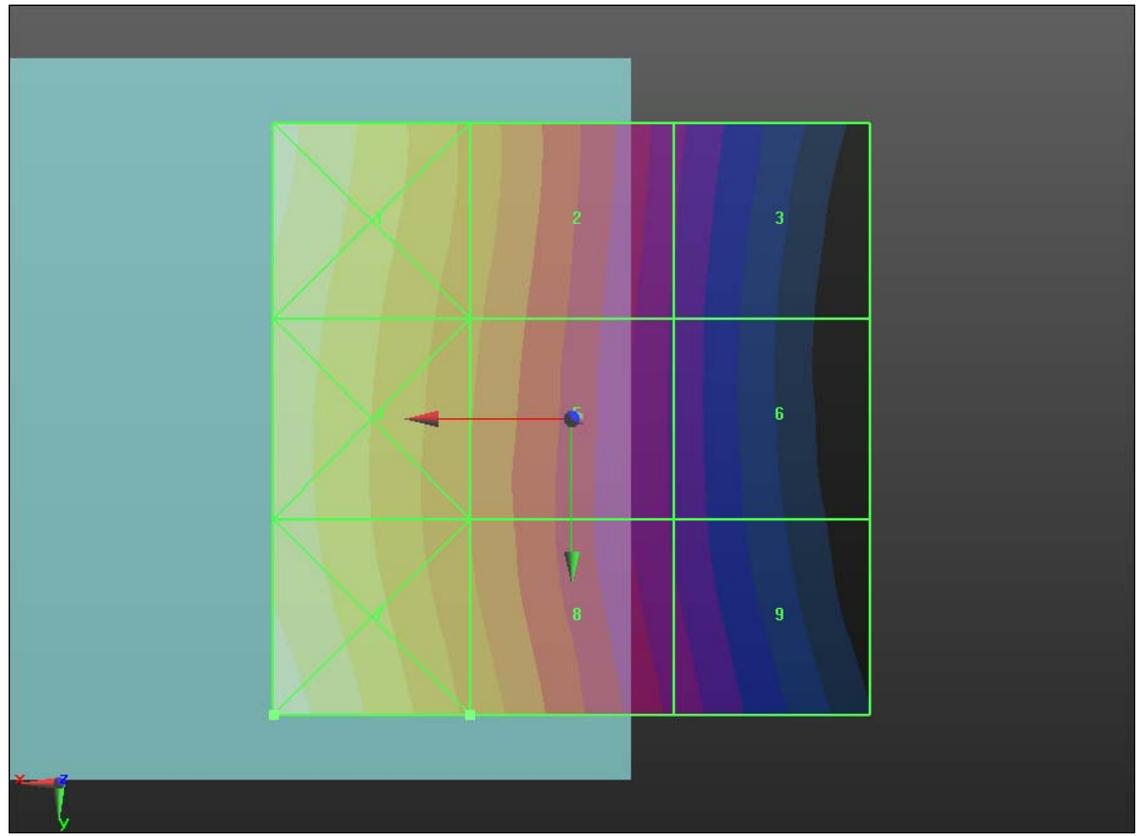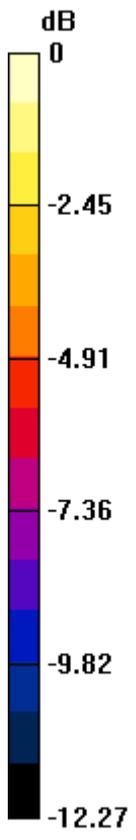

0 dB = 0.130A/m

**#09 RF\_WCDMA V\_RMC12.2K\_Ch4233(H)**

**DUT: 250202A**

Communication System: UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C

**DASY5 Configuration:**

- Probe: H3DV6 - SN6300; ; Calibrated: 2011-11-22
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.4.5 (3634)

**Ch4233/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.094 A/m

Probe Modulation Factor = 1.040

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.069 A/m; Power Drift = 0.02 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m


|                           |                           |                           |
|---------------------------|---------------------------|---------------------------|
| Grid 1<br><b>0.132 M4</b> | Grid 2<br><b>0.093 M4</b> | Grid 3<br><b>0.057 M4</b> |
| Grid 4<br><b>0.124 M4</b> | Grid 5<br><b>0.089 M4</b> | Grid 6<br><b>0.054 M4</b> |
| Grid 7<br><b>0.134 M4</b> | Grid 8<br><b>0.094 M4</b> | Grid 9<br><b>0.058 M4</b> |

**Cursor:**

Total = 0.134 A/m

H Category: M4

Location: 25, 25, 8.7 mm

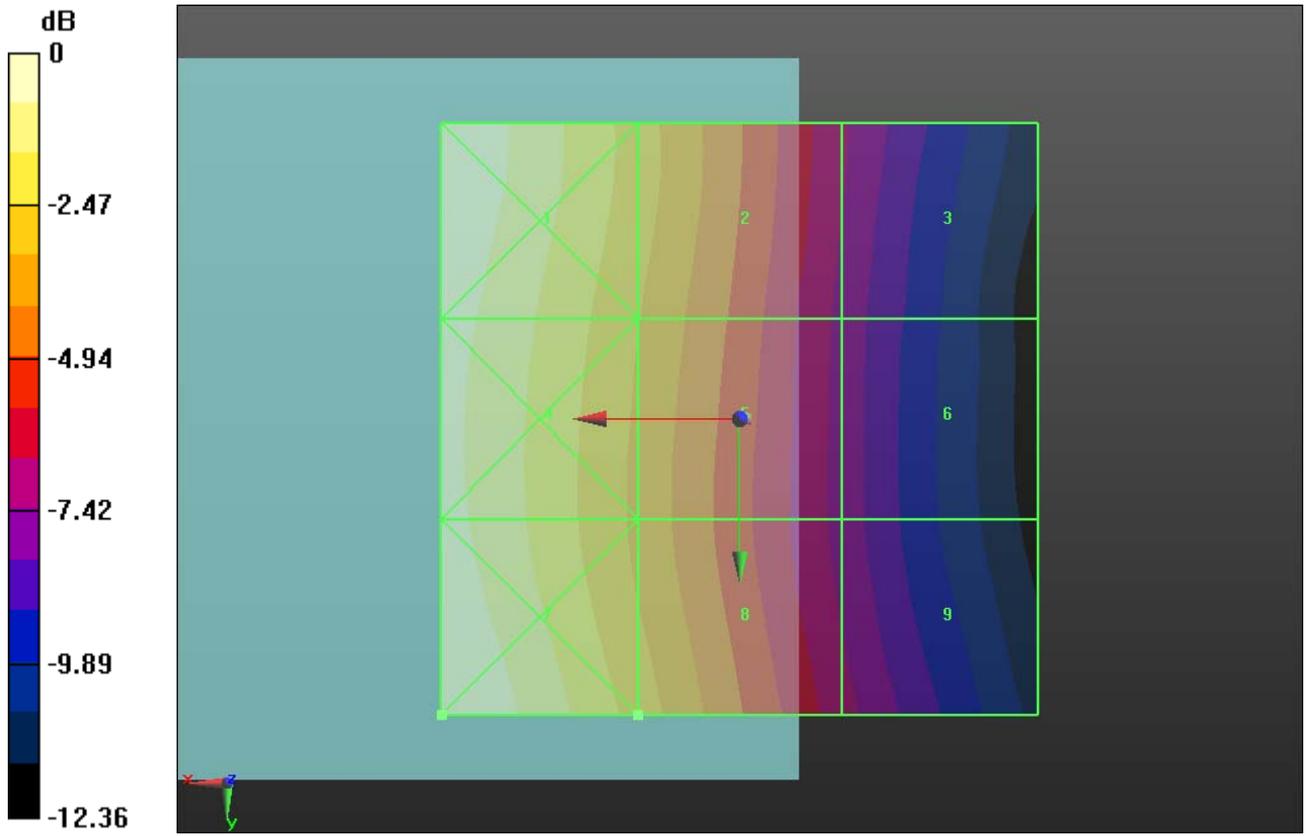

0 dB = 0.130A/m