

RF Test Report

Test in accordance with
Federal Communications Commission(FCC)
CFR TITLE 47, Parts 2, 22, 24

Product Name : GPS Tracker

Model No. : GL300W

FCC ID : YQD-GL300W

Applicant : Queclink Wireless Solutions Co.,Ltd..

Address : Room 501, Building 9, No.99, Tianzhou Road, Shanghai, China

Date of Receipt : 07-10-2015

Test Date : 07-11-2015~07-17-2014

Issued Date : 07-22-2015

Report No.: UL12620150703FCC050-7

Report Version : V1.0

Notes:

The test results only relate to these samples which have been tested.

Partly using this report will not be admitted unless been allowed by Unilab.

Unilab is only responsible for the complete report with the reported stamp of Unilab.

Test Report Certification

Issued Date : 07-22-2015

Report No. : UL12620150703FCC050-7

Product Name : GPS Tracker
Podel No : GL300W
Applicant : Queclink Wireless Solutions Co.,Ltd.
Address : Room 501, Building 9, No.99 Tianzhou Road, Shanghai, China
Manufacturer : Queclink Wireless Solutions Co.,Ltd.
Address : Room 501, Building 9, No.99 Tianzhou Road, Shanghai, China
EUT Voltage : MIN: 3.46 V, NOR: 3.70 V, MAX: 4.20 V
Brand Name : Queclink
FCC ID: YQD-GL300W
Applicable Standard : ANSI/TIA-603-D-2010; FCC CFR Title 47 Part 2;
FCC CFR Title 47 Part22 Subpart H;
FCC CFR Title 47 Part24 Subpart E;
Test Result : Complied
Performed Location : Unilab (Shanghai) Co., Ltd.
FCC 2.948 register number is 714465
No. 1350, Lianxi Rd. Pudong New District, Shanghai, China
TEL: +86-21-50275125 FAX: +86-21-50277862

Documented By :



(Technical Engineer: Jingwei Li)

Reviewed By :



(Senior Engineer: Forest Cao)

Approved By :



(Supervisor: Eva Wang)

TABLE OF CONTENTS

1.	General Information	5
1.1.	EUT Description	5
1.2.	Mode of Operation	6
1.3.	Tested System Details	7
1.4.	Configuration of Tested System.....	8
1.5.	EUT Exercise Software	8
2.	Technical Test.....	9
2.1.	Test Environment	9
3.	Peak Output Power.....	10
3.1.	Test Equipment.....	10
3.2.	Test Setup.....	10
3.3.	Limit.....	11
3.4.	Test Procedure	12
3.5.	Uncertainty	12
3.6.	Test Result	13
4.	Occupied Bandwidth	15
4.1.	Test Equipment.....	15
4.2.	Test Setup	15
4.3.	Limit.....	15
4.4.	Test Procedure	15
4.5.	Uncertainty	15
4.6.	Test Result	16
5.	Spurious Emission At Antenna Terminals (+/- 1MHz)	20
5.1.	Test Equipment.....	20
5.2.	Test Setup	20
5.3.	Limit.....	20
5.4.	Test Procedure	21
5.5.	Uncertainty	21
5.6.	Test Result	22
6.	Spurious Emission.....	24
6.1.	Test Equipment.....	24
6.2.	Test Setup	25
6.3.	Limit.....	26
6.4.	Test Procedure	26
6.5.	Uncertainty	27
6.6.	Test Result	28
7.	Frequency Stability Under Temperature & Voltage Variations.....	33
7.1.	Test Equipment.....	33
7.2.	Test Setup	33
7.3.	Limit.....	33
7.4.	Test Procedure	34
7.5.	Uncertainty	34
7.6.	Test Result	35
8.	Peak to Average	37
8.1.	Test Equipment.....	37
8.2.	Test Setup	37
8.3.	Limit.....	37
8.4.	Test Procedure	37
8.5.	Uncertainty	38
8.6.	Test Result	38
9.	Attachment.....	40

SUMMARY OF TEST RESULT

Report Section	SPECIFICATION	Description	Limit	Result
3	part2.1046	Conducted Output Power	N/A	PASS
3	part 22.913(a)(2)	Effective Radiated Power	<7 Watts	PASS
3	part 24.232(c)	Equivalent Isotropic Radiated Power	<2 Watts	PASS
4	part 2.1049 part 22.917(a) part 24.238(a)	Occupied Bandwidth	N/A	PASS
5	part 2.1051 part 22.917(a) part 24.238(a)	Band Edge Measurement	<43+10lg(P[Watts])	PASS
6	part 2.1051 part 22.917(a) part 24.238(a)	Conducted Spurious Emission	<43+10lg(P[Watts])	PASS
6	part 2.1053 part 22.917(a) part 24.238(a)	Field Strength of Supurious Radiation	<43+10lg(P[Watts])	PASS
7	part 2.1055 part 22.355 part 24.235	Frequency Stability for Temperature & Voltage	<2.5 ppm	PASS
8	part 24.232(d)	Peak-to-Average	<13dB	PASS

1.General Information

1.1. EUT Description

Product Name:	GPS Tracker
Model Name:	GL300W
Hardware Version:	V1.02
Software Version:	A01V20
WCDMA	
Support Band:	WCDMA Band II
Tx Frequency Range:	WCDMA Band II: 1850MHz ~1910MHz
Rx Frequency Range:	WCDMA Band II: 1930MHz ~1990MHz
Type of modulation:	WCDMA(UMTS): QPSK
Antenna Type:	Connector
Antenna Peak Gain:	WCDMA Band II: 0.5dBi
Support Band:	WCDMA Band V
Tx Frequency Range:	WCDMA Band V: 824MHz ~849MHz
Rx Frequency Range:	WCDMA Band V: 869MHz ~894MHz
Type of modulation:	WCDMA(UMTS): QPSK
Antenna Type:	Connector
Antenna Peak Gain:	WCDMA Band V: 0dBi
Component	
Internal Battery	1700mAh 3.7V
Switching Adapter:	Model Name: SAPA05005US
	Input: AC 100-240V 50/60Hz 0.3A
	Output: DC 5.0V/500mA

1.2. Mode of Operation

Unilab has verified the construction and function in typical operation. EUT is in link mode with base station emulator at maximum power level. All the test modes were carried out with the EUT in normal operation, which was shown in this test report is the worst test mode and defined as:

Test Mode		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link
WCDMA Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. The maximum power levels are RMC 12.2Kbps mode for WCDMA Band V and RMC 12.2Kbps mode for WCDMA Band II, only these modes were used for all tests.
3. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst (Z axis) result in this report.

The conducted power table is as follows:

Conducted Power						
Band	WCDMA V			WCDMA II		
RX Channel	4357	4407	4458	9662	9800	9938
Frequency	826.4	836.5	846.6	1852.4	1880	1907.6
RMC 12.2Kbps	22.59	22.61	22.46	23.64	23.34	23.37
RMC 64Kbps	22.44	22.35	22.42	23.43	23.21	23.17
RMC 144Kbps	22.23	22.25	22.40	23.55	23.20	23.08
RMC 384Kbps	22.42	22.27	22.39	23.46	23.26	23.00
HSDPA Subtest-1	22.26	22.15	22.12	22.05	21.94	21.89
HSDPA Subtest-2	21.77	21.59	21.50	21.52	21.42	21.30
HSDPA Subtest-3	21.11	20.96	20.88	21.04	20.93	20.78
HSDPA Subtest-4	20.57	20.23	20.14	20.57	20.22	20.16


1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model	Serial No.	Power Cord
1 Agilent8960	Agilent	E5515C	GB46581718	N/A

1.4. Configuration of Tested System

Connection Diagram

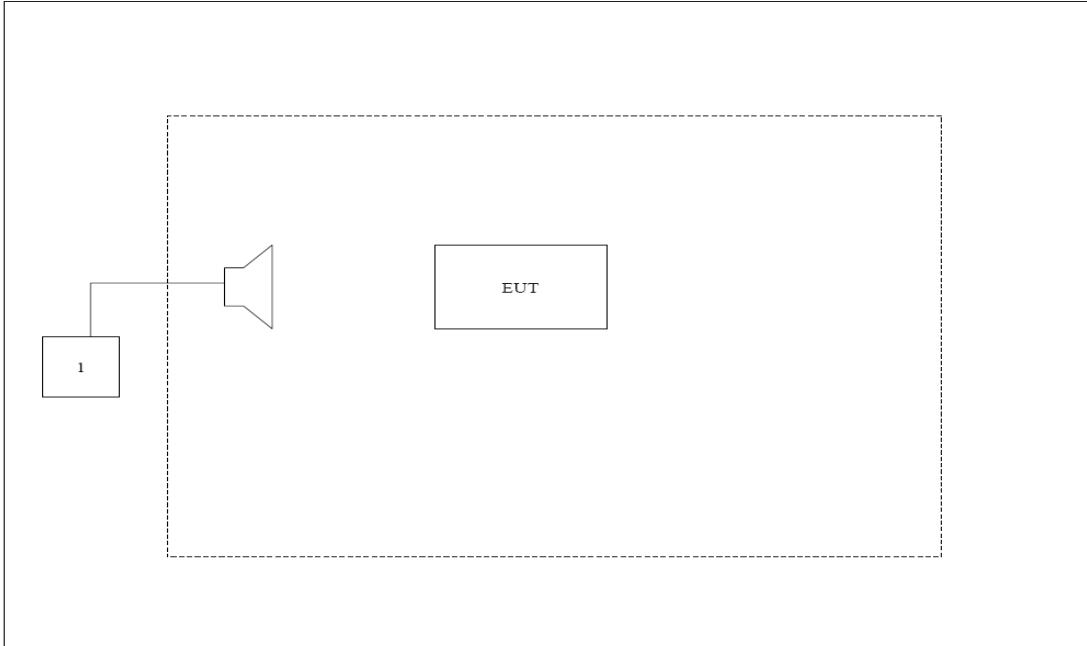

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with E5515C, then select channel to test.

2. Technical Test

2.1. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	22
Humidity (%RH)	25-75	53
Barometric pressure (mbar)	860-1060	950-1000

3. Peak Output Power


3.1. Test Equipment


Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	11.11.2015
Radio Communication Tester	Agilent	E5515C	GB46581718	23.10.2015
Signal Generator	Agilent	N5183A	MY50140938	28.02.2016
Preamplifier	CEM	EM30180	3008A0245	28.02.2016
Bilog Antenna	Schwarzbeck	VULB9160	9160-3316	19.09.2015
VHF-UHF-Biconical Antenna	Schwarzbeck	VUBA9117	9117-263	19.09.2015
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-942	19.09.2015
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-943	19.09.2015

The measure equipment had been calibrated once a year.


3.2. Test Setup

Conducted Power Measurement:

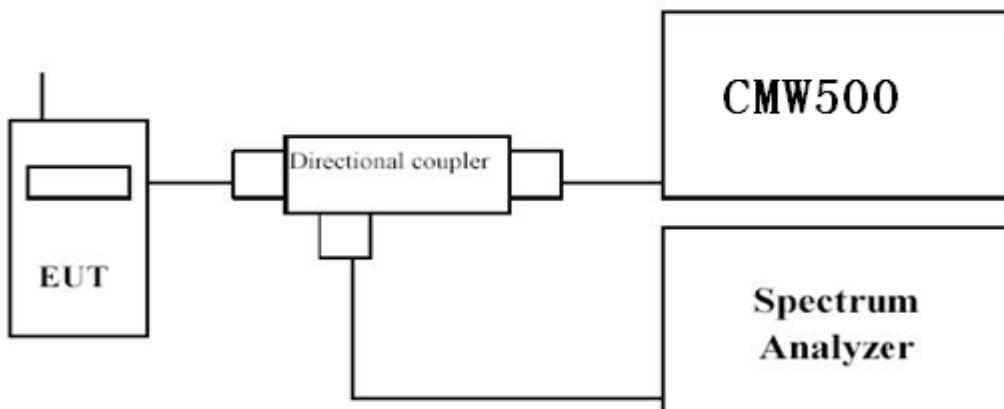

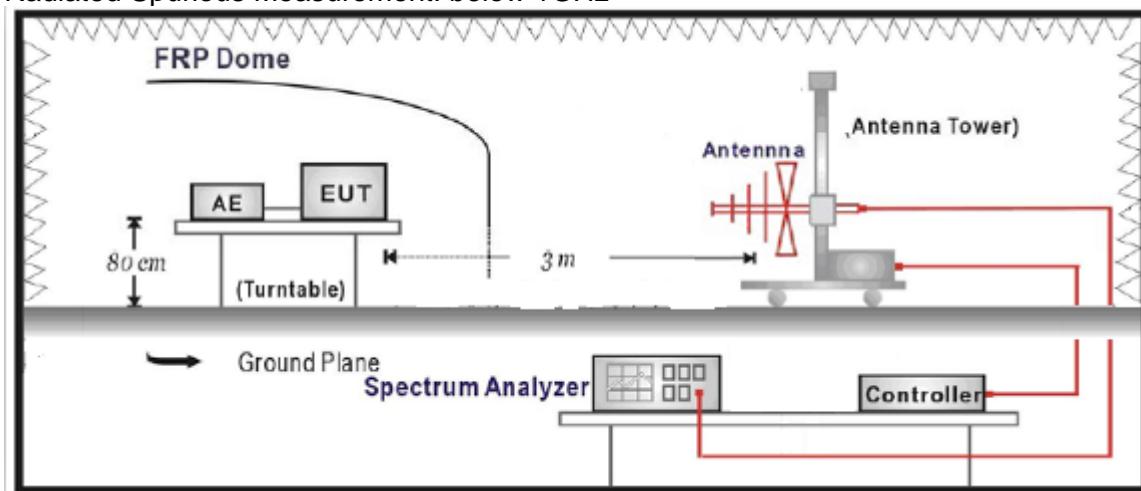

Radiated Spurious Measurement: above 1GHz

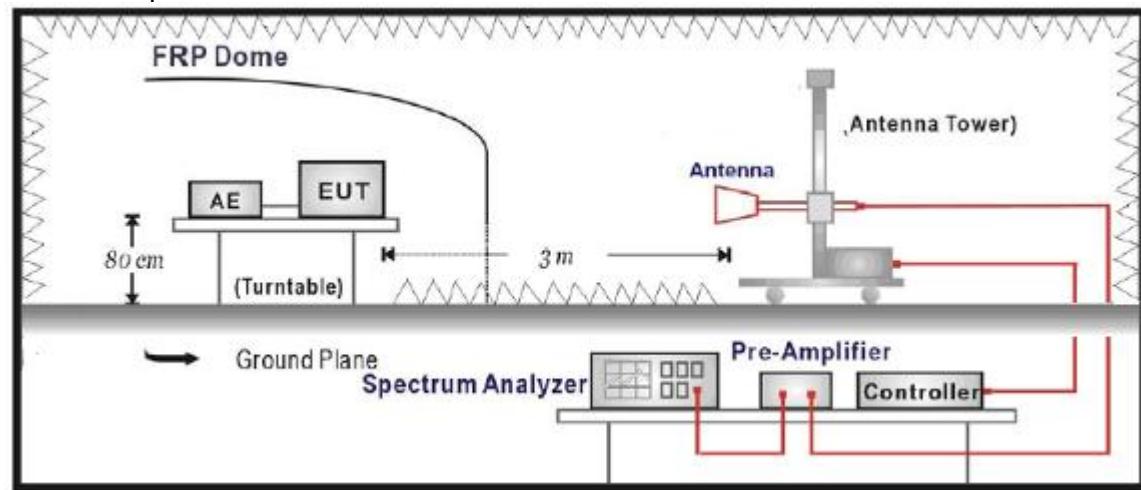

3.3. Limit

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(c):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.4. Test Procedure

Conducted Power Measurement:

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Connect a low loss RF cable from the antenna port to a spectrum analyzer and E5515C by a Directional Couple.
- c. EUT Communicate with E5515C, then selects a channel for testing.
- d. Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4: 2014.

3.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power Measurement ± 1.1 dB, for Radiated Power Measurement ± 3.1 dB

3.6. Test Result

The following table shows the conducted power measured:

Table 1

WCDMA				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (W)
WCDMA Band V	4357(Low)	826.6	22.59	0.18
	4407(Mid)	836.5	22.61	0.17
	4458(High)	846.6	22.46	0.18
WCDMA Band II	9662(Low)	1852.6	23.64	0.23
	9800(Mid)	1880.0	23.34	0.22
	9938(High)	1907.4	23.37	0.22

The following table shows the Radiated power measured :

WCDMA Band V

ERP= SG Reading- Cable Loss+ Gain

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	ERP (W)
Low Channel 4357(826.4MHz)						
826.4	H	31.67	3.83	-2.99	24.85	0.31
826.4	V	30.78	3.83	-2.99	23.96	0.25
Middle Channel 4182 (836.5MHz)						
836.5	H	31.74	3.96	-3.04	24.74	0.30
836.5	V	30.84	3.96	-3.04	23.84	0.24
High Channel 4407 (846.6MHz)						
846.6	H	31.87	3.97	-3.10	24.80	0.30
846.6	V	30.96	3.97	-3.10	23.89	0.24

WCDMA Band II

EIRP= SG Reading- Cable Loss+ Gain

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	EIRP (W)
Low Channel 9662(1852.40MHz)						
1850.2	H	20.04	6.26	10.40	24.18	0.26
1850.2	V	19.30	6.26	10.40	23.44	0.22
Middle Channel 9400 (1880.00MHz)						
1880.0	H	19.99	6.19	10.43	24.23	0.26
1880.0	V	19.15	6.19	10.43	23.39	0.22
High Channel 9938 (1907.60MHz)						
1909.8	H	19.84	6.15	10.44	24.13	0.26
1909.8	V	18.99	6.15	10.44	23.28	0.21

4. Occupied Bandwidth


4.1. Test Equipment

Occupied Bandwidth

Instrument	Manufacturer	Model	Serial No	Cal. Date
Radio Communication Tester	Agilent	E5515C	GB46581718	23.10.2015
Spectrum Analyzer	Agilent	N9038A	MY51210142	11.11.2015

The measure equipment had been calibrated once a year.

4.2. Test Setup

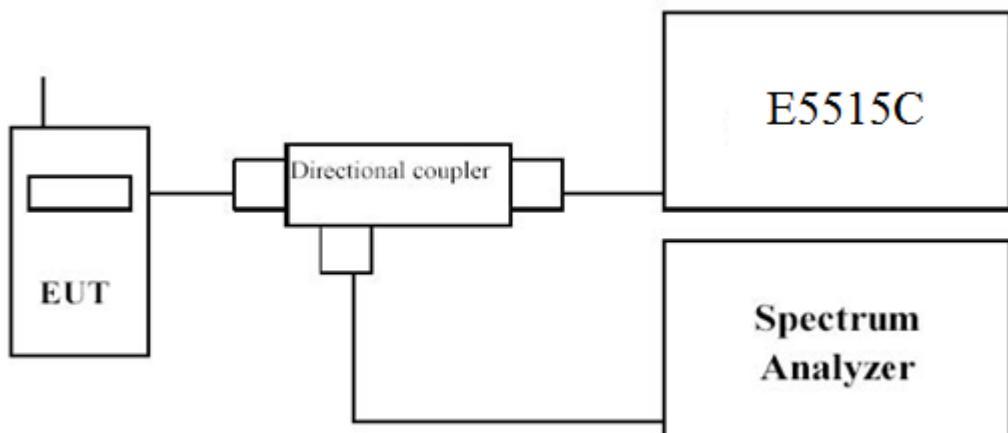

4.3. Limit

N/A

4.4. Test Procedure

Using Occupied Bandwidth measurement function of spectrum analyzer. In the Occupied Bandwidth measurement a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

For WCDMA Band V/II test --- RBW = 100 kHz and VBW = 300 kHz

4.5. Uncertainty


The measurement uncertainty is defined as ± 10 Hz

4.6. Test Result


WCDMA Band V

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
4357	826.40	4.661	4.143
4407	836.50	4.679	4.175
4458	846.40	4.709	4.216


WCDMA Band V, Channel 4357

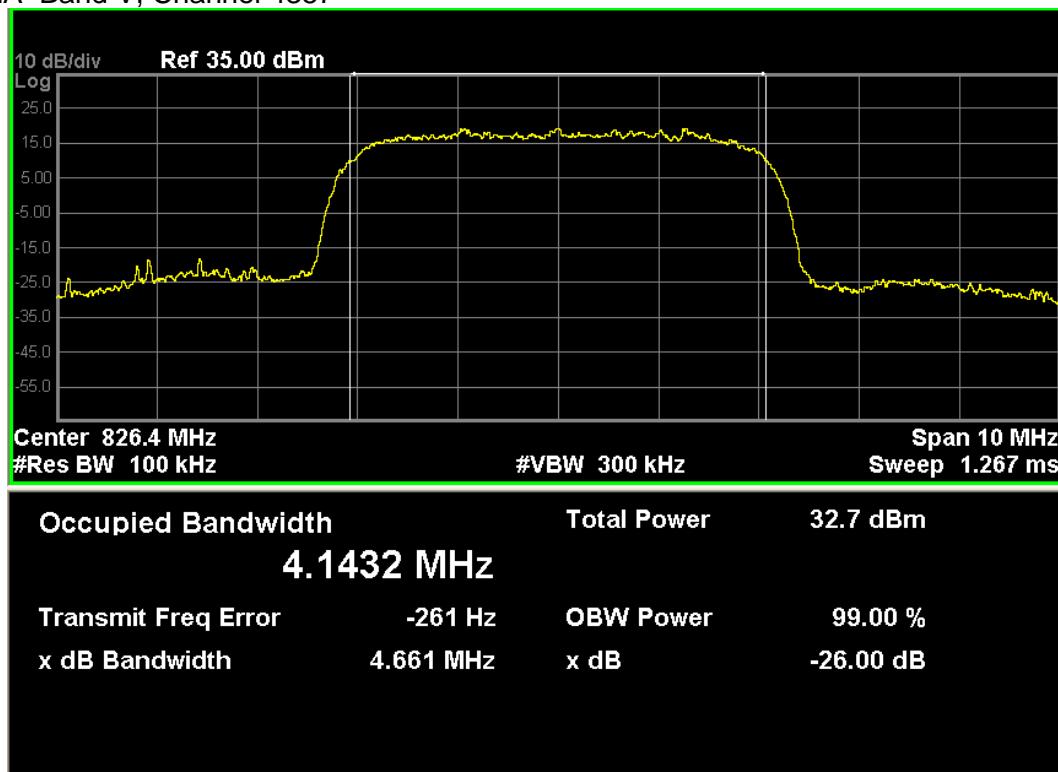

WCDMA Band V, Channel 4407

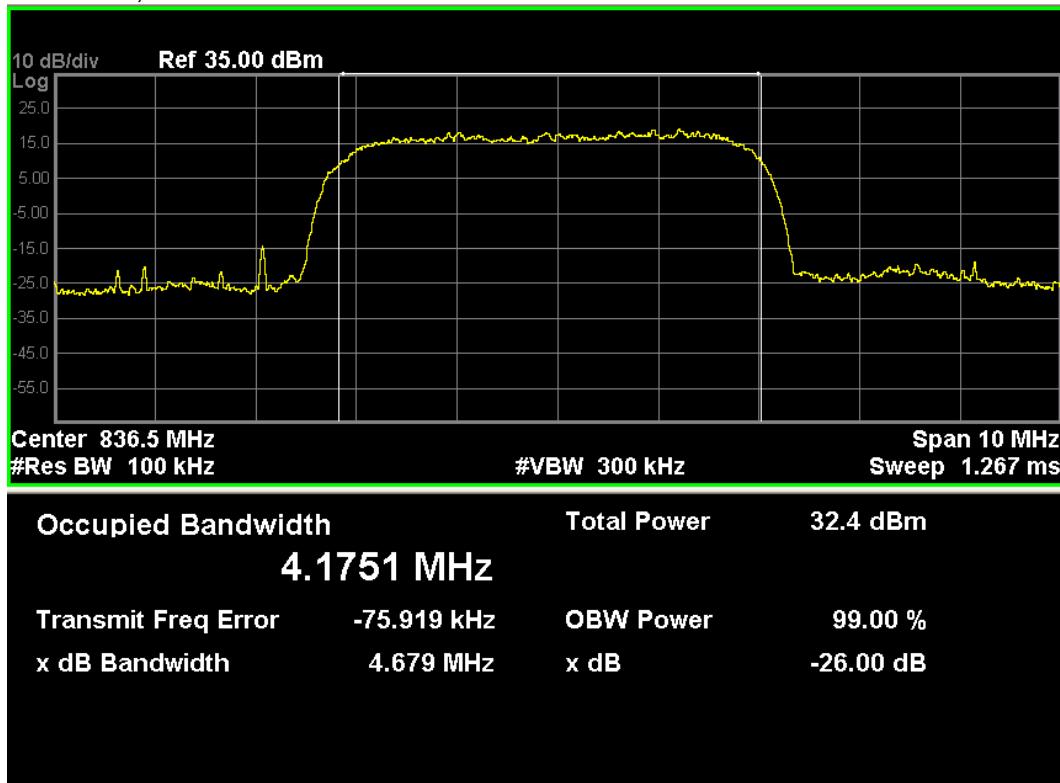


WCDMA Band V, Channel 4458

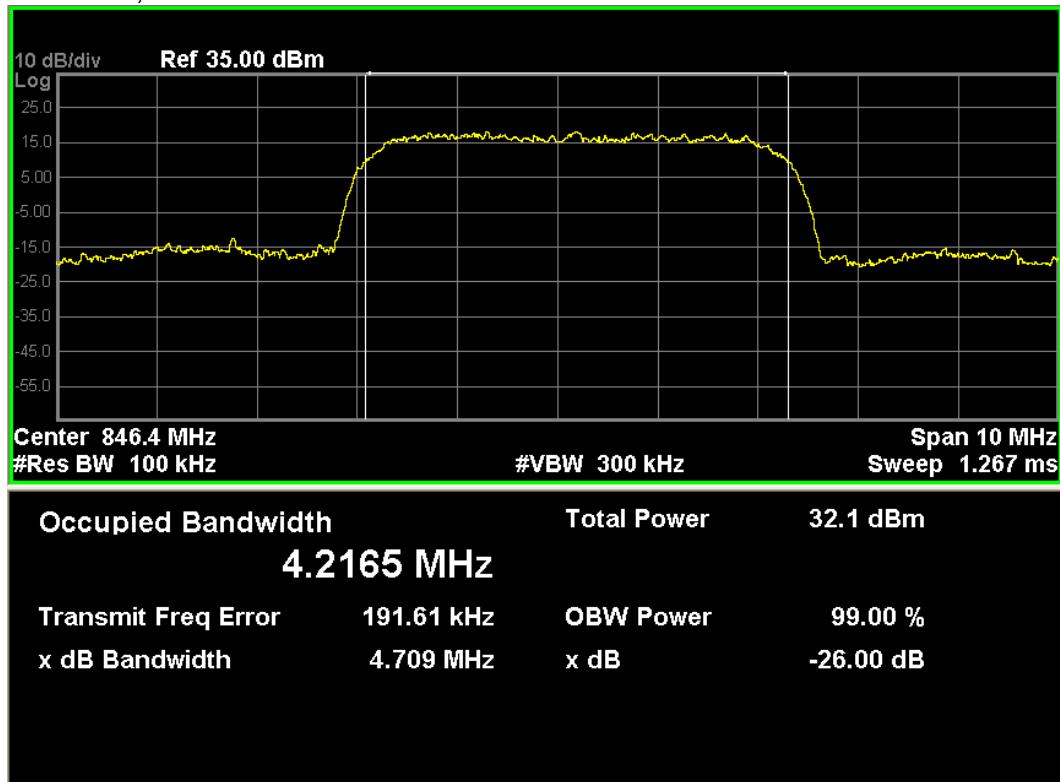


Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
9662	1852.6	4.674	4.157
9800	1880.0	4.668	4.159
9938	1907.4	4.703	4.167


WCDMA Band II, Channel 9662

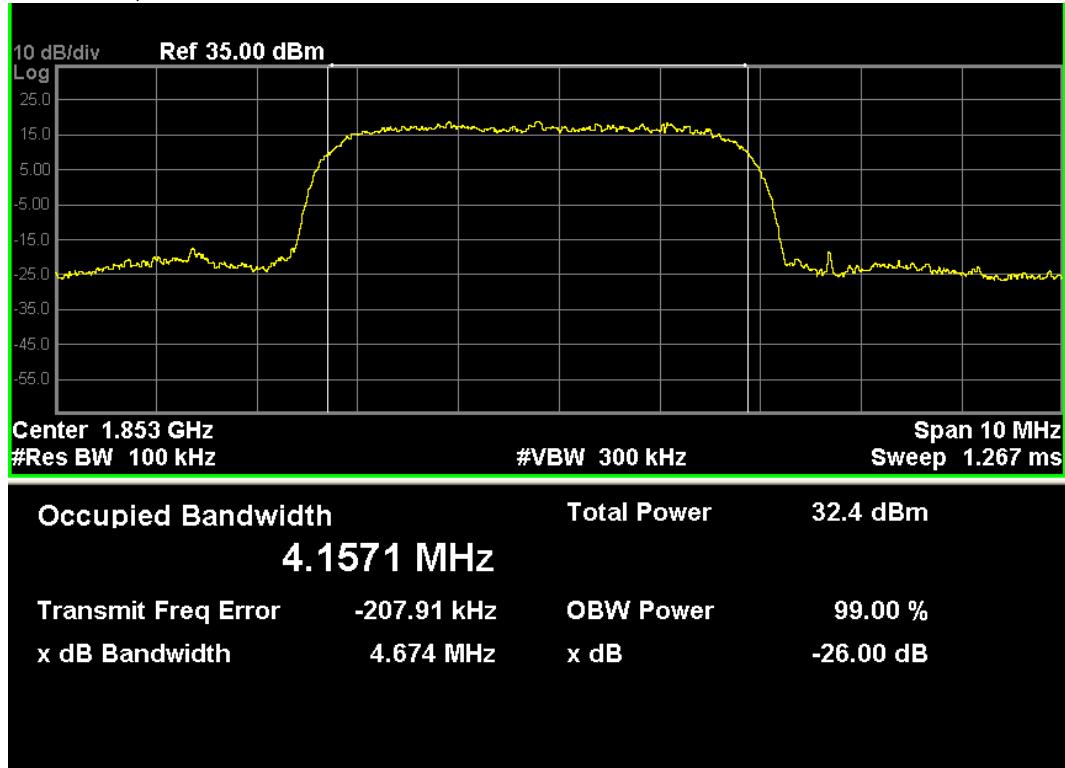

WCDMA Band II, Channel 9800

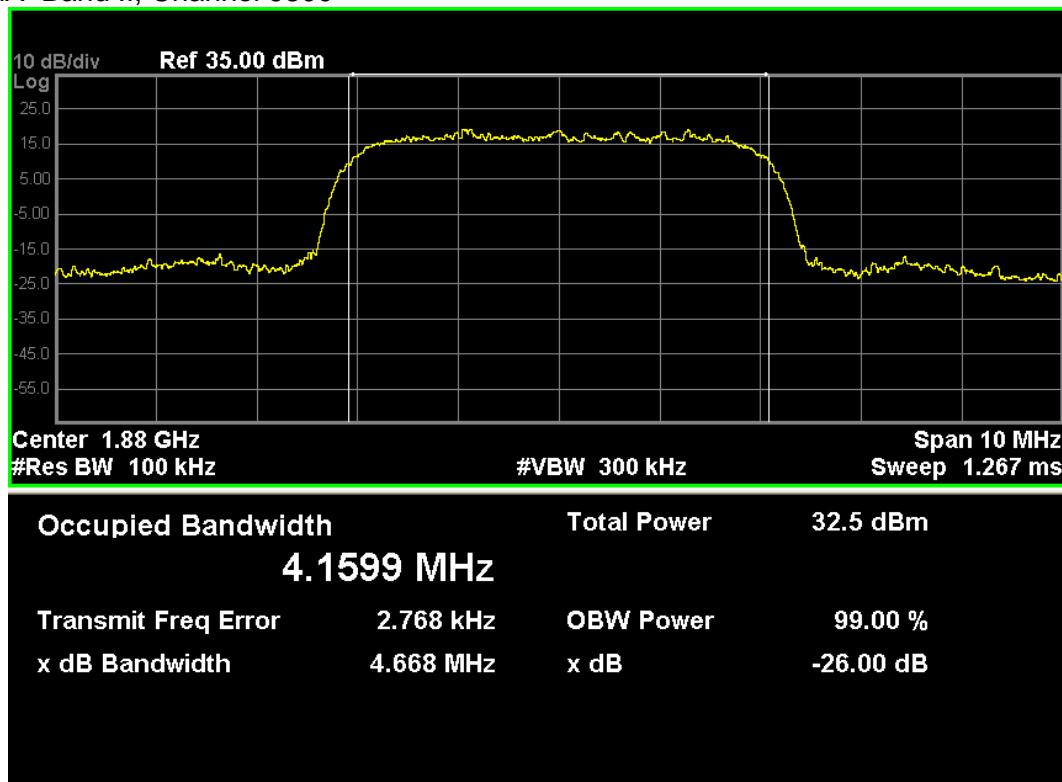

WCDMA Band II, Channel 9938

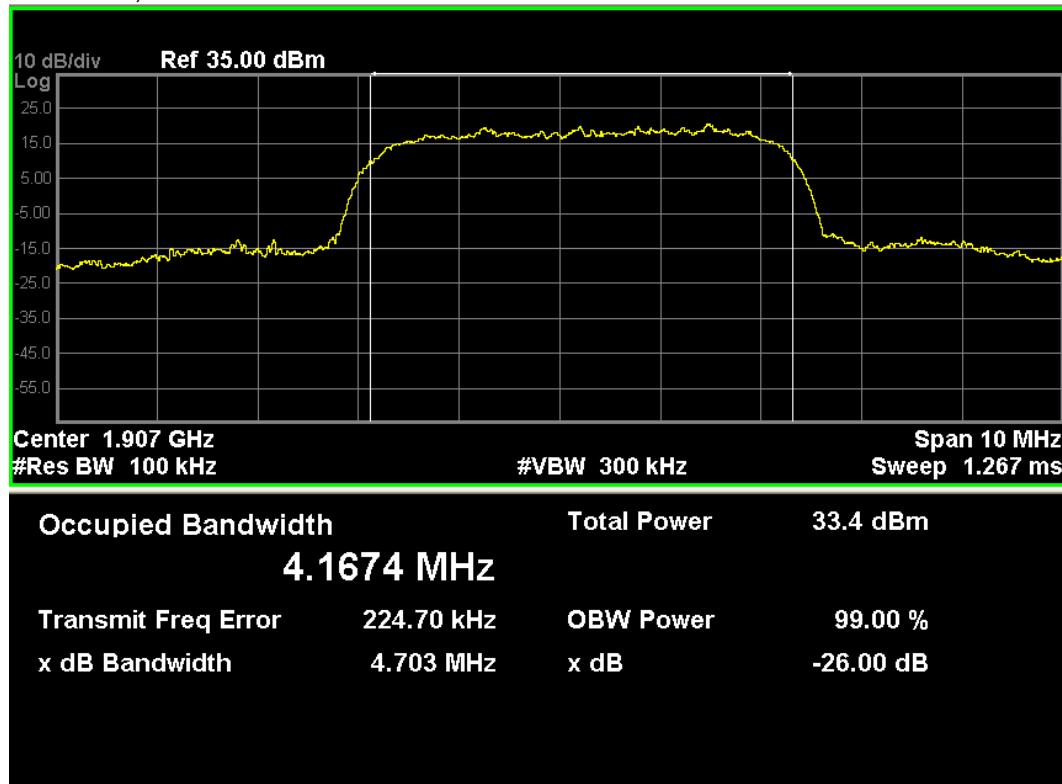


5. Spurious Emission At Antenna Terminals (+/- 1MHz)

5.1. Test Equipment

Instrument	Manufacturer	Model	Serial No	Cal. Date
Radio Communication Tester	Agilent	E5515C	GB46581718	23.10.2015
Spectrum Analyzer	Agilent	N9038A	MY51210142	11.11.2015

The measure equipment had been calibrated once a year.

5.2. Test Setup

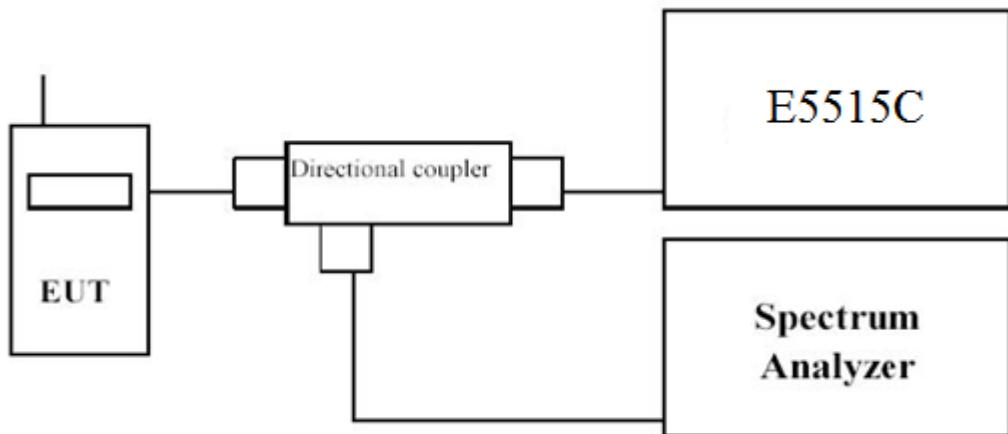

5.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

5.4. Test Procedure

In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

Procedure:


1. The EUT was connected to spectrum analyzer and the E5515C;
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%OBW$ in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with RMS detector.

5.5. Uncertainty


The measurement uncertainty is defined as ± 1.2 dB.


5.6. Test Result

WCDMA Band V, Channel 4357

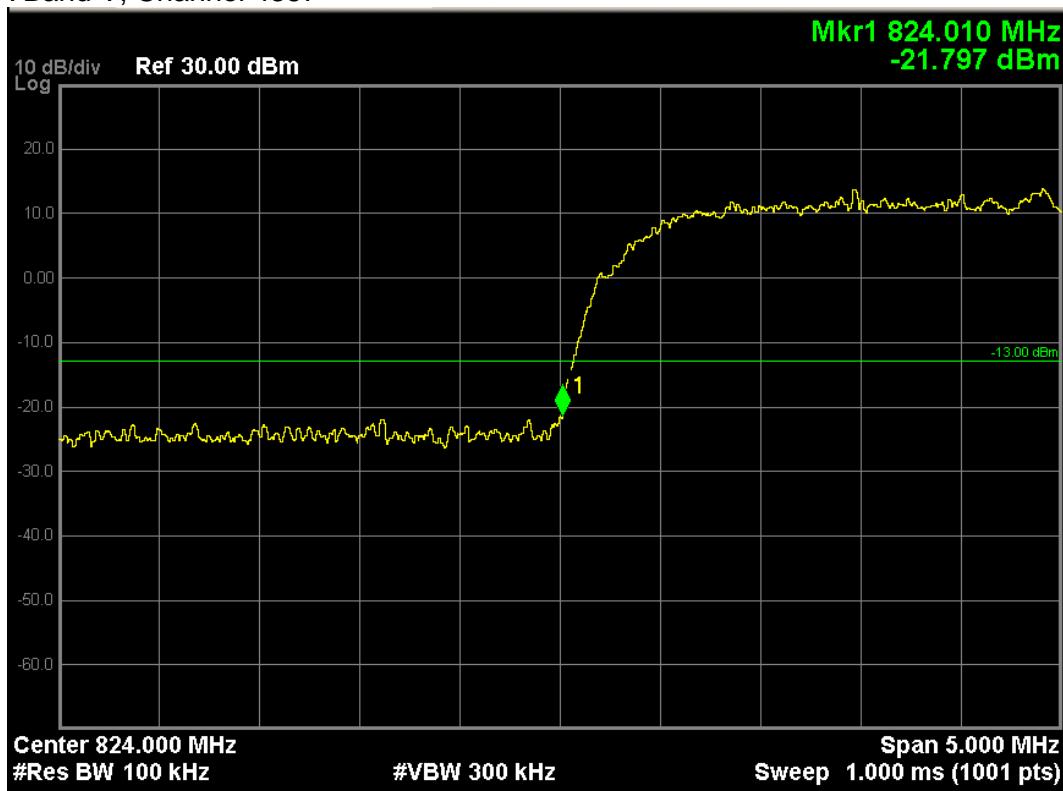


WCDMA Band V, Channel 4458

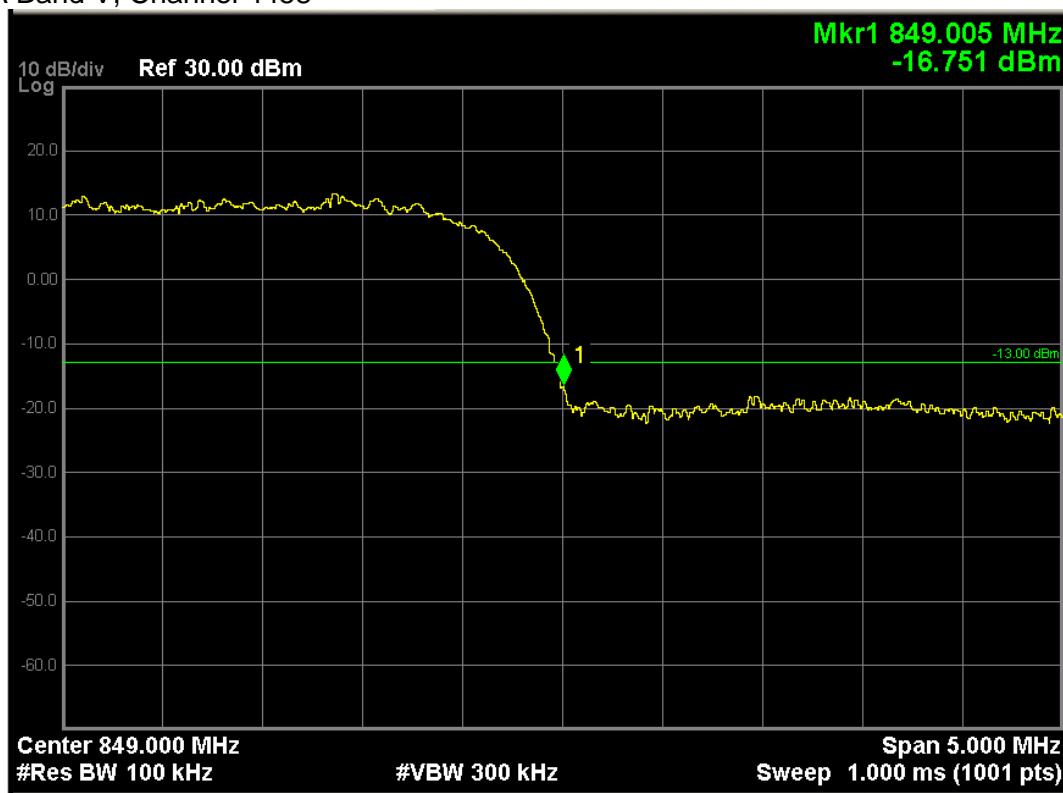

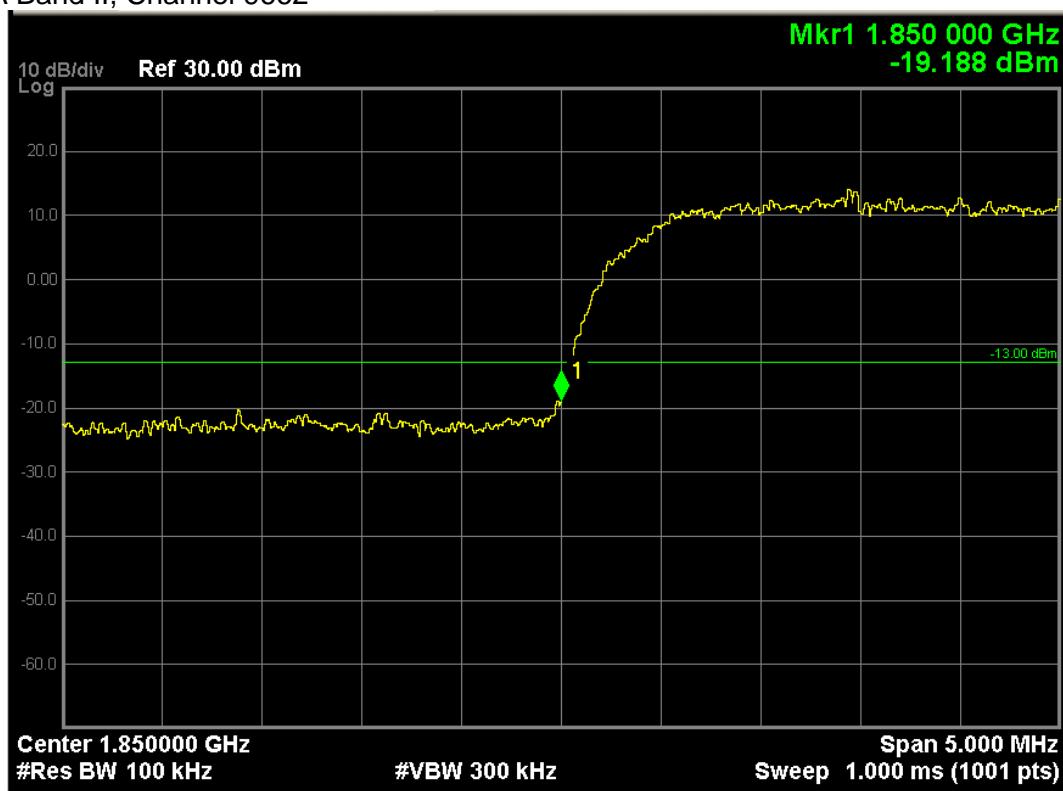

WCDMA Band II, Channel 9938

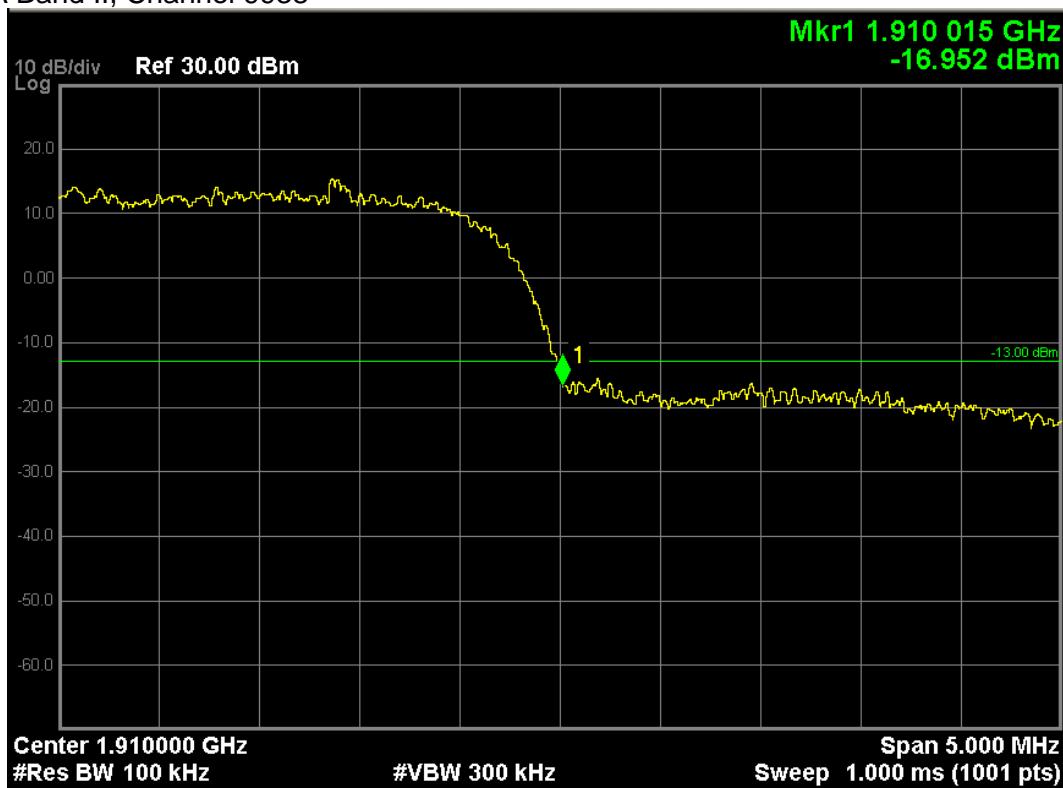

6. Spurious Emission


6.1. Test Equipment

Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	11.11.2015
Radio Communication Tester	Agilent	E5515C	GB46581718	23.10.2015
Signal Generator	Agilent	N5183A	MY50140938	28.02.2016
Preamplifier	CEM	EM30180	3008A0245	28.02.2016
Loop Antenna	Schwarzbeck	FMZB1519	1519-020	19.09.2015
Bilog Antenna	Schwarzbeck	VULB9160	9160-3316	19.09.2015
VHF-UHF-Biconical Antenna	Schwarzbeck	VUBA9117	9117-263	19.09.2015
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-942	19.09.2015
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-943	19.09.2015
Horn Antenna(18-40GHz)	ETS	3116	00070497	19.09.2015


The measure equipment had been calibrated once a year.

6.2. Test Setup


Conducted Spurious Emission Measurement:

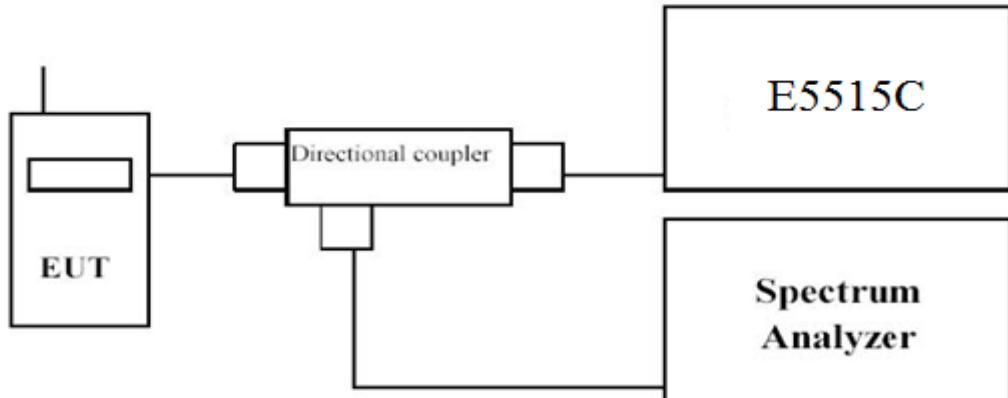


Radiated Spurious Measurement: below 30MHz

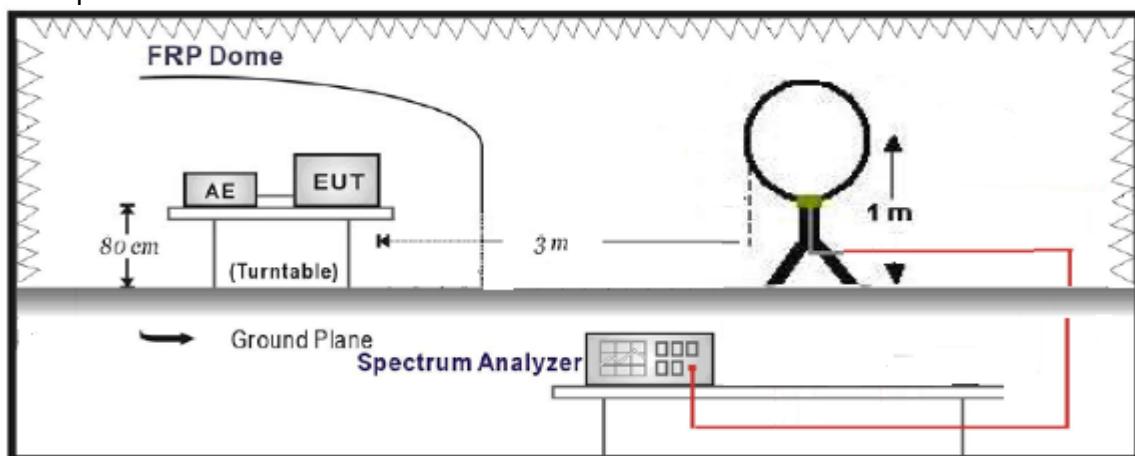

Radiated Spurious Measurement: 30MHz to 1GHz

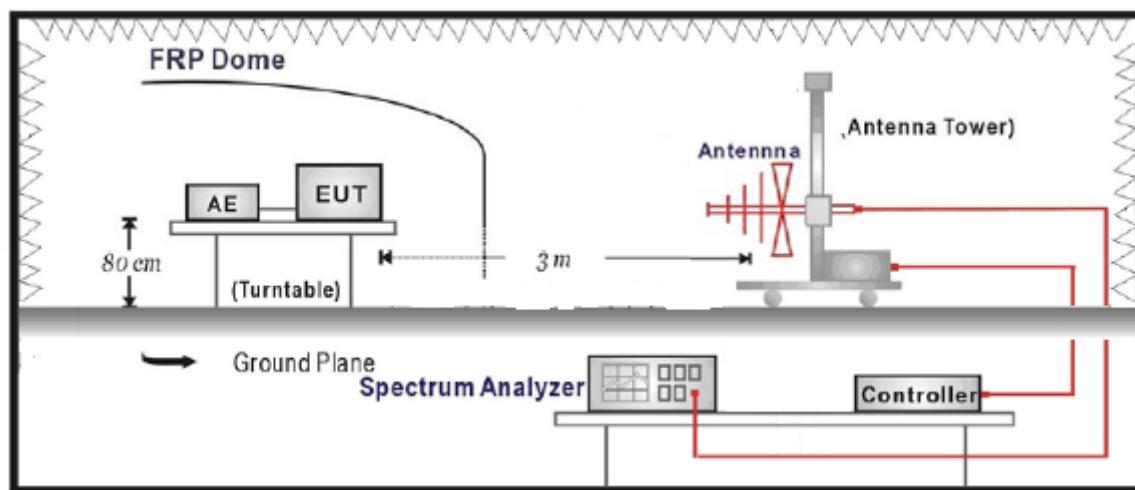

Radiated Spurious Measurement: above 1GHz

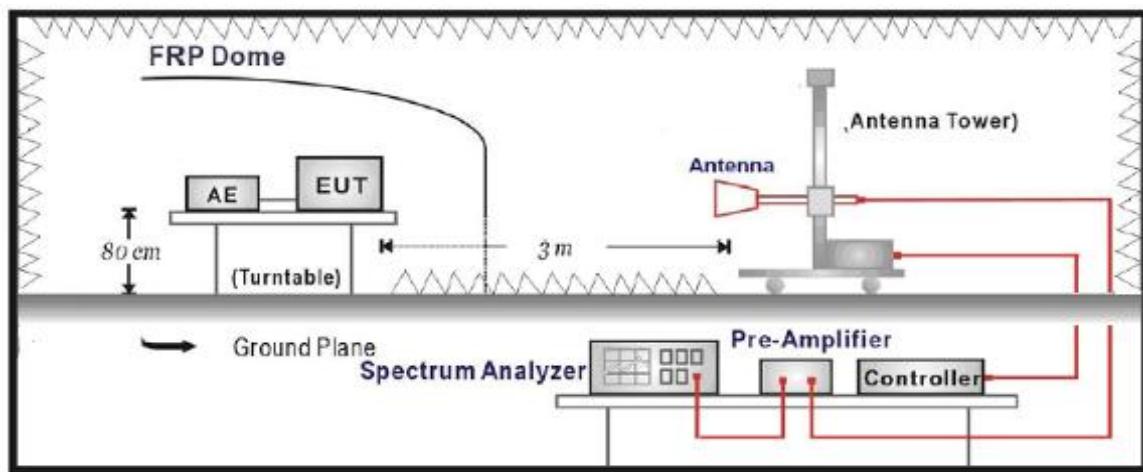

6.3. Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.4. Test Procedure

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and E5515C by a Directional Couple.
- EUT Communicate with E5515C, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

Radiated Spurious Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum

signal level is detected by the measuring receiver.



- f. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- g. The maximum signal level detected by the measuring receiver shall be noted.
- h. The transmitter shall be replaced by a substitution antenna.
- i. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- j. The substitution antenna shall be connected to a calibrated signal generator.
- k. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- l. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- m. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- n. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- o. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- p. The frequency range was checked up to 10th harmonic.

6.5. Uncertainty

The measurement uncertainty is defined as 3.2 dB for Radiated Power Measurement.

6.6. Test Result**Conducted Spurious Measurement:**


WCDMA Band II, Channel 9600:

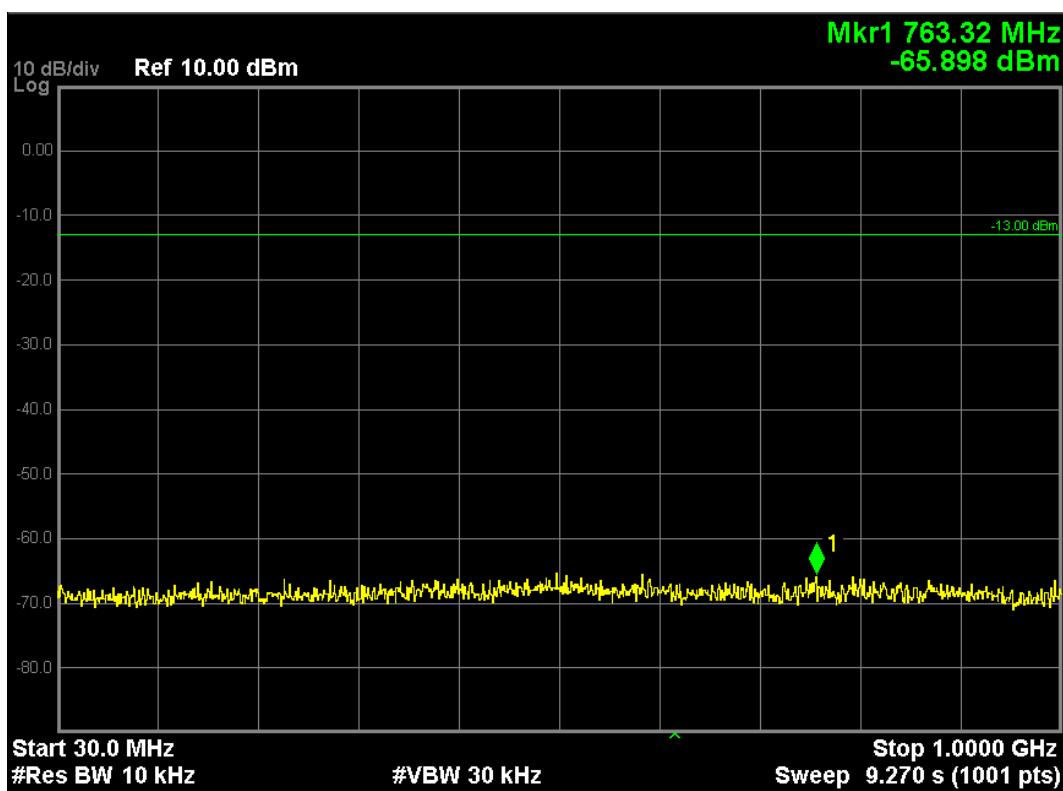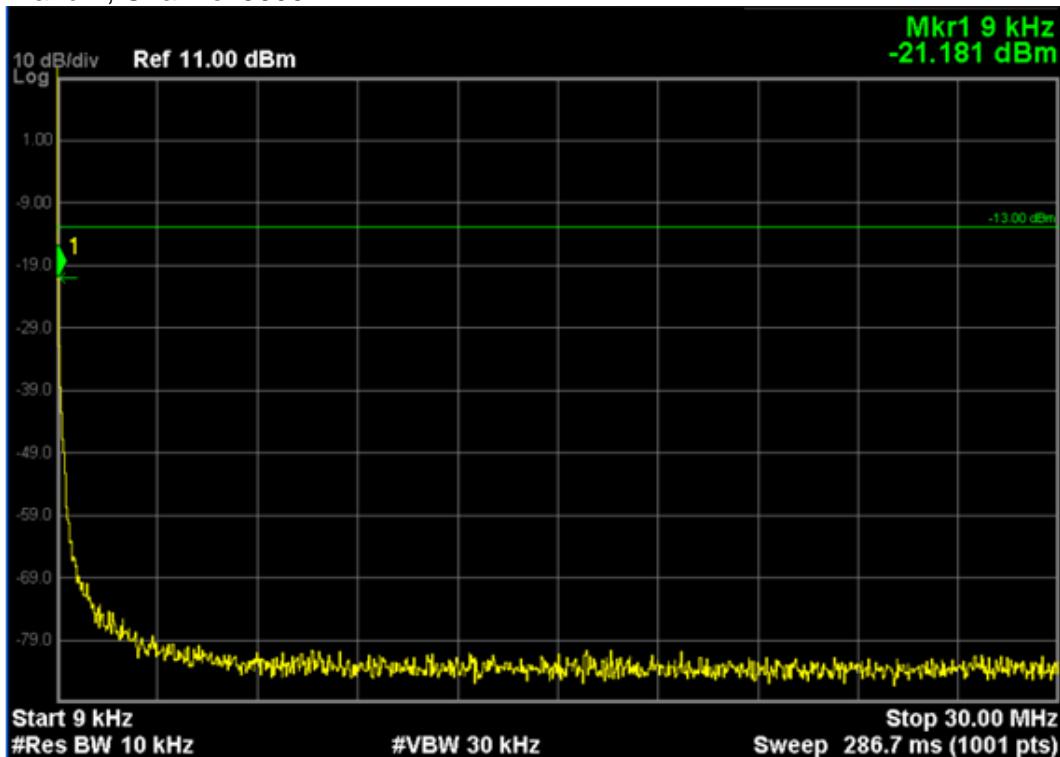





Note: The signal at point 1 is carrier

WCDMA Band V, Channel 4407:

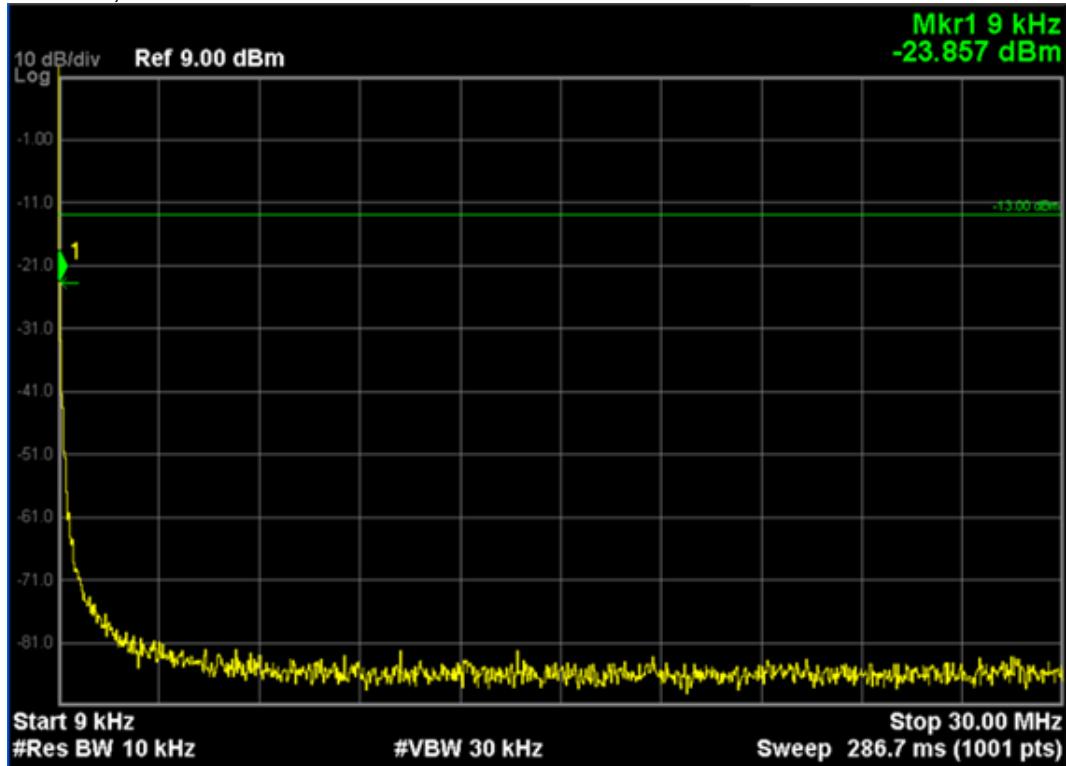

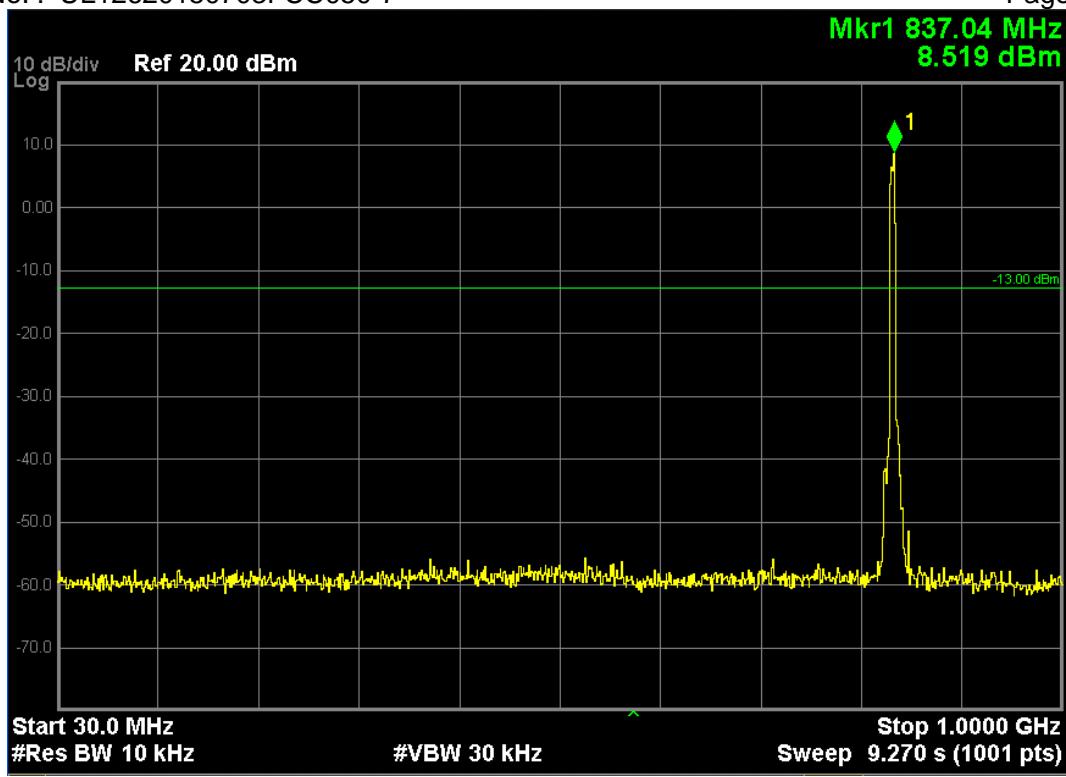

Note: The signal at point 1 is carrier

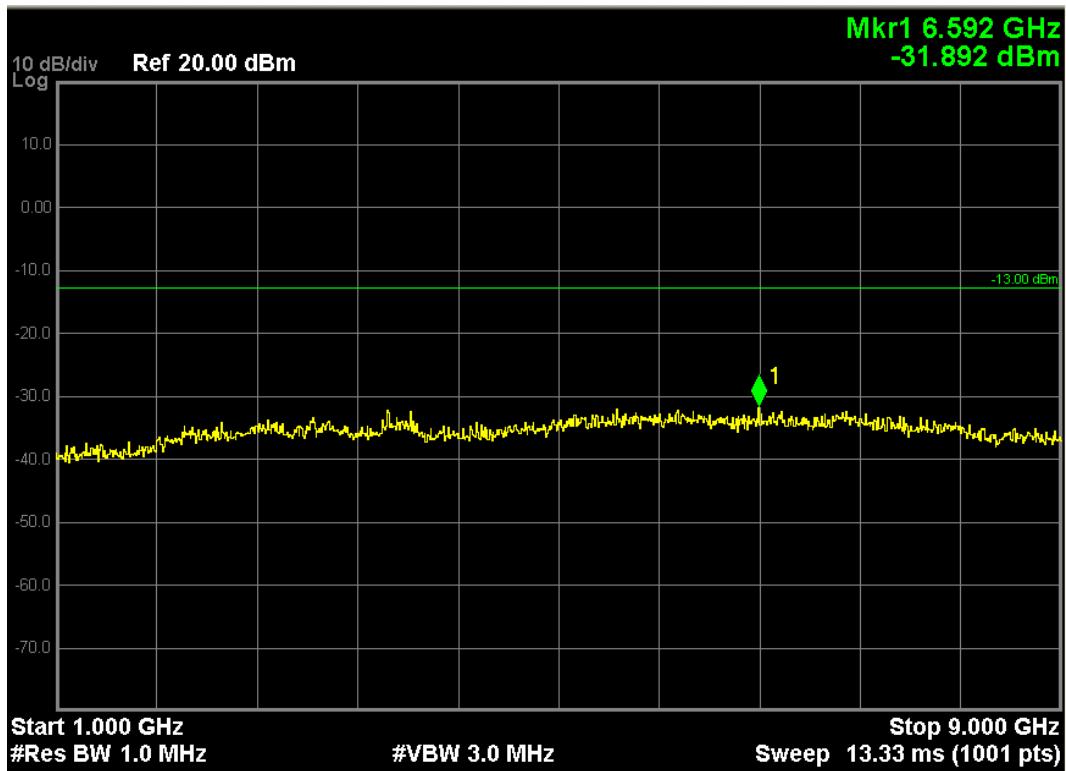

Radiated Spurious Measurement:**WCDMA Band V 9KHz to 30MHz**

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line, and that was not reported per 2.1057 (c).

WCDMA Band V 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 4182 (836.50MHz)							
667.8	H	-50.21	2.97	-2.16	-55.34	-13.00	-42.34
667.8	V	-48.33	2.97	-2.16	-53.46	-13.00	-40.46

WCDMA Band V Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 4182 (836.50MHz)							
1672.8	H	-39.12	6.13	9.40	-35.85	-13.00	-22.85
1672.8	V	-41.25	6.13	9.40	-37.98	-13.00	-24.98
2509.2	H	-44.71	7.32	10.5	-41.53	-13.00	-28.53
2509.2	V	-48.35	7.32	10.5	-45.17	-13.00	-32.17
3345.6	H	-50.62	8.43	11.5	-47.55	-13.00	-34.55
3345.6	V	-52.49	8.43	11.5	-49.42	-13.00	-36.42

WCDMA Band II 9KHz to 30MHz

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line, and that was not reported per 2.1057 (c).

WCDMA Band II 30MHz to 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 9400 (1880MHz)							
732.7	H	-49.13	3.42	-2.56	-55.11	-13.00	-42.11
732.7	V	-51.10	3.42	-2.56	-57.08	-13.00	-44.08

WCDMA Band II Above 1GHz

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Middle Channel 9400 (1880MHz)							
3760	H	-40.35	8.85	12.6	-36.60	-13.00	-23.60
3760	V	-43.54	8.85	12.6	-39.79	-13.00	-26.79
5640	H	-49.68	10.79	13.1	-47.37	-13.00	-34.37
5640	V	-52.03	10.79	13.1	-49.72	-13.00	-36.72


7. Frequency Stability Under Temperature & Voltage Variations

7.1. Test Equipment

Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	11.11.2015
Radio Communication Tester	Agilent	E5515C	GB46581718	23.10.2015
DC Power Supply	Agilent	6612C	MY43002989	02.03.2016
Temperature Chamber	WEISS	DU/20/40	58226017340050	03.01.2016

The measure equipment had been calibrated once a year.

7.2. Test Setup

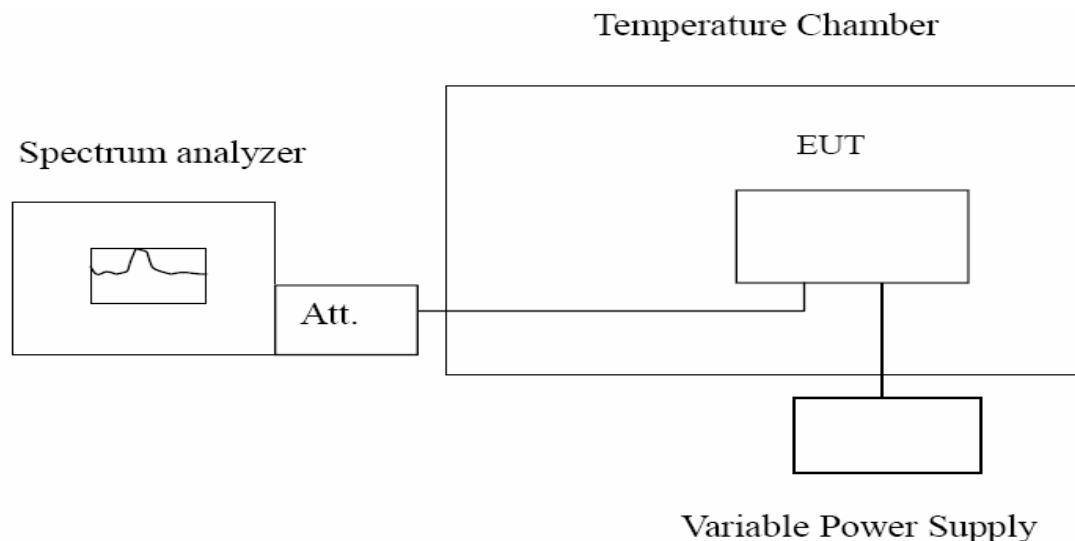

7.3. Limit

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit	< ±2.5 ppm
-------	------------

7.4. Test Procedure

1. Frequency Stability Under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or E5515C. The EUT was placed inside the temperature chamber.

EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

2. Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a DC power source to power the EUT and set the voltage to rated voltage.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.5. Uncertainty

The measurement uncertainty is defined as ± 10 Hz.

7.6. Test Result

WCDMA Band V:

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)
-20	836.50	-30.68	±2091
-10	836.50	25.64	±2091
0	836.50	12.37	±2091
10	836.50	-18.16	±2091
20	836.50	23.48	±2091
30	836.50	-16.89	±2091
40	836.50	13.74	±2091
50	836.50	22.40	±2091

Frequency Stability under Voltage

DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)
3.46	836.50	13.29	±2091
3.70	836.50	20.32	±2091
4.20	836.50	17.02	±2091

WCDMA Band II:

Frequency Stability under Temperature

Temperature Interval (°C)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)
-20	1880.00	-21.24	±4700
-10	1880.00	20.23	±4700
0	1880.00	-12.69	±4700
10	1880.00	31.51	±4700
20	1880.00	23.57	±4700
30	1880.00	-23.57	±4700
40	1880.00	11.63	±4700
50	1880.00	-20.30	±4700

Frequency Stability under Voltage


DC Voltage (V)	Test Frequency (MHz)	Deviation (Hz)	Limit(Hz)
3.46	1880.00	31.34	±4700
3.70	1880.00	22.55	±4700
4.20	1880.00	-32.78	±4700

8. Peak to Average

8.1. Test Equipment

Instrument	Manufacturer	Model	Serial No.	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MY51210142	11.11.2015
Radio Communication Tester	Agilent	E5515C	GB46581718	23.10.2015
Preamplifier	CEM	EM30180	3008A0245	28.02.2016

8.2. Test Setup

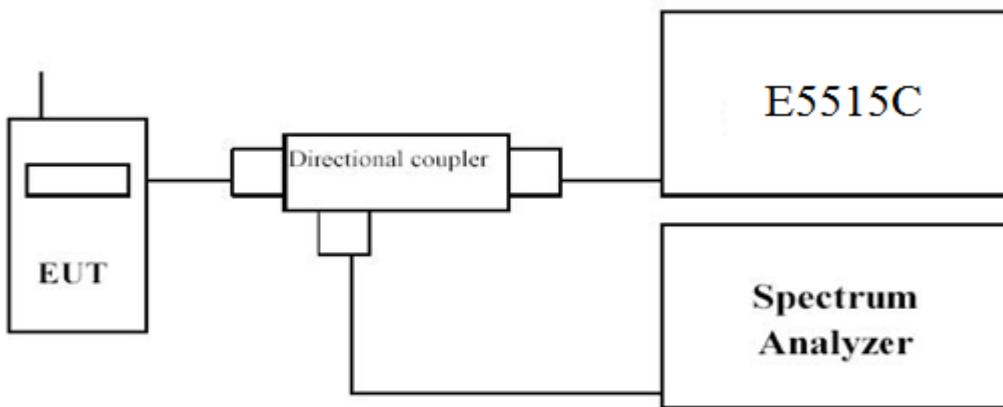

8.3. Limit

In addition, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

8.4. Test Procedure

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function(CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given a bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Procedure:

1. Place the EUT on a bench and set it in transmitting mode.
2. Connect a low loss RF cable from the antenna port to a spectrum analyzer and E5515C by a Directional Couple.
3. EUT Communicate with E5515C, then select a channel for testing.

4. Add a correction factor to the display of spectrum, and then test.
5. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;


8.5. Uncertainty

The measurement uncertainty is defined as ± 1.2 dB.


8.6. Test Result

Band	Channel No.	Limit (dB)	Result (dB)
WCDMA BAND II	9800	<13	7.71
WCDMA BAND V	4407		6.77

For WCDMA BAND II, channel 9800

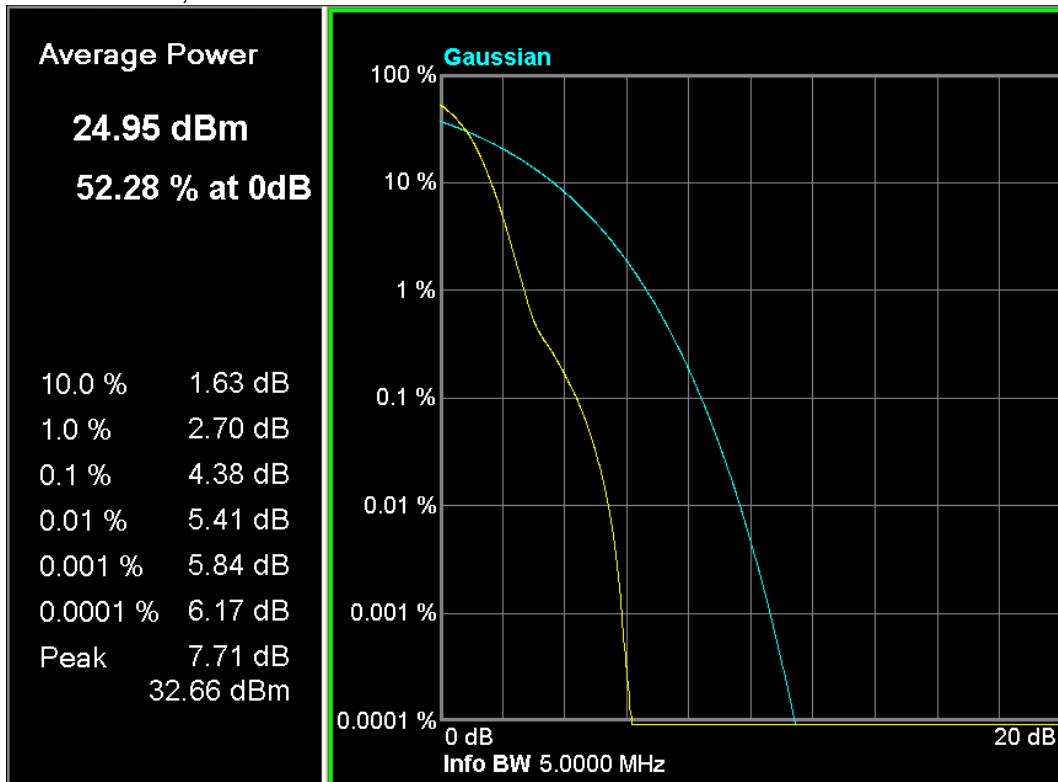

For WCDMA BAND V, channel 4407

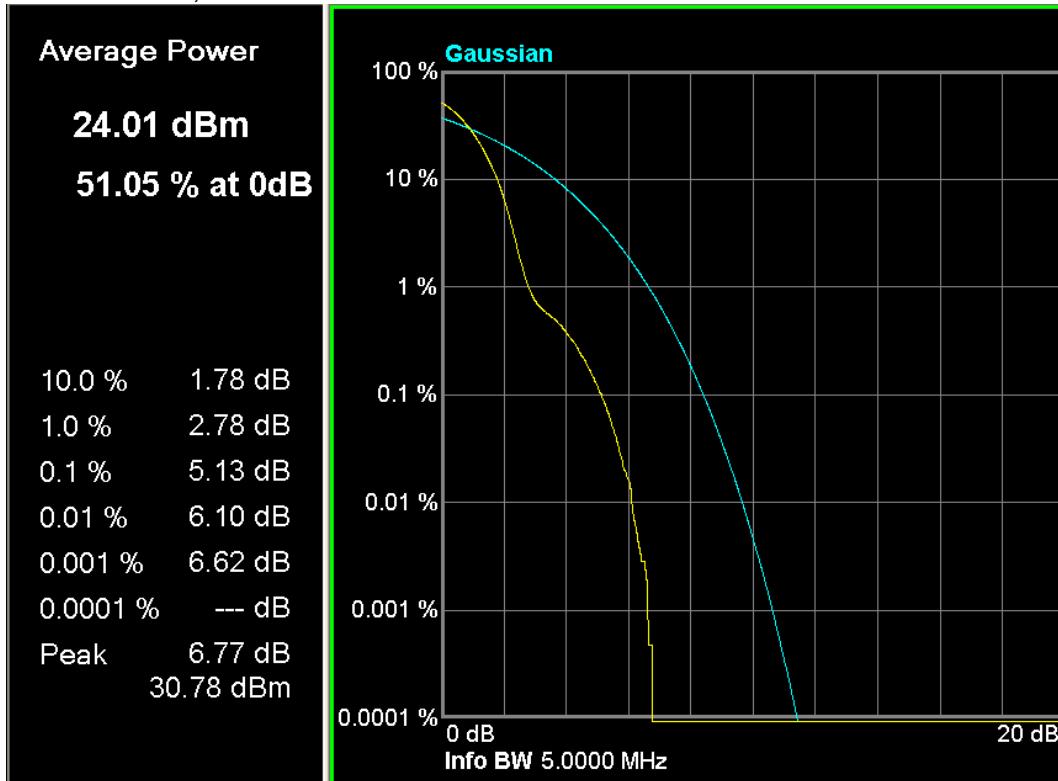

9.Attachment

PHOTOGRAPHS OF TEST SETUP

Please refer to the file named “YQD-GL300W_Part22&24 Test Setup Photos”.

PHOTOGRAPHS OF EUT

Please refer to the two files named “YQD-GL300W_EUT External Photos” and “YQD-GL300W_EUT Internal Photos”.

----End of the report----