

EMI TEST REPORT

| On Model Name: Analog Telephone Adaptor |
|--|
| Model Number: HT802 |
| Brand Name: Grandstream |
| Prepared for Grandstream Networks, Inc. |
| FCC ID Number: YZZHT802 |
| According to FCC 47 CFR Part 15, Subpart B |
| Test Report #: SHE-1412-11274-FCC Tested by: Galanz Daomen /Engineer Company Name Reviewed by: ECMG Jawen Yin/ Senior Engineer Company Name QC Manager: Swall Zhang/QC Manager Company Name |
| Test Report Released by: Swall Zhang December 23 rd , 2014 Swall Zhang Date |

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location : Galanz

25 South Ronggui

Rd., Shunde,

Foshan, Guangdong, China

Tel : (86)-757-23612785

Fax : (86)-757-23612537

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

- CNAL LAB Code: L2244

 Galanz EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.
- FCC Registration No.: 580210 Galanz EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.
- IC Registration No.: 8801A The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 8801A.

Table of Contents

| GOVERNMENT DISCLAIMER NOTICE | 2 |
|--|----|
| REPRODUCTION CLAUSE | 2 |
| OPINIONS AND INTERPRETATIONS | 2 |
| STATEMENT OF MEASUREMENT UNCERTAINTY | 2 |
| ADMINISTRATIVE DATA | 3 |
| EUT DESCRIPTION | 4 |
| FREQUENCY RANGE OF RADIATED MEASUREMENTS | 5 |
| TEST SUMMARY | 6 |
| TEST MODE JUSTIFICATION | 7 |
| EUT EXERCISE SOFTWARE | 7 |
| EQUIPMENT MODIFICATION | 7 |
| EUT SAMPLE PHOTOS | 8 |
| TEST SYSTEM DETAILS | 14 |
| CONFIGURATION OF TESTED SYSTEM | 16 |
| ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS | 17 |
| ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT | 23 |

List Attached Files

| Exhibit Type | File Description | File Name |
|-----------------------|-----------------------|-------------------------------------|
| Test Report | Test Report | YZZHT802 _Test Report.pdf |
| Operation Description | Technical Description | YZZHT802 _Operation description.pdf |
| External Photos | External Photos | YZZHT802 _External Photos |
| Internal Photos | Internal Photos | YZZHT802 _Internal Photos |
| Block Diagram | Block Diagram | YZZHT802 _Block Diagram.pdf |
| Schematics | Circuit Diagram | YZZHT802 _Schematics.pdf |
| ID Label/Location | Label and Location | YZZHT802 _Label & Location.pdf |
| User Manual | User Manual | YZZHT802 _User Manual.pdf |
| Test setup photos | Test set-up photos | YZZHT802 _Test Set-up Photos |

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : Analog Telephone Adaptor

Model Numbers : HT802

Model Tested : HT802

Date of Received : December 13th, 2014

Date Tested : December 15th, 2014

Applicant : Grandstream Networks, Inc.

Address 5F, Bldg #1, No.2 Kefa Rd., Science &

Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Manufacturer : Grandstream Networks, Inc.

Address 5F, Bldg #1, No.2 Kefa Rd., Science &

Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

Factory : Grandstream Networks, Inc.

Address 5F, Bldg #1, No.2 Kefa Rd., Science &

Technology Park, Shenzhen, China

Telephone : (86)-755-26014600

Fax : (86)-755-26014601

EUT Description

Grandstream Networks, Inc. Model Tested HT802 (referred to as the EUT in this report) is an Analog Telephone Adaptor.

Technical specifications are as belows:

| Parameter | | Ranges |
|---------------------|---------------------------|---|
| Basic Rated voltage | | 5.0V |
| parameters | Rated Current | 1.0A |
| | Internet Port (RJ- 45) | Connect to network or PC |
| I/O Ports | 2 RJ11 FXS port | Used to connect to analog phones / fax machines |
| | Power | Micro USB 5V 1A |
| | Input | AC 100–240 V 50/60 Hz 0.15A max |
| Power | Output | DC 5V, 1.0A, UL, FCC certified |
| Adapter #1 | Model | PCF-0500100AV |
| | Brand name | Mass power |
| | Input | 100-240VAC 50/60Hz 0.2A |
| Power | Output | 5VDC,1.0A |
| Adapter #2 | Model | R60UC0500100A |
| | Brand name | Sunlight |

Note: For other informations & features please refer to user's manual of EUT.

Frequency Range Of Radiated Measurements

- (b) For unintentional radiators:
- (1) Except as otherwise indicated in paragraphs (b)(2) or (b)(3) of this section, for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz) |
|--|--|
| Below 1.705 | 30. |
| 1.705-108 | 1000. |
| 108-500 | 2000. |
| 500-1000 | 5000. |
| Above 1000 | 5 th harmonic of the highest frequency or 40 GHz, whichever is lower. |

Note: Since the highest frequency operated of the EUT is 400MHz, so upper frequency of radiated emission test is up to 2GHz as per $\S15.33(b)(1)$.

Test Summary

The Electromagnetic Compatibility requirements on model HT802 for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

| Emission Tests | | | | | | | |
|-------------------------------------|-----------------------|--------------|---------------|--------------|--|--|--|
| Specifications | Description | Test Results | Test Point | Remark | | | |
| FCC Part 15.107 ANSI C63.4 -2009 | Conducted Emission | Passed | AC Input Port | Attachment 1 | | | |
| FCC Part 15.109 ANSI C63.4 -2009 | Radiated Emission | Passed | Enclosure | Attachment 2 | | | |

Test Mode Justification

Pre-Scan has been conducted to determine the worst-case from all possible combination between available operation mode .Following mode(s) was (were) selected for the final test as listed below:

| Pre-Test Mode | |
|-----------------|--|
| | Mode 1: Communication with PC&Analog Telephone + Mass Power (Model: PCF-0500100AV) |
| EMI Test Mode | Mode 2: Communication with PC&Analog Telephone + Sunlight Power (Model: R60UC0500100A) |
| | No PoE Mode |
| Final Test Mode | |
| FMI Test Made | Mode 1: Communication with PC&Analog Telephone + Mass Power (Model: PCF-0500100AV) |
| EMI Test Mode | Mode 2: Communication with PC&Analog Telephone + Sunlight Power (Model:R60UC0500100A) |

EUT Exercise Software

No test software support this test.

Equipment Modification

Any modifications installed previous to testing by Grandstream Networks, Inc. will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen).

EUT Sample Photos

EUT Model: HT802



EUT- Front View



EUT- Rear View



EUT- Top View



EUT- Bottom View



EUT-Left Side View



EUT- Sight Side View




Power Adapter #1 View(Manufacturer: Mass power)




Power Adapter #2 View(Manufacturer: Sunlight)



EUT-Uncovered View

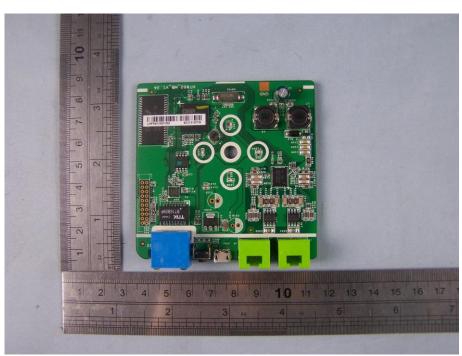

Mother board- Top View

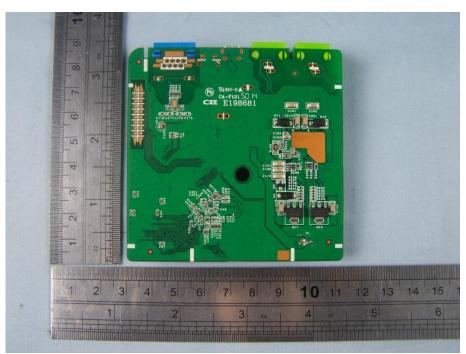

Mother board- Bottom View

Test System Details

EUT

Model Number:

HT802

Model Tested:

HT802

Description:

Analog Telephone Adaptor

Input:

AC 120V/60Hz

Manufacturer:

Grandstream Networks, Inc.

Support Equipment


| | J., P P 3. 1 | | |
|----------------------|---------------------------|----------------------------|--------------|
| Description | Model Number | Serial Number | Manufacturer |
| Notebook COMPUTER | NV57H03c- 2412G64Mnc2s | LXWZ401001125109 201601 | Gateway |
| Mouse | MO32B0 | 23-033131 | IBM |
| Keyboard | Keyboard SK-1788 | | LENOVO |
| Monitor | TFT1780PS | | AOC |
| ANALOG TELEPHONE | HCD007(33)TSDL | | ВВК |

| Cable Description | | | | | | | | |
|------------------------------|------------------|----------------------|-----|-------------------|------------------|--|--|--|
| Description | From | To Leng (Mete | | Shielded (Y/N) | Ferrite (Y/N) | | | |
| Power Adapter | Power Adapter | Notebook COMPUTER | 1.6 | N | Υ | | | |
| Cord Of Notebook Computer | AC Plug | Power Adapter | 1.2 | N | Υ | | | |
| Mouse Cord | Mouse | Notebook COMPUTER | 1.2 | N | Υ | | | |
| Keyboard Cord | keyboard | Notebook COMPUTER | 1.2 | N | Υ | | | |
| RJ-45 Cord | EUT | Notebook COMPUTER | 1.5 | N | N | | | |
| Power Adapter Cord Of EUT | EUT | Plug | 1.8 | N | N | | | |

Note: The "EUT" means "Analog Telephone Adaptor".

NOTE: The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

Configuration of Tested System

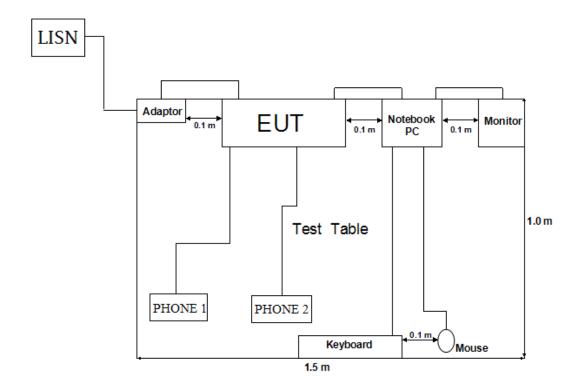


ATTACHMENT 1 - CONDUCTED EMISSION TEST RESULTS


| CLIENT: | Grandstream Networks, Inc. | TEST STANDERD: | Section 15.107 | | | | |
|---------------------------|---|---|-----------------------------|--|--|--|--|
| MODEL NUMBERS: | HT802 | PRODUCT: | Analog Telephone Adaptor | | | | |
| MODEL TESTED: | HT802 | EUT DESIGNATION: | Home or Office | | | | |
| TEMPERATURE: | 22°C | HUMIDITY: | 48% | | | | |
| ATM PRESSURE: | 103kPa | GROUNDING: | None | | | | |
| TESTED BY: | Daomen | DATE OF TEST: | Dec.15 th , 2014 | | | | |
| TEST REFERENCE: | ANSI C63.4- 2009 | | | | | | |
| TEST PROCEDURE: | emissions. The measurement peak scan was made at the fre peaks were then marked, and | The EUT was set up according to the guidelines of ANSI C63.4: 2009 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150KHz to 30MHz. | | | | | |
| TEST MODE: | Mode 1,Mode 2 | | | | | | |
| TEST SET UP: | ground plane re AMN = Art AE = Asso EUT = Equ | EUT D cm to vertical seference plane lificial mains network (LISN) inciated equipment ipment under test edance stabilization network | 80 cm to ground plane | | | | |
| TESTED RANGE: | 150kHz to 30MHz | | | | | | |
| TEST VOLTAGE: | AC 120V/60Hz | | | | | | |
| RESULTS: | The EUT meets the requirement results relate only to the equipment of the | | | | | | |
| CHANGES OR MODIFICATIONS: | There were no modifications in Corp(Shenzhen) test personne | | echnical Testing | | | | |
| M. UNCERTAINTY: | Freq. ± 2x10 ⁻⁷ x Center Freq., | Amp ± 2.6 dB | | | | | |

FCC Test Report #: SHE-1412-11274-FCC Prepared for Grandstream Networks, Inc. Prepared by ECMG Electronic Technical Testing Corp (Shenzhen)

Mode 1:

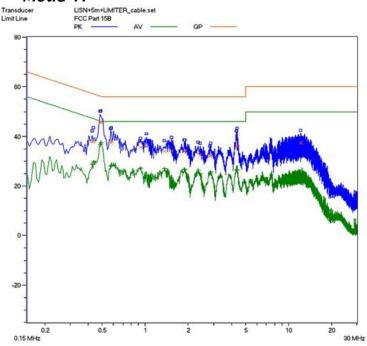


Line L Conducted Emission Graph

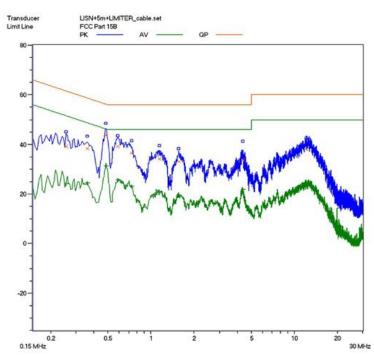


Line N Conducted Emission Graph

Mode 2:

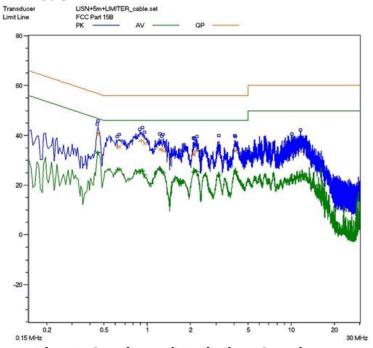

Line L Conducted Emission Graph

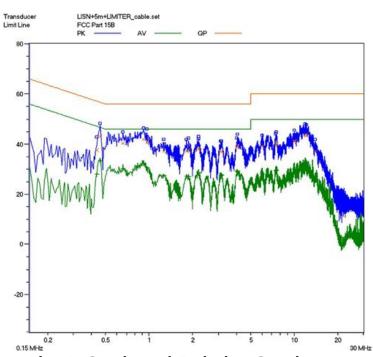

Line N Conducted Emission Graph

Test Data: Mode 1:

| Lines (L/N) | Frequency (MHz) | Correcte d QP Level (dBuV) | Limits QP (dBuV) | Margin QP (dB) | Frequency (MHz) | Corrected AV Level (dBuV) | Limits AV (dBuV) | Margin QP (dB) |
|----------------|--------------------|-------------------------------------|---------------------|-------------------|--------------------|---------------------------------|------------------------|-------------------|
| L | 0.490 | 46.2 | 56.2 | -10.0 | 0.490 | 37.4 | 46.2 | -8.8 |
| L | 4.675 | 43.7 | 56 | -12.3 | 4.675 | 30.1 | 46 | -15.9 |
| L | 4.730 | 43.4 | 56 | -12.6 | 4.730 | 30.3 | 46 | -15.7 |
| N | 0.185 | 45.8 | 64.3 | -18.5 | 0.185 | 24.0 | 54.3 | -30.3 |
| N | 0.485 | 43.8 | 56.3 | -12.5 | 0.485 | 31.4 | 46.3 | -14.9 |
| N | 0.585 | 39.2 | 56 | -16.8 | 0.585 | 25.7 | 46 | -20.3 |

Note:

- 1) All readings are using a bandwidth of 9 kHz, with a 500ms sweep time. A video filter was not use.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Mode 2:

| Lines (L/N) | Frequency (MHz) | Correcte d QP Level (dBuV) | Limits QP (dBuV) | Margin QP (dB) | Frequency (MHz) | Corrected AV Level (dBuV) | Limits AV (dBuV) | Margin QP (dB) |
|----------------|--------------------|-------------------------------------|---------------------|-------------------|--------------------|---------------------------------|------------------------|-------------------|
| L | 0.455 | 40.8 | 56.8 | -16.0 | 0.455 | 33.1 | 46.8 | -13.7 |
| L | 4.675 | 43.1 | 56 | -12.9 | 4.675 | 30.0 | 46 | -16.0 |
| L | 4.730 | 43.4 | 56 | -12.6 | 4.730 | 30.3 | 46 | -15.7 |
| N | 0.185 | 45.1 | 64.3 | -19.2 | 0.185 | 23.7 | 54.3 | -30.6 |
| N | 0.920 | 42.1 | 56 | -13.9 | 0.920 | 32.1 | 46 | -13.9 |
| N | 11.905 | 43.8 | 60 | -16.2 | 11.905 | 31.9 | 50 | -18.1 |

- 1) All readings are using a bandwidth of 9 kHz, with a 500ms sweep time. A video filter was not use.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Test Equipment List:

| Test Equipment | Model No. | Manufacturer | Serial No. | Last Cal. | Cal. Interval |
|--|-----------|--------------|------------|------------|---------------|
| EMI Test Receiver | SMR4503 | SCHAFFNER | 11725 | 2014.07.08 | 2015.07.08 |
| Line impedance stabilization network | ESH2-Z5 | R&S | / | 2014.03.14 | 2015.03.13 |

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

COMPANY NAME

| TESTED | BY: Varne | GALANZ |
|---------|-----------|--------------|
| | ENGINEER | COMPANY NAME |
| | | |
| | Savertino | |
| REVIEWE | | ECMG |

SENIOR ENGINEER



Conducted Emission Test Set-up -Front view





Conducted Emission Test Set-up -Rear view

ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT


| CLIENT: | Grandstream Networks, Inc. | TEST STANDERD: | Section 15.109 | | |
|---------------------------|--|------------------|------------------------------|--|--|
| MODEL NUMBERS: | HT802 | PRODUCT: | Analog Telephone Adaptor | | |
| EUT MODEL: | HT802 | EUT DESIGNATION: | Home or Office | | |
| TEMPERATURE: | 22°C | HUMIDITY: | 47%RH | | |
| ATM PRESSURE: | 103.0kPa | GROUNDING: | None | | |
| TESTED BY: | Daomen | DATE OF TEST: | Dec.1 5 th , 2014 | | |
| TEST REFERENCE: | ANSI C63.4: 2009 | | | | |
| | The EUT was set up according to the guidelines of ANSI C63.4: 2009 for radiated emissions. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber.signal discrimination was then performed and the significant peaks marked.these peaks were then quasi-peaked in the frequency range of 30 MHz to 1GHz and average and peak in the frequency range of 1GHz to 2GHz at an anechoic chamber. | | | | |
| TEST PROCEDURE: | The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows: | | | | |
| | FS= RA + AF + CF - AG | | | | |
| | Where: FS = Field Strength | | | | |
| | RA = Receiver Amplitude | | | | |
| | AF = Antenna Factor | | | | |
| | CF = Cable Attenuation Factor | | | | |
| | AG = Amplifier Gain | | | | |
| TEST MODE: | Mode 1,Mode 2 | | | | |
| TESTED RANGE: | 9KHz to 30MHz and 30 to 2000 | MHz | | | |
| TEST VOLTAGE: | AC 120V/60Hz | | | | |
| RESULTS: | The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client. | | | | |
| CHANGES OR MODIFICATIONS: | There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen). Test personnel. | | | | |
| M. UNCERTAINTY: | Freq. ± 2x10 ⁻⁷ x Center Freq., A | mp ± 3.6 dB | | | |
| Continue on to payt page | • | | | | |

Continue on to next page...

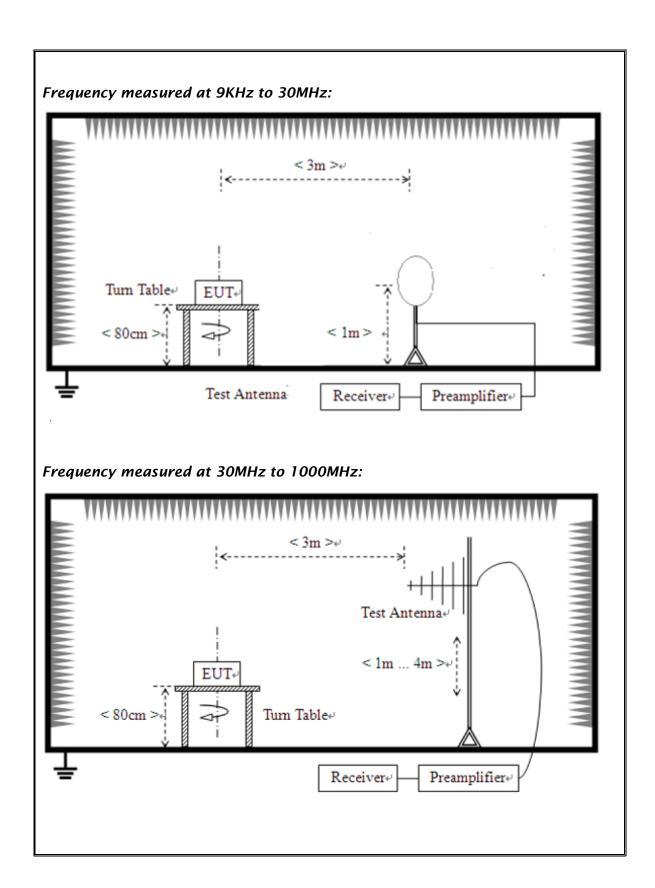


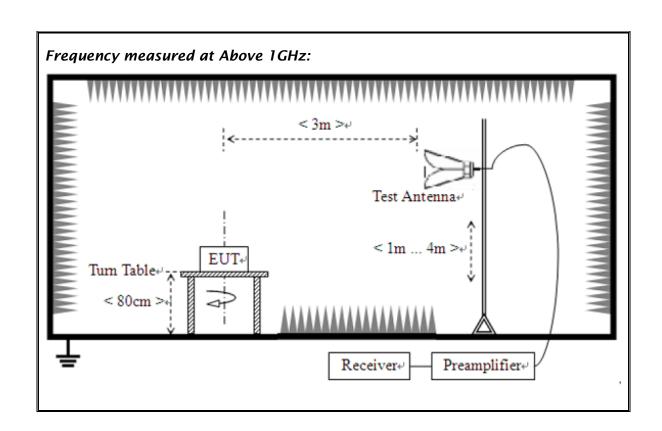


Mode 1:

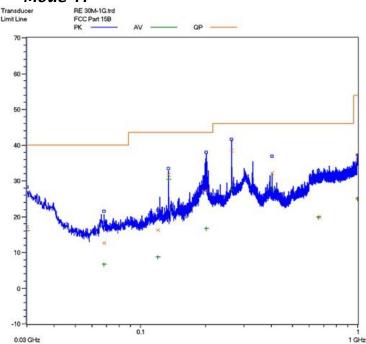


Horizontal: Radiated Emission Test Plot -(30-1000MHz)

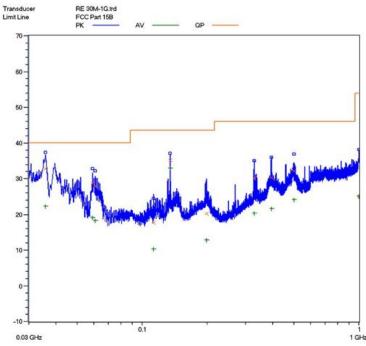

Vertical: Radiated Emission Test Plot (30-1000MHz)

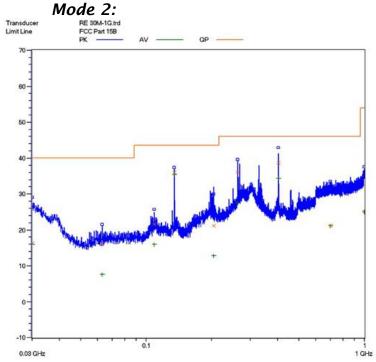

Horizontal: Radiated Emission Test Plot -(30-1000MHz)

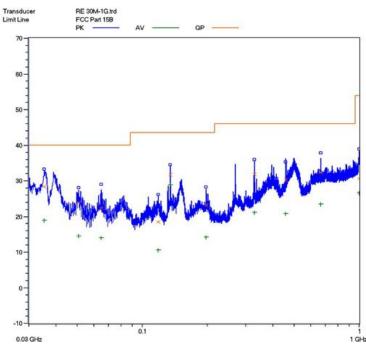

Vertical: Radiated Emission Test Plot (30-1000MHz)

Test Data:

Pre-scan has been conducted to determine the worst-case from all possible combinations between available operation mode. The worst-case is mode 1 was selected for the final testing.

Mode 1:

| Test No.#: | Frequency (MHz) | Factor (dB) | Reading Level QP (dBuV/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|------------|--------------------|----------------|---------------------------------|-------------------------------|-------------------|----------------|
| 1 | / | / | / | / | / | / |
| 2 | / | / | / | / | / | / |
| 3 | / | / | / | / | / | / |
| 4 | / | / | / | / | / | / |
| 5 | / | / | / | / | / | / |
| 6 | / | / | / | / | / | / |

- 1. The field strength is calculated by adding the antenna factor, cable factor. The basic equation with a sample calculation is as follows: Emission Level =Reading Level +Factor.
- 2. The limits shown are based on quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. the bandwidth of Test Receiver was set at 200Hz in frequency range of 9KHz to 150KHz, 9kHz in the frequency range of 150KHz to 30MHz.
- 3. All emission levels in the frequency range of 9KHz to 30MHz are 20dB below the official limits that are not reported.

Test Data:
Mode 1&Below 1GHz:

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB) | Preamp Factor (dB) | Reading Level QP (dBuV/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | | | |
|--------------------|--------------------|---------------------------|--------------------------|---------------------------------|-------------------------------|-------------------|----------------|--|--|--|
| | Horizontal | | | | | | | | | |
| 134.120 | 0.02 | 7.6 | / | 31.18 | 38.8 | 43.5 | -4.7 | | | |
| 262.720 | 0.12 | 12.6 | / | 29.78 | 42.5 | 46 | -3.5 | | | |
| 403.120 | 0.160 | 14.7 | / | 24.34 | 39.2 | 46 | -6.8 | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |
| | | | Ver | tical | | | | | | |
| 35.840 | 0.02 | 17.9 | / | 18.88 | 36.8 | 40 | -3.2 | | | |
| 134.200 | 0.02 | 7.6 | / | 32.48 | 40.1 | 43.5 | -3.4 | | | |
| 250.00 | 0.12 | 11.8 | / | 29.48 | 41.4 | 46 | -4.6 | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |

- 1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
- 2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- 3. The other emission levels are 20dB below the official limits that are not reported.

Mode 1&Above 1GHz:

| Frequency (GHz) | Cable Loss (dB) | Antenna Factor (dB) | Preamp Factor (dB) | Reading Level (dBuV/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Polarizati on (H/V) | | |
|--------------------|-----------------------|---------------------------|--------------------------|------------------------------|-------------------------------|-------------------|----------------|-----------------------------------|--|--|
| | Peak Measurement | | | | | | | | | |
| 1.166 | 1.40 | 23.9 | -33.6 | 53.97 | 45.67 | 74 | -28.33 | Н | | |
| 1.190 | 1.45 | 24.5 | -33.6 | 54.37 | 46.72 | 74 | -27.28 | Н | | |
| 1.325 | 1.57 | 25.1 | -33.6 | 55.29 | 48.36 | 74 | -25.64 | Н | | |
| 1.360 | 1.58 | 25.1 | -33.6 | 54.2 | 47.28 | 74 | -26.72 | V | | |
| 1.455 | 1.65 | 25.7 | -33.6 | 55.64 | 49.39 | 74 | -24.61 | V | | |
| 1.585 | 1.76 | 26.7 | -33 | 54.55 | 50.01 | 74 | -23.99 | V | | |
| | | | Averag | e Measu | irement | | | | | |
| 1.166 | 1.40 | 23.9 | -33.6 | 47.04 | 38.74 | 54 | -15.26 | Н | | |
| 1.190 | 1.45 | 24.5 | -33.6 | 49.75 | 42.10 | 54 | -11.9 | Н | | |
| 1.325 | 1.57 | 25.1 | -33.6 | 46.94 | 40.01 | 54 | -13.99 | Н | | |
| 1.360 | 1.58 | 25.1 | -33.6 | 46.58 | 39.66 | 54 | -14.34 | V | | |
| 1.455 | 1.65 | 25.7 | -33.6 | 48.97 | 42.72 | 54 | -11.28 | V | | |
| 1.585 | 1.76 | 26.7 | -33 | 44.64 | 40.10 | 54 | -13.9 | V | | |

- 1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- 2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
- 3. The other emission levels are 20dB below the official limits that are not reported.

Mode 2&Below 1GHz:

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB) | Preamp Factor (dB) | Reading Level QP (dBuV/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | | | |
|--------------------|--------------------|---------------------------|--------------------------|---------------------------------|-------------------------------|-------------------|----------------|--|--|--|
| | Horizontal | | | | | | | | | |
| 134.400 | 0.02 | 7.6 | / | 32.58 | 40.2 | 43.5 | -3.3 | | | |
| 268.720 | 0.13 | 13.4 | / | 28.37 | 41.9 | 46 | -4.1 | | | |
| 403.120 | 0.16 | 14.7 | / | 26.84 | 41.7 | 46 | -4.3 | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |
| | | | Ver | tical | | | | | | |
| 35.280 | 0.02 | 17.9 | / | 10.58 | 28.5 | 40 | -11.5 | | | |
| 134.400 | 0.02 | 7.6 | / | 30.08 | 37.7 | 43.5 | -5.8 | | | |
| 663.840 | 0.36 | 22.2 | / | 12.74 | 35.3 | 46 | -10.7 | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |
| / | / | / | / | / | / | / | / | | | |

- 1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 60 s sweep time. A video filter was not used.
- 2. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- 3. The other emission levels are 20dB below the official limits that are not reported.

Mode 2&Above 1GHz:

| Frequency (GHz) | Cable Loss (dB) | Antenna Factor (dB) | Preamp Factor (dB) | Reading Level (dBuV/m) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Polarizati on (H/V) | | |
|--------------------|-----------------------|---------------------------|--------------------------|------------------------------|-------------------------------|-------------------|----------------|-----------------------------------|--|--|
| | Peak Measurement | | | | | | | | | |
| 1.166 | 1.40 | 23.9 | -33.6 | 53.97 | 45.67 | 74 | -28.33 | Н | | |
| 1.190 | 1.45 | 24.5 | -33.6 | 54.37 | 46.72 | 74 | -27.28 | Н | | |
| 1.325 | 1.57 | 25.1 | -33.6 | 55.29 | 48.36 | 74 | -25.64 | Н | | |
| 1.360 | 1.58 | 25.1 | -33.6 | 54.2 | 47.28 | 74 | -26.72 | V | | |
| 1.455 | 1.65 | 25.7 | -33.6 | 55.64 | 49.39 | 74 | -24.61 | V | | |
| 1.585 | 1.76 | 26.7 | -33 | 54.55 | 50.01 | 74 | -23.99 | V | | |
| | | | Averag | e Measu | irement | | | | | |
| 1.166 | 1.40 | 23.9 | -33.6 | 47.04 | 38.74 | 54 | -15.26 | Н | | |
| 1.190 | 1.45 | 24.5 | -33.6 | 49.75 | 42.10 | 54 | -11.9 | Н | | |
| 1.325 | 1.57 | 25.1 | -33.6 | 46.94 | 40.01 | 54 | -13.99 | Н | | |
| 1.360 | 1.58 | 25.1 | -33.6 | 46.58 | 39.66 | 54 | -14.34 | V | | |
| 1.455 | 1.65 | 25.7 | -33.6 | 48.97 | 42.72 | 54 | -11.28 | V | | |
| 1.585 | 1.76 | 26.7 | -33 | 44.64 | 40.10 | 54 | -13.9 | V | | |

- 1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- 2. The limits shown are based on Peak value and Average value detector above 1GHz, the bandwidth of Test Receiver was set at 1MHz above 1GHz.
- 3. The other emission levels are 20dB below the official limits that are not reported.

Test Equipment List:


| Test Equipment | Model No. | Manufacturer | Serial No. | Last Cal. | Cal. Due |
|----------------------------------|-----------|--------------|------------|------------|------------|
| EMI Test Receiver | SMR4503 | SCHAFFNER | 11725 | 2014.07.08 | 2015.07.07 |
| Double-ridged Wave guide horn | 3115 | ETS | 6587 | 2014.08.02 | 2015.08.01 |
| Microwave system amplifier | 83017A | Agilent | MY39500438 | 2014.07.11 | 2015.07.10 |
| Biconilog Antenna | 3142C | ETS | 00042672 | 2014.09.28 | 2015.09.27 |
| Band-pass Filter | BRM50702 | Micro-Tronic | S/N-030 | 2014.11.30 | 2015.11.29 |
| Spectrum Analyzer | FSP30 | R&S | 100755 | 2014.11.30 | 2015.11.29 |
| HF Loop Antenna | HLA6120 | TESEQ | 26348 | 2014-10-11 | 2015-10-12 |

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.


| TESTED | BY: | Lamen | GALANZ |
|--------|-----|----------|--------------|
| | | ENGINEER | COMPANY NAME |

REVIEWED BY:
SENIOR ENGINEER


ECMG
COMPANY NAME

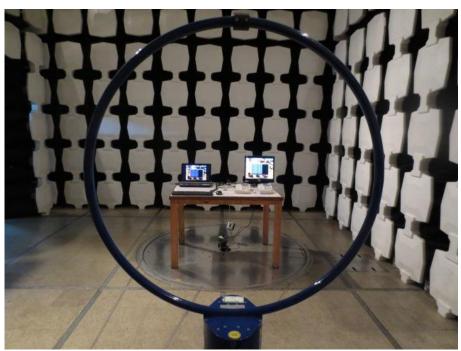

Radiated Emission Test Set-up(9KHz-30MHz)

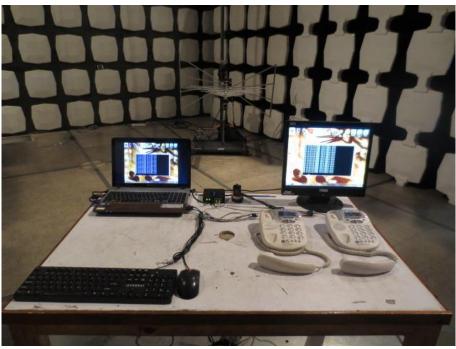

Radiated Emission Test Set-up(30-1000MHz)

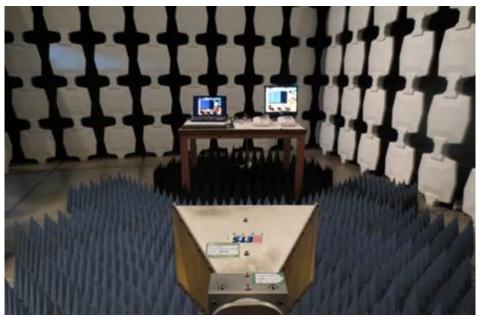

Radiated Emission Test Set-up(Above 1GHz)



Radiated Emission Test Set-up (Rear View)

*** End Of Report ***