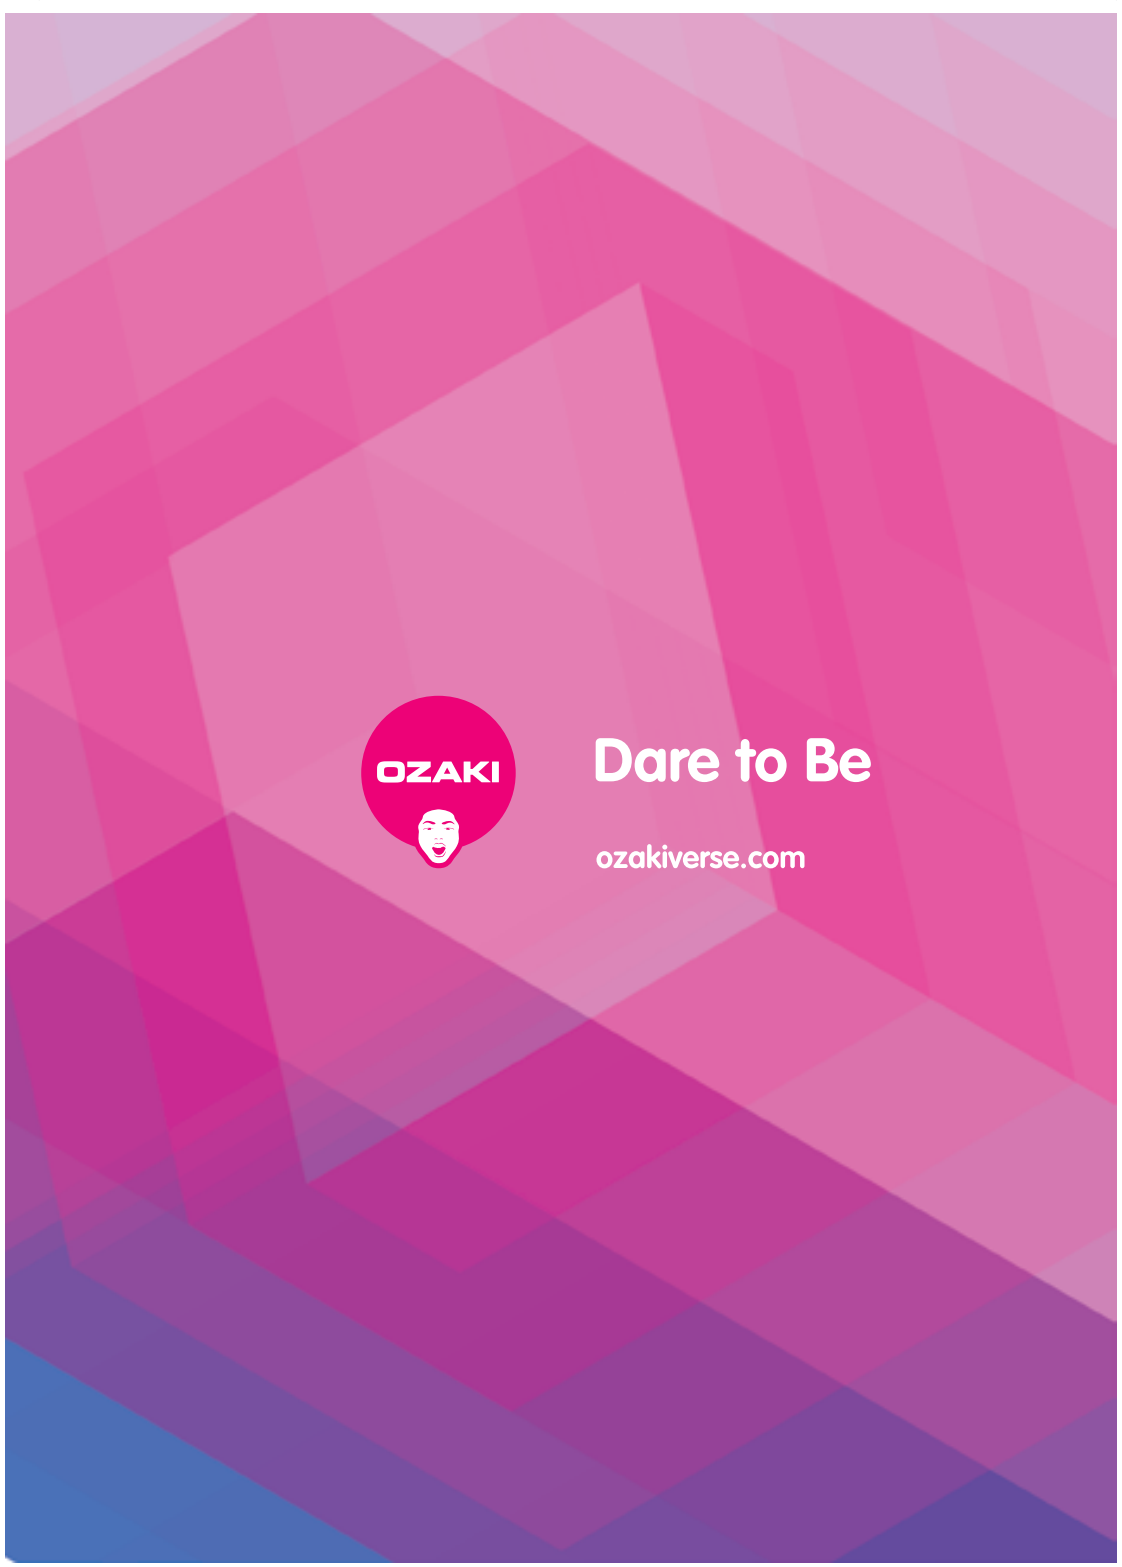
OZAKI
Dare to Be
ozakiverse.com

OZAKI

O!care
Quick Installation Guide

• For further O!care User Manual and iCare App Instruction Please go to iCare information in iCare App

Package Contents

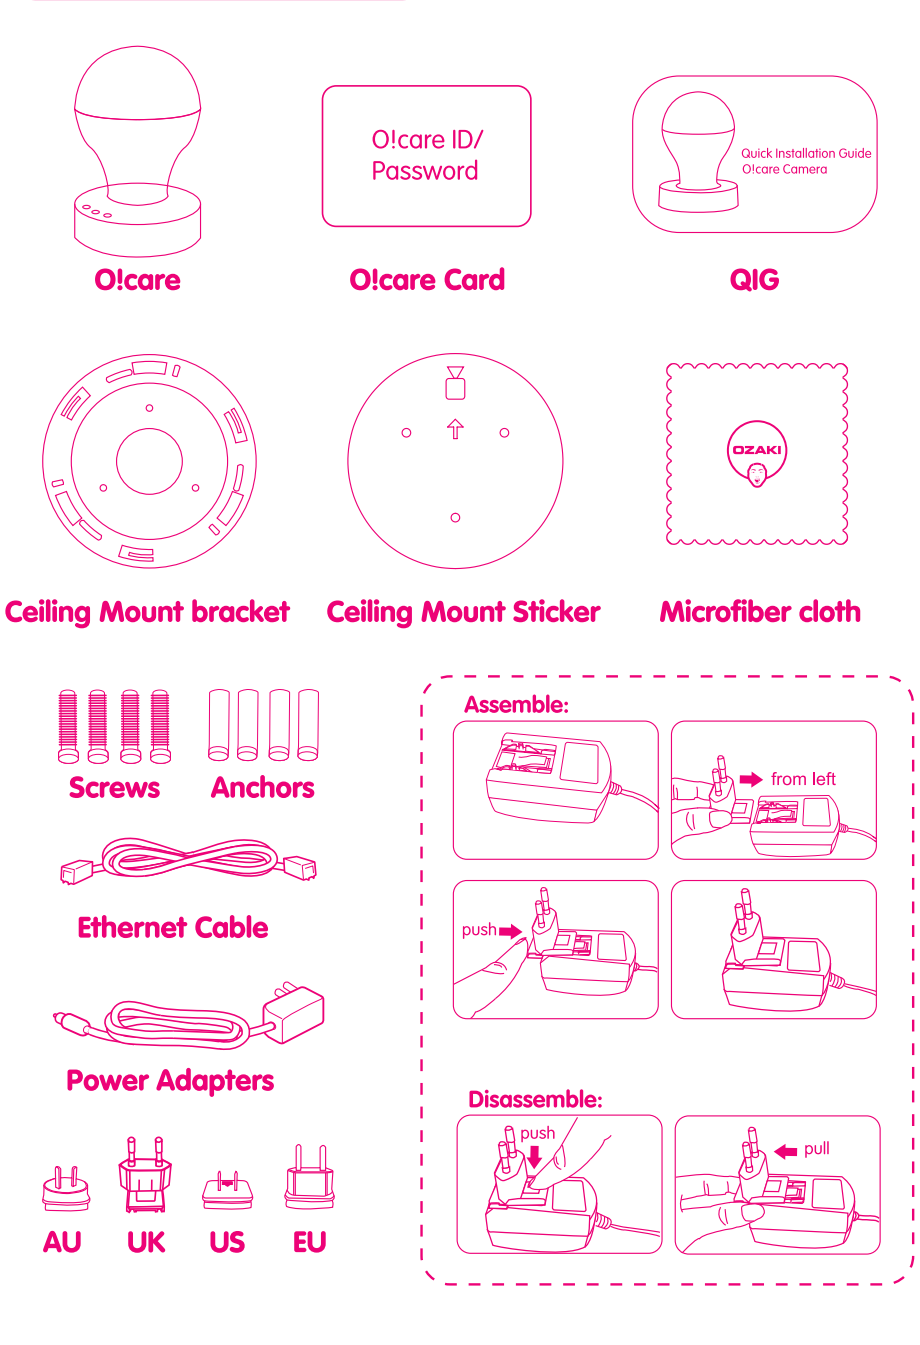
O!care ID/ Password
Quick Installation Guide O!care Camera
O!care
O!care Card
QIG
Ceiling Mount bracket
Ceiling Mount Sticker
Microfiber cloth
Screws
Anchors
Ethernet Cable
Power Adapters
AU
UK
US
EU
Assemble:
from left
push
Disassemble:
push
pull

Hardware View

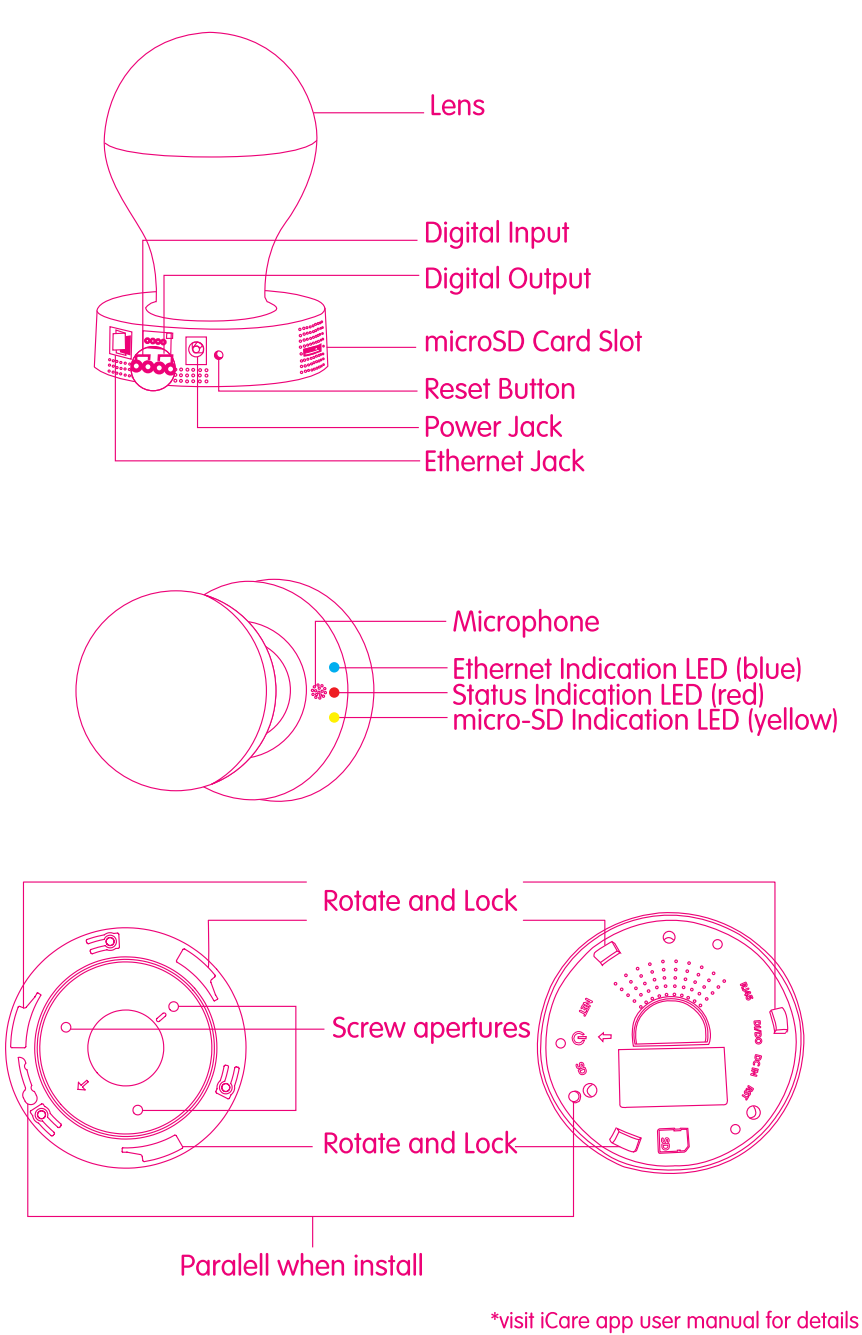
Lens
Digital Input
Digital Output
microSD Card Slot
Reset Button
Power Jack
Ethernet Jack
Microphone
Ethernet Indication LED (blue)
Status Indication LED (red)
micro-SD Indication LED (yellow)
Rotate and Lock
Screw apertures
Rotate and Lock
Paralell when install

*visit iCare app user manual for details

Step 1.

Download iCare App from App Store

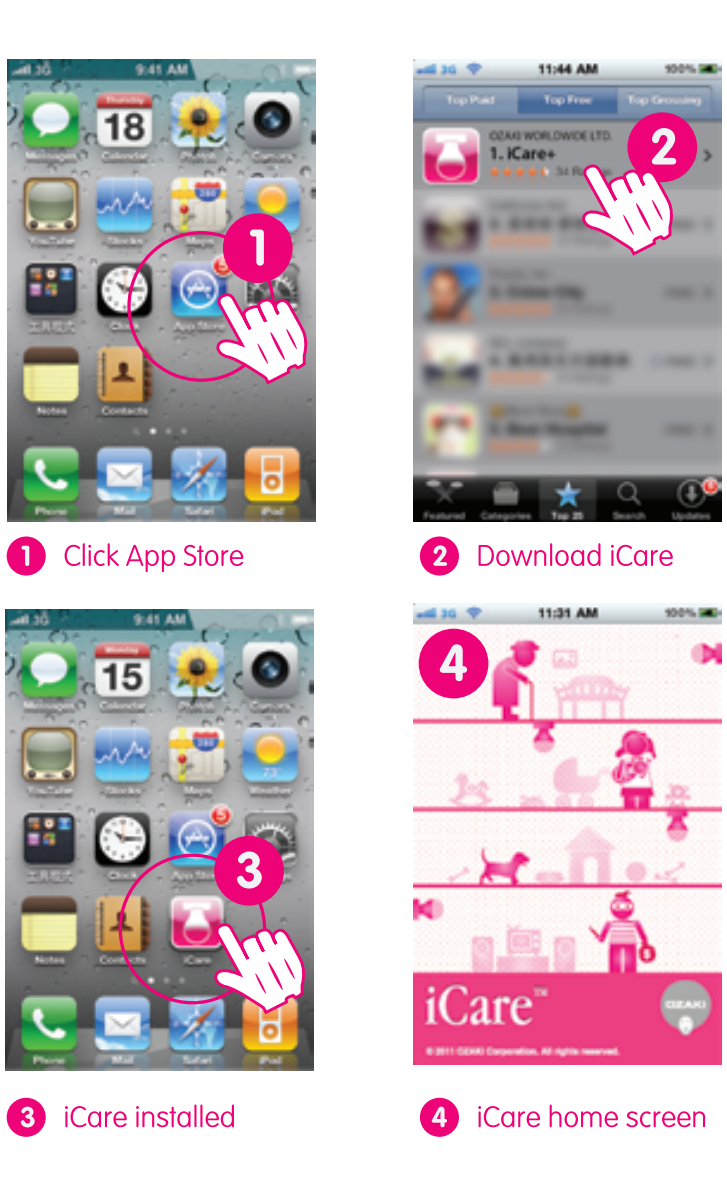

1. Click App Store
2. Download iCare
3. iCare installed
4. iCare home screen

Step 2.

Connect O!care to Power & Ethernet

Make sure iPhone is connected to the wireless router.

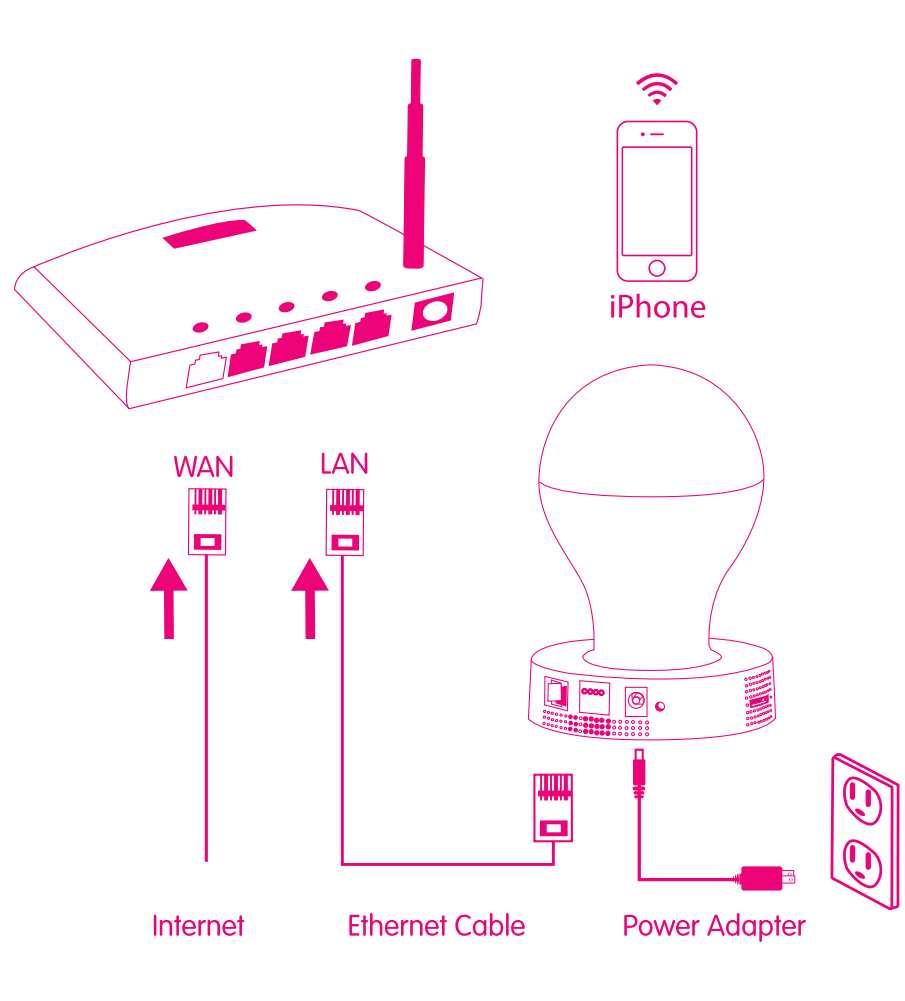
iPhone
WAN
LAN
Internet
Ethernet Cable
Power Adapter

Step 3.

Determine O!care network connection

Make sure that your iPhone and the O!care are linked with the same wireless router.

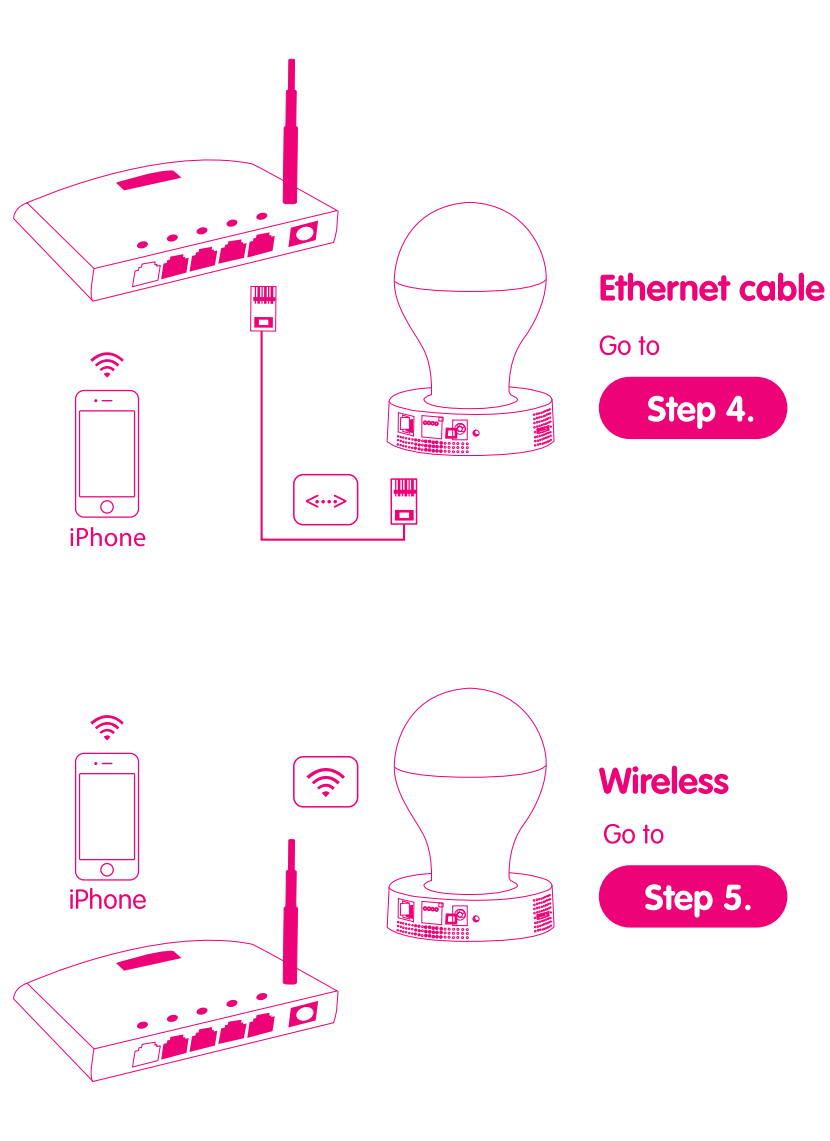
iPhone
Ethernet cable
Go to
Step 4.
iPhone
Wireless
Go to
Step 5.

Step 4.

Ethernet Setting of O!care

Make sure power/ethernet are plugged in.

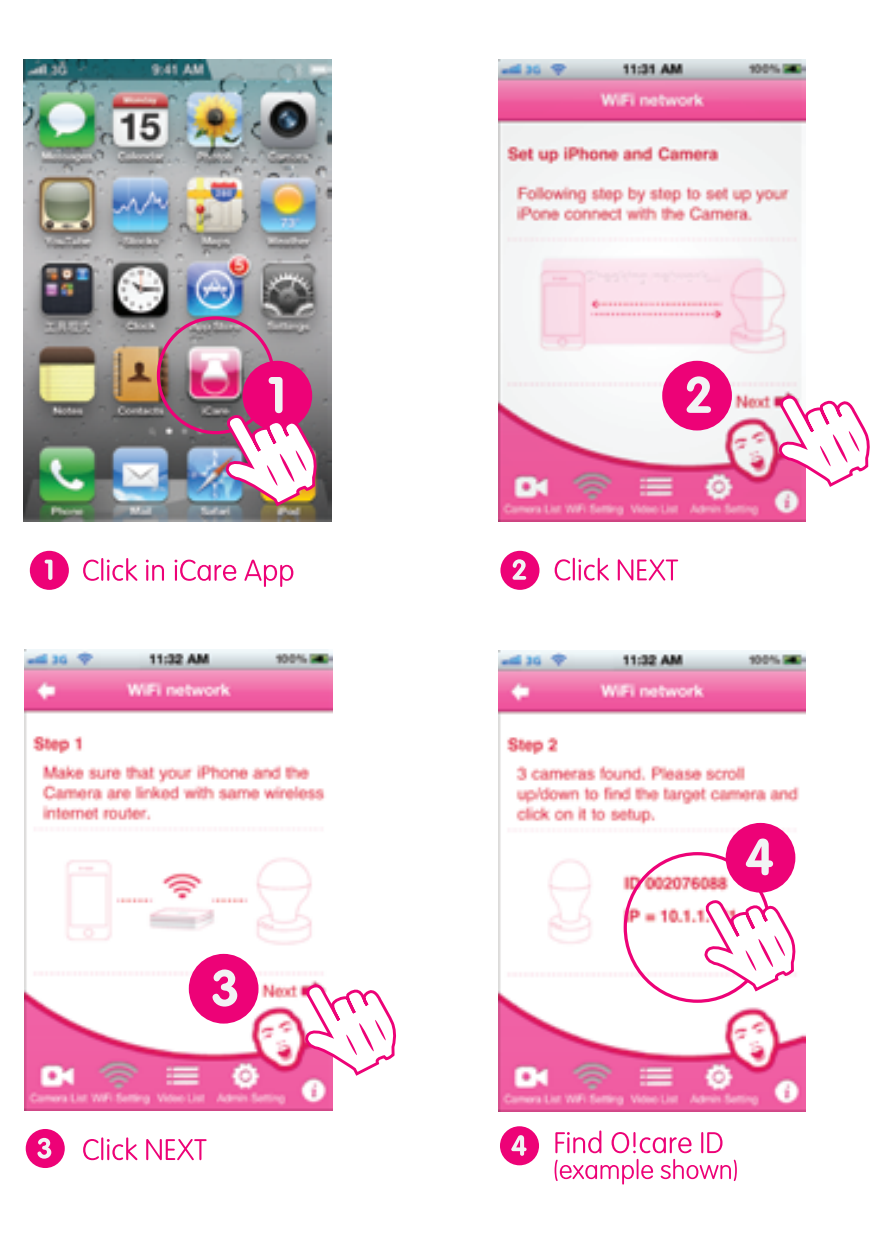

Set up iPhone and Camera

Following step by step to set up your iPone connect with the Camera.

Step 1

Make sure that your iPhone and the Camera are linked with same wireless internet router.

Step 2

3 cameras found. Please scroll up/down to find the target camera and click on it to setup.

1. Click in iCare App
2. Click NEXT
3. Click NEXT
4. Find O!care ID (example shown)

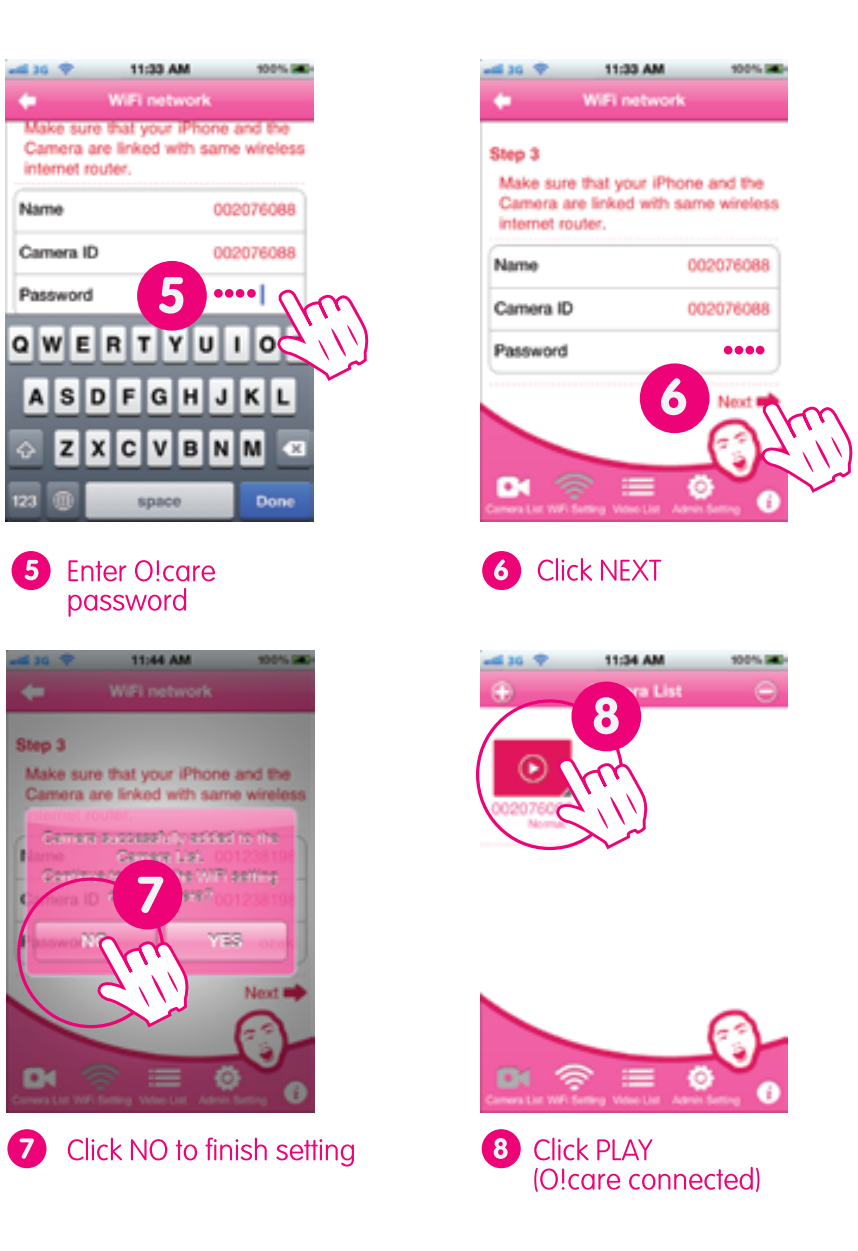

5. Enter O!care password
6. Click NEXT
7. Click NO to finish setting
8. Click PLAY (O!care connected)

Step 5.

Wireless Setting of O!care

Make sure power/ethernet are plugged in.

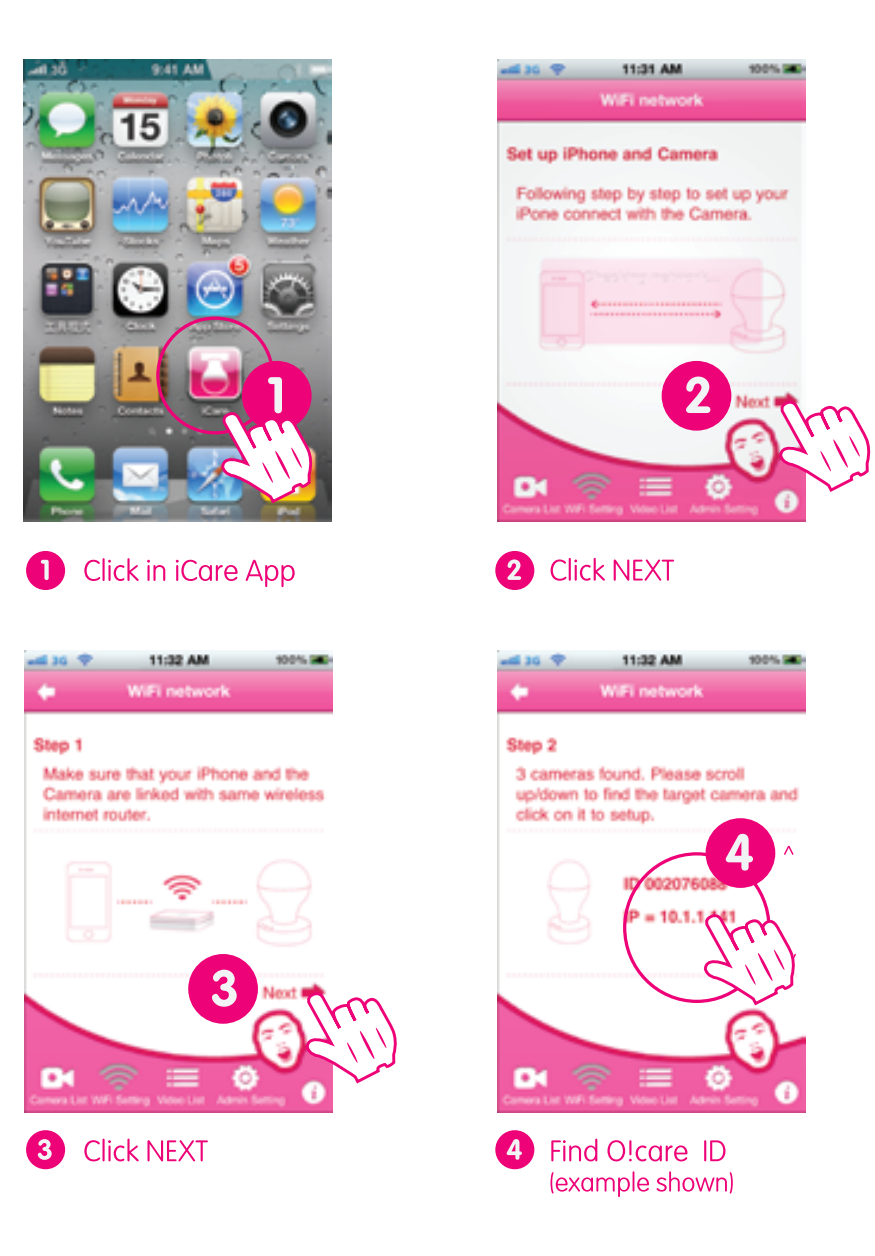

1. Click in iCare App
2. Click NEXT
3. Click NEXT
4. Find O!care ID (example shown)

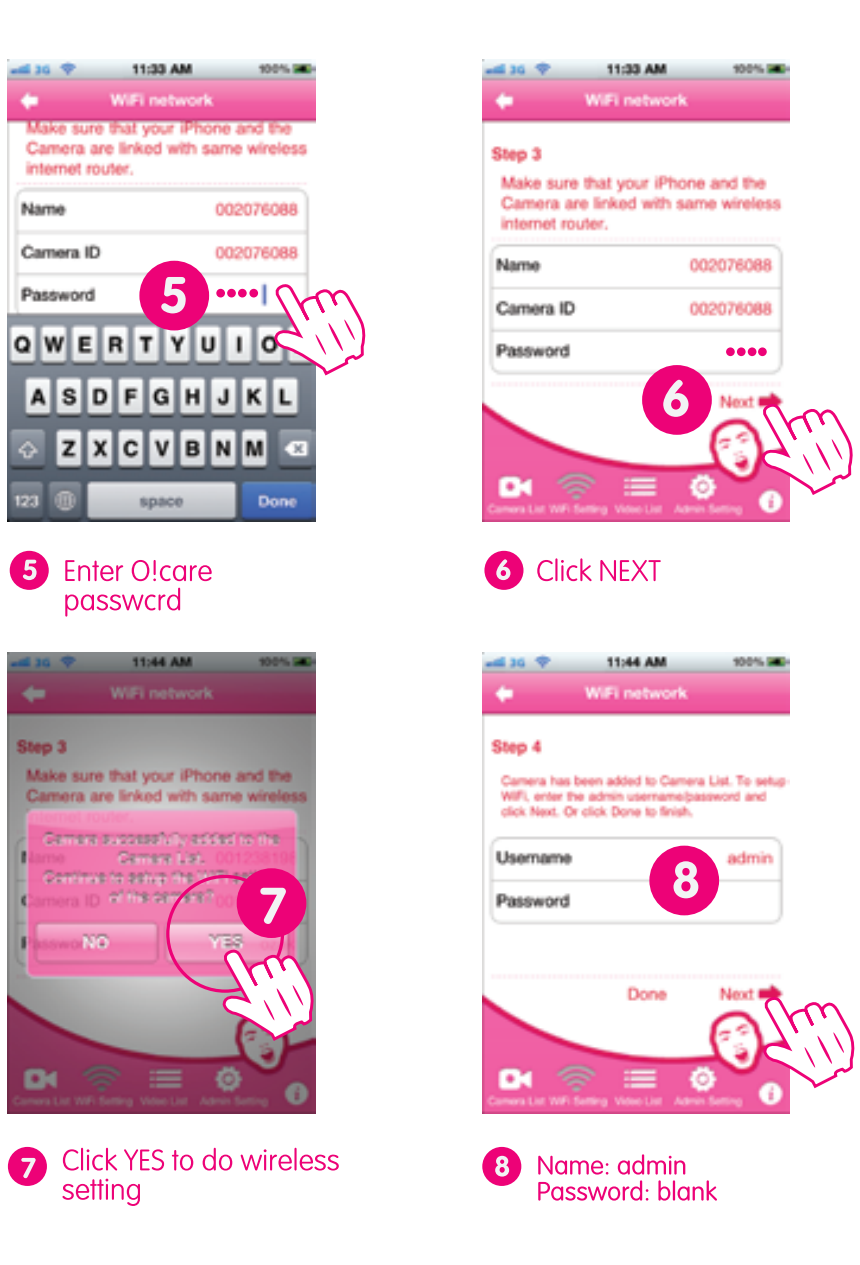

5. Enter O!care passwcrd
6. Click NEXT
7. Click YES to do wireless setting
8. Name: admin Password: blank

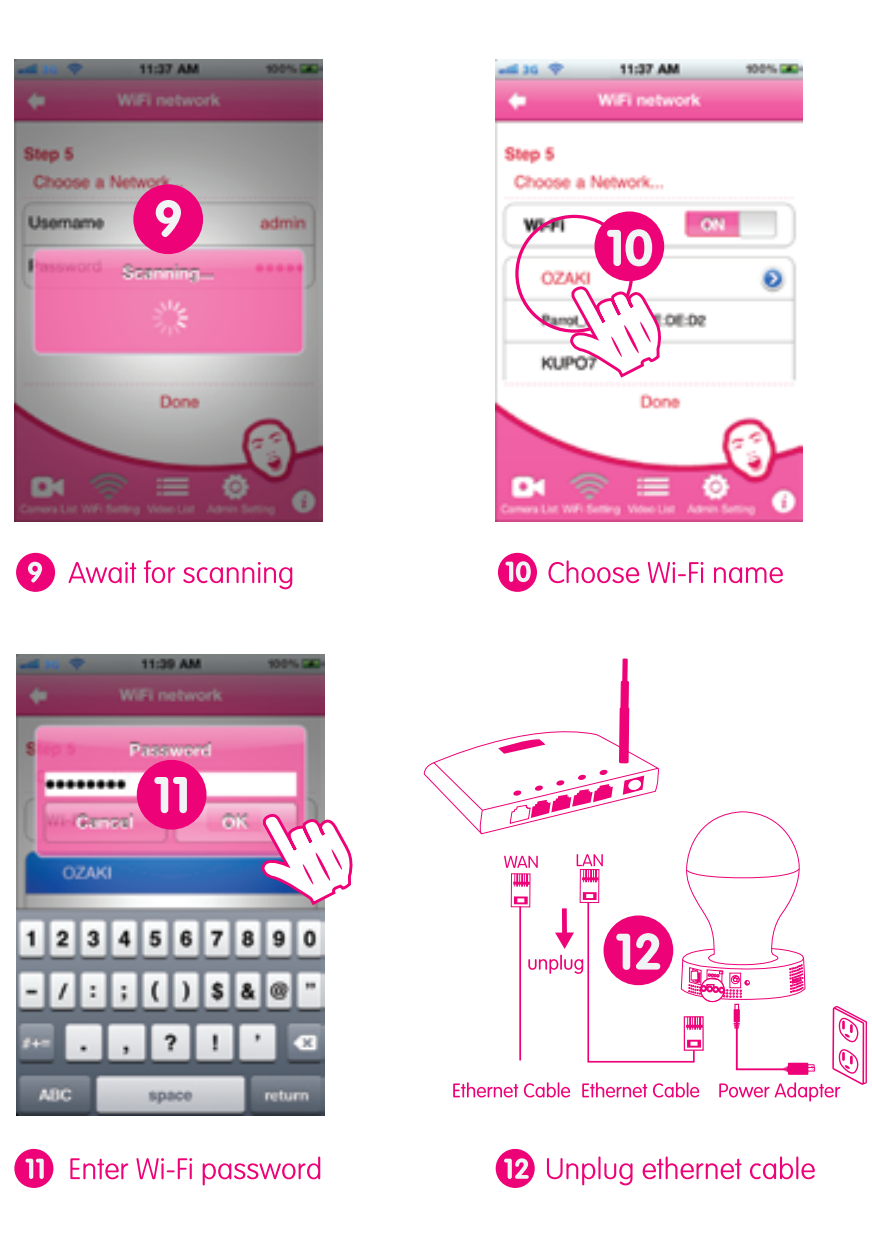
WAN
LAN
unplug
Ethernet Cable
Ethernet Cable
Power Adapter

9. Await for scanning
10. Choose Wi-Fi name
11. Enter Wi-Fi password
12. Unplug ethernet cable

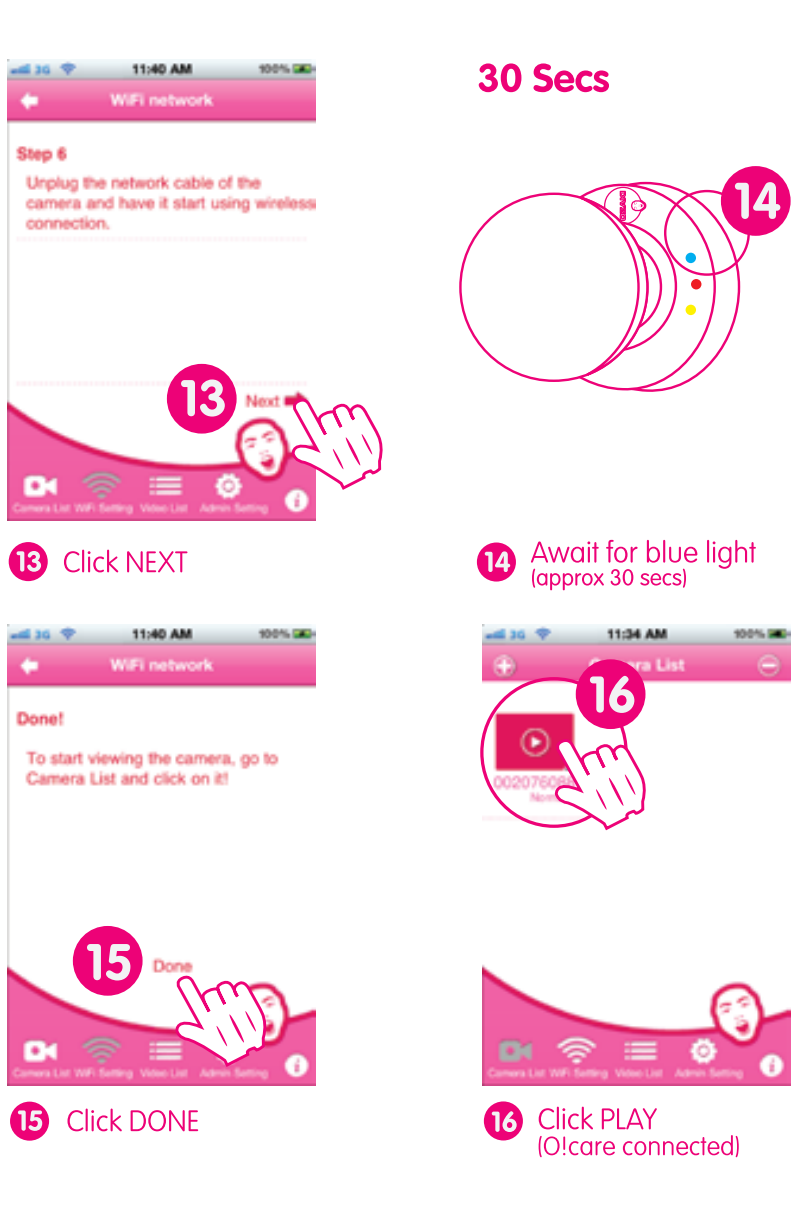

Step 6

Unplug the network cable of the camera and have it start using wireless connection.

Done!

To start viewing the camera, go to Camera List and click on it!

13. Click NEXT
14. Await for blue light (approx 30 secs)
15. Click DONE
16. Click PLAY (O!care connected)

Recommends

1. Locations for O!care

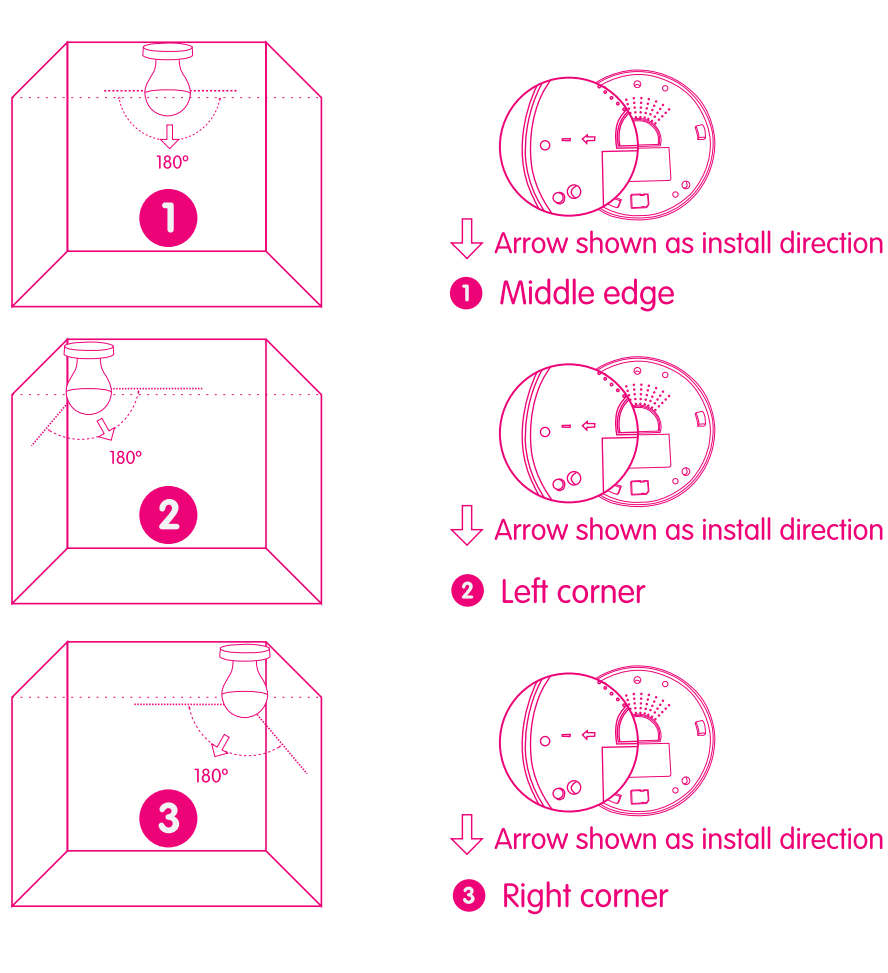

Arrow shown as install direction
1. Middle edge

Arrow shown as install direction
2. Left corner

Arrow shown as install direction
3. Right corner

2. Network Performance

Wi-Fi network conditions can adversely affect O!care performance

3. Image Quality

-Be aware of lens damage while installing the O!care
-Use the provided cloth to clean the lens in order to have a great image quality

Wooden Ceiling

Reminder

1. Before installing O!care, make sure these are ready:
(A) AC 110-240 V power plug
(B) Ethernet connected/wireless connection ready

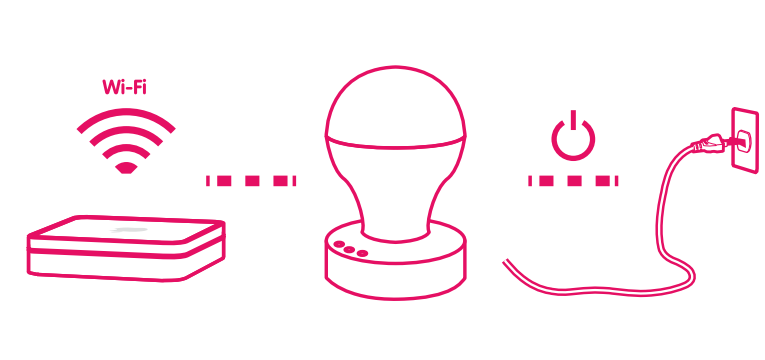

2. When installing on the flat celing,it is important to leave 5CM distance away from the wall

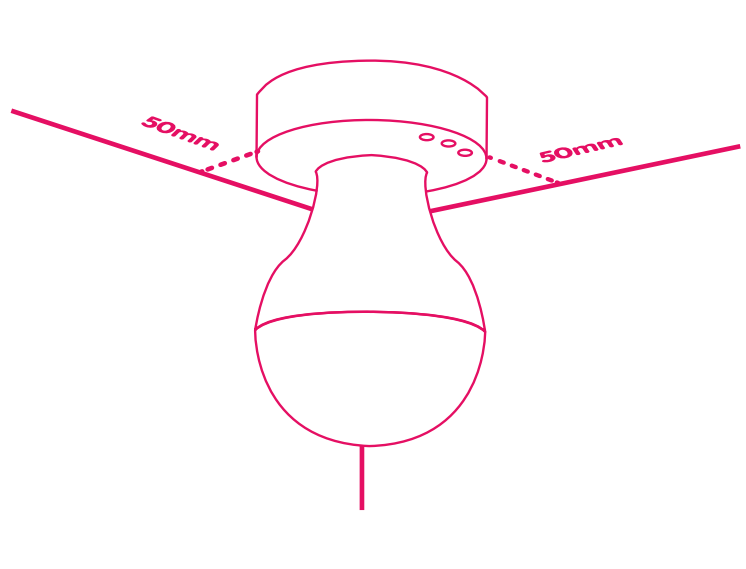

Step 1.

Place the ceiling mount sticker correctly

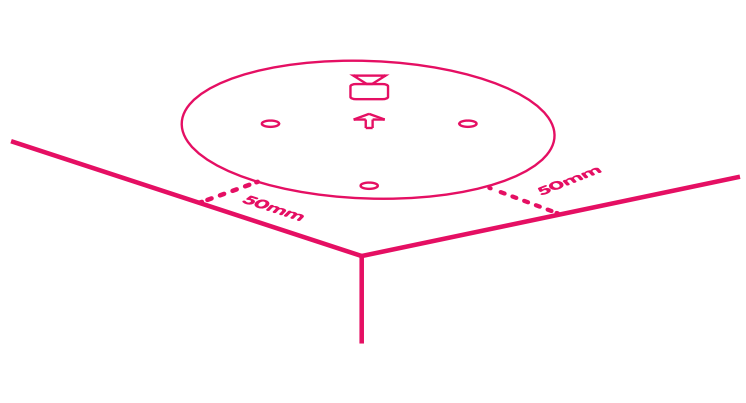

Step 2.

Screw each of the three screws half way

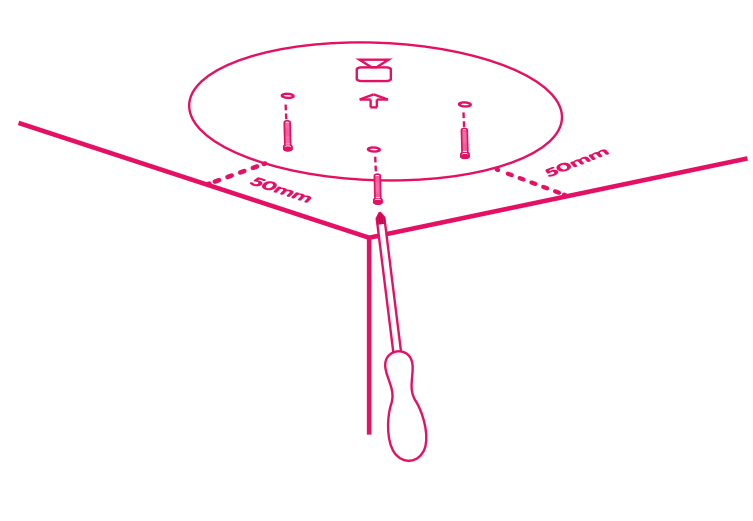

Step 3.

Demount the three screws

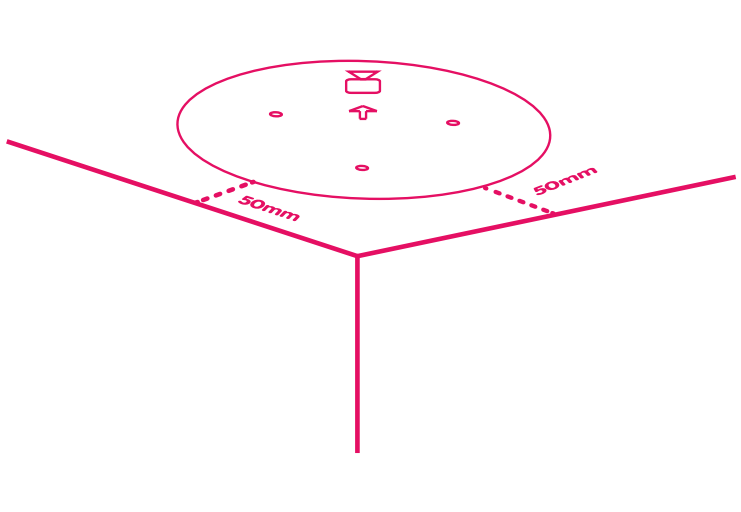

Step 4 .

Remove the ceiling mount sticker, left with three holes

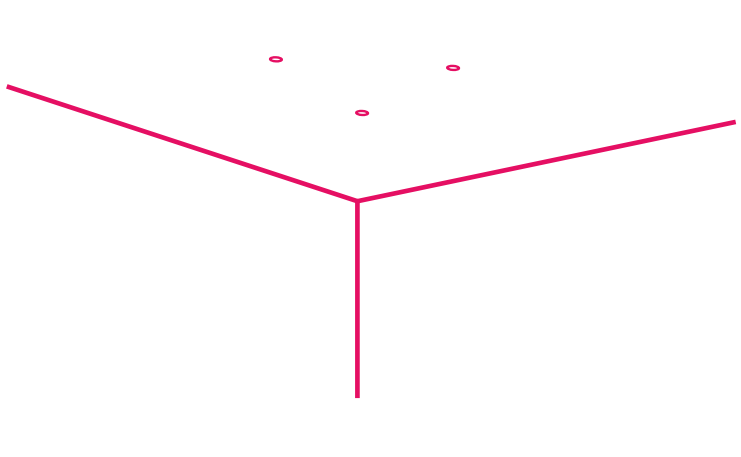

Step 5 .

Place the ceiling mount bracket to the ceiling and have the concaved side facing downwards alining to the three holes

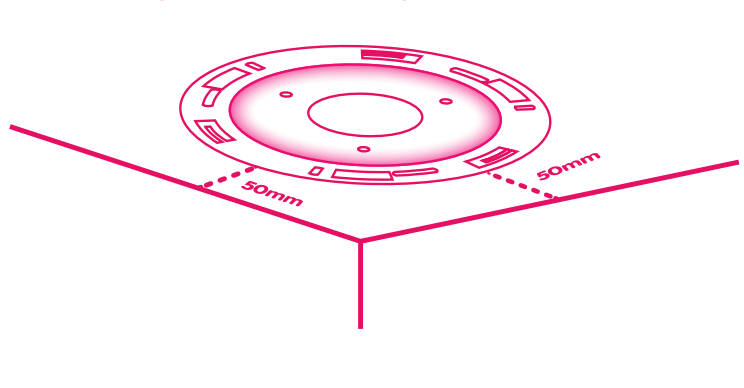

Step 6 .

Start screwing in the screws

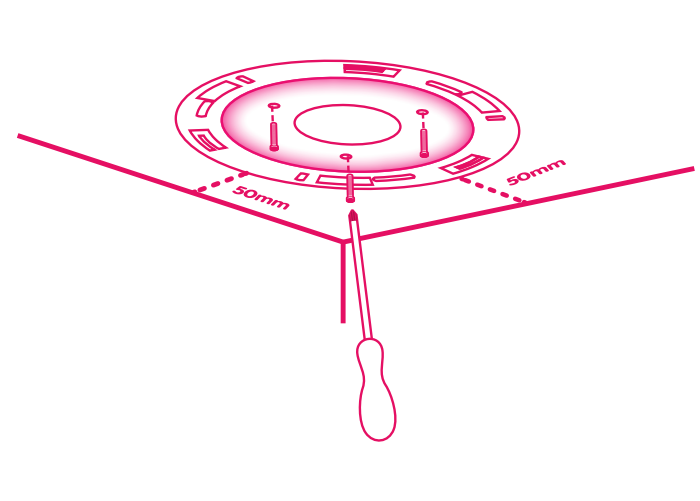

Step 7 .

Place O!care to the bracket alining to the orientated spot then PRESS to an integrate

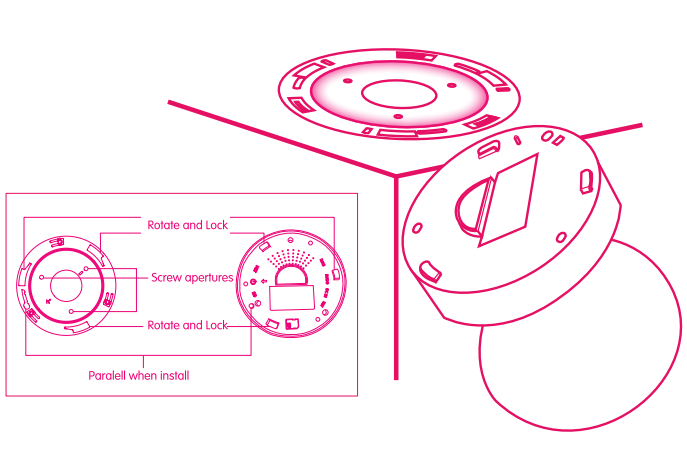
Rotate and Lock
Screw apertures
Rotate and Lock
Paralell when install

Step 8 .

When all three junctions are in tightly, rotate the O!care clockwise to complete the installation.

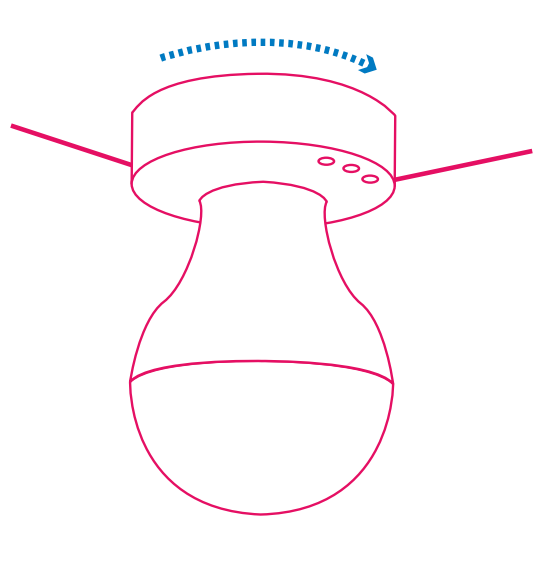

Cement Ceiling

Reminder:

1. Before installing O!care,make sure these are ready:
(A) AC 110-240 V power plug
(B) Ethernet connected/wireless connection ready

2. When installing on the flat celing,it is important to leave 5CM distance away from the wall

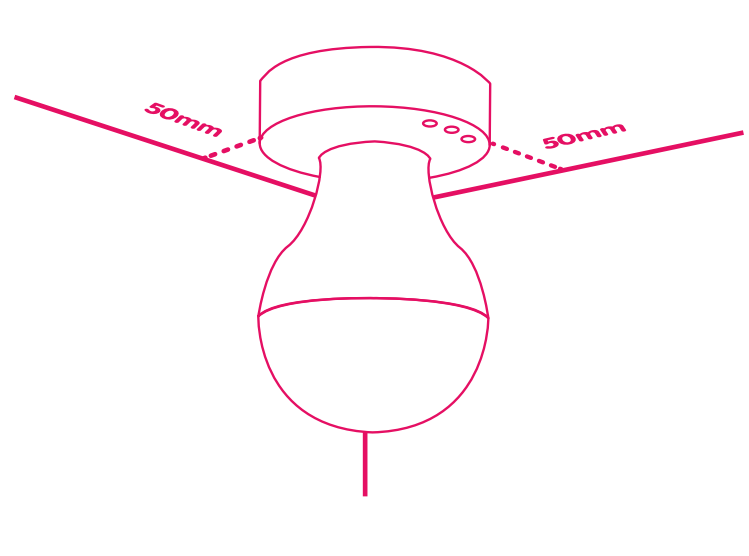

Step 1.

Place the ceiling mount sticker correctly

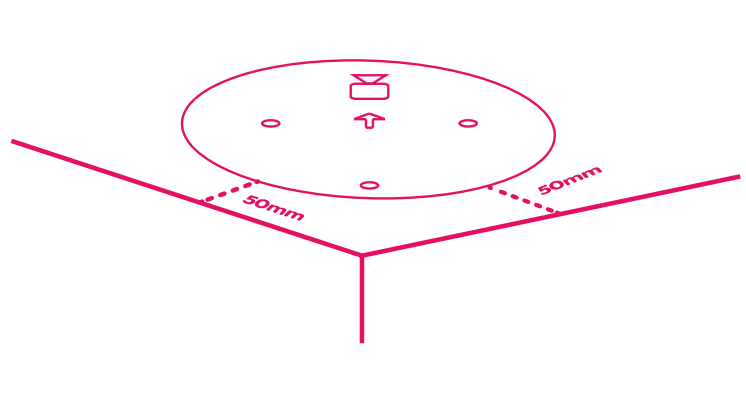

Step 2.

Use a 3mm stub on the electric drill to drill in three holes and make sure the holes are 2mm deeper than the anchor

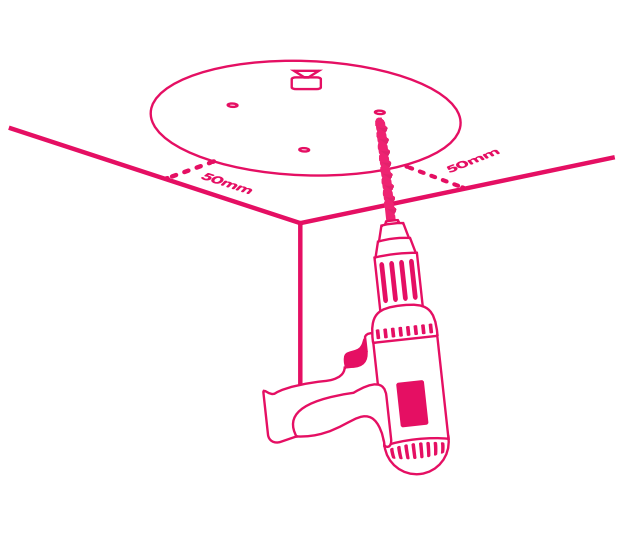

Step 3.

Demount the three screws

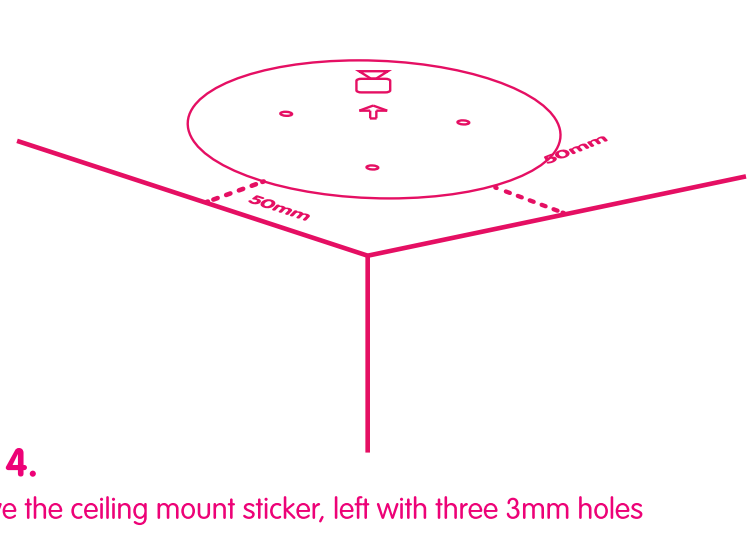

Step 4.

Remove the ceiling mount sticker, left with three 3mm holes

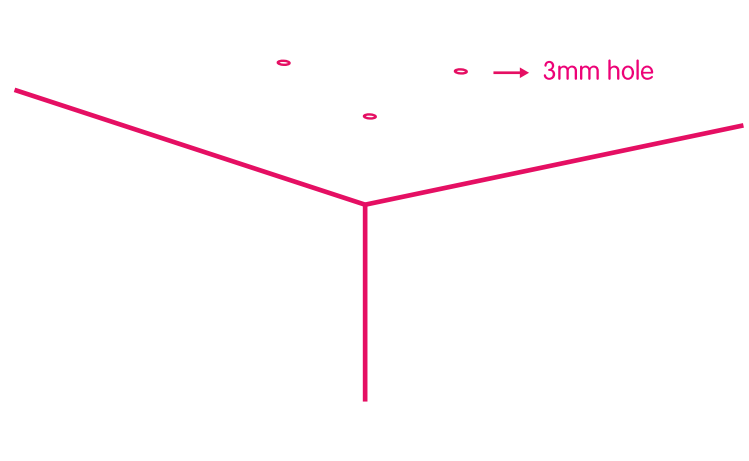

Step 5.

Now use a 5mm stub to repeat drilling process and again make sure the holes are 2mm deeper than the anchors

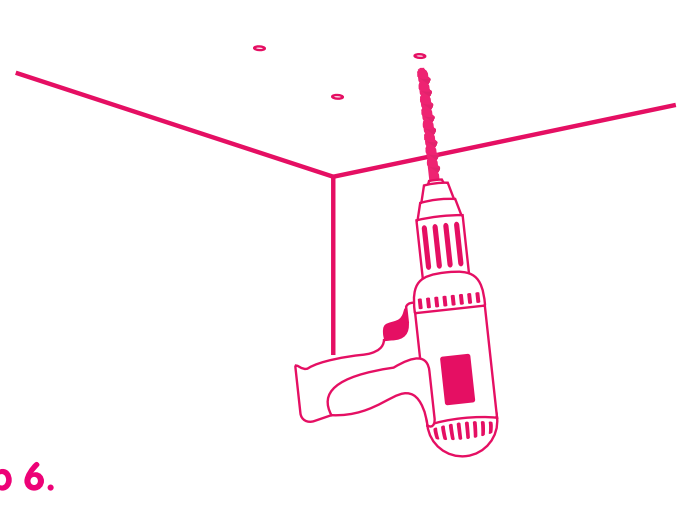

Step 6.

It now leaves the three 5mm holes on the ceiling

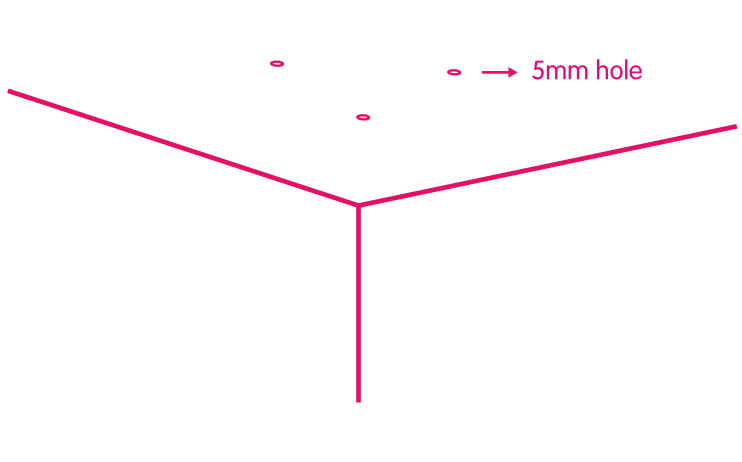

Step 7.

Place the provided three anchors into the 5mm holes

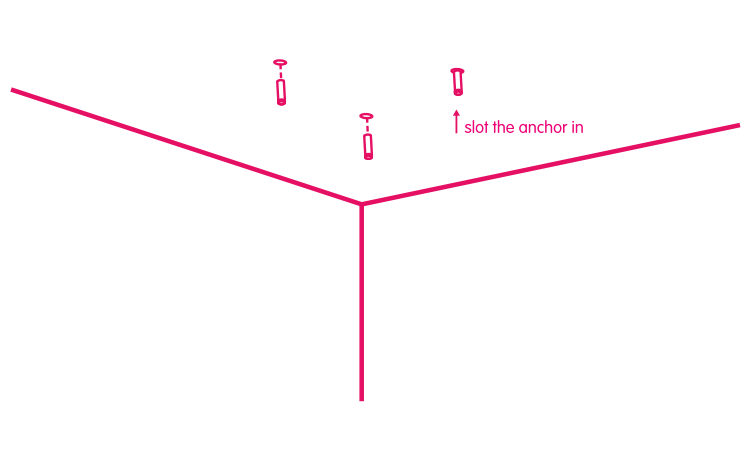
slot the anchor in

Step 8.

Use a hammer to insert the three anchors until it is flat

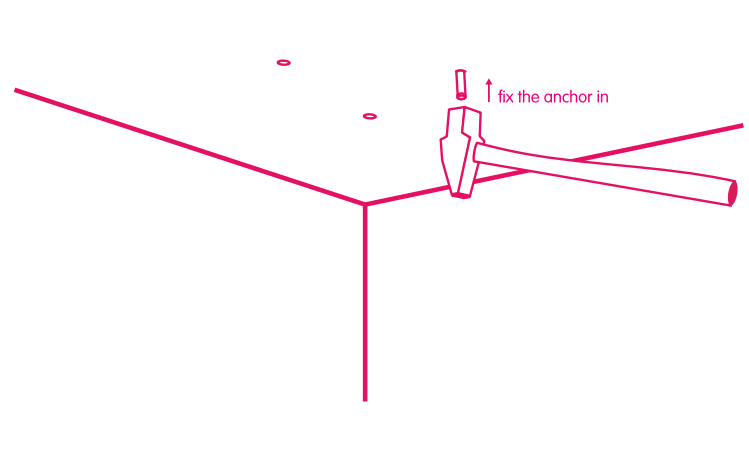
fix the anchor in

Step 9.

Place the ceiling mount bracket to the ceiling and have the concaved side facing downwards alining to the three holes

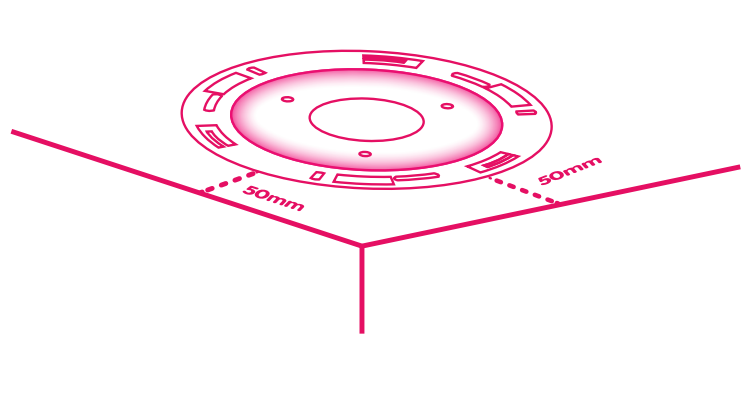

Step 10.

Start screwing in the screws

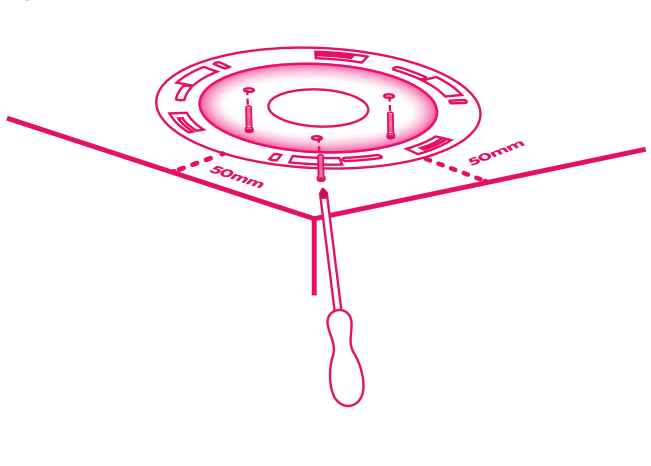

Step 11.

Place O!care to the bracket alining to the orientated spot then PRESS to an integrate

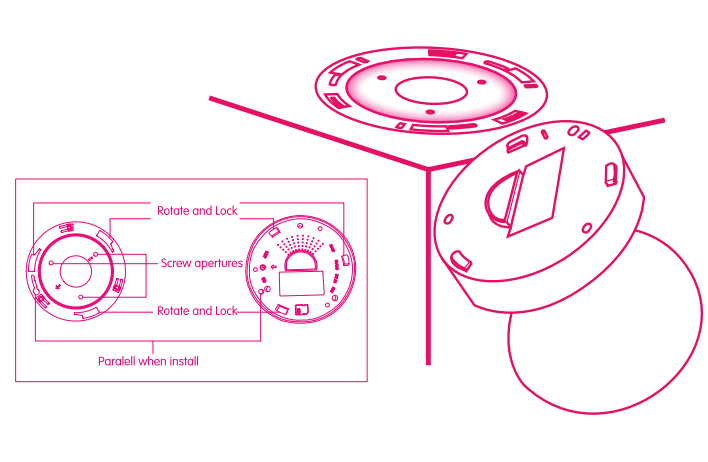
Rotate and Lock
Screw apertures
Rotate and Lock
Paralell when install

Step 12.

When all three junctions are in tightly, rotate the O!care clockwise to complete the installation.

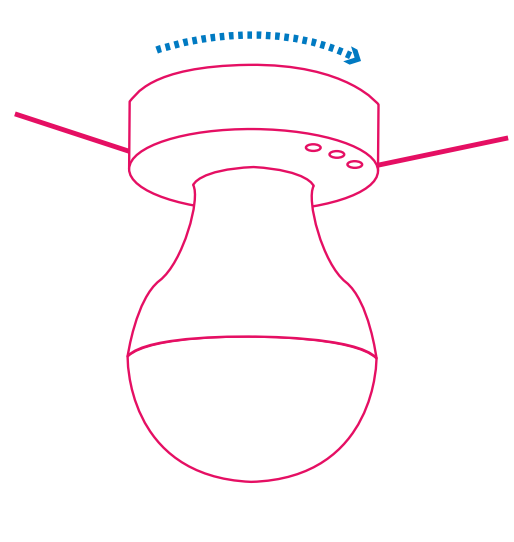

Getting Started

Live View & Remote Control from your iPhone

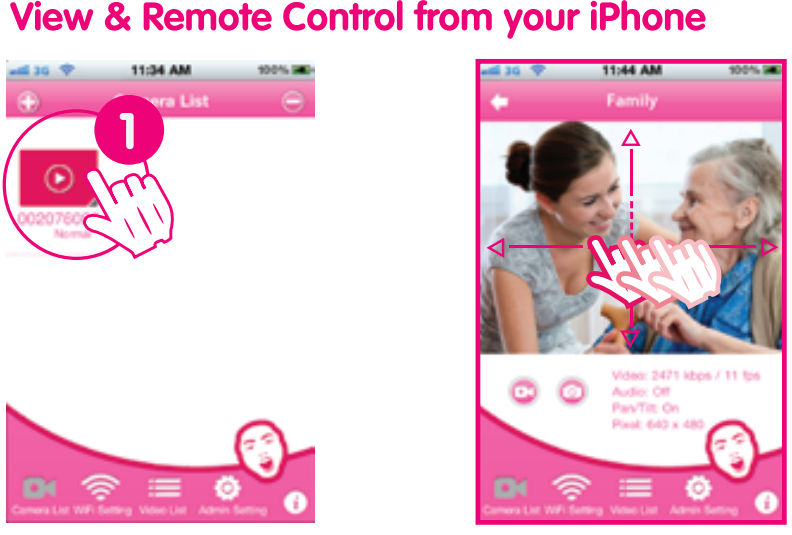

1. O!care connected
2. Swipe up-down, left-right with finger

Quick Guide

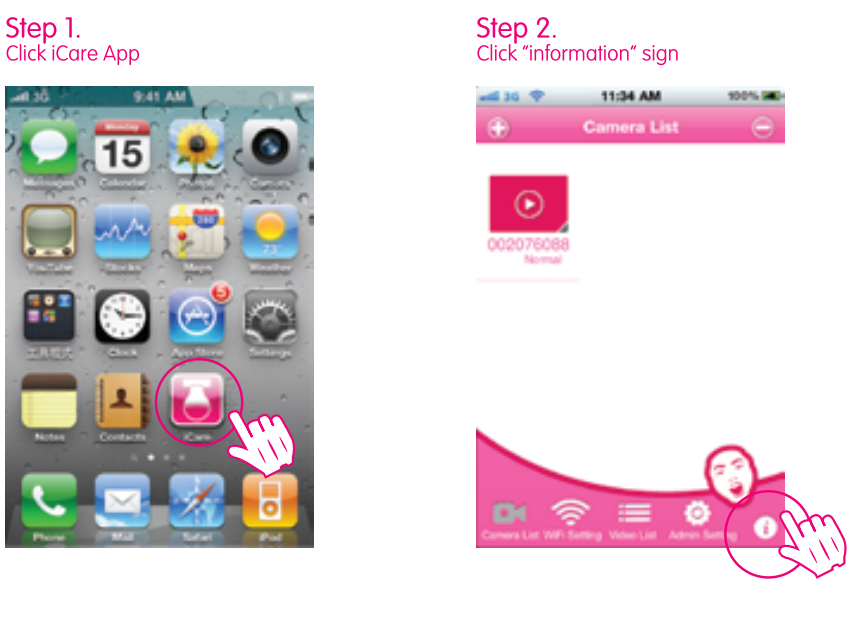

Step 1.
Click iCare App

Step 2.
Click "information" sign

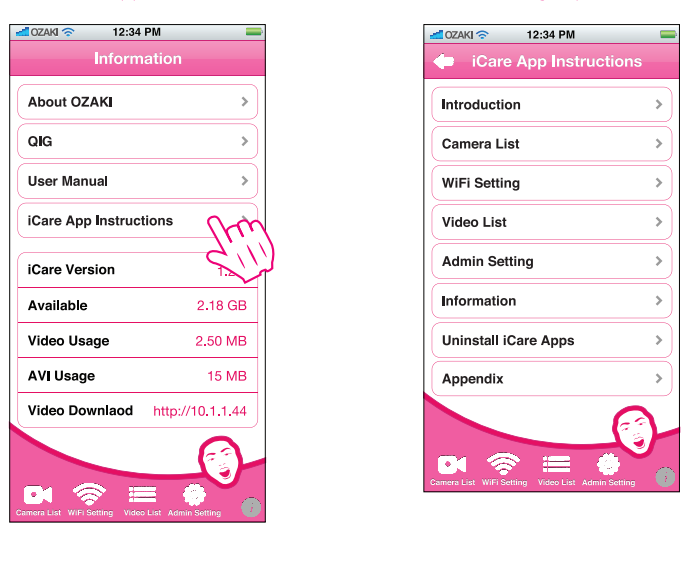

Step 3.
Click iCare App instructions

Step 4.
Click in settings options

Information	
About OZAKI	
QIG	
User Manual	
iCare App Instructions	
iCare Version	
Available	2.18 GB
Video Usage	2.50 MB
AVI Usage	15 MB
Video Downlaod	http://10.1.1.44

iCare App Instructions
- Introduction
- Camera List
- WiFi Setting
- Video List
- Admin Setting
- Information
- Uninstall iCare Apps
- Appendix

1. **O!care can be used on iPhone, iPad and iPod touch**
   After step 2.→ iCare App Instructions → Introduction → Install iCare Apps
2. **iCare App allows multiple O!care connections**
   After step 2. → iCare App Instructions → Camera List
3. **Decide network connections**
   After step 2. → iCare App Instructions → Admin Setting → 1. Wired network 2. Wireless network 3. Advanced
4. **Remote control video viewing angles with iPhone, iPad and iPod touch**
   After step 2. → iCare App Instructions → Camera List → Play video → Step 5.
5. **Add other O!care**
   After step 2. → iCare App Instructions → Camera List → Add new O!care
6. **Live view your O!care**
   After step 2. → iCare App Instructions → Camera List → Play video → Step 1.
7. **Record live video of O!care**
   After step 2. → iCare App Instructions → Camera List → Play video → Step 2.
8. **Snapshot live view of O!care**
   After step 2. → iCare App Instructions → Camera List → Play video - Step 3.
9. **Hear sounds from O!care**
   After step 2. → iCare App Instructions → Camera List → Edit O!care - Normal → Video → Microphone ON
10. **Search the recorded videos and images from iPhone, iPad and iPod touch**
    After step 2. → iCare App Instructions → Video List

11. **Long recording time**
    After step 2. → iCare App Instructions → Admin Setting → SD card
12. **Review recorded videos in O!care**
    After step 2. → iCare App Instructions → Admin Setting → SD card playback
13. **Search recorded videos**
    After step 2. → iCare App Instructions → Admin Setting → SD card playback → Step 2.
14. **Motion detection for email reminder**
    After step 2. → iCare App Instructions → Admin Setting - Email alarm
15. **Scheduling recording period**
    After step 2. → iCare App Instructions → Admin Setting → Scheduling
16. **Password protection and provacy controls**
    After step 2. → iCare App Instructions → Admin Setting → Login
17. **Name each O!care devices**
    After step 2. → iCare App Instructions → Camera List → Edit O!care
18. **Adjust video quality**
    After step 2. → iCare App Instructions → Camera List → Edit O!care → Normal → 1. Quality 2. Video 3. Control 4. Camera info
19. **Rotate O!care positions**
    After step 2. → iCare App Instructions → Camera List → Edit O!care → Normal → Video → Video Flip ON
20. **Additional anti-theft function**
    After step 2. → iCare App Instructions → Admin Setting → DI/DO setting

FAQs

- **What should I do if I forgot the password or the ID/Password card is missing?**
  Please press the "reset" button for five seconds. The O!care will be reset to the factory default settings. The default admin account is "admin", and no password. The default video-play password is "ipcam".
- **What should I do if I cannot see the video remotely?**
  The red LED of the O!care should be always on when the O!care is connected to the Internet. If the red LED is blinking, please double check the network connection and settings again.
- **When RESTORE O!care, please enter default information as shown below:**
  ID: O!care ID (shown on card)
  PASSWORD: ipcam (lower-cases)
- **Admin Setting for further changes in O!care:**
  USERNAME: admin
  PASSWORD: blank

NOTE

Warning

FCC Compliance Statement:

This equipment has been tested and found to comply with limits for a Class B digital device ,pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in residential installations. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used inaccordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee interference will not occur in a particular installation. If this equipment does cause interference to radio or television equipment reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from thatto which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device complies with Part 15 of the FCC Rules. Operation is subjected to the following two conditions

1) This device may not cause harmful interference and

2) This device must accept any interference received,

including interference that may cause undesired operation.

16.09.2011. V1.0.0.7