



## TEST REPORT

Product Name: Wireless Bluetooth Headphones  
FCC ID: Z63-V4B095  
Trademark: PHILIPS, AONI  
Model Number: SHM5108, B095, SHM3108, B092  
Prepared For: SHENZHEN AONI ELECTRONIC CO., LTD.  
Address: No.5, Bldg., Honghui Industrial Park, 2nd Liuxian Road, Baoan District, Shenzhen, China  
Manufacturer: Aoni Intelligent Technology (Zhongshan) Co., Ltd.  
Address: Aoni Technology Park, No. 138, Lianfeng Lefeng South Road, Xiaolan Town, Zhongshan city, Guangdong Province  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Dec. 11, 2024  
Sample tested Date: Dec. 11, 2024 to Dec. 24, 2024  
Issue Date: Dec. 24, 2024  
Report No.: CTB24121109303RF01  
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Zhou KuiArron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

## TABLE OF CONTENT

| Test Report Declaration                                      | Page      |
|--------------------------------------------------------------|-----------|
| <b>1. VERSION.....</b>                                       | <b>3</b>  |
| <b>2. TEST SUMMARY .....</b>                                 | <b>4</b>  |
| <b>3. MEASUREMENT UNCERTAINTY .....</b>                      | <b>5</b>  |
| <b>4. PRODUCT INFORMATION AND TEST SETUP .....</b>           | <b>6</b>  |
| 4.1 Product Information .....                                | 6         |
| 4.2 Test Setup Configuration.....                            | 6         |
| 4.3 Support Equipment.....                                   | 6         |
| 4.4 Channel List .....                                       | 7         |
| 4.5 Test Mode .....                                          | 7         |
| 4.6 Test Environment .....                                   | 7         |
| <b>5. TEST FACILITY AND TEST INSTRUMENT USED .....</b>       | <b>8</b>  |
| 5.1 Test Facility .....                                      | 8         |
| 5.2 Test Instrument Used .....                               | 8         |
| <b>6. AC POWER LINE CONDUCTED EMISSION .....</b>             | <b>11</b> |
| 6.1 Block Diagram Of Test Setup.....                         | 11        |
| 6.2 Limit.....                                               | 11        |
| 6.3 Test procedure .....                                     | 11        |
| 6.4 Test Result .....                                        | 13        |
| <b>7. RADIATED SPURIOUS EMISSION .....</b>                   | <b>15</b> |
| 7.1 Block Diagram Of Test Setup.....                         | 15        |
| 7.2 Limit.....                                               | 15        |
| 7.3 Test procedure .....                                     | 16        |
| 7.4 Test Result .....                                        | 17        |
| <b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS.....</b> | <b>24</b> |
| 8.1 Block Diagram Of Test Setup.....                         | 24        |
| 8.2 Limit.....                                               | 24        |
| 8.3 Test procedure .....                                     | 24        |
| 8.4 Test Result .....                                        | 25        |
| <b>9. CONDUCTED OUTPUT POWER.....</b>                        | <b>29</b> |
| 9.1 Block Diagram Of Test Setup.....                         | 29        |
| 9.2 Limit.....                                               | 29        |
| 9.3 Test procedure .....                                     | 29        |
| 9.4 Test Result .....                                        | 30        |
| <b>10. 6DB OCCUPIED BANDWIDTH.....</b>                       | <b>33</b> |
| 10.1 Block Diagram Of Test Setup.....                        | 33        |
| 10.2 Limit.....                                              | 33        |
| 10.3 Test procedure .....                                    | 33        |
| 10.4 Test Result .....                                       | 33        |
| <b>11. POWER SPECTRAL DENSITY.....</b>                       | <b>36</b> |
| 11.1 Block Diagram Of Test Setup.....                        | 36        |
| 11.2 Limit.....                                              | 36        |
| 11.3 Test procedure .....                                    | 36        |
| 11.4 Test Result .....                                       | 36        |
| <b>12. ANTENNA REQUIREMENT .....</b>                         | <b>39</b> |
| <b>13. EUT TEST SETUP PHOTOGRAPHS.....</b>                   | <b>40</b> |

(Note: N/A means not applicable)



1. VERSION

| Report No.         | Issue Date    | Description | Approved |
|--------------------|---------------|-------------|----------|
| CTB24121109303RF01 | Dec. 24, 2024 | Original    | Valid    |

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

| Test Item                                            | Test Requirement                                     | Test method                                  | Result |
|------------------------------------------------------|------------------------------------------------------|----------------------------------------------|--------|
| <b>AC Power Line Conducted Emission</b>              | 47 CFR Part 15 Subpart C Section 15.207              | ANSI C63.10-2013                             | PASS   |
| <b>Radiated Spurious emissions</b>                   | 47 CFR Part 15 Subpart C Section 15.205/15.209       | ANSI C63.10-2013                             | PASS   |
| <b>Band edge and RF Conducted Spurious Emissions</b> | 47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a) | ANSI C63.10-2013                             | PASS   |
| <b>Conducted Peak Output Power</b>                   | 47 CFR Part 15 Subpart C Section 15.247 (b)(3)       | ANSI C63.10-2013                             | PASS   |
| <b>Bandwidth</b>                                     | 47 CFR Part 15 Subpart C Section 15.247 (a)(2)       | ANSI C63.10-2013                             | PASS   |
| <b>Power Spectral Density</b>                        | 47 CFR Part 15 Subpart C Section 15.247 (e)          | ANSI C63.10-2013/<br>KDB 558074<br>D01v05r02 | PASS   |
| <b>Antenna Requirement</b>                           | 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)   | /                                            | PASS   |

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Item                                                  | Uncertainty        |
|-------------------------------------------------------|--------------------|
| Occupancy bandwidth                                   | 54.3kHz            |
| Conducted output power<br>Above 1G                    | 0.9dB              |
| Conducted output power<br>below 1G                    | 0.9dB              |
| Power Spectral Density , Conduction                   | 0.9dB              |
| Conduction spurious emissions                         | 2.0dB              |
| Out of band emission                                  | 2.0dB              |
| 3m chamber Radiated spurious<br>emission(9K-30MHz)    | 4.8dB              |
| 3m chamber Radiated spurious<br>emission(30MHz-1GHz)  | 4.6dB              |
| 3m chamber Radiated spurious<br>emission(1GHz-18GHz)  | 5.1dB              |
| 3m chamber Radiated spurious<br>emission(18GHz-40GHz) | 3.4dB              |
| humidity uncertainty                                  | 5.5%               |
| Temperature uncertainty                               | 0.63°C             |
| frequency                                             | 1×10 <sup>-7</sup> |
| Conducted Emission (150KHz-30MHz)                     | 3.2 dB             |
| Radiated Emission(30MHz ~ 1000MHz)                    | 4.8 dB             |
| Radiated Emission(1GHz ~6GHz)                         | 4.9 dB             |

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

|                       |                                                                                                          |
|-----------------------|----------------------------------------------------------------------------------------------------------|
| Model(s):             | SHM5108, B095, SHM3108, B092                                                                             |
| Model Description:    | All the model are the same circuit and RF module, only the name is different. Test sample model: SHM5108 |
| Bluetooth Version:    | Bluetooth V5.0                                                                                           |
| Hardware Version:     | V1.0                                                                                                     |
| Software Version:     | V1.0                                                                                                     |
| Operation Frequency:  | Bluetooth: 2402-2480MHz                                                                                  |
| Max. RF output power: | Bluetooth: 1M: 1.742dBm<br>Bluetooth: 2M: 1.856dBm                                                       |
| Type of Modulation:   | Bluetooth: GFSK                                                                                          |
| Antenna installation: | Bluetooth: PCB antenna                                                                                   |
| Antenna Gain:         | Bluetooth: 1.91dBi                                                                                       |
| Ratings:              | DC 5V,1A<br>DC 3.7V by Rechargeable Li-ion Battery, 400mAh                                               |

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| 1.   | Adapter   | JIYIN     | JY-05100C      | /          | AE   |

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

| CH No. | Frequency (MHz) | CH No. | Frequency (MHz) | CH No. | Frequency (MHz) | CH No. | Frequency (MHz) |
|--------|-----------------|--------|-----------------|--------|-----------------|--------|-----------------|
| 0      | 2402            | 1      | 2404            | 2      | 2406            | 3      | 2408            |
| 4      | 2410            | 5      | 2412            | 6      | 2414            | 7      | 2416            |
| 8      | 2418            | 9      | 2420            | 10     | 2422            | 11     | 2424            |
| 12     | 2426            | 13     | 2428            | 14     | 2430            | 15     | 2432            |
| 16     | 2434            | 17     | 2436            | 18     | 2438            | 19     | 2440            |
| 20     | 2442            | 21     | 2444            | 22     | 2446            | 23     | 2448            |
| 24     | 2450            | 25     | 2452            | 26     | 2454            | 27     | 2456            |
| 28     | 2458            | 29     | 2460            | 30     | 2462            | 31     | 2464            |
| 32     | 2466            | 33     | 2468            | 34     | 2470            | 35     | 2472            |
| 36     | 2474            | 37     | 2476            | 38     | 2478            | 39     | 2480            |

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

| Test mode              | Low channel | Middle channel | High channel |
|------------------------|-------------|----------------|--------------|
| Transmitting<br>(GFSK) | 2402MHz     | 2440MHz        | 2480MHz      |

#### 4.6 Test Environment

|                            |      |
|----------------------------|------|
| Humidity(%):               | 54   |
| Atmospheric Pressure(kPa): | 101  |
| Normal Voltage(DC):        | 3.7V |
| Normal Temperature( °C)    | 23   |
| Low Temperature( °C)       | 0    |
| High Temperature( °C)      | 40   |

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

| No. | Equipment                                 | Manufacturer | Type No.                  | Serial No.   | Firmware Version           | Calibrated until |
|-----|-------------------------------------------|--------------|---------------------------|--------------|----------------------------|------------------|
| 1   | Spectrum Analyzer                         | Agilent      | N9020A                    | MY52090073   | A.14.16                    | 2025/6/28        |
| 2   | Power Sensor                              | Agilent      | U2021XA                   | MY56120032   | /                          | 2025/6/28        |
| 3   | Power Sensor                              | Agilent      | U2021XA                   | MY56120034   | /                          | 2025/6/28        |
| 4   | Communication test set                    | R&S          | CMW500                    | 108058       | V3.5.80                    | 2025/6/28        |
| 5   | Spectrum Analyzer                         | KEYSIGHT     | N9020A                    | MY51289897   | A.14.16                    | 2025/6/28        |
| 6   | Signal Generator                          | Agilent      | N5181A                    | MY50140365   | A.01.60                    | 2025/6/28        |
| 7   | Vector signal generator                   | Agilent      | N5182A                    | MY47420195   | A.01.87                    | 2025/6/28        |
| 8   | Communication test set                    | Agilent      | E5515C                    | MY50102567   | B.19.07<br>(E1962B)        | 2025/6/28        |
| 9   | 2.4 GHz Filter                            | Shenxiang    | MSF2400-24<br>83.5MS-1154 | 20181015001  | /                          | 2025/6/30        |
| 10  | 5 GHz Filter                              | Shenxiang    | MSF5150-58<br>50MS-1155   | 20181015001  | /                          | 2025/6/30        |
| 11  | Filter                                    | Xingbo       | XBLBQ-DZA<br>120          | 190821-1-1   | /                          | 2025/6/30        |
| 12  | BT&WI-FI Automatic test software          | Microwave    | MTS8310                   | Ver. 2.0.0.0 | /                          | /                |
| 13  | Rohde & Schwarz SFU Broadcast Test System | R&S          | SFU                       | 101017       | /                          | 2025/6/28        |
| 14  | Temperature humidity chamber              | Hongjing     | TH-80CH                   | DG-15174     | /                          | 2025/6/28        |
| 15  | 234G Automatic test software              | Microwave    | MTS8200                   | Ver. 2.0.0.0 | /                          | /                |
| 16  | 966 chamber                               | C.R.T.       | 966                       | /            | /                          | 2027/6/21        |
| 17  | Receiver                                  | R&S          | ESPI                      | 100362       | RF_ATTEN_7<br>(104489/003) | 2025/6/28        |
| 18  | Amplifier                                 | HP           | 8447E                     | 2945A02747   | /                          | 2025/6/28        |
| 19  | Amplifier                                 | Agilent      | 8449B                     | 3008A01838   | /                          | 2025/6/28        |
| 20  | TRILOG Broadband Antenna                  | Schwarzbeck  | VULB 9168                 | 00869        | /                          | 2025/6/28        |

|    |                                      |             |            |            |         |           |
|----|--------------------------------------|-------------|------------|------------|---------|-----------|
| 21 | Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA9120D  | 01911      | /       | 2025/6/28 |
| 22 | EMI test software                    | Fala        | EZ-EMC     | FA-03A2 RE | /       | /         |
| 23 | Loop Antenna                         | Schwarzbeck | FMZB 1519B | 1519B-224  | /       | 2025/6/28 |
| 24 | loop antenna                         | ZHINAN      | ZN30900A   | GTS534     | /       | /         |
| 25 | 40G Horn antenna                     | A/H/System  | SAS-574    | 588        | /       | 2025/6/28 |
| 26 | Amplifier                            | AEROFLEX    | Aeroflex   | 097        | /       | 2025/6/28 |
| 27 | Power Metter                         | KEYSIGHT    | N1912AP    | N/A        | A.05.00 | 2025/6/28 |


| Continuous disturbance |                        |               |              |            |                  |                  |
|------------------------|------------------------|---------------|--------------|------------|------------------|------------------|
| No.                    | Equipment              | Manufacturer  | Model No.    | Serial No. | Firmware version | Calibrated until |
| 1                      | 843 Shield Room        | C/ R/ T       | 843          | /          | /                | 2027/6/21        |
| 2                      | AMN                    | ROHDE&SCHWARZ | ESH3-Z5      | 831551852  | /                | 2025/6/30        |
| 3                      | Pulse limiter          | ROHDE&SCHWARZ | ESH3Z2       | 357881052  | /                | 2025/6/28        |
| 4                      | EMI TEST RECEIVER      | ROHDE&SCHWARZ | ESCI         | 100428     | V4.42.SP3        | 2025/6/30        |
| 5                      | Coaxial cable          | ZDECL         | Z302S        | 18091904   | /                | 2025/6/30        |
| 6                      | ISN                    | Schwarzbeck   | NTFM8158     | 183        | /                | 2025/6/30        |
| 7                      | Voltage sensor         | Schwarzbeck   | TK 9420      | 01189      | /                | 2025/10/25       |
| 8                      | EZ-EMC                 | Frad          | EMC-con3A1.1 | /          | /                | /                |
| 9                      | Current Probe          | FCC           | F-52B        | 199453     | /                | 2025/5/27        |
| 10                     | Communication test set | R&S           | CMW500       | 108058     | B.19.07 (E1962B) | 2025/6/28        |
| 11                     | Communication test set | Agilent       | E5515C       | MY50102567 | V3.5.80          | 2025/6/28        |

| Radiated emission(No.2 Chamber) |                                      |              |             |            |                  |                  |
|---------------------------------|--------------------------------------|--------------|-------------|------------|------------------|------------------|
| No.                             | Equipment                            | Manufacturer | Model No.   | Serial No. | Firmware version | Calibrated until |
| 1                               | 966 Chamber                          | C/ R/ T      | 966         | /          | /                | 2026/11/14       |
| 2                               | Double Ridged Broadband Horn Antenna | Schwarzbeck  | BBHA 9120 D | 01911      | /                | 2026/7/07        |
| 3                               | Broadband Antenna                    | Schwarzbeck  | VULB 9168   | 1471       | /                | 2025/7/06        |
| 4                               | Amplifier                            | Agilent      | 8449B       | 3008A01838 | /                | 2025/6/30        |
| 5                               | Preamplifier                         | Schwarzbeck  | BBV 9743 B  | 00500      | /                | 2025/5/23        |
| 6                               | EMI TEST RECEIVER                    | R&S          | ESCI7       | 100861     | /                | 2025/10/25       |
| 7                               | Spectrum Analyzer                    | KEYSIGHT     | N9020A      | MY51289897 | A.14.16          | 2025/6/28        |

|    |                        |             |            |            |                     |            |
|----|------------------------|-------------|------------|------------|---------------------|------------|
| 8  | EMI test software      | Farad       | EZ-EMC     | /          | Ver. FARAD-3A1+     | /          |
| 9  | Coaxial cable          | Rosenberg   | 8m         | /          | /                   | 2025/10/25 |
| 10 | Coaxial cable          | Times       | 2m         | /          | /                   | 2025/10/25 |
| 11 | Coaxial cable          | Times       | 2m         | /          | /                   | 2025/10/25 |
| 12 | Coaxial cable          | Times       | 1m         | /          | /                   | 2025/10/25 |
| 13 | loop antenna           | Schwarzbeck | FMZB 1519B | 1519B-224  | /                   | 2025/6/29  |
| 14 | Communication test set | R&S         | CMW500     | 108058     | B.19.07<br>(E1962B) | 2025/6/28  |
| 15 | Communication test set | Agilent     | E5515C     | MY50102567 | V3.5.80             | 2025/6/28  |

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

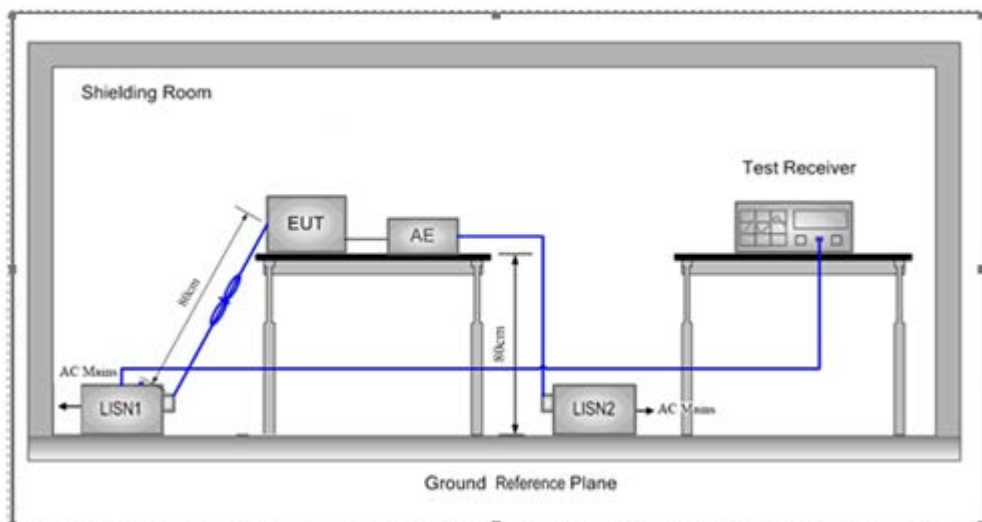

### 6.2 Limit

Table 4 – AC power-line conducted emissions limits

| Frequency (MHz) | Conducted limit (dB $\mu$ V) |                            |
|-----------------|------------------------------|----------------------------|
|                 | Quasi-peak                   | Average                    |
| 0.15 - 0.5      | 66 to 56 <sup>Note 1</sup>   | 56 to 46 <sup>Note 1</sup> |
| 0.5 - 5         | 56                           | 46                         |
| 5 - 30          | 60                           | 50                         |

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the

horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

## 6.4 Test Result

L: Worst case-GFSK(low channel)

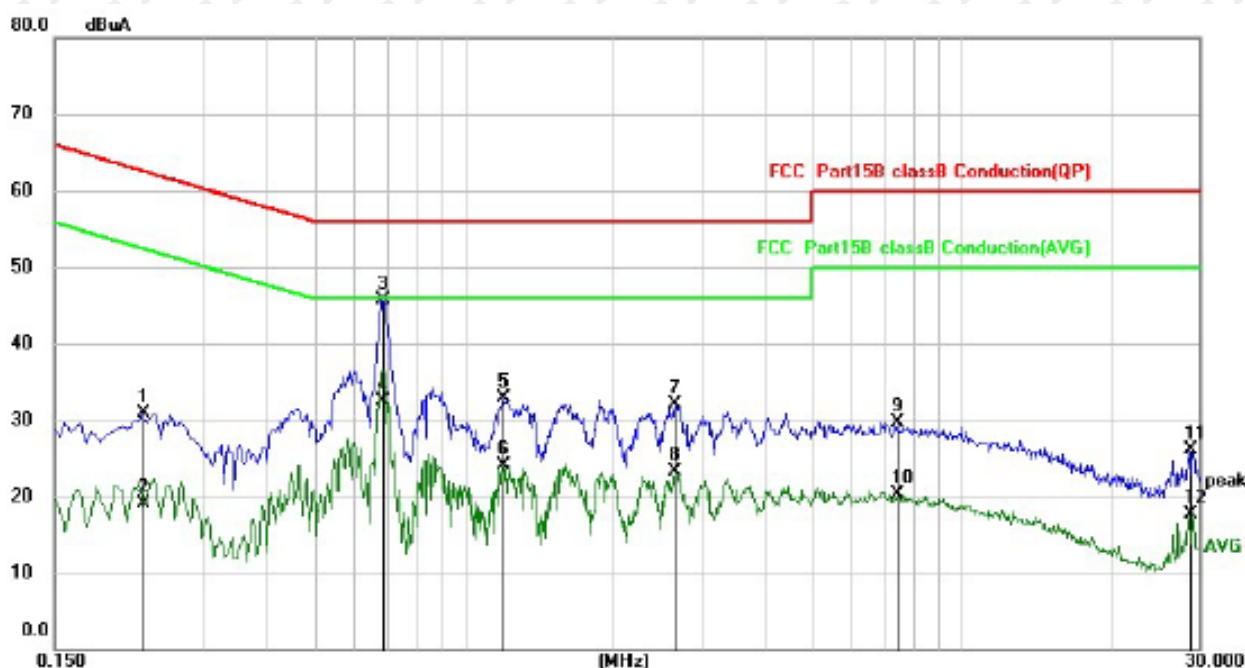


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dBS | Measure-<br>ment<br>dBuA | Limit<br>dBuA | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|--------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.2260       | 20.30                    | 10.69                    | 30.99                    | 62.60         | -31.61     | QP       |
| 2   |     | 0.2260       | 8.39                     | 10.69                    | 19.08                    | 52.60         | -33.52     | AVG      |
| 3   | *   | 0.6860       | 35.04                    | 10.70                    | 45.74                    | 56.00         | -10.26     | QP       |
| 4   |     | 0.6860       | 21.81                    | 10.70                    | 32.51                    | 46.00         | -13.49     | AVG      |
| 5   |     | 1.1980       | 21.80                    | 11.07                    | 32.87                    | 56.00         | -23.13     | QP       |
| 6   |     | 1.1980       | 13.12                    | 11.07                    | 24.19                    | 46.00         | -21.81     | AVG      |
| 7   |     | 2.6500       | 20.32                    | 11.72                    | 32.04                    | 56.00         | -23.96     | QP       |
| 8   |     | 2.6500       | 11.66                    | 11.72                    | 23.38                    | 46.00         | -22.62     | AVG      |
| 9   |     | 7.4220       | 16.66                    | 12.98                    | 29.64                    | 60.00         | -30.36     | QP       |
| 10  |     | 7.4220       | 7.29                     | 12.98                    | 20.27                    | 50.00         | -29.73     | AVG      |
| 11  |     | 28.6860      | 11.64                    | 14.37                    | 26.01                    | 60.00         | -33.99     | QP       |
| 12  |     | 28.6860      | 3.31                     | 14.37                    | 17.68                    | 50.00         | -32.32     | AVG      |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

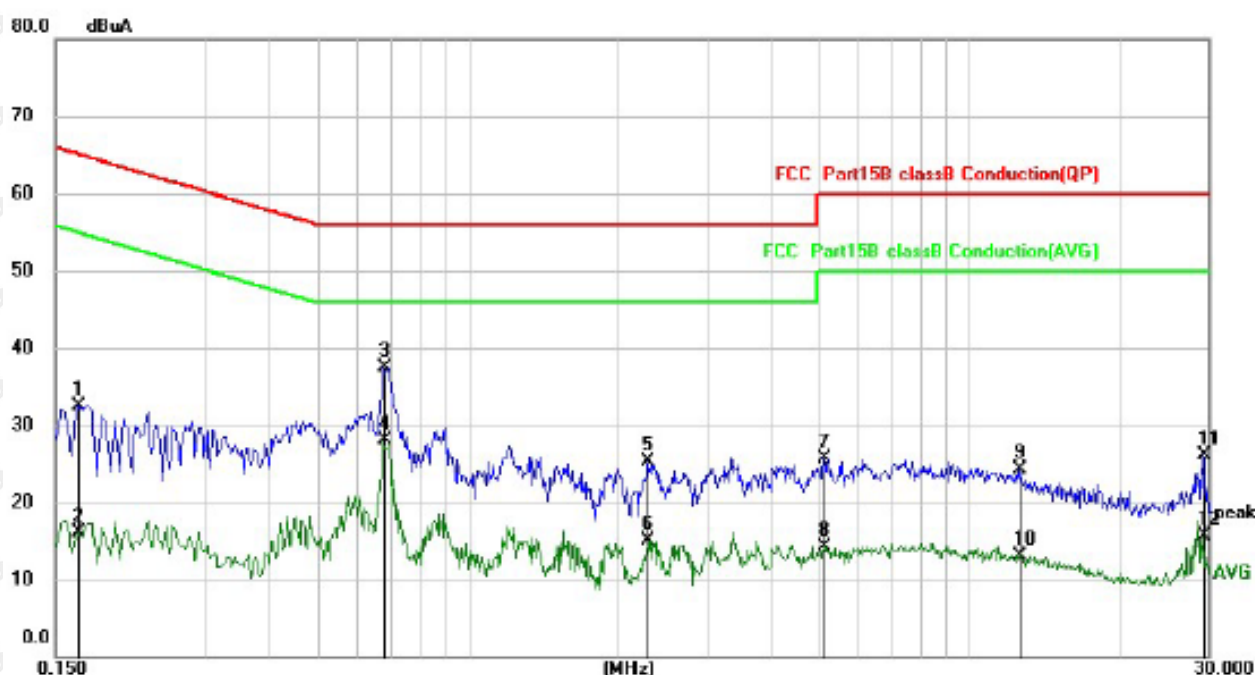

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dBS | Measure-<br>ment<br>dBuA | Limit<br>dBuA | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|--------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1660       | 21.73                    | 10.83                    | 32.56                    | 65.16         | -32.60     | QP       |
| 2   |     | 0.1660       | 5.33                     | 10.83                    | 16.16                    | 55.16         | -39.00     | AVG      |
| 3   |     | 0.6820       | 26.89                    | 10.70                    | 37.59                    | 56.00         | -18.41     | QP       |
| 4   | *   | 0.6820       | 17.43                    | 10.70                    | 28.13                    | 46.00         | -17.87     | AVG      |
| 5   |     | 2.2820       | 13.69                    | 11.64                    | 25.33                    | 56.00         | -30.67     | QP       |
| 6   |     | 2.2820       | 3.55                     | 11.64                    | 15.19                    | 46.00         | -30.81     | AVG      |
| 7   |     | 5.1380       | 13.41                    | 12.29                    | 25.70                    | 60.00         | -34.30     | QP       |
| 8   |     | 5.1380       | 2.05                     | 12.29                    | 14.34                    | 50.00         | -35.66     | AVG      |
| 9   |     | 12.5780      | 11.07                    | 13.29                    | 24.36                    | 60.00         | -35.64     | QP       |
| 10  |     | 12.5780      | -0.18                    | 13.29                    | 13.11                    | 50.00         | -36.89     | AVG      |
| 11  |     | 29.2340      | 11.72                    | 14.42                    | 26.14                    | 60.00         | -33.86     | QP       |
| 12  |     | 29.2340      | 1.31                     | 14.42                    | 15.73                    | 50.00         | -34.27     | AVG      |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

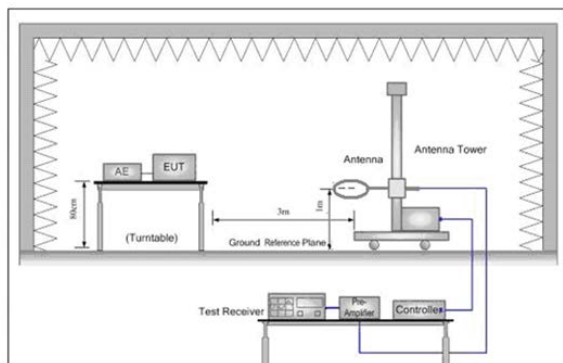


Figure 1. Below 30MHz


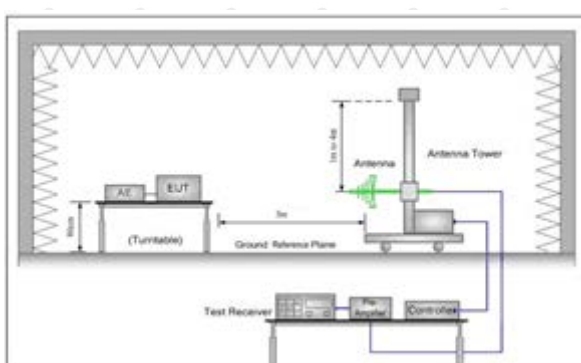


Figure 2. 30MHz to 1GHz

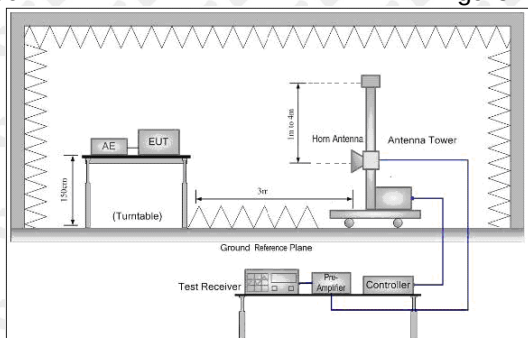

### 7.2 Limit

Spurious Emissions:

| Frequency         | Field strength (microvolt/meter) | Limit (dBμV/m ) | Remark     | Measurement distance (m) |
|-------------------|----------------------------------|-----------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F(kHz)                      | -               | -          | 300                      |
| 0.490MHz-1.705MHz | 24000/F(kHz)                     | -               | -          | 30                       |
| 1.705MHz-30MHz    | 30                               | -               | -          | 30                       |
| 30MHz-88MHz       | 100                              | 40.0            | Quasi-peak | 3                        |
| 88MHz-216MHz      | 150                              | 43.5            | Quasi-peak | 3                        |
| 216MHz-960MHz     | 200                              | 46.0            | Quasi-peak | 3                        |
| 960MHz-1GHz       | 500                              | 54.0            | Quasi-peak | 3                        |
| Above 1GHz        | 500                              | 54.0            | Average    | 3                        |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 7.3 Test procedure

#### Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.
- Full battery is used during test.

Receiver set:


| Frequency         | Detector   | RBW     | VBW    | Remark     |
|-------------------|------------|---------|--------|------------|
| 0.009MHz-0.090MHz | Peak       | 10kHz   | 30KHz  | Peak       |
| 0.009MHz-0.090MHz | Average    | 10kHz   | 30KHz  | Average    |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz   | 30KHz  | Quasi-peak |
| 0.110MHz-0.490MHz | Peak       | 10kHz   | 30KHz  | Peak       |
| 0.110MHz-0.490MHz | Average    | 10kHz   | 30KHz  | Average    |
| 0.490MHz -30MHz   | Quasi-peak | 10kHz   | 30kHz  | Quasi-peak |
| 30MHz-1GHz        | Quasi-peak | 120 kHz | 300KHz | Quasi-peak |
| Above 1GHz        | Peak       | 1MHz    | 3MHz   | Peak       |
|                   | Peak       | 1MHz    | 10Hz   | Average    |

## 7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

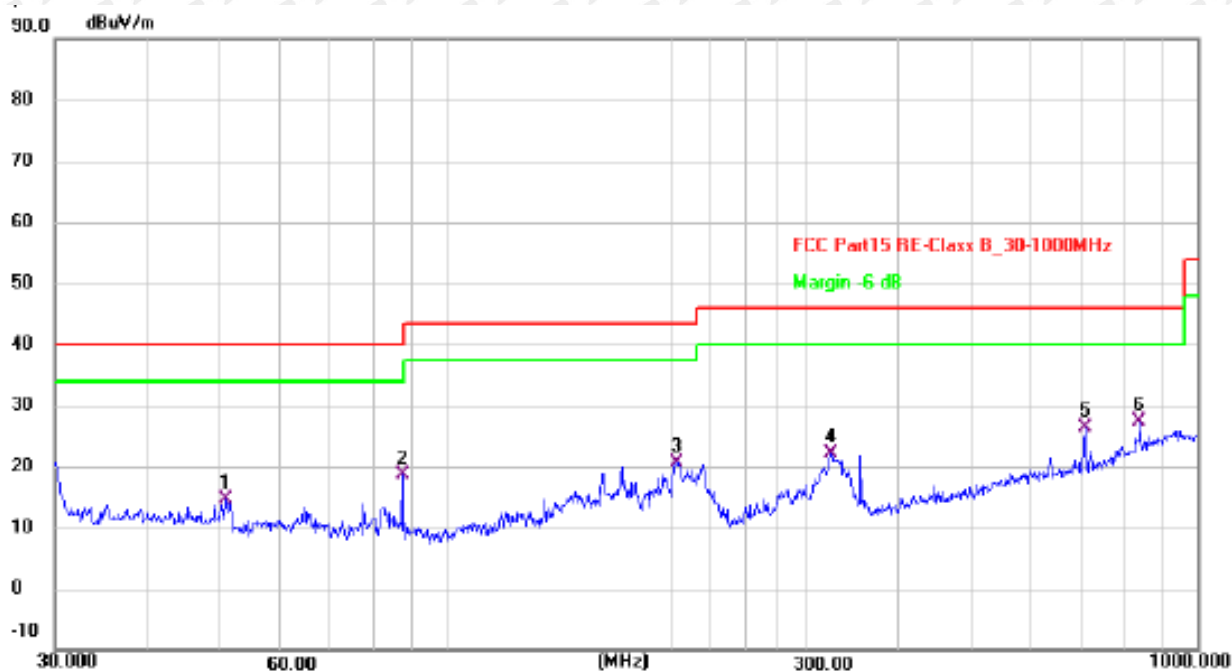

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 50.7636         | 29.19          | -14.59        | 14.60          | 40.00          | -25.40      | QP       |
| 2   | 87.1116         | 37.00          | -18.43        | 18.57          | 40.00          | -21.43      | QP       |
| 3   | 202.1004        | 37.63          | -17.02        | 20.61          | 43.50          | -22.89      | QP       |
| 4   | 324.4560        | 35.62          | -13.44        | 22.18          | 46.00          | -23.82      | QP       |
| 5   | 709.1821        | 31.48          | -5.18         | 26.30          | 46.00          | -19.70      | QP       |
| 6 * | 836.2443        | 29.19          | -1.85         | 27.34          | 46.00          | -18.66      | QP       |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V  
Worst case-GFSK(low channel)

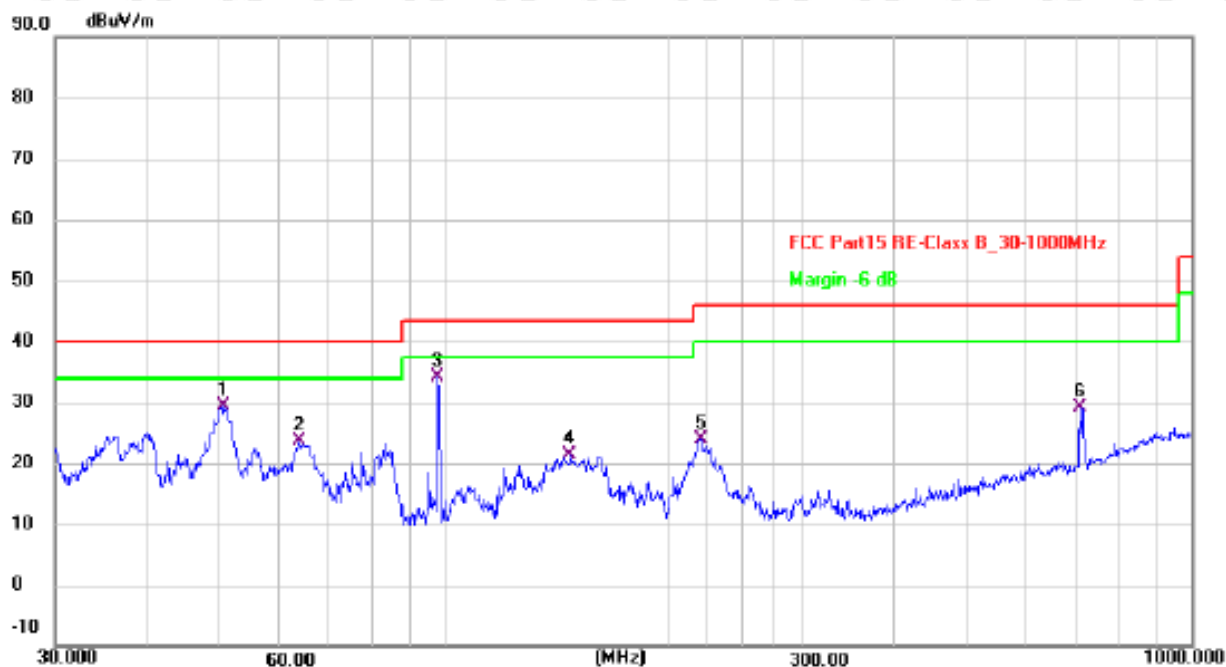

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 50.4090         | 44.00          | -14.59        | 29.41          | 40.00          | -10.59      | QP       |
| 2   | 63.7588         | 39.51          | -15.84        | 23.67          | 40.00          | -16.33      | QP       |
| 3 * | 97.4560         | 52.16          | -18.14        | 34.02          | 43.50          | -9.48       | QP       |
| 4   | 146.8876        | 34.95          | -13.51        | 21.44          | 43.50          | -22.06      | QP       |
| 5   | 219.8448        | 40.67          | -16.79        | 23.88          | 46.00          | -22.12      | QP       |
| 6   | 709.1821        | 34.27          | -5.18         | 29.09          | 46.00          | -16.91      | QP       |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

# Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

| Frequency                                                                                                                                | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                                                    | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2402                                                                                                                                     | 110.57        | -5.84  | 104.73         | N/A      | N/A    | peak          |
| 2402                                                                                                                                     | 94.54         | -5.84  | 88.70          | N/A      | N/A    | AVG           |
| 4804                                                                                                                                     | 58.43         | -3.64  | 54.79          | 74       | -19.21 | peak          |
| 4804                                                                                                                                     | 48.92         | -3.64  | 45.28          | 54       | -8.72  | AVG           |
| 7206                                                                                                                                     | 59.77         | -0.95  | 58.82          | 74       | -15.18 | peak          |
| 7206                                                                                                                                     | 49.29         | -0.95  | 48.34          | 54       | -5.66  | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits |               |        |                |          |        |               |

Vertical:

| Frequency                                                                                                                                | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                                                    | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2402                                                                                                                                     | 111.26        | -5.84  | 105.42         | N/A      | N/A    | peak          |
| 2402                                                                                                                                     | 94.21         | -5.84  | 88.37          | N/A      | N/A    | AVG           |
| 4804                                                                                                                                     | 58.84         | -3.64  | 55.20          | 74       | -18.80 | peak          |
| 4804                                                                                                                                     | 48.39         | -3.64  | 44.75          | 54       | -9.25  | AVG           |
| 7206                                                                                                                                     | 59.58         | -0.95  | 58.63          | 74       | -15.37 | peak          |
| 7206                                                                                                                                     | 49.16         | -0.95  | 48.21          | 54       | -5.79  | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits |               |        |                |          |        |               |

CH Middle (2440MHz)

Horizontal:

| Frequency                                                                                                                                | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                                                    | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2440                                                                                                                                     | 107.13        | -5.71  | 101.42         | N/A      | N/A    | peak          |
| 2440                                                                                                                                     | 92.95         | -5.71  | 87.24          | N/A      | N/A    | AVG           |
| 4880                                                                                                                                     | 56.00         | -3.51  | 52.49          | 74       | -21.51 | peak          |
| 4880                                                                                                                                     | 45.54         | -3.51  | 42.03          | 54       | -11.97 | AVG           |
| 7320                                                                                                                                     | 57.97         | -0.82  | 57.15          | 74       | -16.85 | peak          |
| 7320                                                                                                                                     | 47.74         | -0.82  | 46.92          | 54       | -7.08  | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits |               |        |                |          |        |               |

Vertical:

| Frequency                                                                                                                                | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                                                    | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2440                                                                                                                                     | 106.48        | -5.71  | 100.77         | N/A      | N/A    | peak          |
| 2440                                                                                                                                     | 92.88         | -5.71  | 87.17          | N/A      | N/A    | AVG           |
| 4880                                                                                                                                     | 55.08         | -3.51  | 51.57          | 74       | -22.43 | peak          |
| 4880                                                                                                                                     | 46.53         | -3.51  | 43.02          | 54       | -10.98 | AVG           |
| 7320                                                                                                                                     | 57.26         | -0.82  | 56.44          | 74       | -17.56 | peak          |
| 7320                                                                                                                                     | 47.22         | -0.82  | 46.40          | 54       | -7.60  | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits |               |        |                |          |        |               |

## CH High (2480MHz)

## Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2480      | 107.29        | -5.65  | 101.64         | N/A      | N/A    | peak          |
| 2480      | 92.98         | -5.65  | 87.33          | N/A      | N/A    | AVG           |
| 4960      | 54.32         | -3.43  | 50.89          | 74       | -23.11 | peak          |
| 4960      | 46.46         | -3.43  | 43.03          | 54       | -10.97 | AVG           |
| 7440      | 57.24         | -0.75  | 56.49          | 74       | -17.51 | peak          |
| 7440      | 45.76         | -0.75  | 45.01          | 54       | -8.99  | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2480      | 107.29        | -5.65  | 101.64         | N/A      | N/A    | peak          |
| 2480      | 92.31         | -5.65  | 86.66          | N/A      | N/A    | AVG           |
| 4960      | 55.57         | -3.43  | 52.14          | 74       | -21.86 | peak          |
| 4960      | 46.88         | -3.43  | 43.45          | 54       | -10.55 | AVG           |
| 7440      | 56.48         | -0.75  | 55.73          | 74       | -18.27 | peak          |
| 7440      | 47.52         | -0.75  | 46.77          | 54       | -7.23  | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz, The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report.
- (2). All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

# Restricted bands around fundamental frequency (Radiated)

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case)

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310               | 55.26                   | -5.81          | 49.45                      | 74                 | -24.55         | peak             |
| 2310               | /                       | -5.81          | /                          | 54                 | /              | AVG              |
| 2390               | 55.29                   | -5.84          | 49.45                      | 74                 | -24.55         | peak             |
| 2390               | /                       | -5.84          | /                          | 54                 | /              | AVG              |
| 2400               | 53.37                   | -5.84          | 47.53                      | 74                 | -26.47         | peak             |
| 2400               | /                       | -5.84          | /                          | 54                 | /              | AVG              |

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 2310               | 56.71                   | -5.81          | 50.90                      | 74                 | -23.10         | peak             |
| 2310               | /                       | -5.81          | /                          | 54                 | /              | AVG              |
| 2390               | 53.61                   | -5.84          | 47.77                      | 74                 | -26.23         | peak             |
| 2390               | /                       | -5.84          | /                          | 54                 | /              | AVG              |
| 2400               | 57.61                   | -5.84          | 51.77                      | 74                 | -22.23         | peak             |
| 2400               | /                       | -5.84          | /                          | 54                 | /              | AVG              |

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case)

| Frequency                                                                                                                                | Reading Result | Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                                                    | (dBμV)         | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                                                                                                  | 54.94          | -5.65  | 49.29          | 74       | -24.71 | peak          |
| 2483.50                                                                                                                                  | /              | -5.65  | /              | 54       | /      | AVG           |
| 2500.00                                                                                                                                  | 55.04          | -5.65  | 49.39          | 74       | -24.61 | peak          |
| 2500.00                                                                                                                                  | /              | -5.65  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits |                |        |                |          |        |               |


Vertical:

| Frequency                                                                                                                                | Reading Result | Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                                                                    | (dBμV)         | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.50                                                                                                                                  | 54.98          | -5.65  | 49.33          | 74       | -24.67 | peak          |
| 2483.50                                                                                                                                  | /              | -5.65  | /              | 54       | /      | AVG           |
| 2500.00                                                                                                                                  | 55.92          | -5.65  | 50.27          | 74       | -23.73 | peak          |
| 2500.00                                                                                                                                  | /              | -5.65  | /              | 54       | /      | AVG           |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits |                |        |                |          |        |               |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.                                   |                |        |                |          |        |               |

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

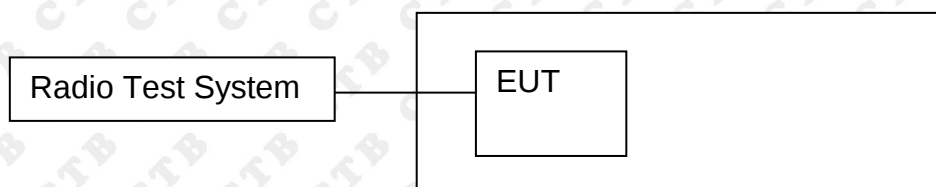

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:


RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold


## 8.4 Test Result

1M:

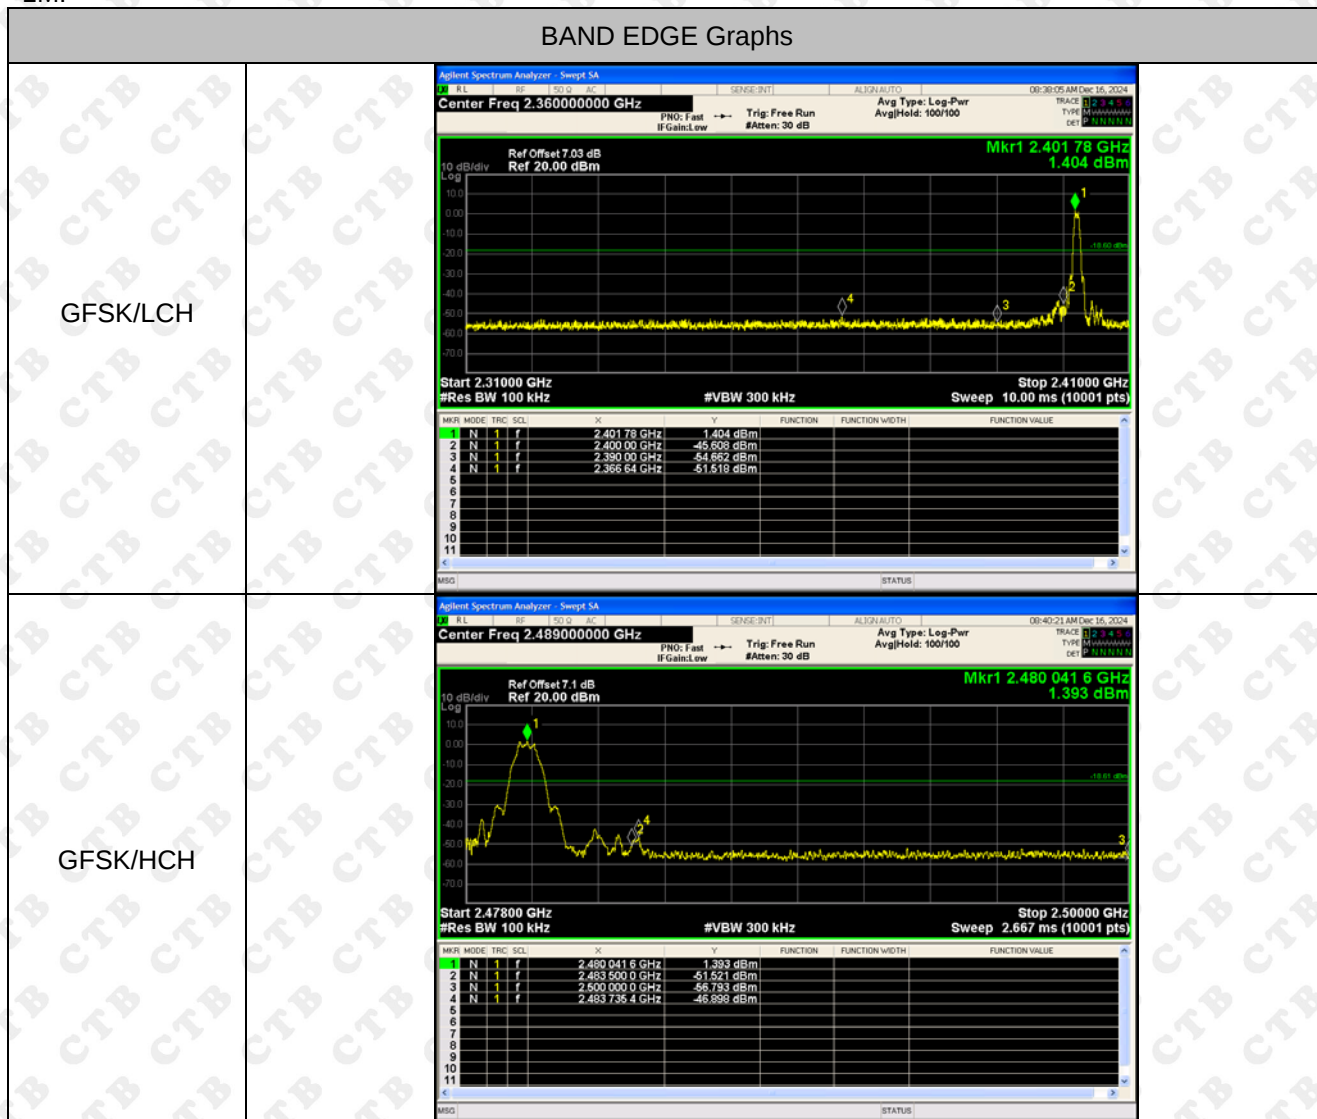


## RF Conducted Spurious Emissions Graphs


GFSK/LCH

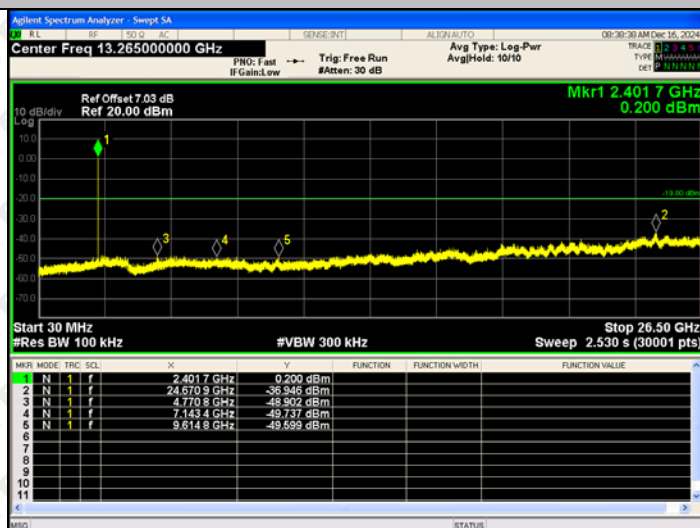


GFSK/MCH

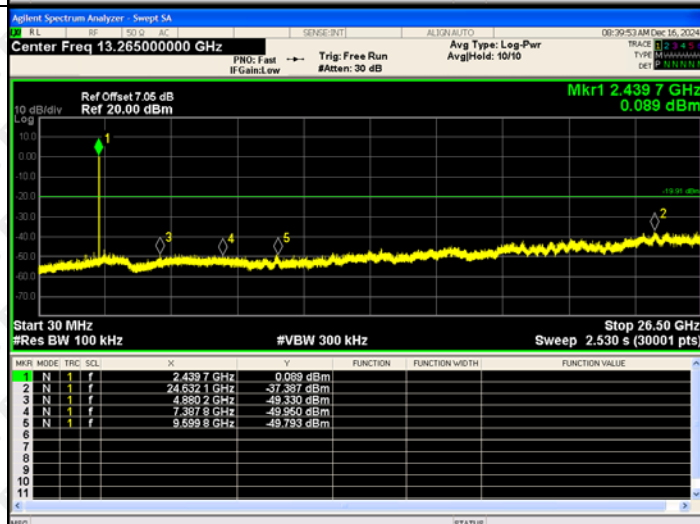

GFSK/HCH

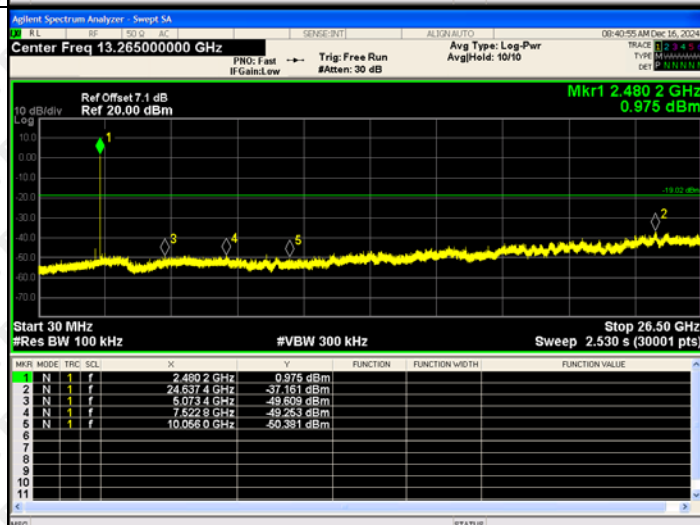


2M:

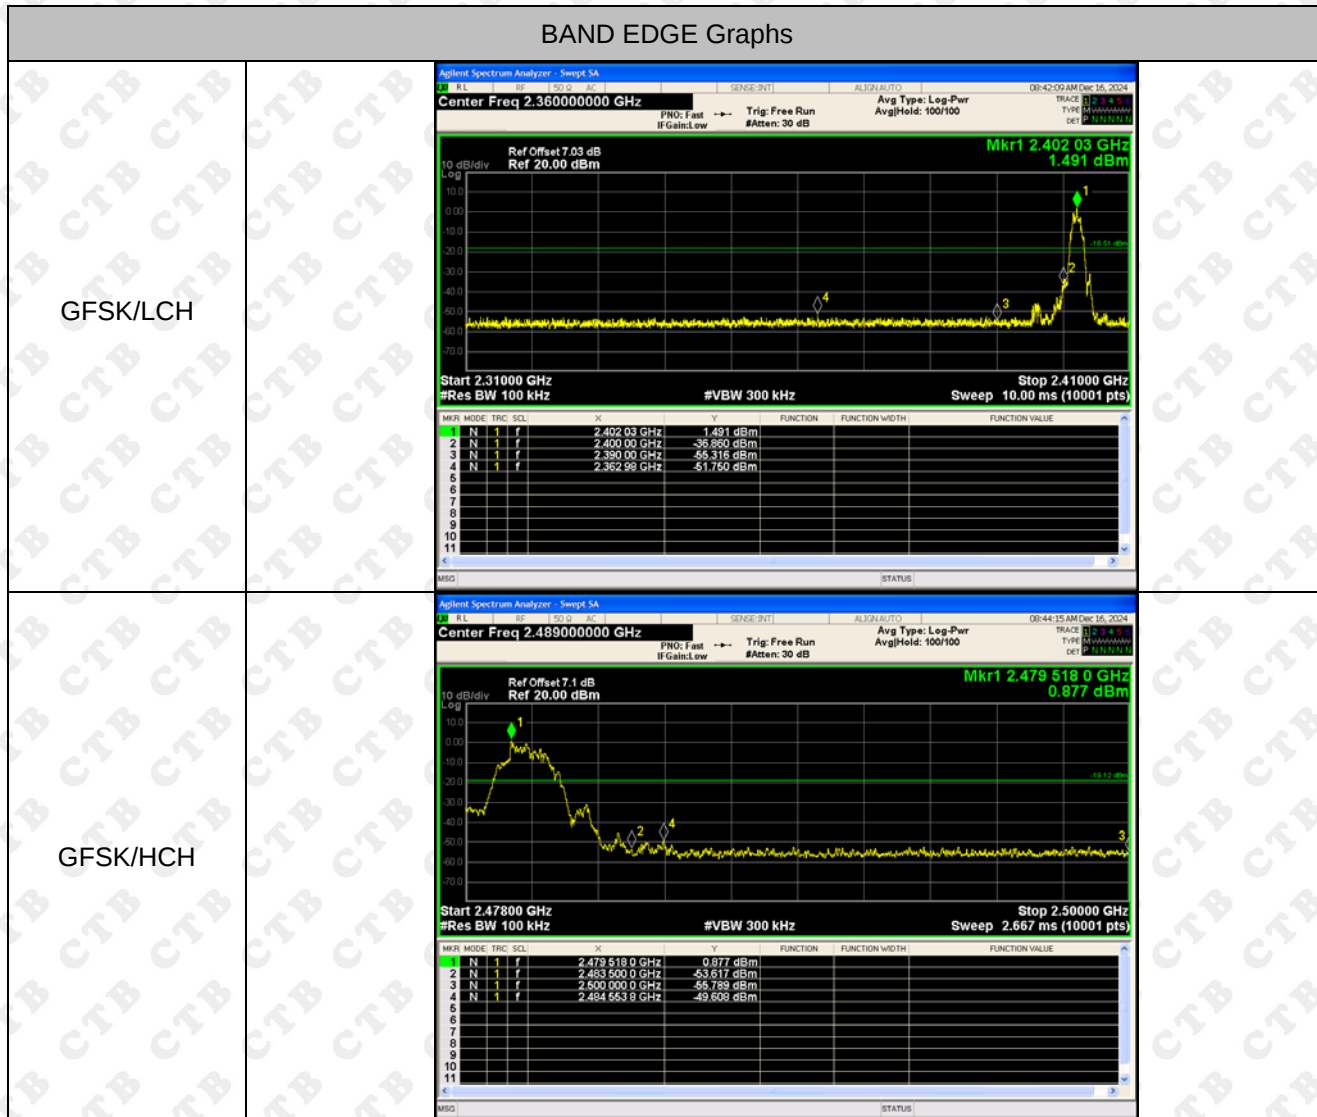


## RF Conducted Spurious Emissions Graphs


GFSK/LCH

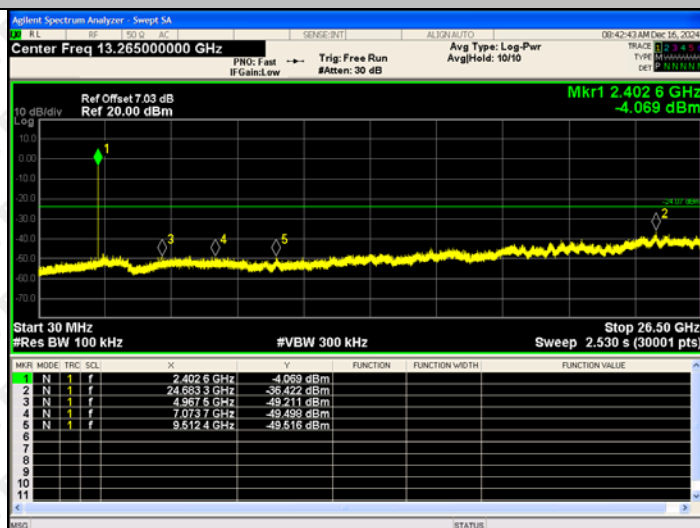

GFSK/MCH

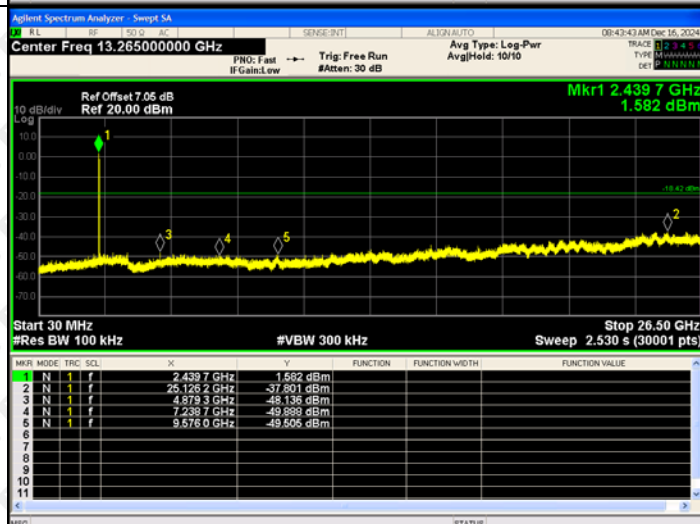


GFSK/HCH

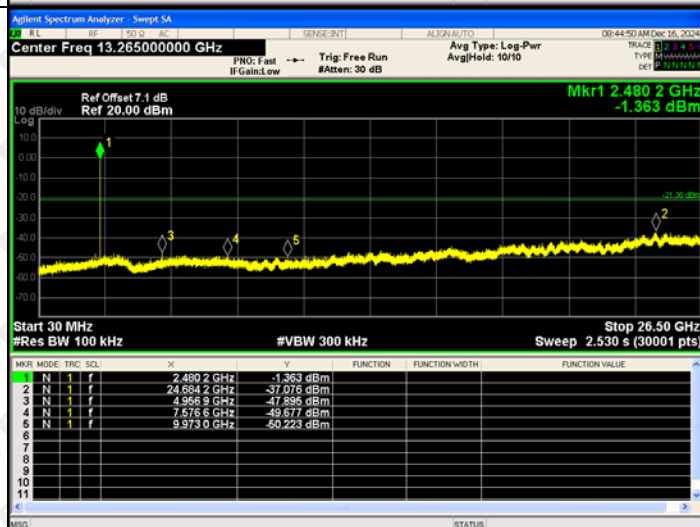

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

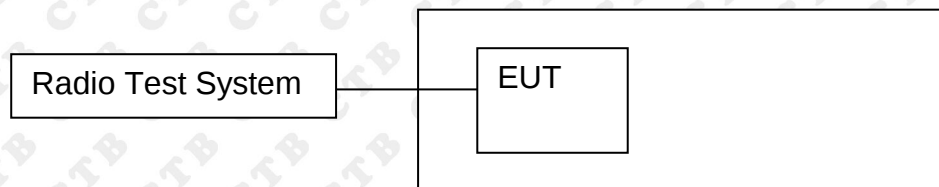

### 9.2 Limit

| FCC Part15 (15.247) , Subpart C |              |                 |                       |        |
|---------------------------------|--------------|-----------------|-----------------------|--------|
| Section                         | Test Item    | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                    | Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Channel power measurement. Sweep = auto; Detector Function = peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

#### 9.4 Test Result

1M:

| Mode | Channel. | Maximum Output Power [dBm] | Limit[dBm] | Verdict |
|------|----------|----------------------------|------------|---------|
| GFSK | LCH      | 1.472                      | 30         | PASS    |
|      | MCH      | 1.742                      | 30         | PASS    |
|      | HCH      | 1.56                       | 30         | PASS    |

Duty Cycle

| Mode | Channel. | Duty Cycle(%) | Correction Factor (dB) |
|------|----------|---------------|------------------------|
| GFSK | LCH      | 100           | 0                      |
|      | MCH      | 100           | 0                      |
|      | HCH      | 100           | 0                      |

2M:


| Mode | Channel. | Maximum Output Power [dBm] | Limit[dBm] | Verdict |
|------|----------|----------------------------|------------|---------|
| GFSK | LCH      | 1.652                      | 30         | PASS    |
|      | MCH      | 1.856                      | 30         | PASS    |
|      | HCH      | 1.742                      | 30         | PASS    |

Duty Cycle

| Mode | Channel. | Duty Cycle(%) | Correction Factor (dB) |
|------|----------|---------------|------------------------|
| GFSK | LCH      | 100           | 0                      |
|      | MCH      | 100           | 0                      |
|      | HCH      | 100           | 0                      |


1M:

Test Graph:

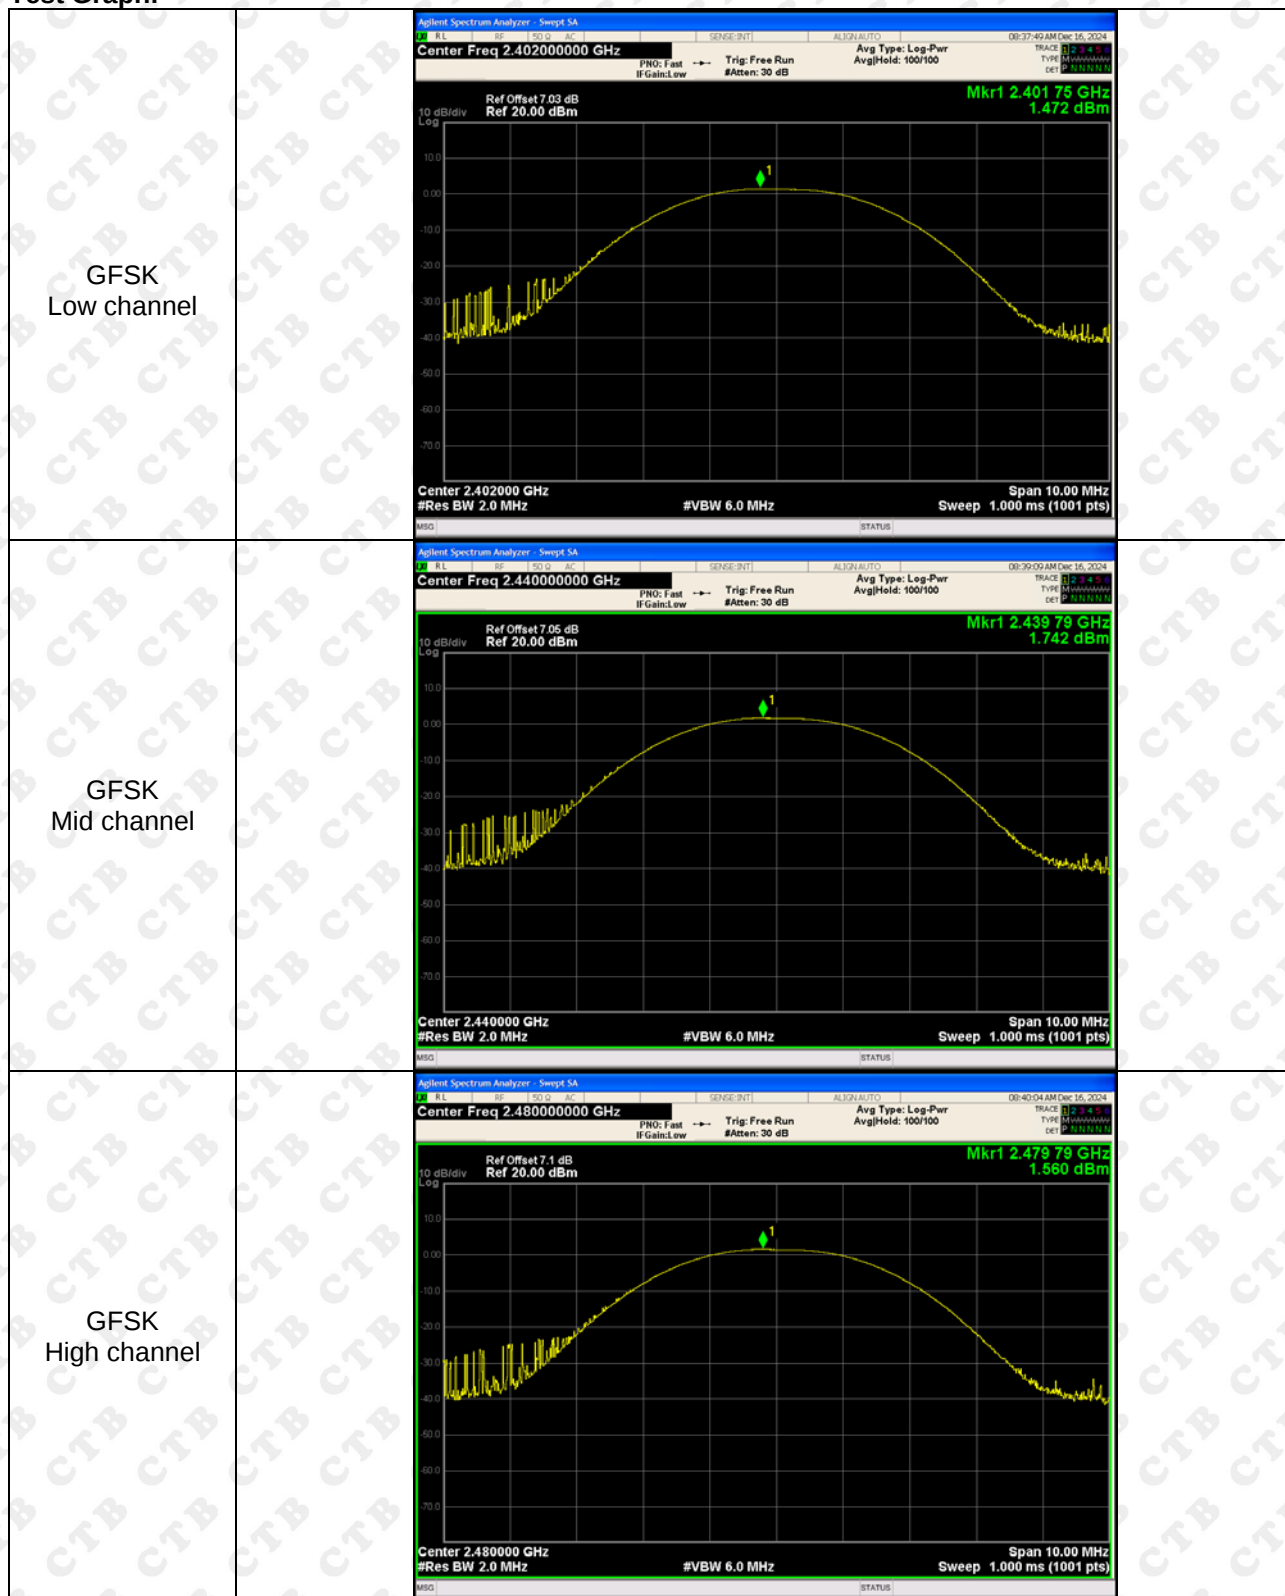


2M:

Test Graph:

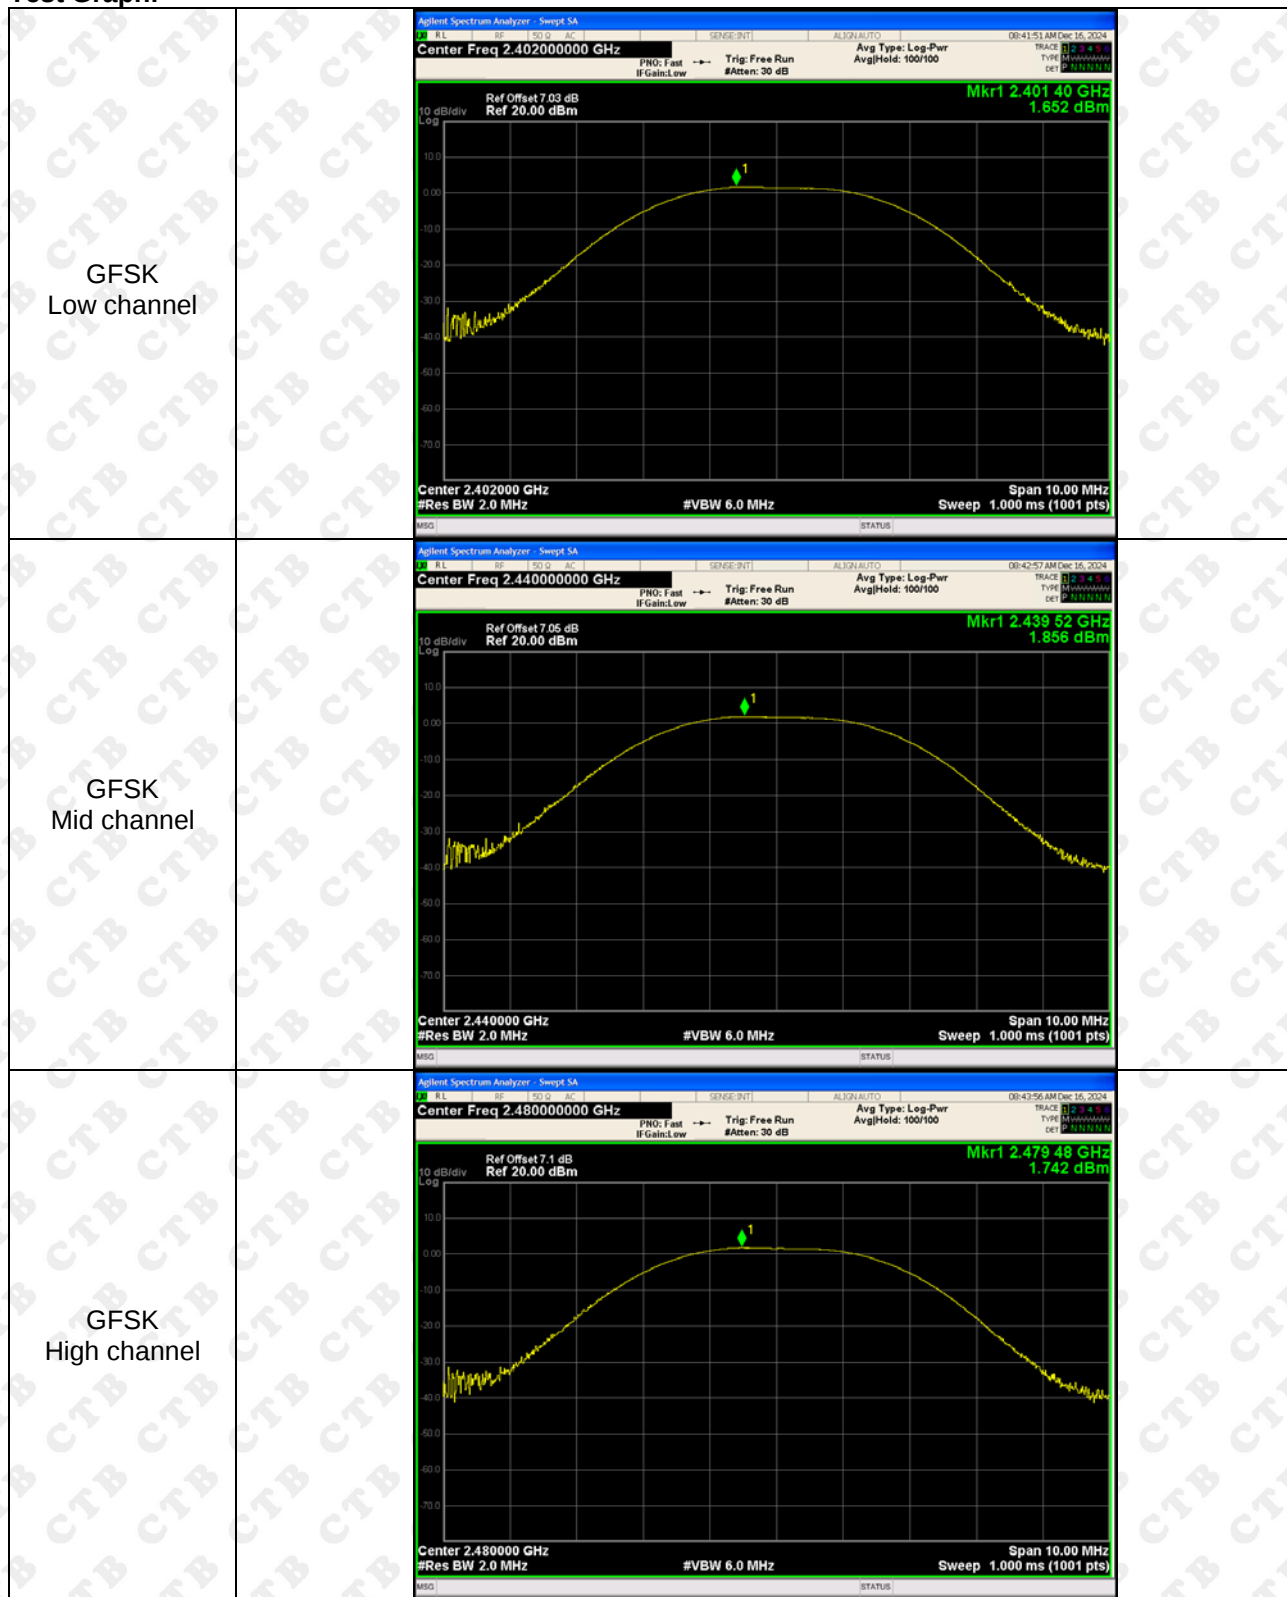

## 10. 6DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

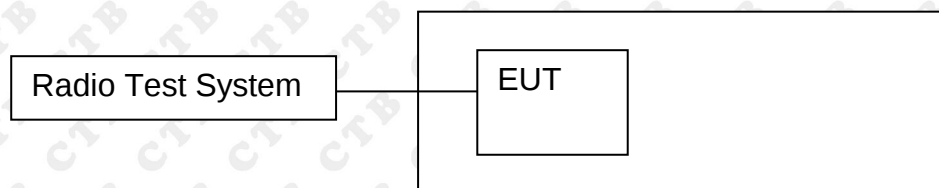

### 10.2 Limit

| FCC Part15 (15.247) , Subpart C |           |                                         |                       |        |
|---------------------------------|-----------|-----------------------------------------|-----------------------|--------|
| Section                         | Test Item | Limit                                   | Frequency Range (MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | $\geq 500\text{KHz}$<br>(6dB bandwidth) | 2400-2483.5           | PASS   |

### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

1M:

| Test Mode | Frequency    | 6dB Bandwidth (MHz) | Limit (KHz) | Result |
|-----------|--------------|---------------------|-------------|--------|
| GFSK      | Low channel  | 0.649               | $\geq 500$  | PASS   |
|           | Mid channel  | 0.652               | $\geq 500$  | PASS   |
|           | High channel | 0.653               | $\geq 500$  | PASS   |

2M:


| Test Mode | Frequency    | 6dB Bandwidth (MHz) | Limit (KHz) | Result |
|-----------|--------------|---------------------|-------------|--------|
| GFSK      | Low channel  | 1.129               | $\geq 500$  | PASS   |
|           | Mid channel  | 1.122               | $\geq 500$  | PASS   |
|           | High channel | 1.16                | $\geq 500$  | PASS   |

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

1M:  
Test Graph:




2M:  
Test Graph:

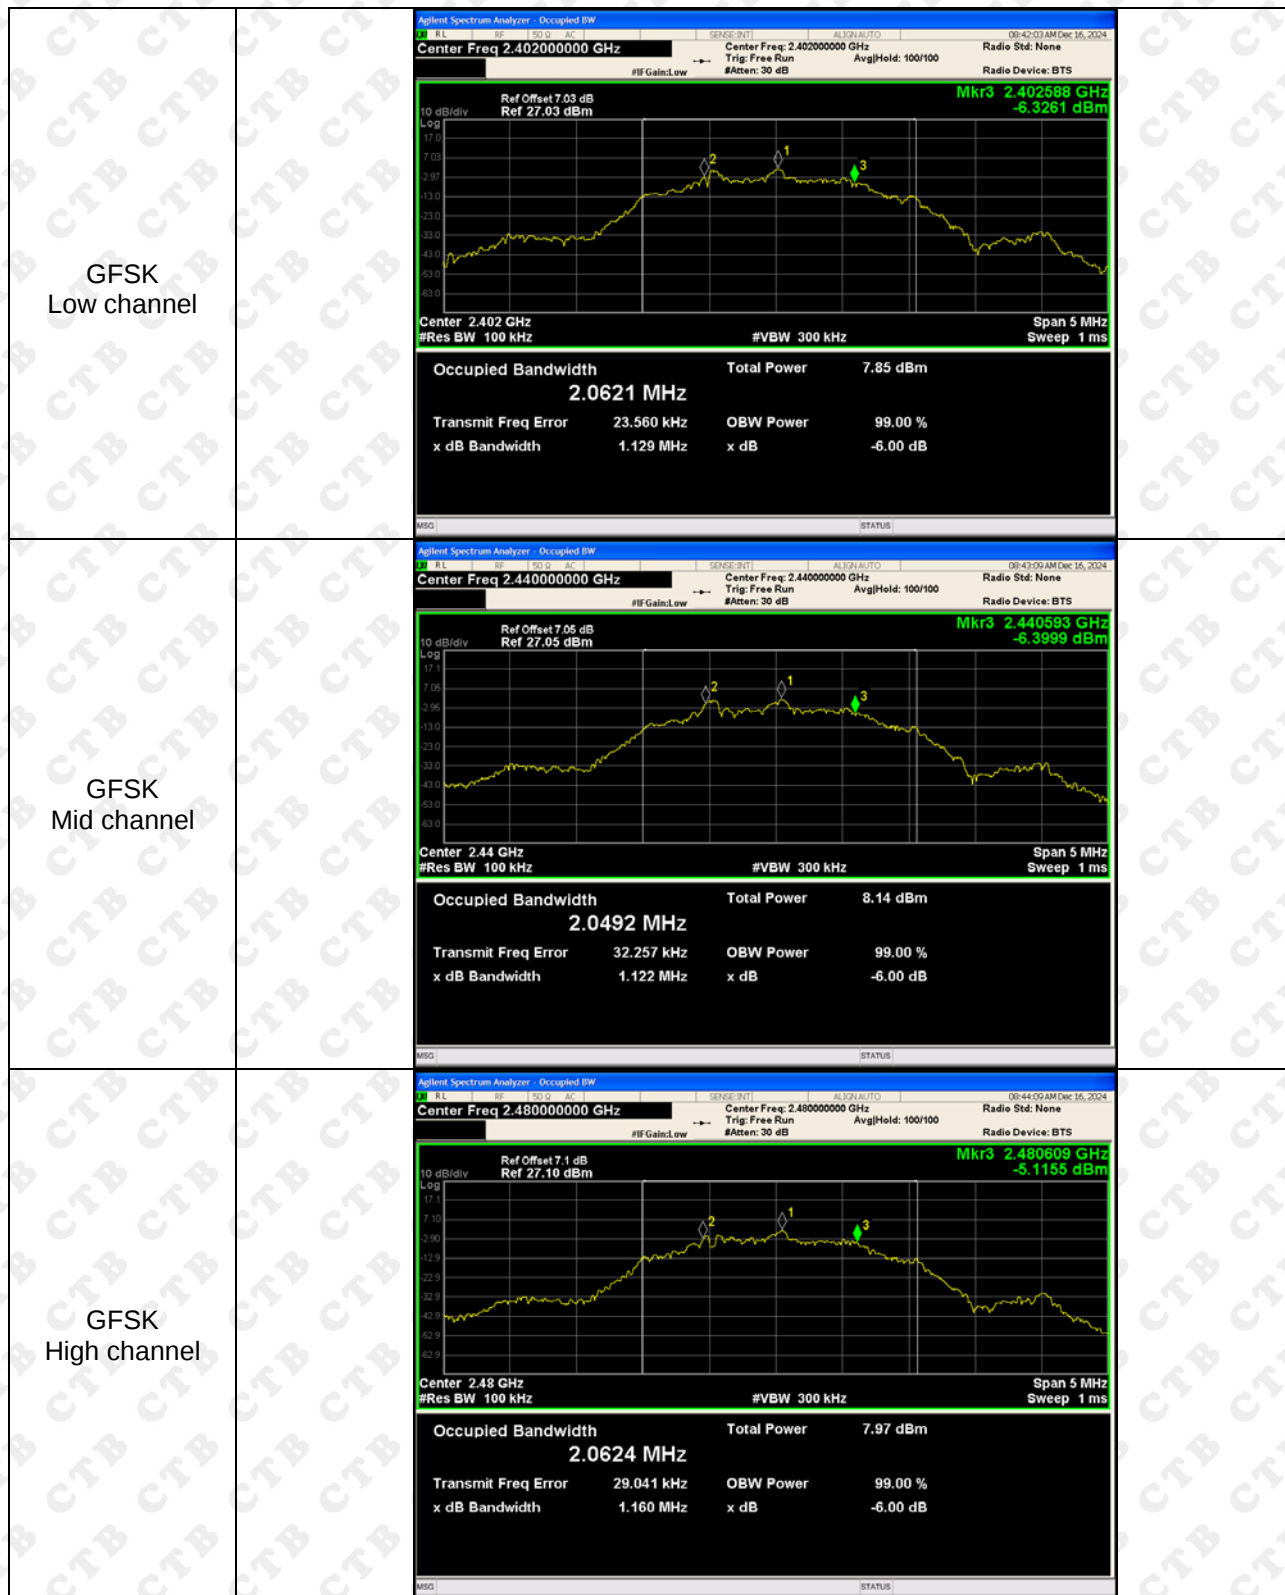

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

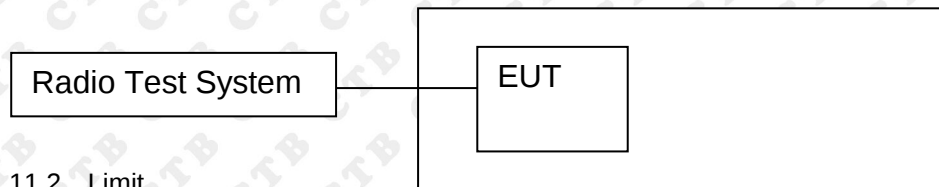

### 11.2 Limit

| FCC Part15 (15.247) , Subpart C |                        |                        |                       |        |
|---------------------------------|------------------------|------------------------|-----------------------|--------|
| Section                         | Test Item              | Limit                  | Frequency Range (MHz) | Result |
| 15.247                          | Power Spectral Density | 8 dBm<br>(in any 3KHz) | 2400-2483.5           | PASS   |

### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 11.4 Test Result




1M:

| Mode | Channel. | Power Spectral Density (dBm/3KHz) | Limit(dBm/3KHz) | Verdict |
|------|----------|-----------------------------------|-----------------|---------|
| GFSK | LCH      | -13.853                           | 8               | PASS    |
| GFSK | MCH      | -13.722                           | 8               | PASS    |
| GFSK | HCH      | -13.944                           | 8               | PASS    |


2M:

| Mode | Channel. | Power Spectral Density (dBm/3KHz) | Limit(dBm/3KHz) | Verdict |
|------|----------|-----------------------------------|-----------------|---------|
| GFSK | LCH      | -15.705                           | 8               | PASS    |
| GFSK | MCH      | -15.719                           | 8               | PASS    |
| GFSK | HCH      | -16.167                           | 8               | PASS    |

# 1M: Test Graph
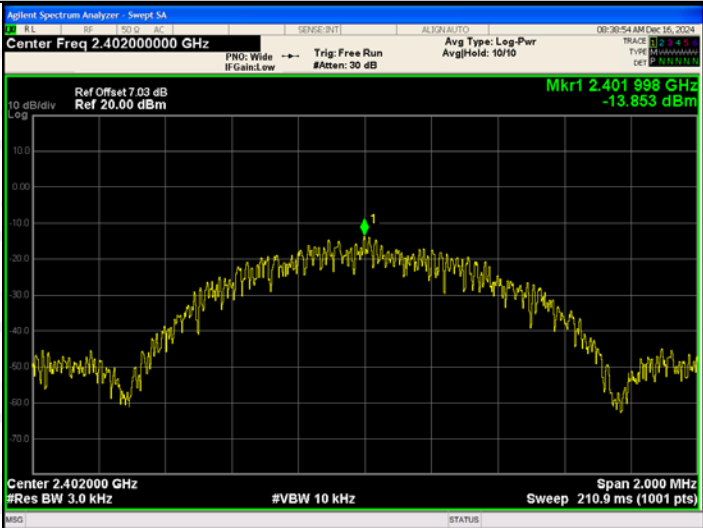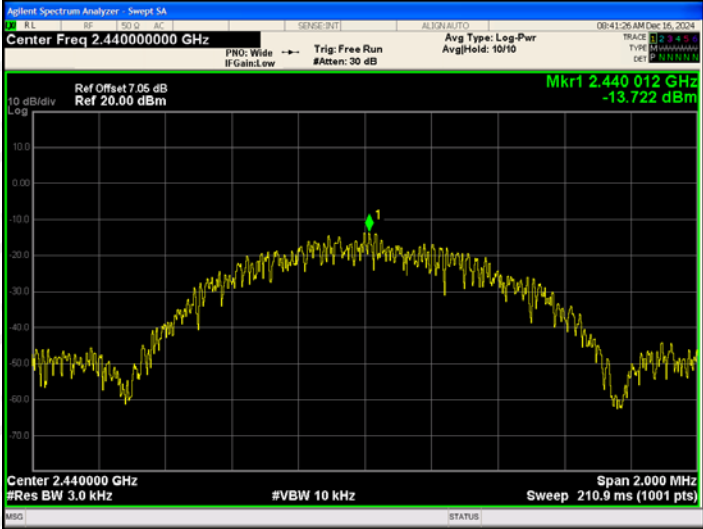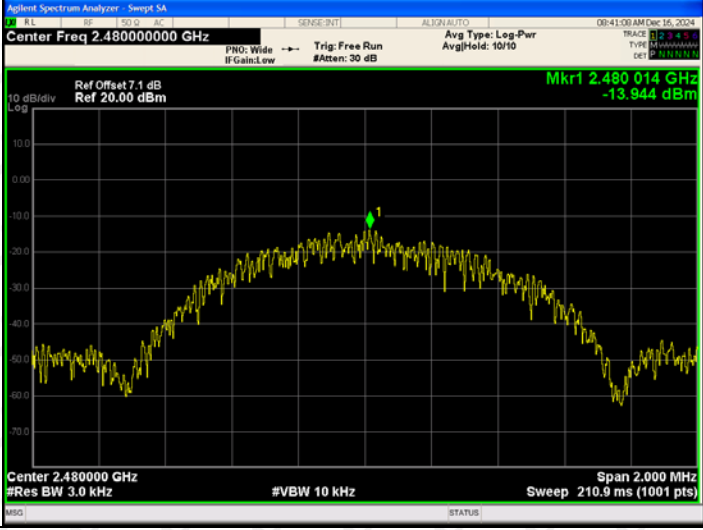
| Graphs   |                                                                                                                                                                                                                                                                                                                                      |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| GFSK/LCH |  <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.402000000 GHz<br/>Ref Offset 7.03 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.401 998 GHz<br/>-13.853 dBm<br/>Span 2.000 MHz<br/>Sweep 210.9 ms (1001 pts)<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz</p>  |
| GFSK/MCH |  <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.440000000 GHz<br/>Ref Offset 7.06 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.440 012 GHz<br/>-13.722 dBm<br/>Span 2.000 MHz<br/>Sweep 210.9 ms (1001 pts)<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz</p> |
| GFSK/HCH |  <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.480000000 GHz<br/>Ref Offset 7.1 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.480 014 GHz<br/>-13.944 dBm<br/>Span 2.000 MHz<br/>Sweep 210.9 ms (1001 pts)<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz</p> |

## 2M: Test Graph

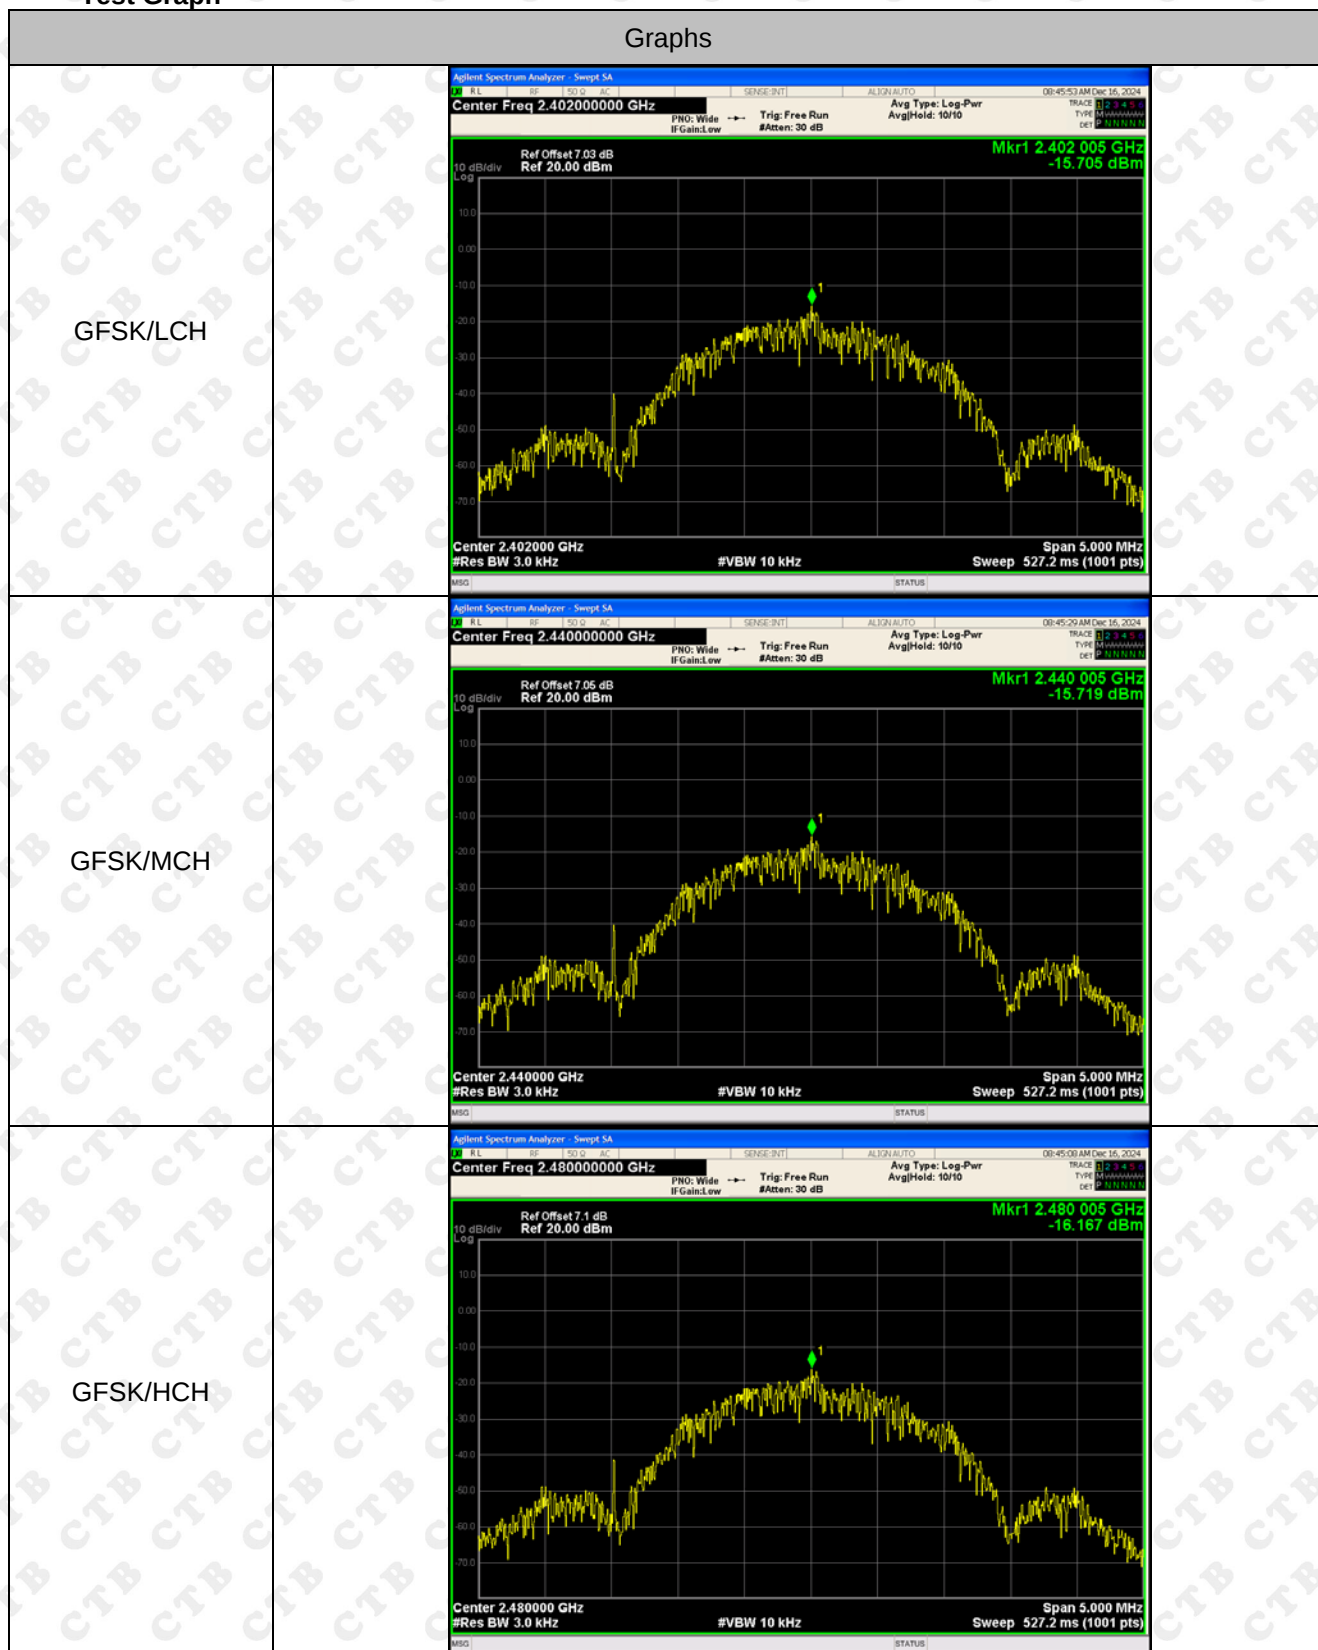

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### EUT Antenna:

The EUT antenna is Internal antenna. The best case gain of the antenna is 1.91dBi.

### 13. EUT TEST SETUP PHOTOGRAPHS

#### Radiated Emissions

Below 1G

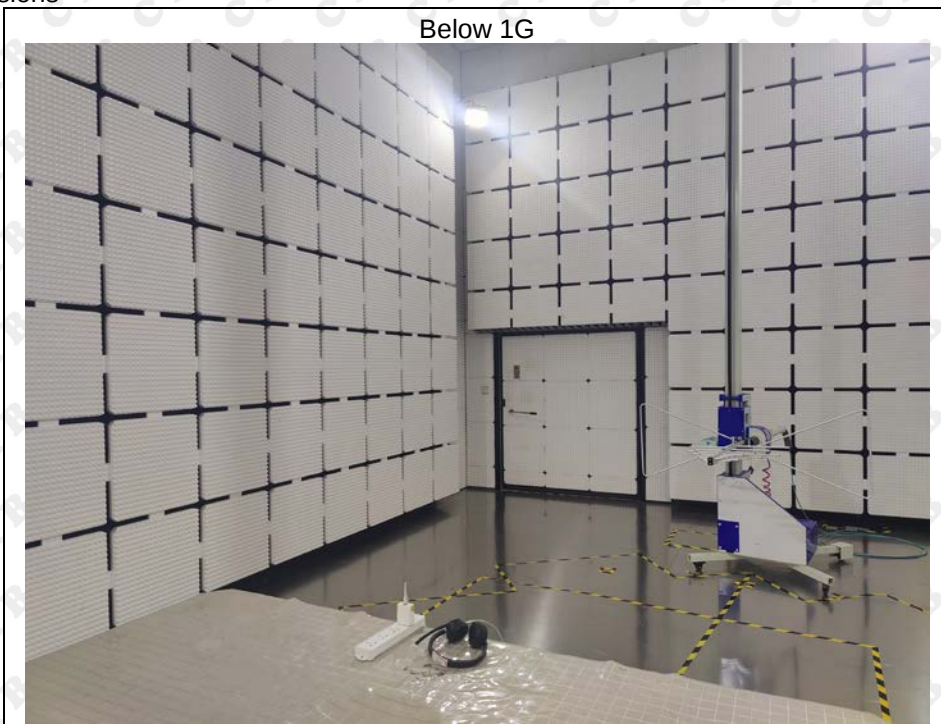

Above 1G



## A photograph of a laboratory setup for a hearing experiment. On the left, a computer monitor is mounted on a wooden stand. A laptop is connected to the monitor and a power supply unit (PSU) on the floor. The PSU is connected to a pair of headphones on a wooden table. A white mouse is also on the table. The setup is in a room with a concrete floor and a white wall.

\*\*\*\*\* END OF REPORT \*\*\*\*\*