Cloud Media Receiver Manual (Front cover)

#### Directory:

#### Content

1.		W	elcome to Cloud Life	4				
	a.		Accessories	4				
	b.		Specifications and Basic Needs	4				
	C.		Appearance	5				
d.			Remote Control Description					
2.		Ma	ain Interface	7				
	a.		Home Page	7				
	b.		Program menu	8				
3.		Ne	etwork Setup	8				
	a.		Network Setup	9				
	b.		Configuring the Network	9				
		1.	Local Network Setup	9				
		2.	ADSL settings	9				
		3.	Wireless Network Setup.	. 10				
	C.		Input Methods	. 10				
4.		Sta	art using the Cloud Media Receiver	. 11				
5.		Со	ontact Us	. 11				

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IMPORTANT NOTE: To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

#### **FCC INFORMATION**

The Federal Communication Commission Radio Frequency Interference Statement includes the following paragraph:

The equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communication. However, there is no grantee that interference will not occur in a particular installation. If this equipment dose cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on , the user is encouraged to try to correct the interference by one or more of the following measures:

- --Reorient or relocate the receiving antenna.
- --Increase the separation between the equipment and receiver.
- --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- --Consult the dealer or an experienced radio/TV technician for help.

  The user should not modify or change this equipment without written approval form New 5 TV co.. Modification could void authority to use this equipment.

## 1. Welcome to Cloud Life

Thank you for choosing Cloud Media Receiver. You are only a few simple operations away from using your new Cloud Media Receiver to watch your favorite television programs. Please read through this manual, and we will gradually guide you into the wonderful Cloud life.

### a. Accessories

Inside this package you should find:

- 1, 1 Cloud Media Receiver
- 2、1 infrared remote control with battery
- 3、Wall mounting brace with concrete nails
- 4、1 headphone adapter
- 5、1 DC adapter and power cord

## **b. Specifications and Basic Needs**

Before use, please make sure that there is a proper network connection that meets these basic needs:

Basic network requirements: 4Mbps download / 1Mbps upload

Support Network

WIFI 802.11 a/g/n

LAN (10/100MB)

PPPOE/DHCP/Fixed IP

Output terminals

High-fidelity stereo sound

Resolution

10.4' LCD 800 X 600

**Power Specifications** 

Input Power: 100 ~ 240V 50 ~ 60HZ

Output voltage: 5V (3A)

Size

186(L) x 117(W) x 23(H) mm

Weight:522g


Security Certification: UL CE Application







# c. Appearance

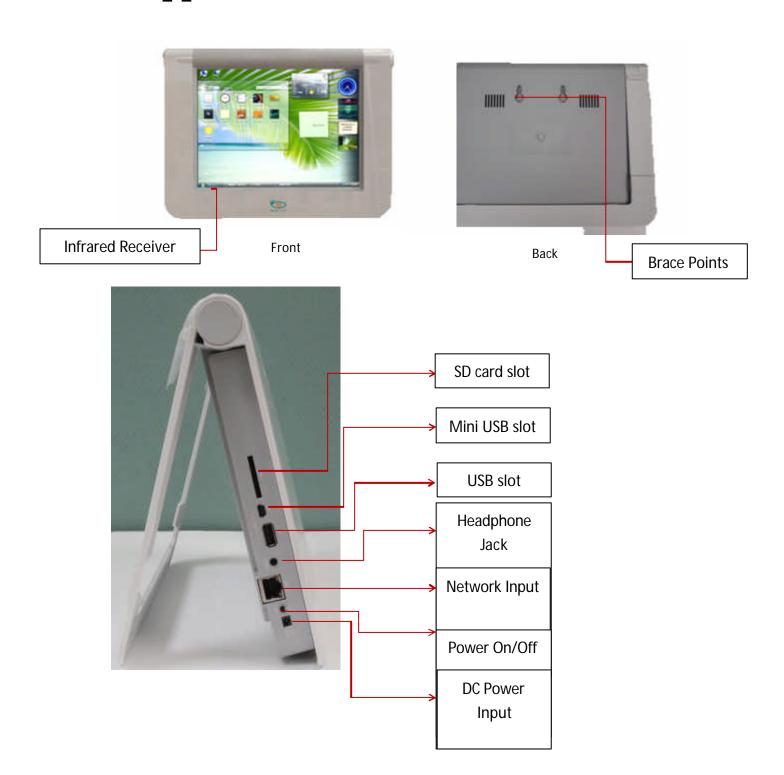


# d. Remote Control Description

(圖)Power button Switches Cloud Media Receiver ON/OFF								
(圖)Number keys Enter Numbers, Letters, and/or Symbols								
(圖)Home button Exit/Back to Previous Level								
(圖)Up and down page button Select units offer features page for page								
(圖)Album button Upload the SD card features into album								
Text input mode as the "elimination of key" using								
(圖)Arrow keys Cursor Movement Functions								
(圖)OK button Confirm Key								
(圖 Set button Direct Access to "Function Setting Screen"								
(圖)Return key Return to the Previous Menu								
(圖)Sound button Volume								
(圖)Mute button Mute								
(圖)BackspaceOn-Demand Program Operations								
(圖)PauseSuspends Operation of the Program on Demand								
(圖)Fast-forward button Fast-forward Through On-demand								



## 2. Main Interface

## a. Home Page

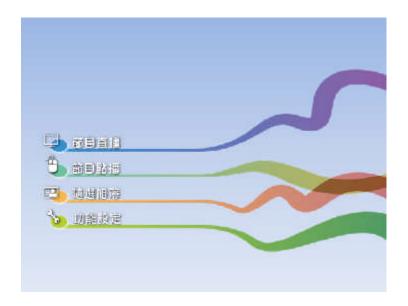

- 1. Turn on your Cloud Media Receiver, the system will automatically search for available networks, please wait about 10 seconds. Upon acquiring a connection, the screen will display the main screen shown above.
- 2. Upon booting into the main screen, using the up and down cursors on the remote control you can select the functions. Selected features will be shown in bold. Select an operation and press the OK button to confirm.
- 3. To return to previous menus press the return key. You can also press the Home key to return directly to the main boot screen.

## b. Program menu



On the boot up screen, select "Program live" or "On-Demand Programming", the system will enter into the Program menu screen.

Using the cursors on the remote move left or right to highlight the channels or program that you would like to watch. Once highlighted, press OK to start viewing. If you purchased more than 10 Program, according to Page button to switch Program menu page.

# 3. Network Setup

Cloud Media Receiver is easy to use, simply set up the network to get started.

- 1. Cloud Media Receiver has a wise memory function. After the initial boot-up, you will only need to configure your settings once. The Cloud Media Receiver will save your settings and automatically connect you on following start-ups.
- 2. If you do change the network environment, such as: business trip or a replacement of a network service provider, you will need to reset the network connection. As before, the system will automatically remember your newly configured settings and automatically connect upon following boot-up.

## a. Network Setup



From the boot screen, select "Options" or press (IMAGE?!) button on the remote control settings, this will guide you directly into the network settings screen.

# b. Configuring the Network

Cloud Media Receiver can be set to include: local networks, ADSL, wireless networks. The receiver is versatile enough to meet any network requirements.

### 1. Local Network Setup



Users with IP sharing devices can select to Obtain IP addresses automatically. For users who need to set a fixed IP address, choose to manually enter the IP address of the telecommunications company.

#### 2. ADSL settings



For this setting enter the telecommunication company's user name and password. Select "Remember user name and password" then click connect.

### 3. Wireless Network Setup



- The system will automatically search for available wireless AP, wait 5 to 10 seconds; all available AP's will list themselves on the left of the page.
- 2. Use the cursor buttons to select the preferred AP.
- 3. If a password is required to

connect, double tap the right-cursor to enter the password field.

- 4. Enter the password.
- 5. Select Confirm and press the OK button.
- 6. Selected AP's will be highlighted in blue. The SSID field will automatically display the name of the selected AP if a successful connection has been made.
- 7. Press the Back button or Home button return to the boot screen.

## c. Input Methods

For all network settings and passwords, CloudMedia Receiver's remote control can provide complete digital, case letters and punctuation marks that are commonly used in input fields.

For number key control input values, please refer to the table below.

	Press	Press twice	Double-click three times	Even at four times	Double-click five	Even at six	Even at seven
1	1	а	b	С	Α	В	С
2	2	d	E	f	D	E	F
3	3	g	Н	1	G	Н	I
4	4	j	K	L	J	K	L
5	5	m	n	0	М	N	0
6	6	p	q	r	Р	Q	R
7	7	S	t	u	S	T	U
8	8	V	W	Х	V	W	Χ
9	9	у	Z		Υ	Z	
0	0						

# 4. Start using the Cloud Media

## Receiver

After setting up the network settings, return to the main screen; you are now ready to enjoy our Cloud Technology that has been designed for your viewing enjoyment!

We wish you a happy viewing!

## 5. Contact Us

If you have any questions or concerns, please contact your local dealer or our head office.

Contact head office as follows:

Aaaxxx

Aaa