

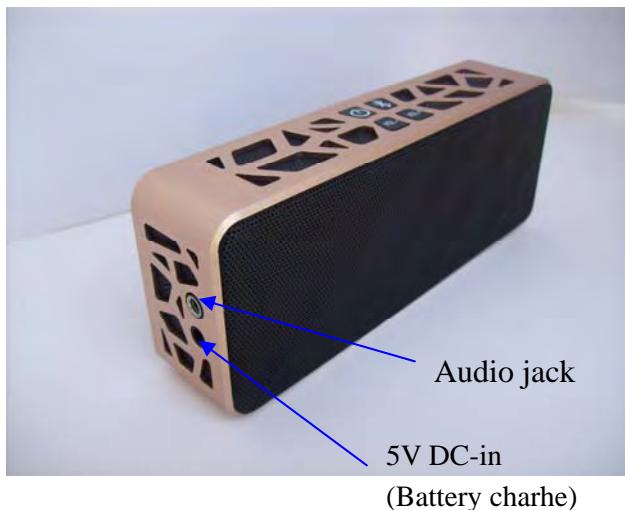


USER'S MANUAL

FEATURES & CONTROLS

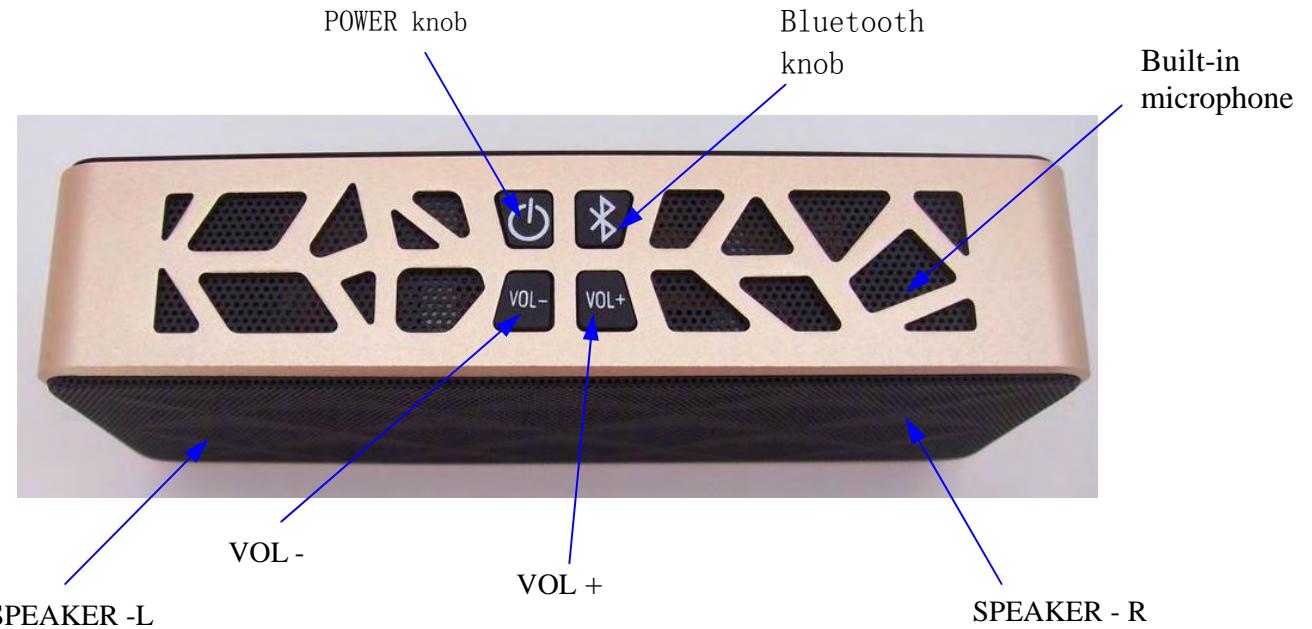

CONNECTION

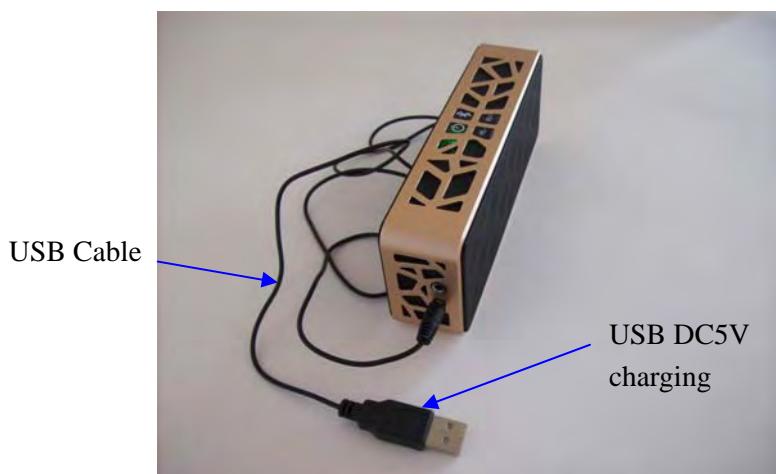

OPERATION

TURN POWER ON

Press POWER button and release while the device is at power-off condition.

Back-light LED of power button lights up in green and blinks , indicating the device is at power-on condition. You may connect a regular audio device to Audio-in jack directly or refer to Bluetooth Operation in the below for Bluetooth-featured devices.

Status of battery is indicated as follow.

1. With Charger cable disconnected

1a: Battery at workable or full level

Green LED repeats a slow flash.

1b: Battery at low level

Red LED repeats a quick flash every second.

2. With Charger cable connected

2a: Red LED repeats a fast flash to when battery is at low level.

2b: Red and green LEDs repeat a slow flash simultaneously when the battery is at workable level.

2c: Both red and green LEDs keep lit when the battery is fully charged.

TURN POWER OFF

Press POWER button and release while the device is at power-on condition.

Back-light green LED of power button is black-out , indicating the device is at power-off condition.

Status of battery is indicated as follow when the charging cable is connected.

a: Red LED repeats a quick flash when the battery is at low level.

b: Red LED repeats a slow flash when the battery is at workable level.

c: Red LED keeps lit when the battery is at its full level.

Remarks : Quick flash implies light up for 1 second and shuts off for 1 second.

Slow flash implies light up for 3 seconds and shuts off for 3 seconds.

BLUETOOTH OPERATION

Turn the BT-Speaker power on and follow the guidance in the below .

2.1. Turn on the Bluetooth

Press the Bluetooth knob and hold for 5 seconds until a beep sounds and the blue LED flashes.

2.2. Turn off the Bluetooth

Press the Bluetooth knob and hold for 3 seconds until a beep sounds and the red LED flashes.

Linking a cell-phone to the BT-Speaker via Bluetooth

1. With the speaker Bluetooth at Off condition , press its knob and hold for 7 seconds until 2 beeps sound while the red and blue LED flashes alternately.
2. Set the cell-phone to Bluetooth mode and search for the mode to be linked.
3. Select " mini BOX" when it appears in the cell-phone to link.

Enter 0000 to link in case a code is required by some cell-phones.

4. After being linked operation of the cell-phone will sound by the speaker.

You may stream music from the cell-phone to the device speaker now.

5. Turn of the speaker Bluetooth first and then Bluetooth of the cell-phone to disconnect the link.

Note :

- 1. Refer to manuals of cell-phones or iPad for Bluetooth operation as it may vary from model to model.**
- 2. Do not plug in Audio jack when Bluetooth is in operation .**

Receiving a call with the BT-speaker

1. Link your cell-phone to the speaker via Bluetooth.

2. Quick press Bluetooth knob to switch a phone-call call to the speaker.

A short beep sounds and you may talk via the built-in microphone of the speaker.

3. To end the talk just quick press the Bluetooth knob again .

A beep sounds and the speaker will automatically resume streaming music which the cell-phone set prior to phone-call.

4. To reject an income-call, simply press the Bluetooth knob and hold for 2 seconds until a long beep sounds.

Redial last number with the BT-speaker

The speaker will redial last number dialed at quick press of Bluetooth knob twice and a long beep sounds.

Hang up with the BT-speaker

A phone-call can be ceased by a quick press of Bluetooth knob followed by a short beep.

Re-linking to the cell-phone

Simply quick press the Bluetooth knob to re-link if both the previously paired cell-phone and the speaker are in Bluetooth on but unlinked condition.

Bluetooth LED indication

Status	LED indication
Power on, un-linked	Blue LED 2 flashes/ sec
Paired	Blue & red LED flash alternately
Linked	Blue LED flashes every 4 seconds
In a phone-call	Blue LED flashes every 4 seconds

AUXILIARY AUDIO INPUT



To play your audio device on the BT-speaker , turn on power of the BT-speaker and

connect your audio-paly device to Audio jack with the audio cable being supplied.

Alternatively just plug in Audio jack when in Bluetooth mode which will be temporarily disconnected. Unplugging Audio jack will resume Bluetooth function .

Adjust volume level to your desire with VOL+/VOL- knobs.

FCC ID : Z8NMINIBOX

BRAND NAME : MINGDA

MODEL : MiniBox

Operation Frequency	2.402 GHz to 2.480GHz
Rated Output Power	3.61dBm(max) for GFSK modulation
Bluetooth Version	V2.1 with EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79
Antenna Designation	Integrated Antenna
Antenna Gain	0.83dBi
Hardware Version	BC57F687A05-IQF-E4

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.