

G1000II Antennae report
product model name antenna model
name PCB Antenna

Test Equipment: Agilent5071

1、Antenna manufacturers

Our Bluetooth antenna is directly used in the PCB onboard mode, the antenna is copper park and tin injection process, copper foil thickness: H / H0Z, the plate is FR-4 thickness of 1.2mm material;


PCB manufacturer :

MEIZHOU CITY HONGLI PRINTED GIRCUIT BOARD CO .LTD

2、Antenna appearance

1.Dimensioned drawing : 14.4*5.0mm

2. Antennae picture:

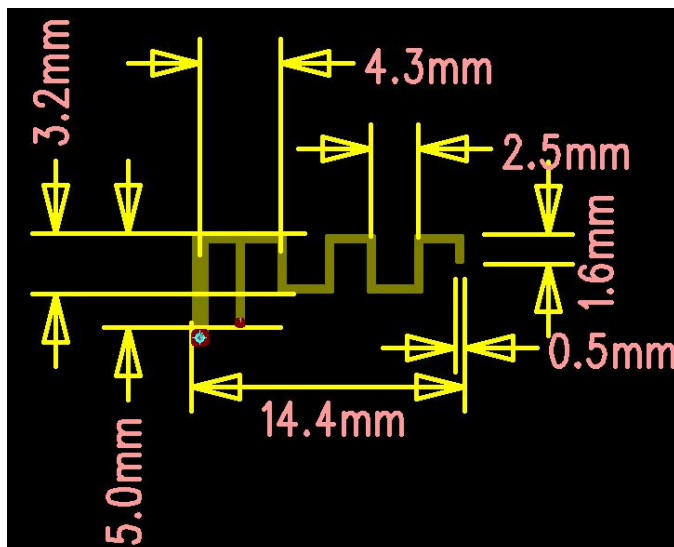


G1000II Antennae report


3、Electrical Characteristics

The antenna na matching circuit:

BT	
Element	
E1(0402)	0.7pF
E2(0402)	0 ohm
E3(0402)	NC

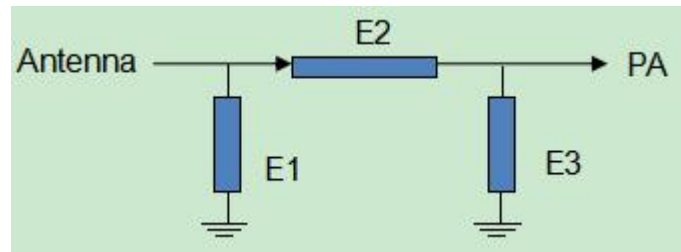

Antennae S11 test:

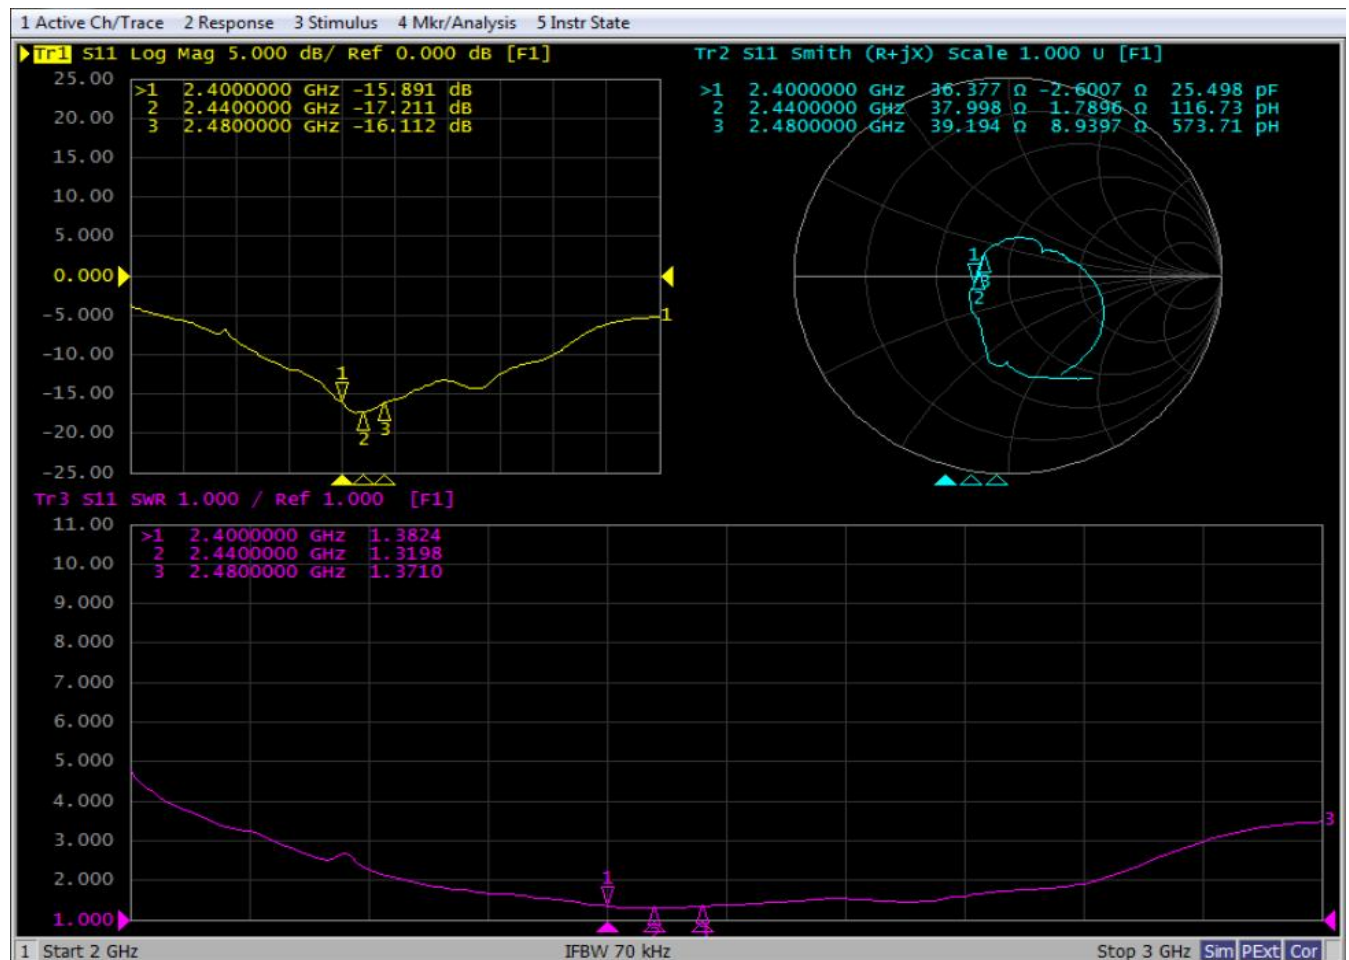

G1000II Antennae report


Freq (MHz)	2400	2440	2480
SWR	1.38	1.32	1.37
Log Mag	-15.89	-17.21	-16.11

Antennae Gain:

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	2.41	54.05
2410	2.47	54.79
2420	2.46	56.05
2430	2.35	57.39
2440	2.36	56.33
2450	2.63	56.21
2460	2.95	55.99
2470	2.96	55.14
2480	2.86	54.10
2490	2.75	53.86
2500	2.82	55.10

G1000II Antennae report

Direction diagram of passive antenna:

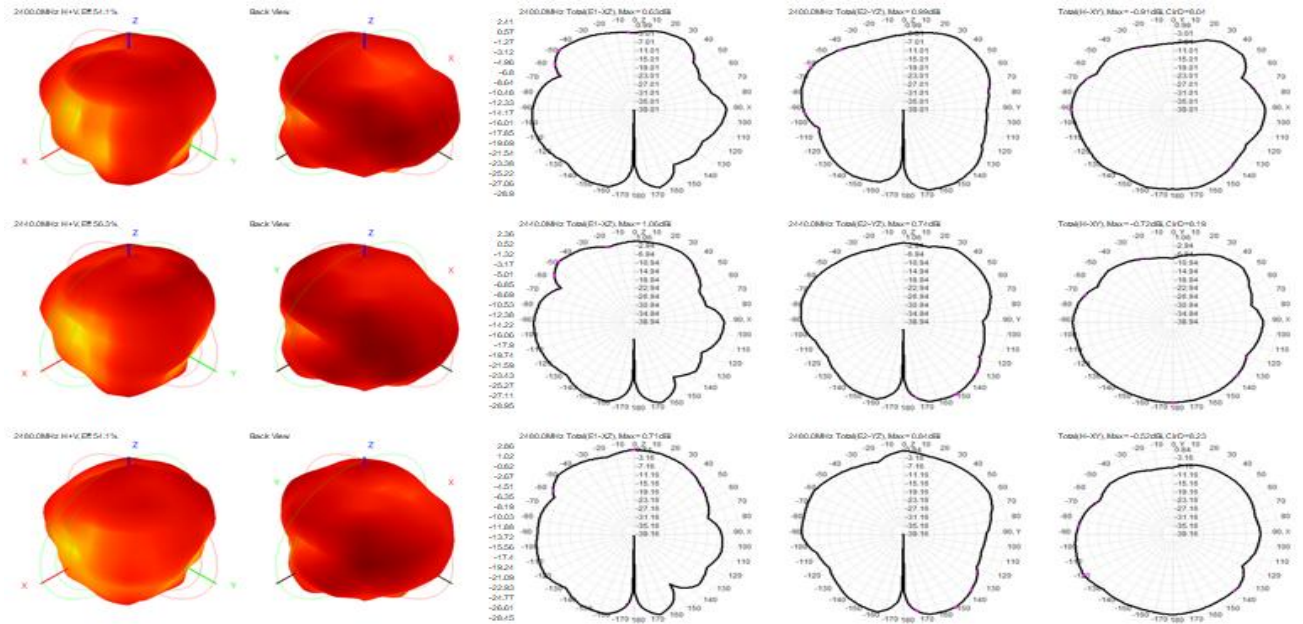

Antennae OTA test :

Channels	TRP	TIS
0	5.53	-86.41
39	5.59	-88.67
78	5.54	-89.33

G1000II Antennae report

3.1 Test methods and test standards:

Name	Parameter	Method	Standard no.
Antenna performance	Radiation efficiency	IEEE Standard Test Procedures for Antennas	ANSI/IEEE Std 149-2021

3.2Instrument list and calibration date:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date.
Network Analyzer	Agilent	E5071B		2024.11..04	2025.11.04
Antenna	RS	CMW500		2024.11..04	2025.11.04
Chamber	FUTUKEJI	4*4*3.5		2024.11..04	2025.11.04

3.3 Antennae manufacturers report

Test Lab Name: Shenzhen Worldelite Electronic CO.,LTD

Test laboratory address: 1st Floor, Building 4, Xiangyuer Industrial Park,
No. 8 Longsheng Road, Longgang District, Shenzhen

Tester: Li Yuepeng

Test date:2025.1.20

G1000II Antennae report

3.4 Test photos:



3.5 Test configuration diagram:

