

WSCB-RF MANUAL


Safety instructions

- 1 Do not open the control box privately, or free warranty will be ineffective.
- 2 Prevent liquid from entering the handset and control box to avoid short-circuit damage.
- 3 The product is not suitable for use by children especially when parents are not present.
- 4 Safe use of control box and actuators are possible only when the operating instructions are read fully.

Installation

- 1 Please read Wesuccess safety instructions before installation.
- 2 Plug the main cable of the linear actuator into mains socket (main voltage 110V), then turn on the power.
- 3 Now you can operate the control box according to the operating instruction.

Operating instruction

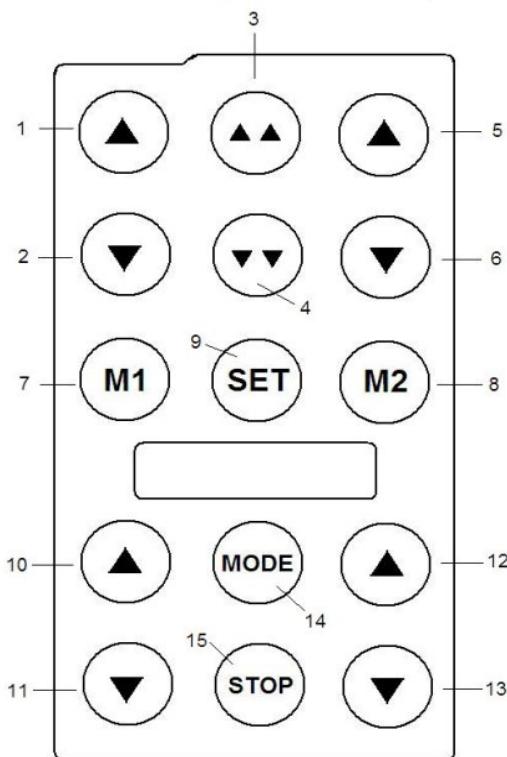

When the button is pressed the LED light is on to show the control state.

- 1) Raise the head of the bed
- 2) Lower the head of the bed
- 3) Raise the head and the foot of the bed synchronously
- 4) Lower the head and the foot of the bed synchronously
- 5) Raise the foot of the bed
- 6) Lower the foot of the bed

To control the bed

When you hold and press buttons 1-6, the motor will be continuously activated for 5 seconds. If you want to activate again, then release the button and press again.

7) Position Memory 1: If the first position is effectively remembered, when press Key 7, the actuator will automatically run to the desired position.

8) Position Memory 2: If the second position is effectively remembered, when press Key 8, the actuator will automatically run to the desired position.

9) Memory Key: When pressing the memory key 9 for more than 3 seconds, you will soon hear the buzzer, which means the beginning of current position memory. Then press Key 7 or 8, and the current location information will be stored in Position Memory 1 or 2.

10) Increase the massage intensity of head.

When the button is pressed, the massage intensity will increase by 1 level. There are 5 levels of massage intensity. If you hear the buzzer with 2 consecutive sounds, that means the motor has reached its maximum intensity.

11) Reduce the massage intensity of head.

When the button is pressed, the massage intensity will decrease by 1 level. There are 5 levels of massage intensity. If you hear the buzzer with 2 consecutive sounds, that means the motor has reached its minimum intensity.

12) Increase the massage intensity of foot.

When the button is pressed, the massage intensity will increase by 1 level. There are 5 levels of massage intensity. If you hear the buzzer with 2 consecutive sounds, that means the motor has reached its maximum intensity.

13) Reduce the massage intensity of foot.

When the button is pressed, the massage intensity will decrease by 1 level. There are 5 levels of massage intensity. If you hear the buzzer with 2 consecutive sounds, that means the motor has reached its minimum intensity.

14) Massage mode switch: There are 3 modes of massage. Press the button, the buzzer will sound, and massage mode will switch. So the cycle operation.

15) Massage stop: Press the button, the buzzer will sound, and massage will stop.

Trouble shooting

- No response
 - First confirm power supply, if there is power then check if the control box cable is properly connected with the dual actuator port.
 - Check if the remote control contains a battery, under normal conditions, the remote control LED will flash when the button is pressed.
 - If the remote button is pressed and the indicator light of the control box is on, the bed frame and the motor should be checked for blockages.

In the case that the massage bed still does not work, please contact the local distributor.

Technical Data:

Operating Voltage: 4.5 VDC (3 AAA battery)
Wireless Operating Frequency: 433.84M

Warranties

There are 3 years warranty for WSCB-RF control box , starting from the date of purchasing. Wesuccess guarantee is only valid so far as the products have been used and maintained correctly and has not been tampered with. Furthermore, the products must not be exposed to violent treatment. Or, the warranty will be ineffective/ invalid. Wesuccess's warranty is only valid if the product is unopened and had been used correctly.

FCC Statement:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.