TRULY INDUSTRIAL (SHANWEI) LTD

NETPAD

Model: N701WG

Aug 3rd 2011

Report No.: 1105013(FCC-SAR) Rev1.2 (This report supersedes 1105013(FCC-SAR) Rev1.1)



Modifications made to the product: None

This Test Report is Issued Under the Authorit	y of:
David Zhang	Bu
David Zhang	Leslie Bai
Compliance Engineer	Director of Certification

This test report may be reproduced in full only. All Test Data Presented in this report is only applicable to presented Test sample.

SIEMIC, INC.
Accessing global m

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 2 of 109 www.siemic.com

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to <u>testing</u> and <u>certification</u>, SIEMIC provides initial design reviews and <u>compliance management</u> through out a project. Our extensive experience with <u>China</u>, <u>Asia Pacific</u>, <u>North America</u>, <u>European</u>, <u>and international</u> compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the <u>global markets</u>.

Accreditations for Conformity Assessment

Accidations for comornity Assessment						
Country/Region	Accreditation Body	Scope				
USA	FCC, A2LA	EMC , RF/Wireless , Telecom , SAR				
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom, SAR				
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom , Safety				
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom				
Australia	NATA, NIST	EMC, RF, Telecom , Safety				
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety, SAR				
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom				
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom				
Europe	A2LA, NIST	EMC, RF, Telecom , Safety, SAR				

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB , NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF , Telecom
HongKong	OFTA (US002)	RF , Telecom

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 3 of 109 www.siemic.com

This page has been left blank intentionally.



| Serial# | 1105013(FCC-SAR) Rev1.2 | Issue Date | Aug 3rd 2011 | Page | 4 of 109 | www.siemic.com |

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	6
2	TECHNICAL DETAILS	
3	INTRODUCTION	
4	SAR MEASUREMENT SETUP	
5	ANSI/IEEE C95.1 – 1999 RF EXPOSURE LIMIT	19
6	SYSTEM AND LIQUID VALIDATION	20
7	TYPE A MEASUREMENT UNCERTAINTY	27
8	OUTPUT POWER VERIFICATION	29
9	SAR TEST RESULTS	33
ANNE	EX A. TEST INSTRUMENT & METHOD	61
ANNE	EX B EUT AND TEST SETUP PHOTOGRAPHS	63
ANNE	EX C CALIBRATION REPORTS	66

| Serial# 1105013(FCC-SAR) Rev1.2 | Issue Date | Aug 3rd 2011 | Page | 5 of 109 | www.siemic.com

This page has been left blank intentionally.



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 6 of 109 www.siemic.com

1 Executive Summary & EUT information

The purpose of this test programmed was to demonstrate compliance of the Truly Industrial (Shanwei) Ltd Model: N701WG against the current Stipulated Standards. The NETPAD have demonstrated compliance with the C95.1, IEEE 1528, OET Bulletin 65 Supplement C and Safety Code 6. The test has demonstrated that this unit complies with stipulated standards.

EUT Information

EUT Description

NETPAD

Test Sample type : Product unit

Model No : N701WG
Serial No : N/A

HW version : 2.1-update1 SW version : 2.6.29 Version number : 110303

: 110303 : 824 – 894 MHz : 0.5 dBi

Antenna Gain 1850-2170MHz : 0.8 dBi

2412-2480MHz: 0.8 dBi

Input Power : 5VDC, 2A

 GPRS1900(Power Class 1)
 : 28.28 dBm

 EGPRS1900(Power Class E2)
 : 25.08 dBm

 WCDMA Band V(Power Class 3)
 : 22.37 dBm

 HSDPA Band V(Power Class 3)
 : 22.06 dBm

Maximum Conducted Output Power to Antenna

HSUPA Band V(Power Class 3) : 22.16 dBm WCDMA Band II(Power Class 3) : 22.42 dBm HSDPA Band II(Power Class 3) : 21.41 dBm HSUPA Band II(Power Class 3) : 21.67 dBm

GPRS1900 (Power Class 3) : 0.81 W (29.08 dBm) / EIRP EGPRS1900 (Power Class E2) : 0.39 W (25.88dBm) / EIRP WCDMA Band V(Power Class 3) : 0.19 W (22.87 dBm) / ERP HSDPA Band V(Power Class 3) : 0.18 W (22.56 dBm) / ERP

HSUPA Band V(Power Class 3) : 0.18 W (22.66 dBm)/ERP WCDMA Band II(Power Class 3) : 0.21 W (23.22 dBm)/ EIRP HSDPA Band II(Power Class 3) : 0.17 W (22.21 dBm)/EIRP HSUPA Band II(Power Class 3) : 0.18 W (22.47 dBm)/EIRP

Transmitter category/ Equipment category

Maximum Radiated ERP/EIRP

Portable Device

Co-located TX : WWAN can transmit simultaneously with 802.11g

Antenna Separation distances : 0.8 cm - WWAN antenna-to-WiFi (802.11g)

Band: GPRS Highest SAR Value: N/A (Head) 1.246 W/kg (Body)

Measured Highest SAR : Band: UMTS

Highest SAR Value: N/A (Head) 1.542 W/kg (Body)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 7 of 109 www.siemic.com

	2 <u>TECHNICAL DETAILS</u>
Purpose	Compliance testing of NETPAD model N701WG with stipulated standard
Applicant / Client	Truly Industrial (Shanwei) Ltd
Manufacturer	Truly Industrial (Shanwei) Ltd Truly Industrial Area, Shanwei City Guangdong Province, PRC
Laboratory performing the tests	SIEMIC Laboratories
Test report reference number	1105013(FCC-SAR) Rev1.2
Date EUT received	Apr 10th 2011
Standard applied	See Page 9
Dates of test (from - to)	Apr 10th-May 31st 2011
No of Units:	1
Equipment Category:	PCE
Trade Name:	Truly Industrial (Shanwei) Ltd
Model Name:	N701WG
RF Operating Frequency (ies)	GPRS/EGPRS 1900 : 1850.2 ~ 1909.8 MHz(TX) / 1930.2 ~ 1989.8 MHz(RX) WCDMA Band V : 826.4 ~ 846.6 MHz(TX) / 871.4 ~ 891.6 MHz(RX) WCDMA Band II : 1852.4 ~ 1907.6 MHz(TX) / 1932.4 ~ 1987.6 MHz(RX)
Number of Channels:	N/A
Modulation:	GPRS : GMSK EGPRS : 8PSK WCDMA : QPSK/BPSK WIFI: DSSS,OFDM
FCC ID:	ZM2-N701

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 8 of 109 www.siemic.com

3 INTRODUCTION

Introduction

This measurement report shows compliance of the EUT with FCC OET Bulletin 65 Supplement C (Edition 01-01) & RSS 102 Issue 4.0.

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], and ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], were employed.

SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (p).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma \mid E \mid^2}{\rho}$$

where:

 σ = conductivity of the tissue (S/m)

 ρ = mass density of the tissue (kg/m3)

E = rms electric field strength (V/m)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 9 of 109


4 SAR Measurement Setup

Dosimetric Assessment System

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than \pm 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR starndard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN62209-1.

Measurement System Diagram

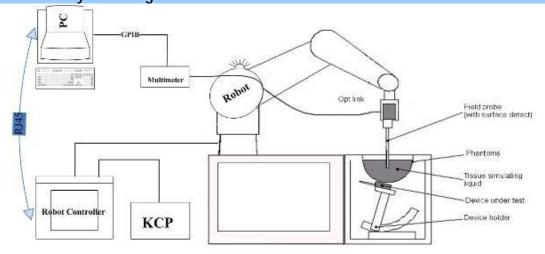

The OPENSAR system for performing compliance tests consist of the following items:

- 1. A standard high precision 6-axis robot (KUKA) with controller and software.
- 2. KUKA Control Panel (KCP).
- 3. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- 4. The functions of the PC plug-in card are to perform the time critical task such as signal filtering, surveillance of the robot operation fast movement interrupts.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 10 of 109

- 5. A computer operating Windows XP.
- 6. OPENSAR software.
- 7. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- 8. The SAM phantom enabling testing left-hand right-hand and body usage.
- 9. The Position device for handheld EUT.
- 10. Tissue simulating liquid mixed according to the given recipes (see Application Note).
- 11. System validation dipoles to validate the proper functioning of the system.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 11 of 109

EP100 Probe





Construction Symmetrical design with triangular Core. Built-in shielding against static charges Calibration in air from 100 MHz to 2.5 GHz. In brain and muscle simulating tissue at frequencies from 800 to 6000 MHz (accuracy of 8%).

Frequency 100 MHz to 6 GHz;

Linearity; 0.25 dB (100 MHz to 6 GHz),

Directivity: 0.25 dB in brain tissue (rotation around probe axis) 0.5 dB in brain tissue (rotation normal probe axis)

Dynamic: 0.001W/kg to > 100W/kg;

Range Linearity: 0.25 dB

Surface: 0.2 mm repeatability in air and liquids

Dimensions Overall length: 330 mm

Tip length: 16 mm

Body diameter: 8 mm

Tip diameter: 2.6 mm

Distance from probe tip to dipole centers: <1.5 mm

Application General dosimetric up to 6 GHz

Compliance tests of mobile phones

Fast automatic scanning in arbitrary phantoms

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique, with printed resistive lines on ceramic substrates.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 12 of 109

It is connected to the KRC box on the robot arm and provides an automatic detection of the phantom surface. The 3D file of the phantom is include in OpenSAR software. The Video Positioning System allow the system to take the automatic reference and to move the probe safely and accurately on the phantom.

E-Field Probe Calibration Process

Each probe is calibrated according to a dosimetric assessment procedure described in SAR standard with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 0.8 GHz, and in a waveguide above 0.8 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. E-field correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue.

SAM Phantom

The SAM Phantom SAM29 is constructed of a fiberglass shell ntegrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN62209-1. The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness: 2 0.2 mm Filling Volume: Approx. 25 liters

Dimensions (H x L x W): 810 x 1000 x 500 mm

Liquid is filled to at least 15mm from the bottom of Phantom.



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 13 of 109 www.siemic.com

Device Holder

In combination with the Generic Twin Phantom V3.0, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations [10]. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

Data Evaluation

The OPENSAR software automatically executes the following procedure to calculate the field units from the microvolt readings at the probe connector. The parameters used in the valuation are stored in the configuration modules of the software:

Probe Parameters	- Sensitivity	Norm _i
	- Conversion factor	ConvFi
	- Diode compression point Dcpi	
Device Parameter	- Frequency	f
	- Crest factor	cf
Media Parametrs	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can either be found in the component documents or be imported into the software from the configuration files issued for the OPENSAR components.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Where V_i = Compensated signal of channel i (i = x, y, z)

 U_i = Input signal of channel i (i = x, y, z)

cf = Crest factor of exciting field(DASY parameter)

 $dcp_i = Diode\ compression\ point\ (DASY\ parameter)$

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 14 of 109 www.siemic.com

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:
$$H_i = \sqrt{Vi} \cdot \frac{a_{i10} + a_{i11}f + a_{i12}f^2}{f}$$

Where
$$V_i$$
 = Compensated signal of channel i (i = x, y, z)

$$Norm_i$$
 = Sensor sensitivity of channel i (i = x, y, z)

$$\mu V/(V/m)$$
2 for E0field Probes

f = Carrier frequency (GHz)

E_i = Electric field strength of channel i in V/m

H_i = Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{sot} - \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR - E_{tot}^2 - \frac{\sigma}{\rho \cdot 1000}$$

where SAR = local specific absorption rate in mW/g

 E_{tot} = total field strength in V/m

 σ = conductivity in [mho/m] or [siemens/m]

 ρ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pus} = \frac{E_{ns}^2}{3770}$$
 or $P_{pus} = H_{ns}^2 \cdot 37.7$

where P_{pwe} = Equivalent power density of a plane wave in mW/cm2

 E_{tot} = total electric field strength in V/m H_{tot} = total magnetic field strength in A/m

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 15 of 109

SAR Evaluation - Peak Spatial - Average

The procedure for assessing the peak spatial-average SAR value consists of the following steps

· Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

· Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in OPENSAR software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

· Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more then one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

· Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded.

SAR Evaluation - Peak SAR

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g. The OPENSAR system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- · boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maximum within -2 dB of the global maxima for all SAR distributions.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 16 of 109

Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

<u>Definition of Reference Points</u>

Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" is than located at the same level as the center of the ear reference point. The test device is positioned so that the "vertical centerline" is bisecting the front surface of the device at it's top and bottom edges, positioning the "ear reference point" on the outer surface of both the left and right head phantoms on the ear reference point [5].




Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 17 of 109

Test Configuration - Positioning for Cheek / Touch

 Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane defined by the vertical center line and the horizontal line of the device is approximately parallel to the sagittal plane of the phantom



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

- 2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
- 3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- 4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
- 5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




Figure 7.2 Side view w/ relevant markings

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 18 of 109 www.siemic.com

Test Configuration – Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position":

- 1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
- 2. Rotate the device around the horizontal line by 15 degrees.
- 3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).



Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

Test Position – Body Worn Configurations

Body-worn operating configurations are tested with the accessories attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then, when multiple accessories that contain metallic components are supplied with the device, the device is tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration where a separation distance between the back of the device and the flat phantom is used. All test position spacings are documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worst-case positioning is then documented and used to perform Body SAR testing.

1105013(FCC-SAR) Rev1.2 Serial# Issue Date Aug 3rd 2011 Page 19 of 109

ANSI/IEEE C95.1 - 1999 RF Exposure Limit

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. ² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 20 of 109

6 SYSTEM AND LIQUID VALIDATION

System Validation

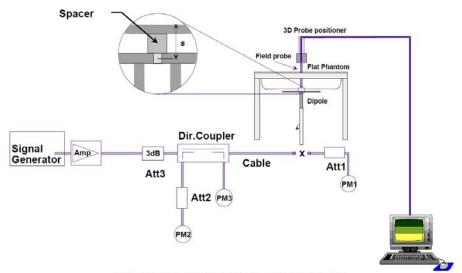


Fig 8.1 System Setup for System Evaluation

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

- 1. Signal Generator
- 2. Amplifier
- 3. Directional Coupler
- 4. Power Meter
- 5. Calibrated Dipole

The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 21 of 109

Numerical reference SAR values (W/kg) for reference dipole and flat phantom

Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) ^a
300	3.0	2.0	4.4	2.1
450	4.9	3.3	7.2	3.2
835	9.5	6.2	4.1	4.9
900	10.8	6.9	16.4	5.4
1450	29.0	16.0	50.2	6.5
1800	38.1	19.8	69.5	6.8
1900	39.7	20.5	72.1	6.6
2000	41.1	21.1	74.6	6.5
2450	52.4	24.0	104.2	7.7
3000	63.8	25.7	140.2	9.5

Target and measurement SAR after Normalized

Measurement Date	Frequency (MHz)	Configuration	Target SAR1g (W/kg)	Measured SAR1g (W/kg)	Deviation (%)
N/A	835	Head	N/A	N/A	N/A
N/A	1900	Head	N/A	N/A	N/A
N/A	2450	Head	N/A	N/A	N/A
May 23rd 2011	835	Body	9.50	9.0450	-4.79
May 23rd 2011	1900	Body	39.7	40.4165	+1.80
May 23rd 2011	2450	Body	52.4	51.4650	-1.80

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 22 of 109

Liquid Validation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended Tissue Dielectric Parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest xpected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency	He	ad	Во	ody
MHz	εr	σ (S/m)	εr	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

Note: ε_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³

Liquid Confirmation Result:

Temperature	e: <u>21</u> °C	Relative humidity: <u>58</u> %			
835MHz		Target	Measured	Deviation (%)	Limit (%)
Body	Permittivity	55.20	55.13	0.127	5
	Conductivity	0.97	0.938	-0.330	5

Temperature: <u>21</u> °C Relative humidity: <u>58</u> %					
	1900MHz	Target	Measured	Deviation (%)	Limit (%)
Body	Permittivity	53.30	53.55	-0.154	5
	Conductivity	1.52	1.53	-0.526	5



| Serial# 1105013(FCC-SAR) Rev1.2 | Issue Date | Aug 3rd 2011 | Page | 23 of 109 | www.siemic.com |

Temperature: 21°C			Relative humidity: <u>58</u> %			
2450MHz		Target	Measured	Deviation (%)	Limit (%)	
Dody	Permittivity	52.70	53.10	0.75	5	
Body	Conductivity	1.95	1.97	1.02	5	




1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 24 of 109

System Validation Plots

Product Description : Netpad

Model: N701WG

Test Date: May 23rd 2011

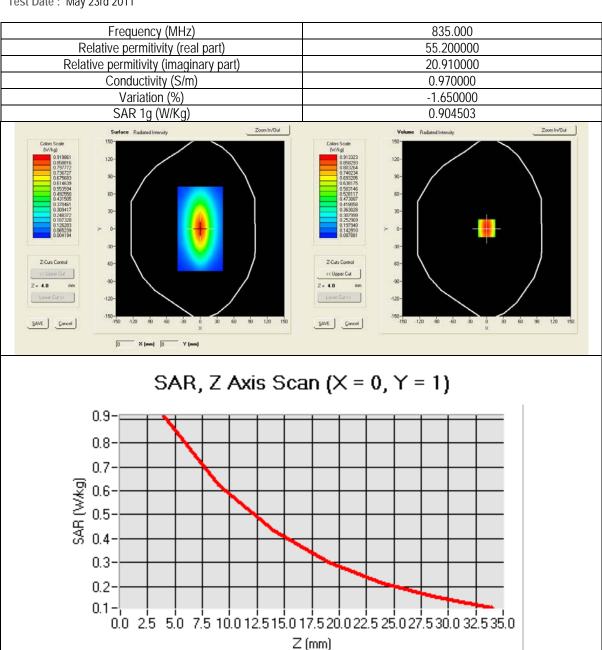


Product Description: Netpad

1.00 -


0.09 - |

Model: N701WG Test Date: May 23rd 2011

Frequency (MHz)	1900.000
Relative permitivity (real part)	53.3000000
Relative permitivity (imaginary part)	14.470000
Conductivity (S/m)	1.5100000
Variation (%)	0.120000
SAR 1g (W/Kg)	4.041647

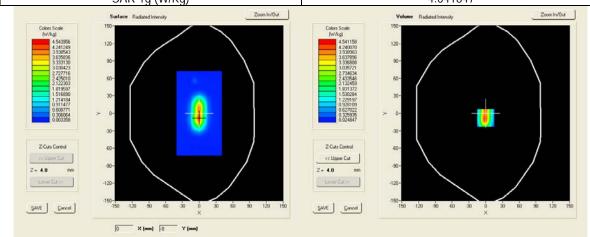

SAR, Z Axis Scan (X = 0, Y = -8)

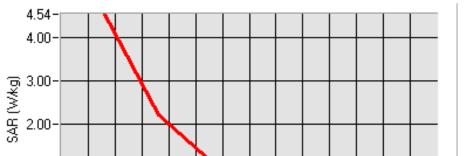


0.0 2.5 5.0 7.5 10.012.515.017.520.022.525.027.530.032.535.0 Z (mm)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 26 of 109


Product Description: Netpad

Model: N701WG Test Date: May 23rd 2011

Frequency (MHz)	2450.0000			
Relative permitivity (real part)	52.710001			
Relative permitivity (imaginary part)	14.310000			
Conductivity (S/m)	1.940015			
Variation (%)	-0.390000			
SAR 1g (W/Kg)	5.146499			
Surface Redised Intensity Zoom In/Out Colors Scale 150- BV/hol	Volume Rudated Intensity Zoom In/Dut Colors Scale 150-			

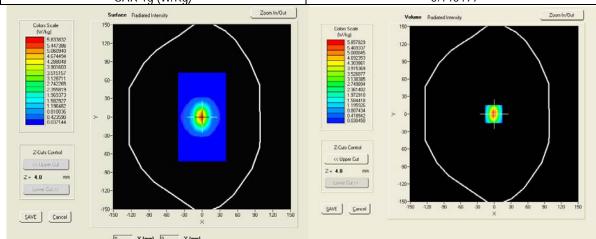



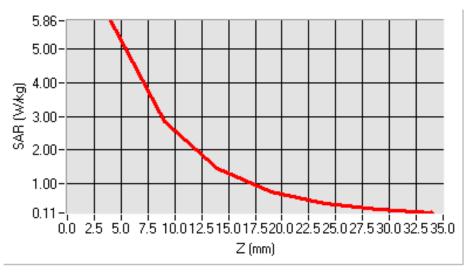

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 27 of 109

7 TYPE A MEASUREMENT UNCERTAINTY

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below:

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor ^(a)	1/k ^(b)	1 / √3	1 / √6	1 / √2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sum-by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table :

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 28 of 109

Uncertainty Budget of COMOSAR for frequency range 300 MHz to 6 GHz

Uncertainty Component	Tolerances %	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Uncertainty 1g(%)	Uncertainty 10g(%)
Component	/0	DISTIDUTION		(ig)	(10g)	19(76)	109(76)
Measurement System Related	i						
Probe Calibration	6	N	1	1	1	6	6
Axial Isotropy	3	R	√3	√ (1-Cp)	√ (1-Cp)	1.22474	1.22474
Hemispherical Isotropy	4	R	√3	√ Cp	√Cp	1.63299	1.63299
Boundary Effect	1	R	√3	1	1	0.57735	0.57735
Linearity	5	R	√3	1	1	2.88675	2.88675
System Detection Limits	1	R	√3	1	1	0.57735	0.57735
Readout Electronics	0.5	N	1	1	1	0.5	0.5
Response Time	0.2	R	√3	1	1	0.11547	0.11547
Integration Time	2	R	√3	1	1	1.1547	1.1547
RF Ambient Conditions	3	R	√3	1	1	1.73205	1.73205
Probe Positioner Mechanical	2	R	√3	1	1	1.1547	1.1547
Tolerances			٧3				
Probe Positioning with	1	R	√3	1	1	0.57735	0.57735
respect to Phantom Shell			٧3				
Extrapolation, Interpolation	1.5	R	,	1	1	0.86603	0.86603
and integration Algorithms for			√3				
Max. SAR Evaluation.							
Test Sample Related	4.5			1 4		4.5	4.5
Test Sample Positioning	1.5	N	1	1	1	1.5	1.5
Device Holder Uncertainty	5	N	1	1	1	5	5
Output Power Variation –	3	R	√3	1	1	1.73205	1.73205
SAR Drift measurement			,,,				
DI I IT' D	51.1						
Phantom and Tissue Paramet		T 5	1	1 4		0.0004	2 224
Phantom Uncertainty (Shape and thickness Tolerances)	4	R	√3	1	1	2.3094	2.394
Liquid Conductivity –	5	R	√3	0.64	0.43	1.84752	1.2413
deviation from target value			٧٥				
Liquid Conductivity –	2.5	N	1	0.64	0.43	1.6	1.075
Measurement Uncertainty			ı				
Liquid Permittivity – deviation	3	R	√3	0.6	0.49	1.03923	0.8487
from target value			٧٥				
Liquid Permittivity –	2.5	N	1	0.6	0.49	1.5	1.225
Measurement Uncertainty			ı				
				Standard L		9.66051 %	9.52428 %
	Expan	ded Standard Ur	icertainty (k	$\zeta=2$, confidence	ence 95%)	18.9346 %	18.6676 %

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 29 of 109

8 OUTPUT POWER VERIFICATION

8.1 GSM Mode

GPRS (GMSK) - CS1

Frequency Band	Slot Config	Channel No.	Frequency	Burst Average Power(dBm)	Duty Cycle Factor (dB)	Time-Averaged Power (dBm)
		Low(512)	1850.2	28.23	-6	22.23
GPRS1900	2 Slot	Mid(661)	1880.0	28.27	-6	22.27
		High(810)	1909.8	28.34	-6	22.34
		Low(512)	1850.2	28.29	-4.3	23.99
GPRS1900	3 Slot	Mid(661)	1880.0	28.36	-4.3	24.06
		High(810)	1909.8	28.34	-4.3	24.04
		Low(512)	1850.2	28.41	-3	25.41
GPRS1900	4 Slot	Mid(661)	1880.0	28.57	-3	25.57
		High(810)	1909.8	28.43	-3	25.43

EGPRS (8PSK) - MCS4

Frequency Band	Slot Config	Channel No.	Frequency	Burst Average Power(dBm)	Duty Cycle Factor (dB)	Time-Averaged Power (dBm)
		Low(512)	1850.2	24.83	-6	18.83
EGPRS1900	2 Slot	Mid(661)	1880.0	24.59	-6	18.59
		High(810)	1909.8	25.08	-6	19.08
		Low(512)	1850.2	24.79	-4.3	20.49
EGPRS1900	3 Slot	Mid(661)	1880.0	24.62	-4.3	20.32
		High(810)	1909.8	25.13	-4.3	20.83
		Low(512)	1850.2	24.94	-3	21.94
EGPRS1900	4 Slot	Mid(661)	1880.0	25.06	-3	22.06
		High(810)	1909.8	24.62	-3	21.62

Note: The output power of EGPRS mode is lower that under the GPRS mode, according to FCC rules for test mode reduction, the measurement for EGPRS mode is not necessary if the output power of EGPRS mode is not ¼ dB greater than GPRS mode. So only the SAR measurement for GPRS mode was performed.

 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 30 of 109

 www.siemic.com

UMTS Mode

R99 RMC (12.2kps)

Frequency Band	UL Channel No.	Frequency	Conducted Average Power(dBm)	Duty Cycle Factor (dB)	Time- Averaged Power (dBm)
UMTS850	Low(4132)	826.4	22.32	0	22.32
(Band V)	Mid(4182)	836.4	22.37	0	22.37
(Daliu V)	High(4233)	846.6	22.26	0	22.26
UMTS1900	Low(9262)	1852.4	22.22	0	22.22
(Band II)	Mid(9400)	1880.0	22.42	0	22.42
(Dailu II)	High(9538)	1907.6	22.40	0	22.40

Rel 6 HSDPA Mode

Frequency Band	Mode	UL Channel No.	Frequency	Conducted Average Power(dBm)	Duty Cycle Factor (dB)	Time- Averaged Power (dBm)
		Low(4132)	826.4	22.05	0	22.05
	Subtest 1	Mid(4182)	836.4	22.06	0	22.06
	Sublest 1	High(4233)	846.6	22.06	0	22.06
		Low	826.4	22.04	0	22.04
UMTS850	Subtest 2	Mid	836.4	22.02	0	22.02
(Band V)	Sublest 2	High	846.6	21.98	0	21.98
(Dallu V)		Low	826.4	22.04	0	22.04
	Subtest 3	Mid	836.4	22.03	0	22.03
	Sublest 5	High	846.6	21.91	0	21.91
	Subtest 4	Low	826.4	21.99	0	21.99
		Mid	836.4	22.01	0	22.01
		High	846.6	22.03	0	22.03
		Low(9262)	1852.4	20.41	0	20.41
	Subtest 1	Mid(9400)	1880.0	21.41	0	21.41
	Sublest 1	High(9538)	1907.6	20.36	0	20.36
		Low	1852.4	21.28	0	21.28
UMTS1900	Subtest 2	Mid	1880.0	20.98	0	20.98
(Band II)	Sublest 2	High	1907.6	21.38	0	21.38
(Dariu II)		Low	1852.4	21.08	0	21.08
	Subtest 3	Mid	1880.0	21.36	0	21.36
	Sublest 5	High	1907.6	21.07	0	21.07
		Low	1852.4	21.29	0	21.29
	Subtest 4	Mid	1880.0	21.27	0	21.27
		High	1907.6	21.19	0	21.19

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 31 of 109 www.siemic.com

Rel 6 HSPA Mode

Frequency Band	Mode	UL Channel No.	Frequency	Conducted Average Power(dBm)	Duty Cycle Factor (dB)	Time- Averaged Power (dBm)
		Low(4132)	826.4	21.71	0	21.71
	Subtest 1	Mid(4182)	836.4	22.16	0	22.16
	Sublest 1	High(4233)	846.6	21.28	0	21.28
		Low	826.4	21.66	0	21.66
UMTS850	Subtest 2	Mid	836.4	22.01	0	22.01
(Band V)	Sublest 2	High	846.6	21.98	0	21.98
(Dallu V)		Low	826.4	20.99	0	20.99
	Subtest 3	Mid	836.4	22.08	0	22.08
	Sublest 3	High	846.6	21.76	0	21.76
		Low	826.4	20.96	0	20.96
	Subtest 4	Mid	836.4	21.08	0	21.08
		High	846.6	21.20	0	21.20
		Low(9262)	1852.4	21.07	0	21.07
	Subtest 1	Mid(9400)	1880.0	21.67	0	21.67
	Sublest 1	High(9538)	1907.6	21.16	0	21.16
		Low	1852.4	21.09	0	21.09
	Subtest 2	Mid	1880.0	21.19	0	21.19
UMTS1900	Sublest 2	High	1907.6	20.97	0	20.97
(Band II)		Low	1852.4	21.07	0	21.07
	Subtest 3	Mid	1880.0	21.15	0	21.15
	วนมเธรเ ว	High	1907.6	21.22	0	21.22
	Subtest 4	Low	1852.4	21.07	0	21.07
	Sublest 4	Mid	1880.0	21.39	0	21.39
		High	1907.6	21.49	0	21.49

Note: The output power of HSDPA mode and HSPA mode is lower that under the WCDMA RMC mode, according to FCC rules for test mode reduction, the measurement for HSDPA mode and HSPA mode is not necessary if the output power of those modes is not ¼ dB greater than WCDMA RMC mode. So only the SAR measurement for WCDMA RMC mode was performed. Only the SAR measurement with maximum output power configuration was performed and presented for WCDMA RMC mode.

 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 32 of 109

 www.siemic.com

WIFI Mode

802.11b mode

Channel number	Frequency (MHz)	Average Output Power(dBm)	Duty Cycle Factor (dB)	Time-Averaged Power (dBm)
1	2412	9.1	0	9.1
6	2437	9.5	0	9.5
11	2462	10.0	0	10.0

802.11g mode

Channel number	Frequency (MHz)	Average Output Power(dBm)	Duty Cycle Factor (dB)	Time-Averaged Power (dBm)
1	2412	9.3	0	9.3
6	2437	9.1	0	9.1
11	2462	9.0	0	9.0

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 33 of 109

9 SAR TEST RESULTS

GPRS Mode

Body SAR (Separation distance: 0cm)

Test Configuration , Body			Crest Factor : 3		Date of Measured : May 23rd 2011		
Freq Band	Mode	Channel	Position	SAR 1g (W/kg)	SAR 10g(W/kg)	Power Variation (%)	1g SAR Limit (W/kg)
	CS1	Low		0.955	0.439	1.74	1.6
GPRS1900	CS1	Mid	EUT bottom	0.966	0.442	2.75	1.6
	CS1	High		0.965	0.433	-4.20	1.6
	CS1	Low	Antonno odno	1.125	0.560	-3.84	1.6
GPRS1900	CS1	Mid	Antenna edge touch	1.246	0.608	-4.26	1.6
	CS1	High		1.126	0.561	-2.02	1.6
GPRS1900	CS1	Mid	Antenna edge vertical	0.005	0.003	-2.29	1.6

Note: The measurement above was based on the 4 slot configuration which gave the maximum time-averaged output power.

UMTS Mode

Body SAR (Separation distance: 0cm)


Test Configuration	on , Body	Crest Factor : 1 Date of Measured : May 23rd 2011			ay 23rd 2011		
Freq Band	Mode	Channel	Position	SAR 1g (W/kg)	SAR 10g(W/kg)	Power Variation (%)	1g SAR Limit (W/kg)
UMTS850 (Band V)	RMC,12.2kbps	Low	EUT bottom	1.532	0.928	0.50	1.6
	RMC,12.2kbps	Mid		1.340	0.765	-0.26	1.6
(Bana V)	RMC,12.2kbps	High		1.353	0.768	-0.22	1.6
LUATOOSO	RMC,12.2kbps	Low	Antenna edge touch	1.005	0.532	0.16	1.6
UMTS850 (Band V)	RMC,12.2kbps	Mid		0.962	0.511	-1.48	1.6
	RMC,12.2kbps	High		1.010	0.533	0.12	1.6
UMTS850 (Band V)	RMC,12.2kbps	Mid	Antenna edge vertical	0.032	0.023	-0.59	1.6
LIMTCAGO	RMC,12.2kbps	Low	EUT bottom	1.513	0.694	-0.05	1.6
UMTS1900 (Band II)	RMC,12.2kbps	Mid		1.537	0.705	1.90	1.6
(Bana n)	RMC,12.2kbps	High		1.542	0.717	-0.09	1.6
UMTS1900 (Band II)	RMC,12.2kbps	Low	Antenna edge touch	1.025	0.501	-0.46	1.6
	RMC,12.2kbps	Mid		1.443	0.693	0.58	1.6
	RMC,12.2kbps	High	cuyc touch	0.907	0.435	-0.82	1.6
UMTS1900 (Band II)	RMC,12.2kbps	Mid	Antenna edge vertical	0.014	0.009	-4.39	1.6

WIFI Mode

Body Worn (Separation distance: 0cm)

Test Configuration , Body			Crest Factor : 1	Date of Measured : May 23rd 2011			
				SAR 10g	SAR	Power	1g SAR Limit
Freq Band	Mode	Channel	Position	(W/kg)	1g(W/kg)	Variation (%)	(W/kg)
2437MHz	802.11g	Mid	EUT bottom	0	0	-4.10	1.6
2437MHz	802.11g	Mid	Antenna edge touch	0	0	-1.07	1.6
2437MHz	802.11g	Mid	Antenna edge vertical	0	0	-4.07	1.6

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 35 of 109 www.siemic.com

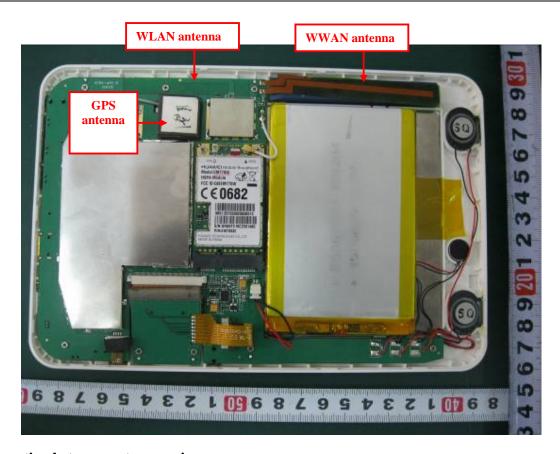

Separation between antenna pairs

- 1. GPS—WWAN: 6CM
- 2. GPS—WIFI: 0.8CM
- 3. WIFI---WWAN: 1.5CM

EUT antenna location view

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 36 of 109

KDB & Simultaneous SAR Evaluation.

Antenna Separation Information:

Test Case	Ant1	Ant2	The shortest distance between Ant1 & Ant2 (mm)
1	WWAN	GPS	60
2	WWAN	WIFI	15
3	WIFI	GPS	8

Antenna Pair	Justification	Simultaneous SAR required ?	
WIFI / WWAN	Σ of the highest measured 1-g SAR for each portable transmitter/antenna included in the simultaneous transmission configuration) / 1.6 W/kg] = Σ [WWAN(SAR) / 1.6 + WIFI(SAR)/1.6] = Σ [1.572/1.6 + 0/1.6] = 0.983 < 1 Note: WIFI(SAR) = 0, the measurement was performed, but only the noise floor was detected.	No	

Test Result: N/A

1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 37 of 109

SAR measurement Plots **GPRS1900 Mode**

Product Description : Netpad


Model: N701WG Test Date: May 23rd 2011


Configuration: EUT bottom side touched the phantom. – Low channel

Frequency (MHz)	1850.20 (Flat, Phone measurement)
Relative permittivity (real part)	53.32
Relative permittivity (imaginary part)	14.57
Conductivity (S/m)	1.50
Variation (%)	1.74
SAR 1g (W/Kg)	0.955
SAR 10g (W/Kg)	0.439


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = 54, Y = -72)

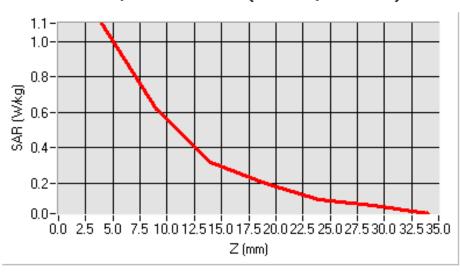





Model: N701WG Test Date: May 23rd 2011

Configuration: EUT bottom side touched the phantom. – Mid channel


Frequency (MHz)	1880.00 (Flat, Phone measurement)
Relative permittivity (real part)	53.32
Relative permittivity (imaginary part)	14.57
Conductivity (S/m)	1.50
Variation (%)	2.75
SAR 1g (W/Kg)	0.966
SAR 10g (W/Kg)	0.442

VOLUME SAR







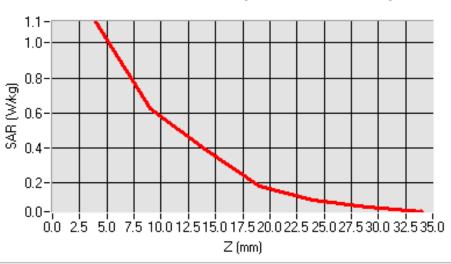





Model: N701WG Test Date: May 23rd 2011

Configuration: EUT bottom side touched the phantom. - High channel


Frequency (MHz)	1909.8.00 (Flat, Phone measurement)
Relative permittivity (real part)	53.30
Relative permittivity (imaginary part)	14.47
Conductivity (S/m)	1.51
Variation (%)	-4.20
SAR 1g (W/Kg)	0.965
SAR 10g (W/Kg)	0.433

VOLUME SAR







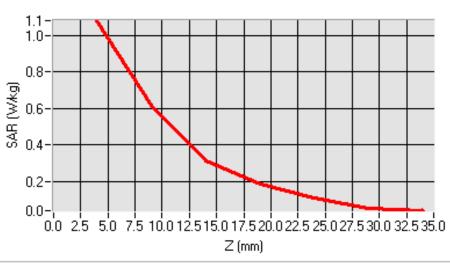




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – Low channel

Frequency (MHz)	1850.20 (Flat, Phone measurement)
Relative permittivity (real part)	53.32
Relative permittivity (imaginary part)	14.57
Conductivity (S/m)	1.50
Variation (%)	-3.84
SAR 1g (W/Kg)	1.125
SAR 10g (W/Kg)	0.560


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = -69, Y = -31)

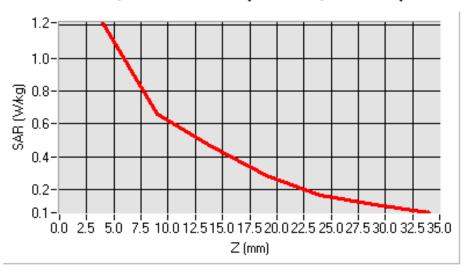




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – Mid channel

Frequency (MHz)	1880.00 (Flat, Phone measurement)
Relative permittivity (real part)	53.30
Relative permittivity (imaginary part)	14.47
Conductivity (S/m)	1.51
Variation (%)	-4.26
SAR 1g (W/Kg)	1.246
SAR 10g (W/Kg)	0.608


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = -75, Y = -32)

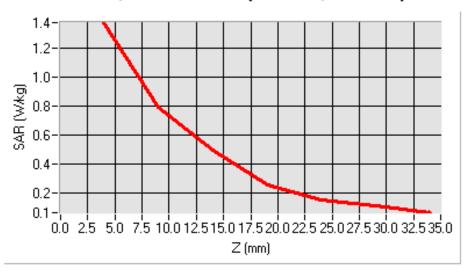





Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – High channel


Frequency (MHz)	1909.80 (Flat, Phone measurement)
Relative permittivity (real part)	53.20
Relative permittivity (imaginary part)	14.24
Conductivity (S/m)	1.51
Variation (%)	-2.02
SAR 1g (W/Kg)	1.126
SAR 10g (W/Kg)	0.561

VOLUME SAR







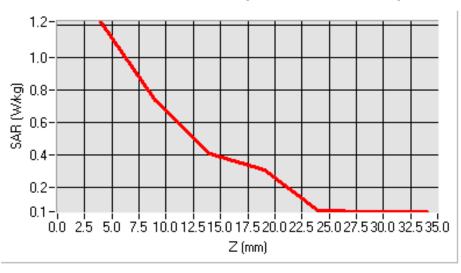





Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge is perpendicular to the phantom.

Frequency (MHz)	1880.00 (Flat, Phone measurement)
Relative permittivity (real part)	53.30
Relative permittivity (imaginary part)	14.47
Conductivity (S/m)	1.51
Variation (%%)	-2.29
SAR 1g (W/Kg)	0.005
SAR 10g (W/Kg)	0.003

VOLUME SAR





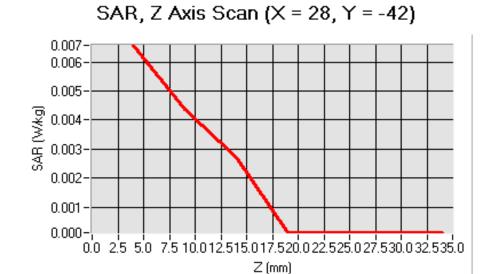



WCDMA Band V(850MHz) Mode

Product Description: Netpad


Model: N701WG Test Date: May 23rd 2011


Configuration: EUT bottom side touched the phantom – Low channel

826.00 (Flat, Phone measurement)
55.24
21.30
0.98
0.50
1.532
0.928


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = 55, Y = -46)

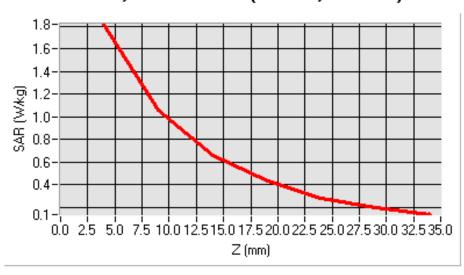





Model: N701WG Test Date: May 23rd 2011


Configuration: EUT bottom side touched the phantom - Mid channel


Frequency (MHz)	836.00 (Flat, Phone measurement)
Relative permittivity (real part)	55.24
Relative permittivity (imaginary part)	21.30
Conductivity (S/m)	0.98
Variation (%)	-0.26
SAR 1g (W/Kg)	1.340
SAR 10g (W/Kg)	0.765

VOLUME SAR







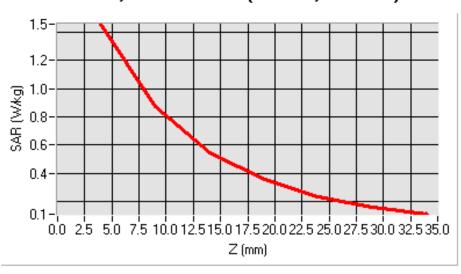




Model: N701WG Test Date: May 23rd 2011


Configuration: EUT bottom side touched the phantom - High channel

Frequency (MHz)	846.00 (Flat, Phone measurement)
Relative permittivity (real part)	55.20
Relative permittivity (imaginary part)	20.91
Conductivity (S/m)	0.97
Variation (%)	-0.22
SAR 1g (W/Kg)	1.353
SAR 10g (W/Kg)	0.768


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = 54, Y = -49)

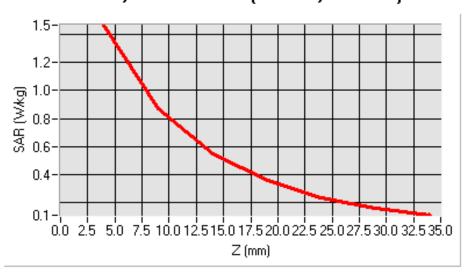





Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – Low channel


Frequency (MHz)	826.00 (Vertical, Phone measurement)
Relative permittivity (real part)	55.24
Relative permittivity (imaginary part)	21.30
Conductivity (S/m)	0.98
Variation (%)	0.16
SAR 1g (W/Kg)	1.005
SAR 10g (W/Kg)	0.532

VOLUME SAR







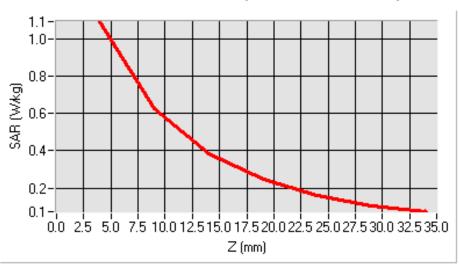




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – Mid channel

Frequency (MHz)	836.00 (Vertical, Phone measurement)
Relative permittivity (real part)	55.20
Relative permittivity (imaginary part)	20.91
Conductivity (S/m)	0.97
Variation (%)	-1.48
SAR 1g (W/Kg)	0.962
SAR 10g (W/Kg)	0.511


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = -37, Y = -25)

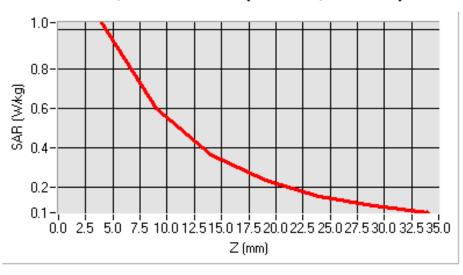




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – High channel

Frequency (MHz)	846.00 (Vertical, Phone measurement)		
Relative permittivity (real part)	55.17		
Relative permittivity (imaginary part)	20.93		
Conductivity (S/m)	0.98		
Variation (%)	0.12		
SAR 1g (W/Kg)	1.010		
SAR 10g (W/Kg)	0.533		


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = -51, Y = -25)

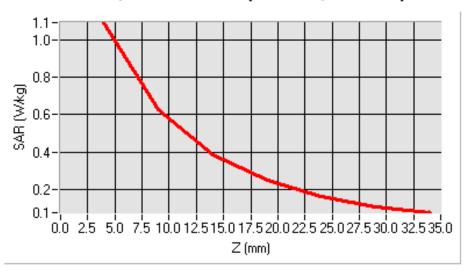




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge is perpendicular to the phantom.


Frequency (MHz)	836.00 (Flat, Phone measurement)		
Relative permittivity (real part)	55.20		
Relative permittivity (imaginary part)	20.91		
Conductivity (S/m)	0.97		
Variation (%%)	-0.59		
SAR 1g (W/Kg)	0.032		
SAR 10g (W/Kg)	0.023		

VOLUME SAR

SURFACE SAR





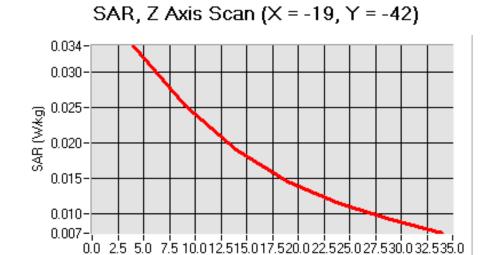

Z (mm)

WCDMA Band II (1900MHz) Mode

Product Description: Netpad


Model: N701WG Test Date: May 23rd 2011


Configuration: EUT bottom side touched the phantom – Low channel

Frequency (MHz)	1850.20 (Flat, Phone measurement)		
Relative permittivity (real part)	53.30		
Relative permittivity (imaginary part)	14.78		
Conductivity (S/m)	1.52		
Variation (%)	-0.05		
SAR 1g (W/Kg)	1.513		
SAR 10g (W/Kg)	0.694		


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = 48, Y = -70)

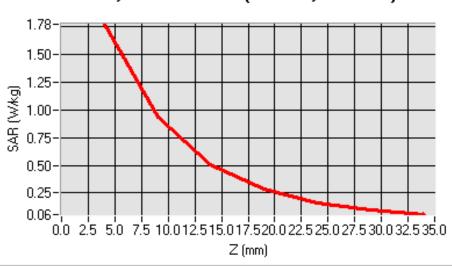





Model: N701WG Test Date: May 23rd 2011

Configuration: EUT bottom side touched the phantom - Mid channel


Frequency (MHz)	1880.00 (Flat, Phone measurement)		
Relative permittivity (real part)	53.30		
Relative permittivity (imaginary part)	14.56		
Conductivity (S/m)	1.52		
Variation (%)	1.90		
SAR 1g (W/Kg)	1.537		
SAR 10g (W/Kg)	0.705		

VOLUME SAR







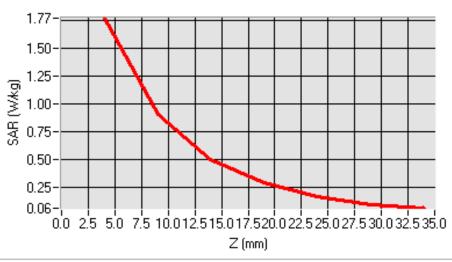





Model: N701WG Test Date: May 23rd 2011


Configuration: EUT bottom side touched the phantom – Mid channel


Frequency (MHz)	1907.00 (Flat, Phone measurement)		
Relative permittivity (real part)	53.30		
Relative permittivity (imaginary part)	14.35		
Conductivity (S/m)	1.52		
Variation (%)	-0.09		
SAR 1g (W/Kg)	1.542		
SAR 10g (W/Kg)	0.717		

VOLUME SAR







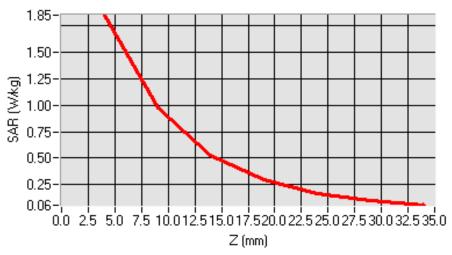




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – Low channel

Frequency (MHz)	1852.00 (Flat, Phone measurement)		
Relative permittivity (real part)	53.30		
Relative permittivity (imaginary part)	14.78		
Conductivity (S/m)	1.52		
Variation (%)	-0.46		
SAR 1g (W/Kg)	1.025		
SAR 10g (W/Kg)	0.501		


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = -51, Y = -23)

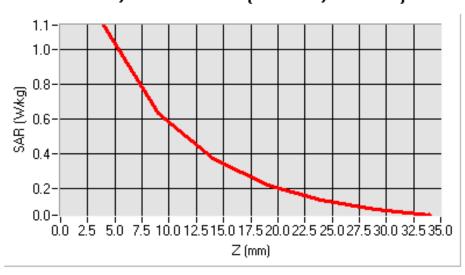




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom - Mid channel

Frequency (MHz)	1880.00 (Flat, Phone measurement)		
Relative permittivity (real part)	53.30		
Relative permittivity (imaginary part)	14.78		
Conductivity (S/m)	1.52		
Variation (%)	0.58		
SAR 1g (W/Kg)	1.443		
SAR 10g (W/Kg)	0.693		


VOLUME SAR

SURFACE SAR





SAR, Z Axis Scan (X = -45, Y = -29)

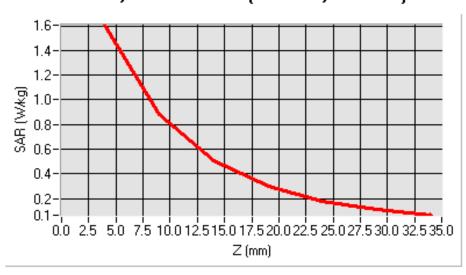





Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom – High channel


Frequency (MHz)	1907.00 (Flat, Phone measurement)		
Relative permittivity (real part)	53.30		
Relative permittivity (imaginary part)	14.56		
Conductivity (S/m)	1.52		
Variation (%)	-0.82		
SAR 1g (W/Kg)	0.907		
SAR 10g (W/Kg)	0.435		

VOLUME SAR







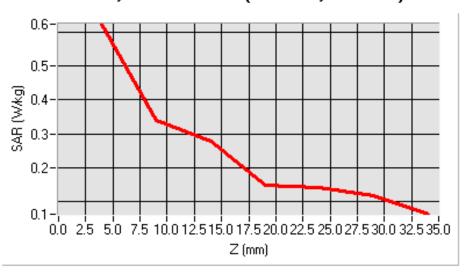





Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge is perpendicular to the phantom.


Frequency (MHz)	1880.00 (Flat, Phone measurement)		
Relative permittivity (real part)	53.30		
Relative permittivity (imaginary part)	14.56		
Conductivity (S/m)	1.52		
Variation (%%)	-4.39		
SAR 1g (W/Kg)	0.009		
SAR 10g (W/Kg)	0.014		

VOLUME SAR







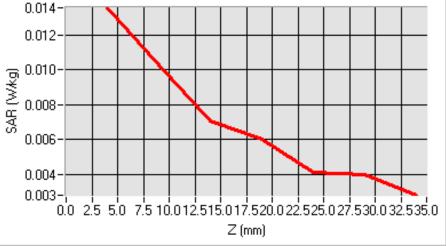




WIFI (802.11g) Mode

Product Description : Netpad

Model: N701WG Test Date: May 23rd 2011

Configuration: EUT bottom side touched the phantom.

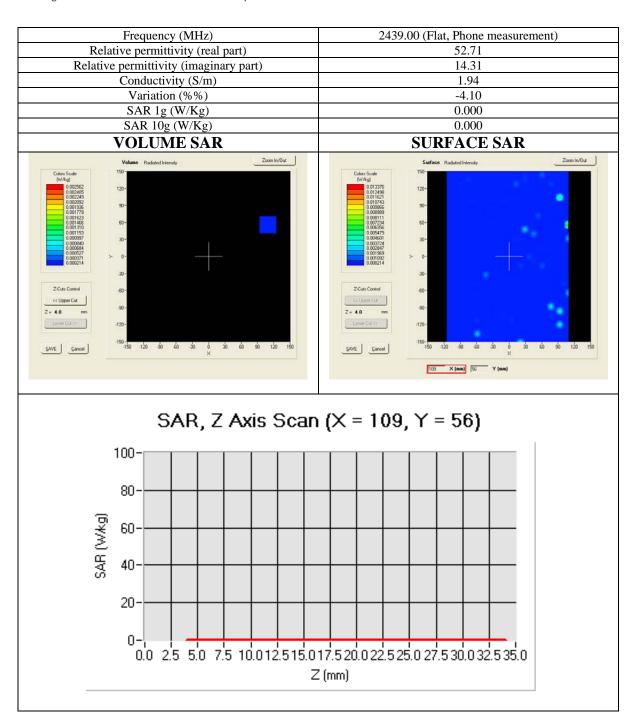

Note: only noise floor was detected.




Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge touched the phantom.


2439.00 (Flat, Phone measurement)		
52.71		
14.31		
1.94		
-1.07		
0.000		
0.000		

VOLUME SAR

SURFACE SAR





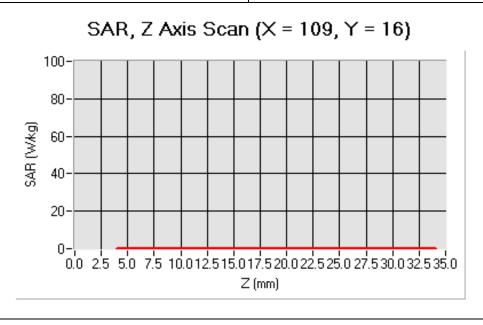

Note: only noise floor was detected.


Model: N701WG Test Date: May 23rd 2011


Configuration: Antenna edge is perpendicular to the phantom.


2439.00 (Flat, Phone measurement)		
52.71		
14.31		
1.94		
-4.07		
0.000		
0.000		

VOLUME SAR

SURFACE SAR





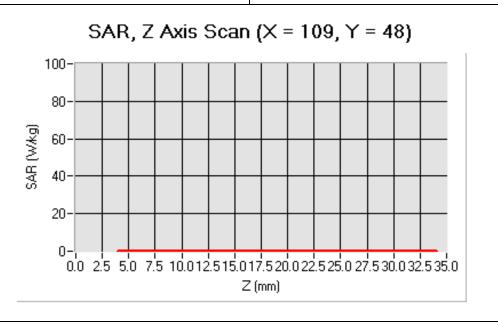

Note: only noise floor was detected.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 61 of 109 www siemic com

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Due
PC	Compaq	PV 3.06GHz	375052-AA1	N/A
Signal Generator	Agilent	8665B-008	3744A01304	5/17/2012
MultiMeter	Keithley	MiltiMeter 2000	1259033	08/13/2011
S-Parameter Network Analyzer	Agilent	8753ES	US38161019	08/04/2012
Wireless Communication Test Set	R&S	CMU200	111078	2/22/2012
Power Meter	HP	437B	3038A03648	5/17/2012
E-field PROBE	SATIMO	EPG111	SN31-10 EPG111	08/04/2011
DIPOLE 900	SATIMO	DIPOLE 900MHz	SN 31/10 DIPD134	08/04/2011
DIPOLE 1800	SATIMO	DIPOLE 1800MHz	SN 31/10 DIPF135	08/04/2011
Dipole 835	SATIMO	Dipole 835MHz	SN 31/10 DIPC133	08/04/2011
DIPOLE 1900	SATIMO	DIPOLE 1900MHz	SN 31/10 DIPG136	08/04/2011
DIPOLE 2000	SATIMO	DIPOLE 2000MHz	SN 31/10 DIPI137	08/04/2011
DIPOLE 2450	SATIMO	DIPOLE 2450MHz	SN 31/10 DIPJ138	08/04/2011
DIPOLE 3500	SATIMO	DIPOLE 3500MHz	SN 31/10 DIPL139	08/04/2011
WaveGuide 5/6 GHz	SATIMO	Wave Guide 5/6GHz	SN 31/10 DIPWGA13	08/04/2011
COMOHAC E-Field Probe	SATIMO	EPH25	SN 3110 EPH25	08/04/2011
COMOHAC H-Field Probe	SATIMO	HPH38	SN 3110 HPH38	08/04/2011
COMOSAR Open Coaxial Probe	SATIMO	OCP36	SN 31/10 OCP36	08/04/2012
T-Coil Probe	SATIMO	TCP17	SN 31/10 TCP17	08/04/2011
Communication Antenna	SATIMO	ANTA30	SN 31/10 ANTA30	N/A
Laptop POSITIONING DEVICE	SATIMO	LSH63	SN 31/10 LSH13	N/A
Mobile Phone POSITIONING DEVICE	SATIMO	MSH63	SN 31/10 MSH63	N/A
COMOHAC Broadband Dipole 800- 950	SATIMO	COMOHAC Broadband Dipole 800-950MHz	SN 31/10 DHA25	08/04/2012
COMOHAC Broadband Dipole 1700- 2000	SATIMO	COMOHAC Broadband Dipole 1700-2000MHz	SN 31/10 DHB26	08/04/2012
COMOHAC TELEPHONE MAGNETIC FIELD SIMULATOR	SATIMO	TMFS08	SN 31/10 TMFS08	08/04/2012
DUMMY PROBE	ANTENNESSA	None	SN 31/10	N/A
Hygro Hermograph	Sekonic	ST-50	HE01-000092	06/04/2012



| Serial# | 1105013(FCC-SAR) Rev1.2 | Issue Date | Aug 3rd 2011 | Page | 62 of 109 | www.siemic.com |

SAM PHANTOM	SATIMO	SAM77	SN 31/10 SAM77	N/A
Elliptic Phantom	SATIMO	ELLI17	SN 31-10 ELLI17	N/A
PHANTOM TABLE	SATIMO	N/A	N/A	N/A
6 AXIS ROBOT	KUKA	KR5	949319	N/A
High Power Solid State Amplifier (80MHz~1000MHz)	Instruments for Industry	CMC150	M631-0408	N/A
Medium Power Solid State Amplifier (0.8~4.2GHz)	Instruments for Industry	S41-25	M629-0408	N/A
Wave Tube Amplifier 4-8 GHz at 20Watt	Hughes Aircraft Company	1277H02F000	81	N/A

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 63 of 109

Annex B EUT AND TEST SETUP PHOTOGRAPHS



SAR test setup -1



| Serial# 1105013(FCC-SAR) Rev1.2 | Issue Date | Aug 3rd 2011 | Page | 64 of 109 | www.siemic.com |



EUT bottom touched phantom



Antenna edge touch phantom



Antenna edge perpendicular to Phantom



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 66 of 109

Annex C CALIBRATION REPORTS

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 67 of 109

COMOSAR E-Field probe Calibration Report



Ref: CR.216.1.10.SATB.A

Page: 1/25 | Issue: A | Date: 2010/08/04

COMOSAR E-FIELD PROBE CALIBRATION REPORT

Prepared By: LUC Jérôme, SATIMO

Project Description: SAR TEST BENCH

Prepared For (End User): SIEMIC, INC.

This document is issued by SATIMO, in confidence and is not to be reproduced in whole or in part without the prior written permission. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of SATIMO.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 68 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report



Ref: CR.216.1.10.SATB.A

Page: 2/25 Issue: A Date: 2010/08/04

COMOSAR SEPT ISOTROPIC E-FIELD PROBE CALIBRATION REPORT

DATE: 15/09/2010

OBJECT: COMOSAR SEPT ISOTROPIC E-FIELD PROBE

MANUFACTURER: SATIMO

SERIAL NUMBER: SN 31/10 EPG111

CUSTOMER: SIEMIC, INC.
CONTRACT: PO1007001

DATE OF CALIBRATION: 04/08/2010

WARRANTY:

This Calibration certificate may not be reproduced other than in full. Calibration certificates without signature and seal are not valid. This documentation contains property information which is protected by copyright. All right are reserved. No part of this document may be photocopied, reproduced without the prior written agreement of SATIMO. SATIMO shall not be liable for errors contained herein or for incidental or consequential in connection with the furnishing, performance or use of this material. Warranty doesn't apply to Normal wear, Normal tear, Improper use, Improper maintain, Improper installation.

Date

09-09-10

SAR TEAM MANAGER

2105 Barrett Park Dr. Suite 104
Kennesow, Gr. - USA
Fax: +1 678 797 9172
www.satimo.com

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 69 of 109 www siemic com

COMOSAR E-Field probe Calibration Report



Ref: CR.216.1.10.SATB.A

Page: 3/25 Issue: A Date: 2010/08/04

PRODUCT DESCRIPTION



Frequency Range	100 MHz - 30 GHz	
Probe length	330 mm	
Length of one dipole	2.0 mm	
Maximum external diameter	8 mm	
Probe extremity diameter	2.8 mm	
Distance between dipoles/probe extremity	< 1.5 mm	
Resistance of the three dipole (at the connector)	Dipole 1: R1=0.291 M Ω Dipole 2: R2=0.223 M Ω Dipole 3: R3=0.303 M Ω	
Diode Compression Point	Dipole 1: DCP1=121 mV Dipole 2: DCP2=119 mV Dipole 3: DCP3=116 mV	

The probe could be checked by measuring the resistance of the three dipoles.

CALIBRATION TEST EQUIPMENT

TYPE	IDENTIFICATION	DATE OF CALIBRATION	
Calibration bench	CALISAR CALIBRATION SYSTEM V2.0		
Multimeter Keithley (2000, SN: 1000572) Da		Date of calibration: 01-07-2009	

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 70 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report



Ref: CR.216.1.10.5A1B.A


Page: 4/25

Issue: A

Date: 2010/08/04

MEASUREMENT PROCEDURE

Probe calibration is realized, in compliance with CENELEC EN 50361 and IEEE 1528 std, with CALISAR, SATIMO proprietary calibration system. The calibration is performed with the EN 50361 annexe technique using reference guide at the five frequencies.

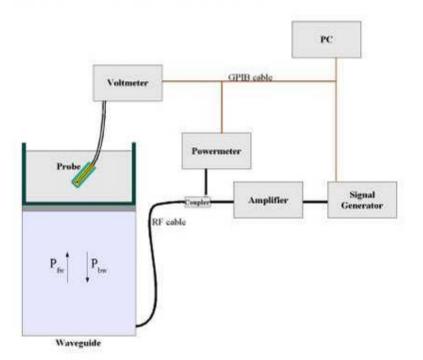

$$SAR = \frac{4\left(P_{fw} - P_{bw}\right)}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-(2z/\delta)}$$

Where:

P_{bw} = Forward Power P_{bw} = Backward Power a and b = Waveguide dimensions = Skin depth

5/7

Keithley configuration:

Rate = Medium; Filter =ON; RDGS=10; FILTER TYPE =MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 71 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report



Ref: CR.216.1.10.SATB.A

Page: 5/25 Issue: A Date: 2010/08/04


PROBE UNCERTAINTIES

Calibration report of dosimetric SATIMO probe

ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3,00%	Rectangular	$\sqrt{3}$	1	1,732%
Reflected power	3,00%	Rectangular	√3	1.	1,732%
Liquid conductivity	5,00%	Rectangular	√3	1	2,887%
Liquid permittivity	4,00%	Rectangular	√3	1	2,309%
Field homogeneity	3,00%	Rectangular	$\sqrt{3}$	1	1,732%
Field probe positioning	5,00%	Rectangular	√3	1	2,887%
Field probe linearity	3,00%	Rectangular	√3	1	1,732%
Combined standard uncertainty					4,761%
Expanded uncertainty (confidence interval of 95%)					9,331%

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 72 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report




1. Calibration at 835.00 MHz

A. Calibration parameters.

Label	850	
Epsilon	41.44	
Sigma	0.90 S/m	
Temperature	21°C	
Cable loss	0.10 dB	
Coupler loss	20.50 dB	
Waveguide S11	-20,90 dB	
Low limit detection	0.75 V/m (0.51 mW/kg)	

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

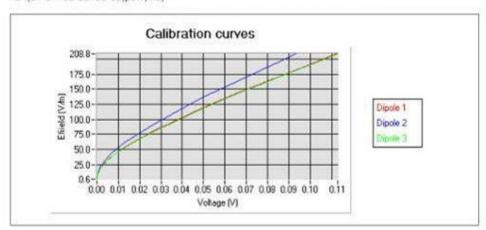

The following tables represent the calibration curves linearization by curve segment in CW signal.



 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 73 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 7/25 Issue: A Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

Liquid	Epsilon	Sigma (S/m)	CF dipole 1	CF dipole 2	CF dipole 3
	0.000		(W,kg-1 (mV)-1)	(W.kg-I (mV)-1)	(W.kg-1 (mV)-1)
Head	41.44	0.90	168.8	225.03	167.83
Body	53.21	0.98	181.88	242.53	180.89


B. Isotropy.

- Axial isotropy: 0.03 dB - Hemispherical isotropy: 0.03 dB



Investment 30'

C. Linearity.



Linearity (1+/-2.00% (+/-0.09dB)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 74 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report




2. Calibration at 897.00 MHz

A. Calibration parameters.

Label	900
Epsilon	40.99
Sigma	0.99 S/m
Temperature	21°C
Cable loss	0.10 dB
Coupler loss	20.27 dB
Waveguide S11	-12.70 dB
Low limit detection	0.78 V/m (0.60 mW/kg)

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

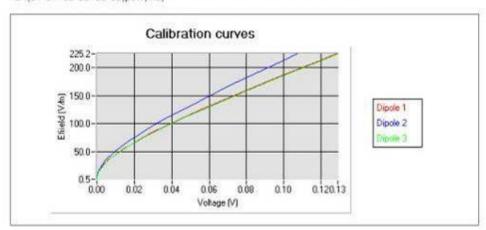



 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 75 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 9/25 Issue: A Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W,kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1)
Head	40.99	0.99	173.98	227.41	169,94
Body	52.68	1.04	182,79	238.90	178.51


B. Isotropy.

- Axial isotropy: 0.03 dB - Hemispherical isotropy: 0.04 dB



Hemisters 30 Hemisters 75' Hemisters 7

C. Linearity.



Linearity 9+/-0.92% (+/-0.04dB)


 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 76 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report




3. Calibration at 1747.00 MHz

A. Calibration parameters.

Label	1800
Epsilon	39.55
Sigma	1,42 S/m
Temperature	21°C
Cable loss	0.14 dB
Coupler loss	20.18 dB
Waveguide S11	-12.70 dB
Low limit detection	0.85 V/m (1.02 mW/kg)

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

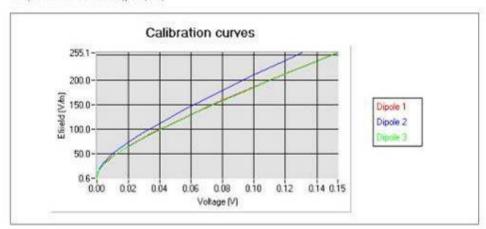



 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 77 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 11/25 Issue: A Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W,kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1)
Head	39.55	1.42	255.29	323.02	243.31
Body	53.55	1.51	270.69	339.85	258.45


B. Isotropy.

- Axial isotropy: 0.05 dB - Hemispherical isotropy: 0.06 dB






C. Linearity.



Linearity.0+/-2.25% (+/-0.10dB)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 78 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report




4. Calibration at 1880.00 MHz

A. Calibration parameters.

Label	1900
Epsilon	40.23
Sigma	1,41 S/m
Temperature	21°C
Cable loss	0.15 dB
Coupler loss	20.12 dB
Waveguide S11	-32.10 dB
Low limit detection	0.83 V/m (0.97 mW/kg)

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

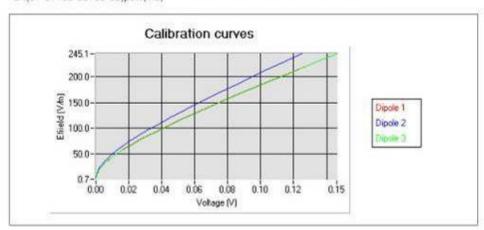



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 79 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 13/25 Issue: A


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W.kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1)
Head	40.23	1.41	250.56	317.11	241.74
Body	54.65	1.54	273.66	346.35	264.03


B. Isotropy.

- Axial isotropy: 0.06 dB - Hemispherical isotropy: 0.08 dB



Herophee -32* Herophee -55* Herophee -55*


C. Linearity.



Linearity 0+/-1.51% (+/-0.07dB)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 80 of 109

COMOSAR E-Field probe Calibration Report




5. Calibration at 1950.00 MHz

A. Calibration parameters.

Label	2000	
Epsilon	41.39	
Sigma	1,39 S/m	
Temperature	21°C	
Cable loss	0.14 dB	
Coupler loss	20.12 dB	
Waveguide S11	-31,20 dB	
Low limit detection	0.86 V/m (1.03 mW/kg)	

Calibration curves ei=1(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

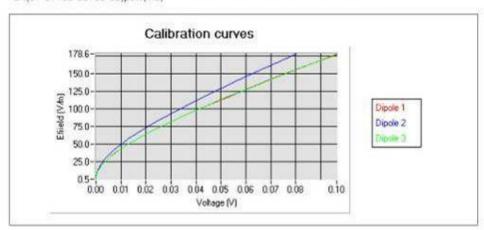



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 81 of 109

COMOSAR E-Field probe Calibration Report



Page: 15/25 Issue: A Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

1000	Scisiarity in injuri.				
Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W.kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1)
Head	41,39	1.39	232.12	304.13	228.24
Body	53.54	1.49	237.24	310.84	233.28


B. Isotropy.

- Axial isotropy: 0.07 dB - Hemispherical isotropy: 0.09 dB






C. Linearity.



Linearity 9+/-2.25% (+/-0.10dB)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 82 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report




6. Calibration at 2450.00 MHz

A. Calibration parameters.

Label	2450
Epsilon	38.51
Sigma	1,79 S/m
Temperature	21°C
Cable loss	0.13 dB
Coupler loss	21.51 dB
Waveguide S11	-13.20 dB
Low limit detection	0.90 V/m (1.45 mW/kg)

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

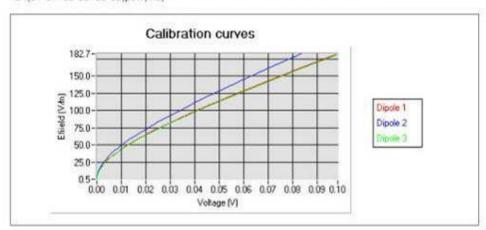



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 83 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 17/25 Issue: A Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W.kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1)
Head	38,51	1.79	296.04	397.04	300.71
Body	52.36	1.97	325.81	436.97	330.95


B. Isotropy.

- Axial isotropy: 0.09 dB - Hemispherical isotropy: 0.11 dB



Handyless 30' Handyless 15' Handyless 17'

C. Linearity.



Linearity 8+/-2.25% (+/-0.10dB)

 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 84 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report




7. Calibration at 3500.00 MHz

A. Calibration parameters.

Label	3500
Epsilon	38.10
Sigma	2.88 S/m
Temperature	21 °C
Cable loss	0.23 dB
Coupler loss	20.67 dB
Waveguide S11	-17.32 dB
Low limit detection	0.88 V/m (2.23 mW/kg)

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

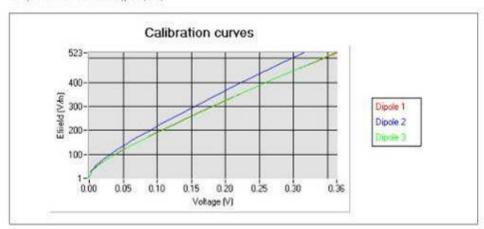



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 85 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 19/25 | Issue: A | Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:


Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W.kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1
Head	38.10	2.88	562.79	712,62	546.19
Body	51,47	3.21	627.28	794.27	608.77

B. Isotropy.

- Axial isotropy: 0.10 dB - Hemispherical isotropy: 0.12 dB




C. Linearity.



Linearity:+/-1.55% (+/-0.07dB)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 86 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report




8. Calibration at 5200.00 MHz

A. Calibration parameters.

Label	5200
Epsilon	35.55
Sigma	4.51 S/m
Temperature	21 °C
Cable loss	0.35 dB
Coupler loss	20.04 dB
Waveguide S11	-11.20 dB
Low limit detection	0.69 V/m (2.15 mW/kg)

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

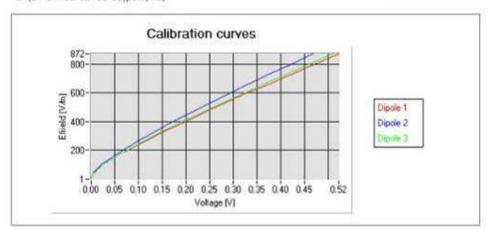



 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 87 of 109

COMOSAR E-Field probe Calibration Report



Page: 21/25 Date: 2010/08/04 Issue: A


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:


Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W,kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1
Head	35.55	4.51	1386.9	1724,9	1441.5
Body	47.21	5.21	1571.5	1954.3	1633.3

B. Isotropy.

- Axial isotropy: 0.10 dB - Hemispherical isotropy: 0.13 dB



C. Linearity.



Linearity 8+/-2.25% (+/-0.10dB)


 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 88 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report




9. Calibration at 5500.00 MHz

A. Calibration parameters.

Label	5500
Epsilon	35.10
Sigma	5.00 S/m
Temperature	21°C
Cable loss	0.37 dB
Coupler loss	20.01 dB
Waveguide S11	-10.99 dB
Low limit detection	0.65 V/m (2.11 mW/kg)

Calibration curves ei=1(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

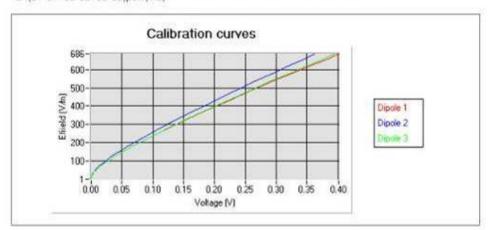



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 89 of 109 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 23/25 Issue: A Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W,kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1)
Head	35.10	5.00	1477.7	1812.8	1531.4
Body	47.54	5.58	1649.1	2023.1	1709.0


B. Isotropy.

- Axial isotropy: 0.11 dB - Hemispherical isotropy: 0.14 dB



Handyless 30' Handyless 15' Handyless 17'

C. Linearity.



Linearity:+/-1,79% (+/-0.08dB)


 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 90 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report




10. Calibration at 5800.00 MHz

A. Calibration parameters.

Label	5800
Epsilon	35.10
Sigma	5.41 S/m
Temperature	21°C
Cable loss	0.13 dB
Coupler loss	21.51 dB
Waveguide S11	-13.20 dB
Low limit detection	0.58 V/m (1.82 mW/kg)

Calibration curves ei=f(V) (i=1,2,3) allow to obtain E-field value using the formula: E=(e1*e1+e2*e2+e3*e3)pow(1/2)

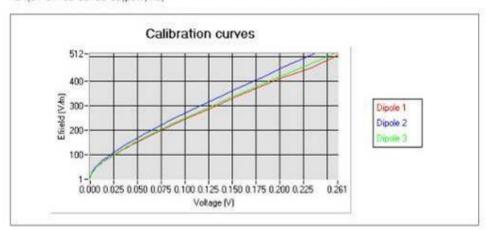



 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 91 of 109

 www.siemic.com

COMOSAR E-Field probe Calibration Report



Page: 25/25 | Issue: A | Date: 2010/08/04


Calibration coefficients for the three dipoles in CW;

Sensitivity in liquid:

Liquid	Epsilon	Sigma (S/m)	CF dipole 1 (W,kg-1 (mV)-1)	CF dipole 2 (W.kg-1 (mV)-1)	CF dipole 3 (W.kg-1 (mV)-1
Head	35.10	5.41	1756.0	2145.7	1819.0
Body	47.98	5.87	1905.3	2328.1	1973.7


B. Isotropy.

- Axial isotropy; 0.13 dB - Hemispherical isotropy; 0.13 dB



Handyless 30' Handyless 75' Marriales 7

C. Linearity.



Linearity 9+/-1.52% (+/-0.07dB)

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 92 of 109

COMOSAR Dipole 835 MHz Calibration Report



Ref: CR.216.2.10.SATB.A

Page: 1/6 Issue: A Date: 2010/08/04

DIPOLE 835 MHZ CALIBRATION REPORT

Prepared By: LUC Jérôme, SATIMO

Project Description: SAR TEST BENCH

Prepared For (End User): SIEMIC, INC.

This document is issued by SATIMO, in confidence and is not to be reproduced in whole or in part without the prior written permission. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of SATIMO.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 93 of 109 www.siemic.com

COMOSAR Dipole 835 MHz Calibration Report



Ref: CR.216.2.10.SATB.A

Page: 2/6

Issue: A

Date: 2010/08/04

DIPOLE 835 MHz CALIBRATION REPORT

DATE: 15/09/2010

OBJECT: COMOSAR IEEE REFERENCE DIPOLE

MANUFACTURER: SATIMO

SERIAL NUMBER: SN 31/10 DIPC133

CUSTOMER: SIEMIC, INC.
CONTRACT: PO1007001

DATE OF CALIBRATION: 04/08/2010

WARRANTY:

This Calibration certificate may not be reproduced other than in full. Calibration certificates without signature and seal are not valid. This documentation contains property information which is protected by copyright. All right are reserved. No part of this document may be photocopied, reproduced without the prior written agreement of SATIMO. SATIMO shall not be liable for errors contained herein or for incidental or consequential in connection with the furnishing, performance or use of this material. Warranty doesn't apply to Normal wear, Normal tear, Improper use, Improper maintain, Improper installation.

Date

09-09-10

SAR TEAM MANAGER

2105 Barrett Park

Kenne 307 GA - USA Tet+1 678 797 9172 Fax:+1 678 797 9173

Suite 104



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 94 of 109 www siemic com

COMOSAR Dipole 835 MHz Calibration Report



Ref: CR.216.2.10.SATB.A


Page: 3/6

Issue: A

Date: 2010/08/04

PRODUCT DESCRIPTION





Dimension: L=161.0 mm/ h=89.8 mm / d=3.6 mm

CALIBRATION TEST EQUIPMENT

TYPE	IDENTIFICATION	DATE OF CALIBRATION
Vector Network Analyzer	HP8753D (SN: 5410A08882)	08-06-2009


MEASUREMENT PROCEDURE

We placed the dipole under the flat part of SAM phantom fill with 835 MHz head liquid.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 95 of 109 www.siemic.com


COMOSAR Dipole 835 MHz Calibration Report



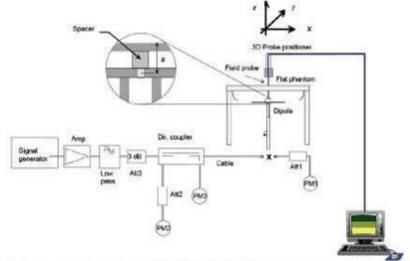

Page: 4/6

Calibration was performed according to IEEE Std P1528-2003 and OET bulletin 65 Supplement C (Ed. 01-01)

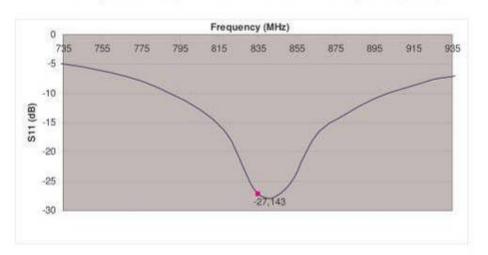

VSWR at 835 MHz: -27.14 dB.

R

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 96 of 109

COMOSAR Dipole 835 MHz Calibration Report



Ref: CR.216.2.10.SATB.A

Page: 5/6

Issue: A

Date: 2010/08/04

SAR MEASUREMENT EQUIPEMENT

Voltmeter	Keithley (2000, SN:1000572)	Date of calibration: 24-06-2009
Signal generator	Rohde&Schwarz (SML_03, SN:101868)	Date of calibration: 14-11-2008
Power amplifier	Nuclétudes (ALB216, SN:10800)	Date of calibration: 20-10-2008
Power meter	Rohde&Schwarz (NRVD, SN:101066)	Date of calibration: 02-07-2009
Probe	SATIMO Bretagne (SN:EP37) CF (30.11,28.89,32.11)	Date of calibration: 08-06-2010

SAR MEASUREMENT CONDITION

Software	OpenSAR V3	
Phantom	SATIMO Bretagne (SN: SN_20_07_SAM42)	
Liquid	SATIMO Bretagne (Last Calibration: 04 08 10 Head Liquid Values: eps' : 41.15 sigma : 0.87	
Distance between the center of the dipole and the liquid (set with a spacer)	15 mm	
Area scan resolution	dx=8mm/dy=8mm	
Zoom scan resolution	dx=8mm/dy=8m/dz=5mm	
Frequency	835 MHz	
Input power	20 dBm	
Expanded uncertainty (K=1)	8.09%	

SAR MEASUREMENT RESULT

	10g	1g
SAR measured	0.623 W/Kg	0.958 W/Kg
Liquid : HL	+0.1 %	+0.2 %


Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 97 of 109 www.siemic.com

COMOSAR Dipole 835 MHz Calibration Report



SAR MEASUREMENT PLOTS

Page: 6/6

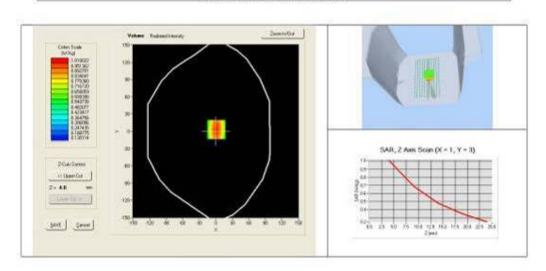

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 98 of 109

COMOSAR Dipole 1800 MHz Calibration Report



Ref: CR.216.4.10.SATB.A

Page: 1/6 Issue: A Date: 2010/08/04

DIPOLE 1800 MHZ CALIBRATION REPORT

Prepared By: LUC Jérôme, SATIMO

Project Description: SAR TEST BENCH

Prepared For (End User): SIEMIC, INC.

This document is issued by SATIMO, in confidence and is not to be reproduced in whole or in part without the prior written permission. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of SATIMO.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 99 of 109 www.siemic.com

COMOSAR Dipole 1800 MHz Calibration Report



Ref: CR.216.4.10.SATB.A

Page: 2/6

Issue: A

Date: 2010/08/04

DIPOLE 1800 MHz CALIBRATION REPORT

DATE: 15/09/2010

OBJECT: COMOSAR IEEE REFERENCE DIPOLE

MANUFACTURER: SATIMO

SERIAL NUMBER: SN 31/10 DIPF135

CUSTOMER: SIEMIC, INC.
CONTRACT: PO1007001

DATE OF CALIBRATION: 04/08/2010

WARRANTY:

This Calibration certificate may not be reproduced other than in full. Calibration certificates without signature and seal are not valid. This documentation contains property information which is protected by copyright. All right are reserved. No part of this document may be photocopied, reproduced without the prior written agreement of SATIMO. SATIMO shall not be liable for errors contained herein or for incidental or consequential in connection with the furnishing, performance or use of this material. Warranty doesn't apply to Normal wear, Normal tear, Improper use, Improper maintain, Improper installation.

Date

09-09-10

SAR TEAM MANAGER



Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 100 of 109


COMOSAR Dipole 1800 MHz Calibration Report



PRODUCT DESCRIPTION

Page: 3/6





Dimension: L=72 mm/ h=41.7 mm / d=3.6 mm

CALIBRATION TEST EQUIPMENT

TYPE	IDENTIFICATION	DATE OF CALIBRATION
Vector Network Analyzer	HP8753D (SN: 5410A08882)	08-06-2009


MEASUREMENT PROCEDURE

We placed the dipole under the flat part of SAM phantom fill with 1800 MHz head liquid.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 101 of 109


COMOSAR Dipole 1800 MHz Calibration Report



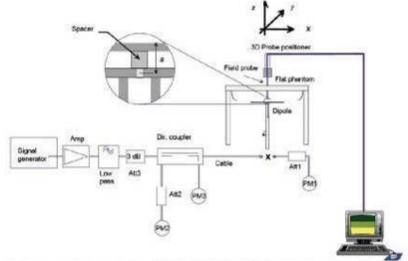

Page: 4/6

Calibration was performed according to IEEE Std P1528-2003 and OET bulletin 65 Supplement C (Ed. 01-01)

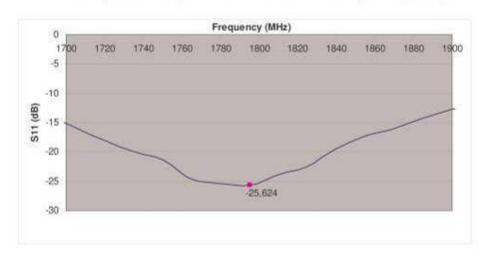

VSWR at 1800 MHz: -25.62 dB.

R

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 102 of 109

COMOSAR Dipole 1800 MHz Calibration Report



Ref: CR.216.4.10.SATB.A

Page: 5/6

Issue: A

Date: 2010/08/04

SAR MEASUREMENT EQUIPEMENT

Voltmeter	Keithley (2000, SN:1000572)	Date of calibration: 24-06-2009
Signal generator	Rohde&Schwarz (SML_03, SN:101868)	Date of calibration: 14-11-2008
Power amplifier	Nuclétudes (ALB216, SN:10800)	Date of calibration: 20-10-2008
Power meter	Rohde&Schwarz (NRVD, SN:101066)	Date of calibration: 02-07-2009
Probe	SATIMO Bretagne (SN:EP37) CF (35.00,34.54,37.71)	Date of calibration: 08-06-2010

SAR MEASUREMENT CONDITION

Software	OpenSAR V3
Phantom	SATIMO Bretagne (SN: SN_20_07_SAM42)
Liquid	SATIMO Bretagne (Last Calibration: 04 08 10) Head Liquid Values: eps': 39.33 sigma: 1.39
Distance between the center of the dipole and the liquid (set with a spacer)	10 mm
Area scan resolution	dx=8mm/dy=8mm
Zoom scan resolution	dx=8mm/dy=8m/dz=5mm
Frequency	1800 MHz
Input power	20 dBm
Expanded uncertainty (K=1)	8.09%

SAR MEASUREMENT RESULT

	10g	1g
SAR measured	2.028 W/Kg	3.859 W/Kg
Liquid : HL	+0.9 %	+0.5 %


Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 103 of 109 www.siemic.com

COMOSAR Dipole 1800 MHz Calibration Report



SAR MEASUREMENT PLOTS

Page: 6/6

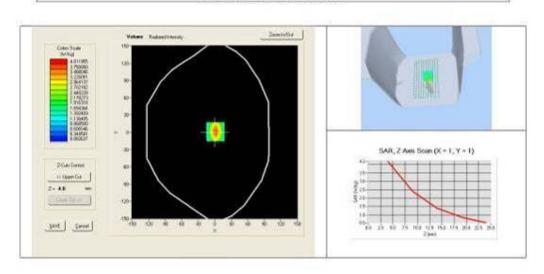

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 104 of 109

COMOSAR Dipole 1900 MHz Calibration Report



Ref: CR.216.5.10.SATB.A

Page: 1/6 Issue: A Date: 2010/08/04

DIPOLE 1900 MHZ CALIBRATION REPORT

Prepared By: LUC Jérôme, SATIMO

Project Description: SAR TEST BENCH

Prepared For (End User): SIEMIC, INC.

This document is issued by SATIMO, in confidence and is not to be reproduced in whole or in part without the prior written permission. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of SATIMO.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 105 of 109 www.siemic.com

COMOSAR Dipole 1900 MHz Calibration Report



Ref: CR.216.5.10.SATB.A

Page: 2/6

Issue: A

Date: 2010/08/04

DIPOLE 1900 MHz CALIBRATION REPORT

DATE: 15/09/2010

OBJECT: COMOSAR IEEE REFERENCE DIPOLE

MANUFACTURER: SATIMO

SERIAL NUMBER: SN 31/10 DIPG136

CUSTOMER: SIEMIC, INC.
CONTRACT: PO1007001

DATE OF CALIBRATION: 04/08/2010

WARRANTY:

This Calibration certificate may not be reproduced other than in full. Calibration certificates without signature and seal are not valid. This documentation contains property information which is protected by copyright. All right are reserved. No part of this document may be photocopied, reproduced without the prior written agreement of SATIMO. SATIMO shall not be liable for errors contained herein or for incidental or consequential in connection with the furnishing, performance or use of this material. Warranty doesn't apply to Normal wear, Normal tear, Improper use, Improper maintain, Improper installation.

Date

09-09-10

SAR TEAM MANAGER

2105 Barrett Park

Kennesson Gri - U. Tet +1 678 797 9172 Fax: +1 678 797 9173

Suite 104



 Serial#
 1105013(FCC-SAR) Rev1.2

 Issue Date
 Aug 3rd 2011

 Page
 106 of 109

COMOSAR Dipole 1900 MHz **Calibration Report**



Ref: CR.216.5.10.SATB.A


Page: 3/6

Issue: A

Date: 2010/08/04

PRODUCT DESCRIPTION





Dimension: L=68 mm/ h=39.5 mm / d=3.6 mm

CALIBRATION TEST EQUIPMENT

TYPE	IDENTIFICATION	DATE OF CALIBRATION
Vector Network Analyzer	HP8753D (SN: 5410A08882)	08-06-2009


MEASUREMENT PROCEDURE

We placed the dipole under the flat part of SAM phantom fill with 1900 MHz head liquid.

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 107 of 109 www siemic com


COMOSAR Dipole 1900 MHz Calibration Report



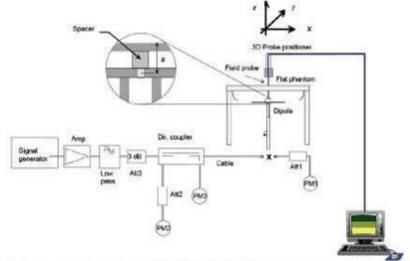

Page: 4/6

Calibration was performed according to IEEE Std P1528-2003 and OET bulletin 65 Supplement C (Ed. 01-01)

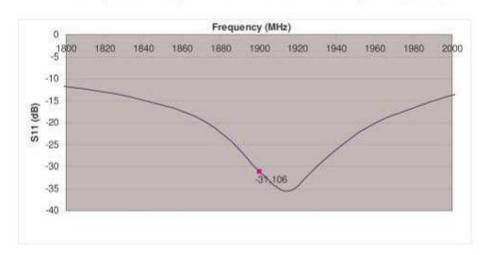

VSWR at 1900 MHz: -31.11 dB.

R

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 108 of 109 www.siemic.com

COMOSAR Dipole 1900 MHz Calibration Report



Ref: CR.216.5.10.SATB.A

Page: 5/6 Is

Issue: A

Date: 2010/08/04

SAR MEASUREMENT EQUIPEMENT

Voltmeter	Keithley (2000, SN:1000572)	Date of calibration: 24-06-2009
Signal generator	Rohde&Schwarz (SML_03, SN:101868)	Date of calibration: 14-11-2008
Power amplifier	Nuclétudes (ALB216, SN:10800)	Date of calibration: 20-10-2008
Power meter	Rohde&Schwarz (NRVD, SN:101066)	Date of calibration: 02-07-2009
Probe	SATIMO Bretagne (SN:EP37) CF (35.57,34.83,37.93)	Date of calibration: 08-06-2010

SAR MEASUREMENT CONDITION

Software	OpenSAR V3
Phantom	SATIMO Bretagne (SN: SN_20_07_SAM42)
Liquid	SATIMO Bretagne (Last Calibration: 04 08 10) Head Liquid Values: eps': 39.13 sigma: 1.44
Distance between the center of the dipole and the liquid (set with a spacer)	10 mm
Area scan resolution	dx=8mm/dy=8mm
Zoom scan resolution	dx=8mm/dy=8m/dz=5mm
Frequency	1900 MHz
Input power	20 dBm
Expanded uncertainty (K=1)	8.09%

SAR MEASUREMENT RESULT

	10g	1g
SAR measured	2.093 W/Kg	4.077 W/Kg
Liquid : HL	+2.1 %	+2.7 %

Serial# 1105013(FCC-SAR) Rev1.2 Issue Date Aug 3rd 2011 Page 109 of 109 www.siemic.com

COMOSAR Dipole 1900 MHz Calibration Report



SAR MEASUREMENT PLOTS

Page: 6/6

