

FCC RF Test Report

APPLICANT : Fibocom Wireless Inc.
EQUIPMENT : 5G Module
BRAND NAME : Fibocom
MODEL NAME : FG370-NA
FCC ID : ZMOFG370NA
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Jan. 29, 2024 ~ Apr. 12, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum Conducted Power and Emission Designator	6
1.5 Testing Site.....	8
1.6 Test Software	8
1.7 Applied Standards	9
2 Test Configuration of Equipment Under Test	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration	12
2.4 Measurement Results Explanation Example	13
2.5 Frequency List of Low/Middle/High Channels.....	13
3 Conducted Test Items.....	14
3.1 Measuring Instruments.....	14
3.2 Conducted Output Power	15
3.3 EIRP	16
3.4 Occupied Bandwidth	17
3.5 Conducted Band Edge	18
3.6 Conducted Spurious Emission	19
3.7 Frequency Stability.....	20
4 Radiated Test Items	21
4.1 Measuring Instruments.....	21
4.2 Test Setup	21
4.3 Test Result of Radiated Test.....	22
4.4 Radiated Spurious Emission	23
5 List of Measuring Equipment.....	24
6 Measurement Uncertainty	25
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG3D1101P	01	Initial issue of report	May 13, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.3	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.4	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.6	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 12.65 dB at 10874.880 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,,Shenzhen, China

1.2 Manufacturer

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,,Shenzhen, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	5G Module
Brand Name	Fibocom
Model Name	FG370-NA
FCC ID	ZMOFG370NA
Tx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
SCS	15kHz, 30kHz
Bandwidth	SCS 15kHz: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz* SCS 30kHz: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz* / 60MHz* / 70MHz* / 80MHz* / 90MHz* / 100MHz* (* means Downlink only)
Antenna Gain	<Ant. 3/5>: 5G NR n48: -4.5 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)
IMEI Code	Conducted: 864952060076756 Radiation: 864952060020580
HW Version	V1.0
SW Version	81140.7000.00.11.01.14
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The maximum conducted power is calculated from max output power and antenna gain, only the maximum conducted power are shown in the report, 5G NR n48/n48B for Ant.3 and n48 UL_MIMO for Ant. (3+5)
3. 5G NR n48 support SCS 15kHz and 30kHz. According to the maximum power, SCS 15kHz was full test to cover SCS 30kHz.
4. 5G NR n48 support UL MIMO mode is correlated, the MIMO Antenna gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$. The conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{ANT})$ according to

KDB 662911 D01.

5. 5G NR n48 support SA and NSA mode. The whole testing has assessed SA mode by referring to the higher conducted power.
6. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
7. The EN-DC mode combination could be referred to the product spec.

1.4 Maximum Conducted Power and Emission Designator

5G NR n48-SCS 15kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.0861	9M27G7D	0.0710	9M29W7D
15	3557.52~3692.49	0.0877	14M1G7D	0.0711	14M2W7D
20	3560.01~3690.00	0.0875	19M0G7D	0.0714	19M0W7D
30	3565.02~3684.99	0.0887	28M5G7D	0.0735	28M6W7D
40	3570.00~3679.98	0.0910	38M7G7D	0.0728	38M7W7D

5G NR n48 MIMO-SCS 15kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.0643	9M29G7D	0.0581	9M28W7D
15	3557.52~3692.49	0.0643	14M1G7D	0.0577	14M1W7D
20	3560.01~3690.00	0.0659	19M0G7D	0.0586	19M0W7D
30	3565.02~3684.99	0.0650	28M7G7D	0.0589	28M6W7D
40	3570.00~3679.98	0.0693	38M7G7D	0.0605	38M7W7D

5G NR n48B - SCS 15kHz		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)		Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
10+10		0.0127	19M2G7D	0.0110	19M1W7D
15+5		0.0032	19M0G7D	0.0033	19M1W7D
10+15		0.0124	24M0G7D	0.0111	24M1W7D
15+10		0.0128	24M1G7D	0.0113	24M1W7D
20+5		0.0032	23M8G7D	0.0032	23M9W7D
15+15		0.0127	28M9G7D	0.0114	28M9W7D
10+20		0.0123	28M6G7D	0.0110	28M5W7D
20+10		0.0126	28M5G7D	0.0112	28M5W7D



15+20	0.0127	33M4G7D	0.0113	33M6W7D
20+15	0.0129	33M4G7D	0.0116	33M6W7D
10+30	0.0133	38M4G7D	0.0118	38M6W7D
30+10	0.0132	38M4G7D	0.0117	38M4W7D
20+20	0.0128	38M4G7D	0.0114	38M8W7D
15+30	0.0126	43M0G7D	0.0111	43M3W7D
30+15	0.0034	43M4G7D	0.0034	43M3W7D
20+30	0.0132	48M6G7D	0.0118	48M6W7D
30+20	0.0131	48M2G7D	0.0117	48M5W7D
10+40	0.0134	47M8G7D	0.0119	48M0W7D
40+10	0.0132	48M1G7D	0.0118	48M4W7D
15+40	0.0128	53M1G7D	0.0114	53M0W7D
40+15	0.0034	52M9G7D	0.0034	53M2W7D
30+30	0.0133	58M3G7D	0.0118	58M0W7D
20+40	0.0134	57M5G7D	0.0118	57M9W7D
40+20	0.0134	58M6G7D	0.0121	58M0W7D
30+40	0.0129	68M4G7D	0.0115	68M3W7D
40+30	0.0136	67M6G7D	0.0121	68M1W7D
40+40	0.0136	78M3G7D	0.0109	77M8W7D

Note:

1. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.
2. 5G NR n48B supported bandwidth combinations and frequency are followed 3GPP 38.508-1.
3. BW5MHz is restricted to operation when carrier is CA configuration.

1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation					RB #		Test Channel		
		5	10	15	20	30	40	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n48	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	n48	-	v	v	v	v	v	v	v	v	v	v	-	v	-	v	-
Adjacent Channel Leakage Ratio	n48	-	v	-	v	-	v	v	v	-	-	-	v	v	v	v	v
Conducted Band Edge	n48	-	v	-	v	-	v	v	v				v	v	v	v	v
Conducted Spurious Emission	n48	-	v	-	v	-	v	v	v				v	-	v	v	v
E.I.R.P	n48	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	n48	-	-	-	v	-	-	-	v	-	-	-	-	v	-	v	-
Radiated Spurious Emission	n48	Worst Case													v	v	v
Remark	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “- ” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All test items are based on engineering evaluation. 5. Frequency Stability: Normal Voltage = 3.8V ; Low Voltage =3.3V; High Voltage =4.4V																



Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg.40+40M, 40+30M, 30+40M, 40+20M, 20+40M, 30+30M, 40+15M, 15+40M, 40+10M, 10+40M, 30+20M, 20+30M, 30+15M, 15+30M, 20+20M, 30+10M, 10+30M, 20+15M, 15+20M, 20+10M, 10+20M, 15+15M, 20+5M, 15+10M, 10+15M, 15+5M, 10+10M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	n48B	All supported Bandwidth	All Modulation	1RB, Full RB	L, M, H
E.I.R.P	n48B	All supported Bandwidth	All Modulation	1RB, Full RB	L, M, H
ACLR	n48B	10+10M, 20+20M, 40+40M	PI/2 BPSK, QPSK	1RB, Full RB	L, M, H
26dB and 99% Bandwidth	n48B	All supported Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	n48B	10+10M, 20+20M, 40+40M	PI/2 BPSK, QPSK	1RB, Full RB	L, M, H
Conducted Spurious Emission	n48B	10+10M, 20+20M, 40+40M	PI/2 BPSK, QPSK	1RB, Full RB	L, M, H
Radiated Spurious Emission	n48B	Worst case from maximum power			M
Note:					
1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.					
2. All test items are based on engineering evaluation.					

2.2 Connection Diagram of Test System

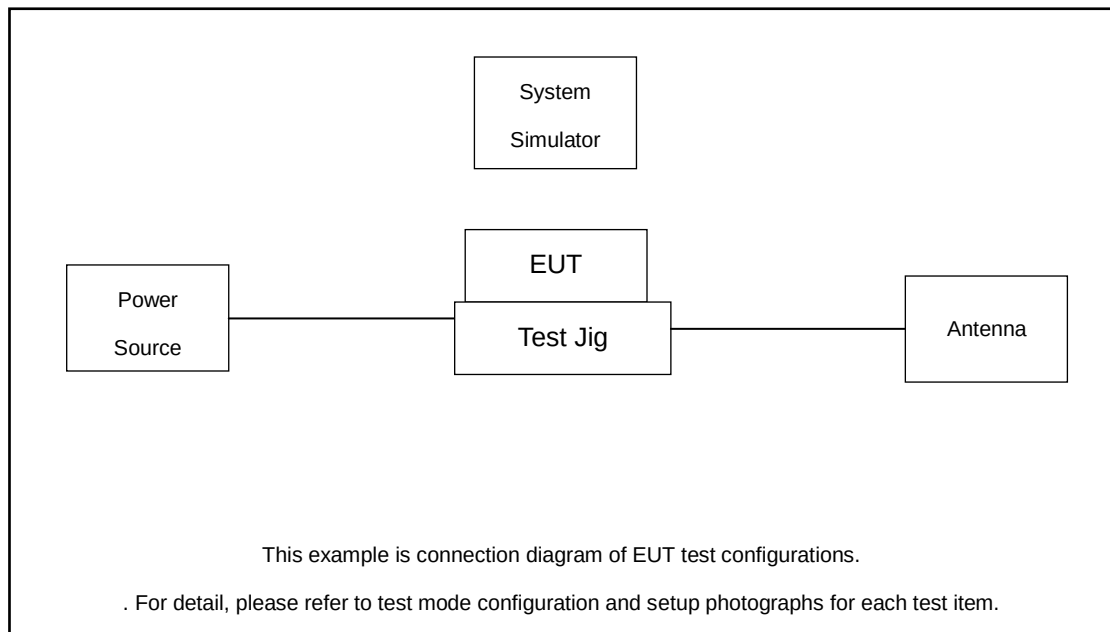

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Antenna	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.9 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637666	641666	645666
	Frequency	3564.99	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
15	Channel	637168	641666	646166
	Frequency	3557.52	3624.99	3692.49
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power / ACLR

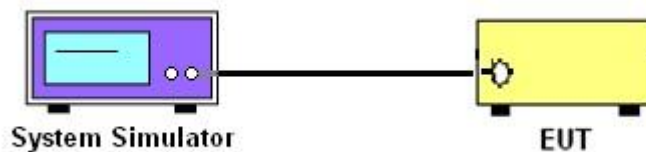

3.1.3 Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

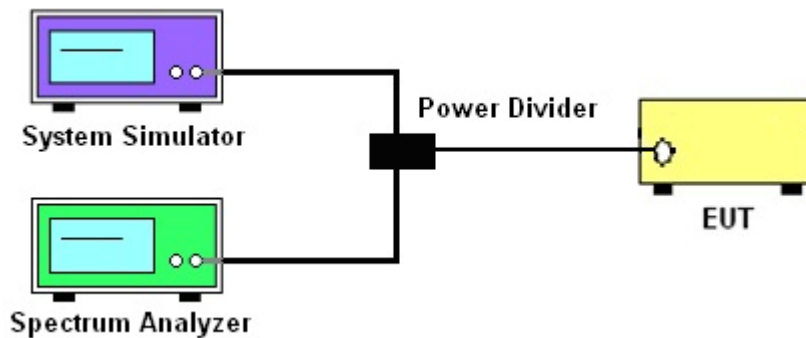

3.1.4 Frequency Stability

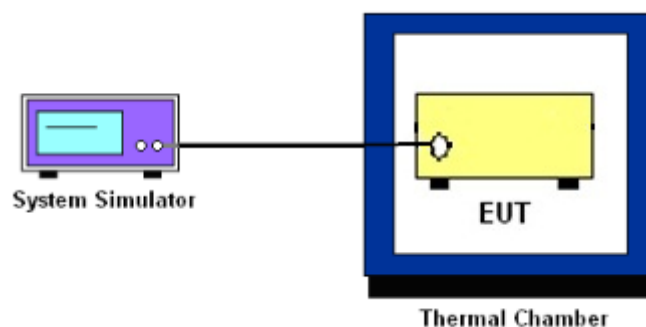

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 EIRP

3.3.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark:

The worst case EIRP shown in this section is found with NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for NR n48 (i.e. 10, 20, 30, 40MHz)

3.3.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$

$$P_T = \text{transmitter output power in dBm}$$

$$G_T = \text{gain of the transmitting antenna in dBi}$$

$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for Band n48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

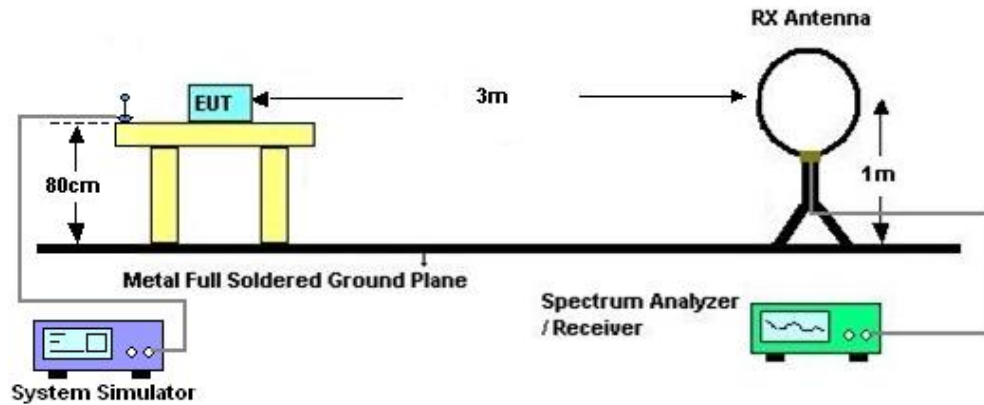

4.2.2 For radiated test from 30MHz to 1GHz

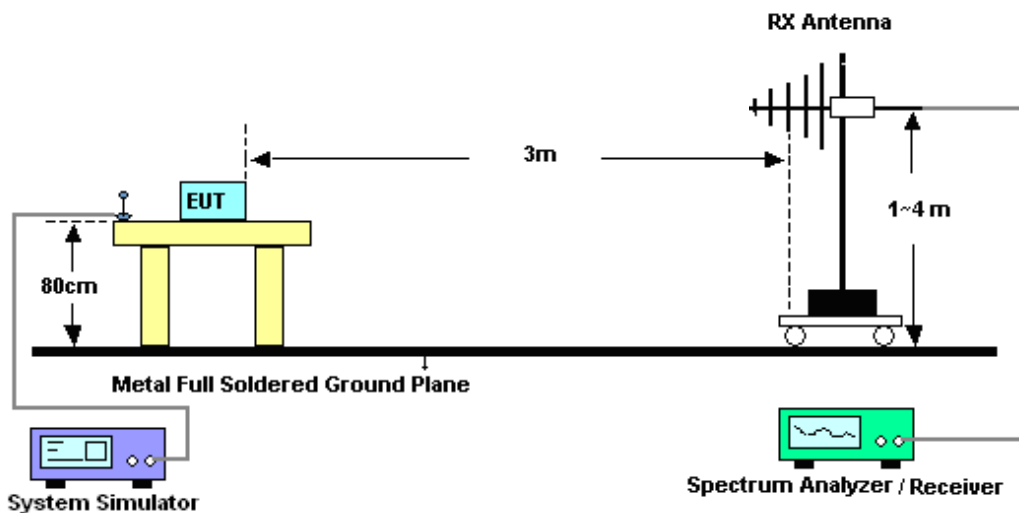

4.2.3 For radiated test above 1GHz

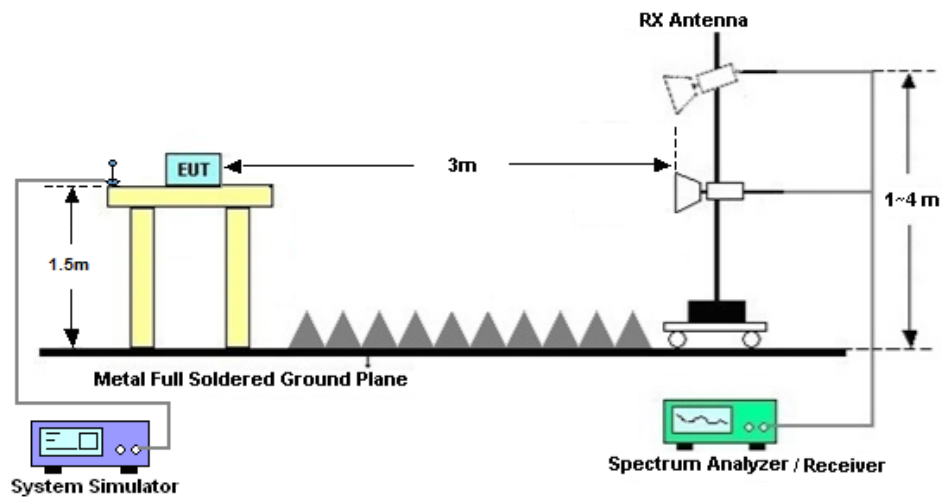

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 05, 2023	Jan. 29, 2024~ Apr. 12, 2024	Apr. 04, 2024	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 04, 2024		Apr. 03, 2025	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jan. 29, 2024~ Apr. 12, 2024	Jul. 06, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 25, 2023	Jan. 29, 2024~ Apr. 12, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Jan. 29, 2024~ Apr. 12, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Mar. 28, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Mar. 28, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Mar. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Mar. 28, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Mar. 28, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	Mar. 28, 2024	Apr. 07, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Mar. 28, 2024	Apr. 03, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10 P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Mar. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Mar. 28, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Mar. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 28, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 28, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Conducted Power Density	± 1.32 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.80dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.48dB
---	--------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.53dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.02dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Hank Lin	Temperature :	24~26°C
		Relative Humidity :	50~53%

FR1 N48_Ant.3

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-4.50dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
48	15	10	637000	3555	DFT-s-OFDM QPSK	1@1	19.13	14.63	0.0290
48	15	10	637000	3555	DFT-s-OFDM 16 QAM	1@1	18.23	13.73	0.0236
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@1	19.35	14.85	0.0305
48	15	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	18.51	14.01	0.0252
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@1	19.24	14.74	0.0298
48	15	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@1	18.42	13.92	0.0247
48	15	15	637168	3557.52	DFT-s-OFDM QPSK	1@1	19.14	14.64	0.0291
48	15	15	637168	3557.52	DFT-s-OFDM 16 QAM	1@1	18.28	13.78	0.0239
48	15	15	641666	3624.99	DFT-s-OFDM QPSK	1@1	19.43	14.93	0.0311
48	15	15	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	18.52	14.02	0.0252
48	15	15	646166	3692.49	DFT-s-OFDM QPSK	1@1	19.25	14.75	0.0299
48	15	15	646166	3692.49	DFT-s-OFDM 16 QAM	1@1	18.27	13.77	0.0238
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	19.2	14.7	0.0295
48	15	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	18.33	13.83	0.0242
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	19.42	14.92	0.0310
48	15	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	18.54	14.04	0.0254
48	15	20	646000	3690	DFT-s-OFDM QPSK	1@1	19.15	14.65	0.0292
48	15	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	18.35	13.85	0.0243
48	15	30	637668	3565.02	DFT-s-OFDM QPSK	1@1	19.14	14.64	0.0291
48	15	30	637668	3565.02	DFT-s-OFDM 16 QAM	1@1	18.35	13.85	0.0243
48	15	30	641666	3624.99	DFT-s-OFDM QPSK	1@1	19.48	14.98	0.0315
48	15	30	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	18.66	14.16	0.0261
48	15	30	645666	3684.99	DFT-s-OFDM QPSK	1@1	19.26	14.76	0.0299
48	15	30	645666	3684.99	DFT-s-OFDM 16 QAM	1@1	18.37	13.87	0.0244
48	15	40	638000	3570	DFT-s-OFDM PI/2 BPSK	108@54	19.26	14.76	0.0299
48	15	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	19.28	14.78	0.0301
48	15	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@214	19.25	14.75	0.0299
48	15	40	638000	3570	DFT-s-OFDM QPSK	108@54	19.29	14.79	0.0301
48	15	40	638000	3570	DFT-s-OFDM QPSK	1@1	19.22	14.72	0.0296
48	15	40	638000	3570	DFT-s-OFDM QPSK	1@214	19.27	14.77	0.0300

48	15	40	638000	3570	DFT-s-OFDM 16 QAM	108@54	18.27	13.77	0.0238
48	15	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	18.33	13.83	0.0242
48	15	40	638000	3570	DFT-s-OFDM 16 QAM	1@214	18.4	13.9	0.0245
48	15	40	638000	3570	DFT-s-OFDM 64 QAM	108@54	16.76	12.26	0.0168
48	15	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	16.96	12.46	0.0176
48	15	40	638000	3570	DFT-s-OFDM 64 QAM	1@214	17.03	12.53	0.0179
48	15	40	638000	3570	DFT-s-OFDM 256 QAM	108@54	14.74	10.24	0.0106
48	15	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	15.05	10.55	0.0114
48	15	40	638000	3570	DFT-s-OFDM 256 QAM	1@214	15.19	10.69	0.0117
48	15	40	638000	3570	CP-OFDM QPSK	108@54	17.77	13.27	0.0212
48	15	40	638000	3570	CP-OFDM QPSK	1@1	17.78	13.28	0.0213
48	15	40	638000	3570	CP-OFDM QPSK	1@214	17.84	13.34	0.0216
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	108@54	19.59	15.09	0.0323
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	19.47	14.97	0.0314
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@214	19.45	14.95	0.0313
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	108@54	19.58	15.08	0.0322
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	19.52	15.02	0.0318
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@214	19.49	14.99	0.0316
48	15	40	641666	3624.99	DFT-s-OFDM 16 QAM	108@54	18.59	14.09	0.0256
48	15	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	18.61	14.11	0.0258
48	15	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@214	18.62	14.12	0.0258
48	15	40	641666	3624.99	DFT-s-OFDM 64 QAM	108@54	17.05	12.55	0.0180
48	15	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	17.13	12.63	0.0183
48	15	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@214	17.21	12.71	0.0187
48	15	40	641666	3624.99	DFT-s-OFDM 256 QAM	108@54	15.12	10.62	0.0115
48	15	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	15.37	10.87	0.0122
48	15	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@214	15.4	10.9	0.0123
48	15	40	641666	3624.99	CP-OFDM QPSK	108@54	18.06	13.56	0.0227
48	15	40	641666	3624.99	CP-OFDM QPSK	1@1	18.12	13.62	0.0230
48	15	40	641666	3624.99	CP-OFDM QPSK	1@214	18.16	13.66	0.0232
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	108@54	19.32	14.82	0.0303
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	19.29	14.79	0.0301
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@214	19.42	14.92	0.0310
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	108@54	19.33	14.83	0.0304
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	19.21	14.71	0.0296
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@214	19.43	14.93	0.0311

48	15	40	645332	3679.98	DFT-s-OFDM 16 QAM	108@54	18.31	13.81	0.0240
48	15	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	18.3	13.8	0.0240
48	15	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@214	18.55	14.05	0.0254
48	15	40	645332	3679.98	DFT-s-OFDM 64 QAM	108@54	16.79	12.29	0.0169
48	15	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	17.05	12.55	0.0180
48	15	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@214	17.25	12.75	0.0188
48	15	40	645332	3679.98	DFT-s-OFDM 256 QAM	108@54	14.82	10.32	0.0108
48	15	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	15.23	10.73	0.0118
48	15	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@214	15.4	10.9	0.0123
48	15	40	645332	3679.98	CP-OFDM QPSK	108@54	17.82	13.32	0.0215
48	15	40	645332	3679.98	CP-OFDM QPSK	1@1	17.88	13.38	0.0218
48	15	40	645332	3679.98	CP-OFDM QPSK	1@214	18.03	13.53	0.0225


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0052	PASS	NV
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0025	PASS	LV
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0032	PASS	HV
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0069	PASS	-30°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0031	PASS	-20°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0066	PASS	-10°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0028	PASS	0°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0045	PASS	10°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0052	PASS	20°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0053	PASS	30°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0069	PASS	40°C
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	0.0022	PASS	50°C


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
48	15	10	641666	3624.99	CP-OFDM QPSK	52@0	9.273	9.659
48	15	10	641666	3624.99	CP-OFDM 16 QAM	52@0	9.2604	9.682
48	15	10	641666	3624.99	CP-OFDM 64 QAM	52@0	9.2939	9.725
48	15	10	641666	3624.99	CP-OFDM 256 QAM	52@0	9.2721	9.638
48	15	15	641666	3624.99	CP-OFDM QPSK	79@0	14.052	14.57
48	15	15	641666	3624.99	CP-OFDM 16 QAM	79@0	14.069	14.71
48	15	15	641666	3624.99	CP-OFDM 64 QAM	79@0	14.155	14.76
48	15	15	641666	3624.99	CP-OFDM 256 QAM	79@0	14.117	14.67
48	15	20	641666	3624.99	CP-OFDM QPSK	106@0	18.999	19.55
48	15	20	641666	3624.99	CP-OFDM 16 QAM	106@0	18.936	19.68
48	15	20	641666	3624.99	CP-OFDM 64 QAM	106@0	18.965	19.54
48	15	20	641666	3624.99	CP-OFDM 256 QAM	106@0	18.821	19.63
48	15	30	641666	3624.99	CP-OFDM QPSK	160@0	28.541	29.56
48	15	30	641666	3624.99	CP-OFDM 16 QAM	160@0	28.497	29.5
48	15	30	641666	3624.99	CP-OFDM 64 QAM	160@0	28.551	29.51
48	15	30	641666	3624.99	CP-OFDM 256 QAM	160@0	28.551	29.44
48	15	40	641666	3624.99	CP-OFDM QPSK	216@0	38.662	39.92
48	15	40	641666	3624.99	CP-OFDM 16 QAM	216@0	38.446	39.81
48	15	40	641666	3624.99	CP-OFDM 64 QAM	216@0	38.662	39.86
48	15	40	641666	3624.99	CP-OFDM 256 QAM	216@0	38.508	39.8


N48(10M)_CP-
OFDM QPSK Outer Full Mid CH

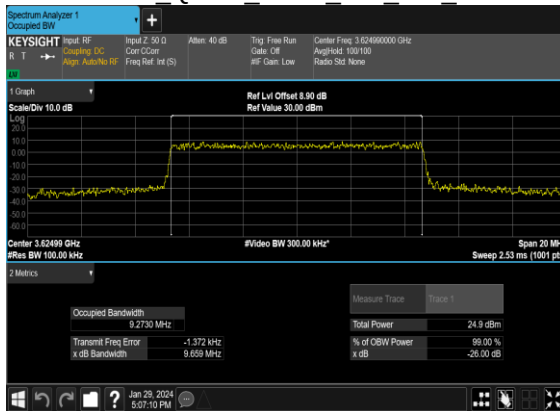


N48(10M)_CP-OFDM_16
QAM Outer Full Mid CH

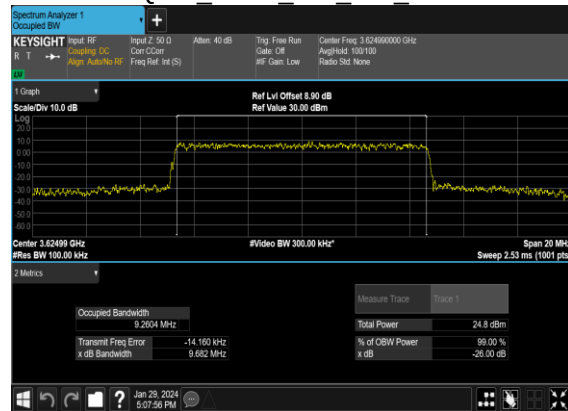


N48(10M)_CP-OFDM_64
QAM Outer Full Mid CH

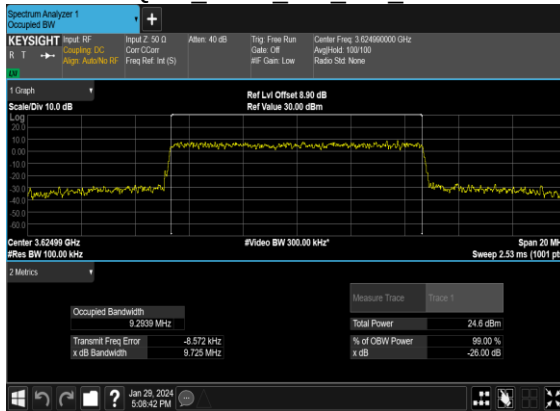


N48(10M)_CP-OFDM_256
QAM Outer Full Mid CH

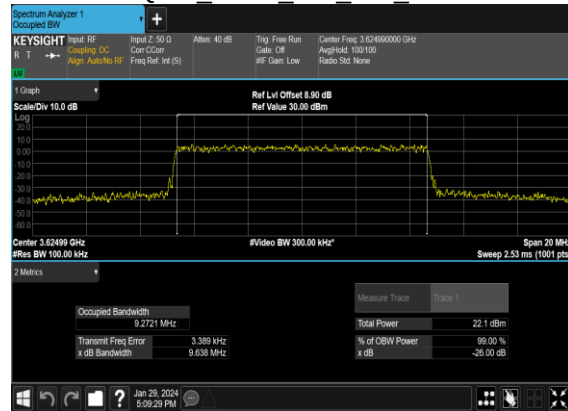


N48(15M)_CP-
OFDM QPSK Outer Full Mid CH

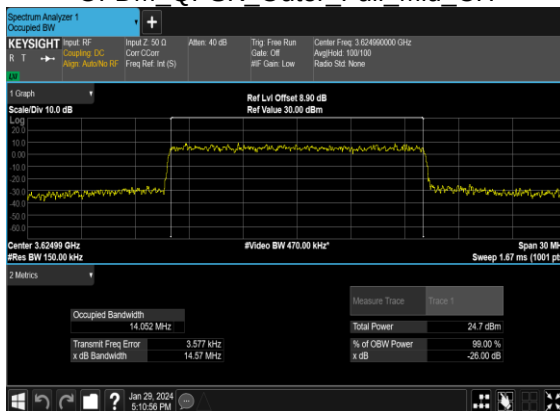


N48(15M)_CP-OFDM_16
QAM Outer Full Mid CH

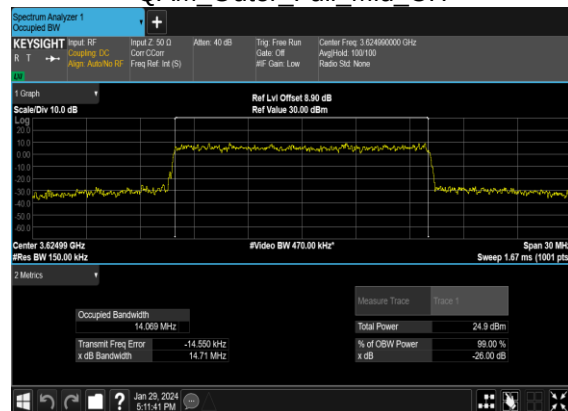


N48(15M)_CP-OFDM_64
QAM Outer Full Mid CH

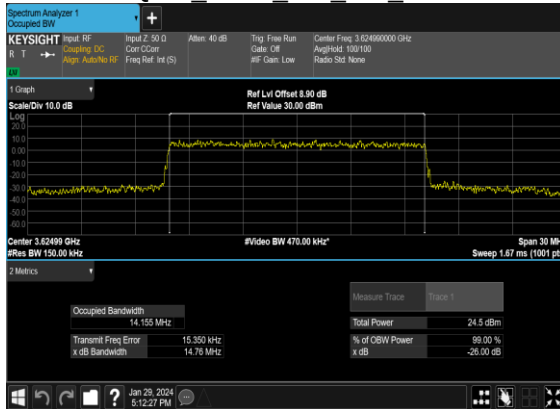


N48(15M)_CP-OFDM_256
QAM Outer Full Mid CH

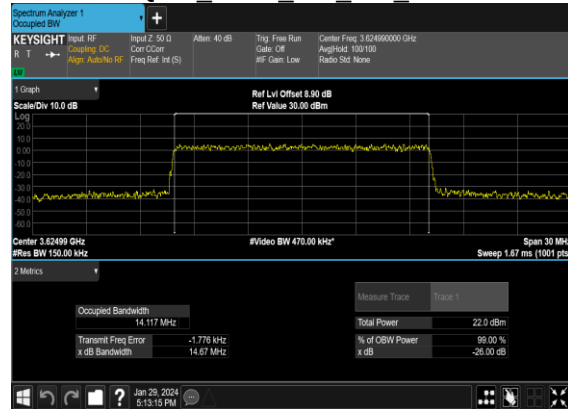


N48(20M)_CP-OFDM_QPSK Outer Full Mid CH

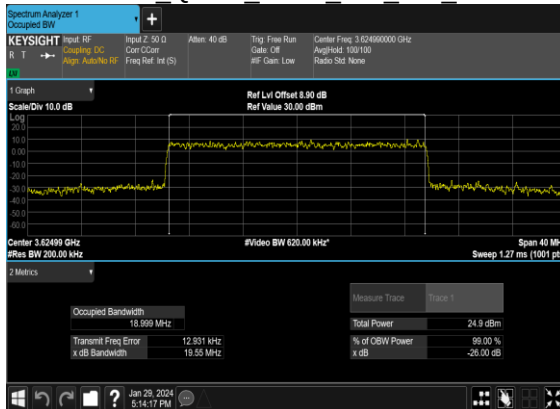


N48(20M)_CP-OFDM_16
QAM Outer Full Mid CH

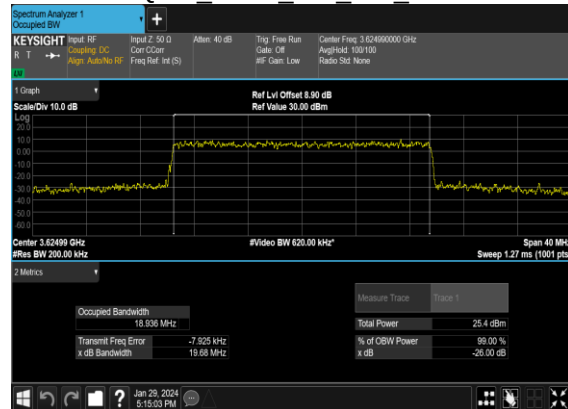


N48(20M)_CP-OFDM_64
QAM Outer Full Mid CH

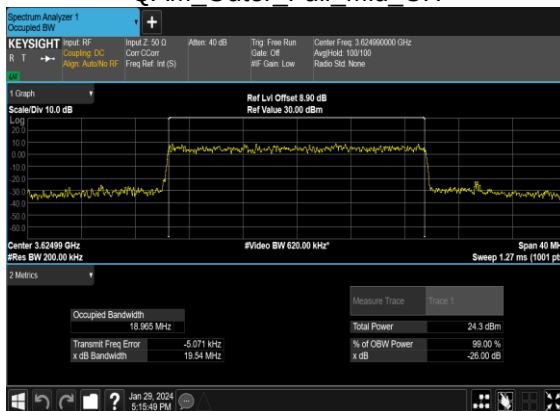


N48(20M)_CP-OFDM_256
QAM Outer Full Mid CH

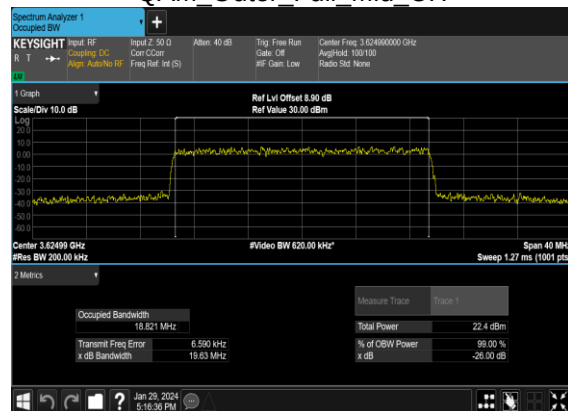


N48(30M)_CP-OFDM_QPSK Outer Full Mid CH

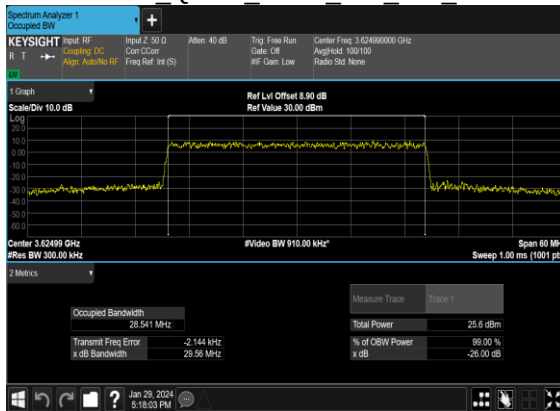


N48(30M)_CP-OFDM_16QAM Outer Full Mid CH

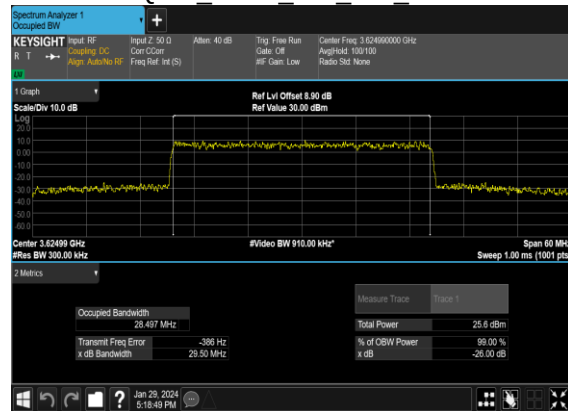


N48(30M)_CP-OFDM_64QAM Outer Full Mid CH

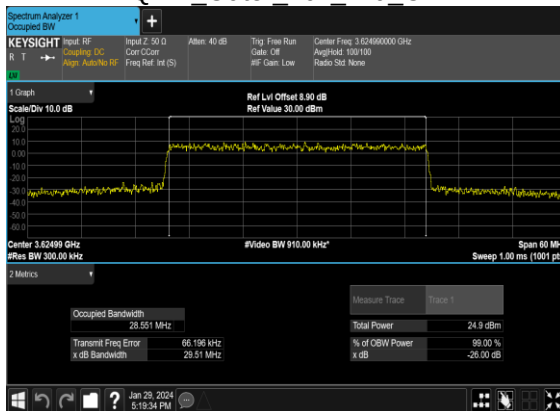


N48(30M)_CP-OFDM_256QAM Outer Full Mid CH

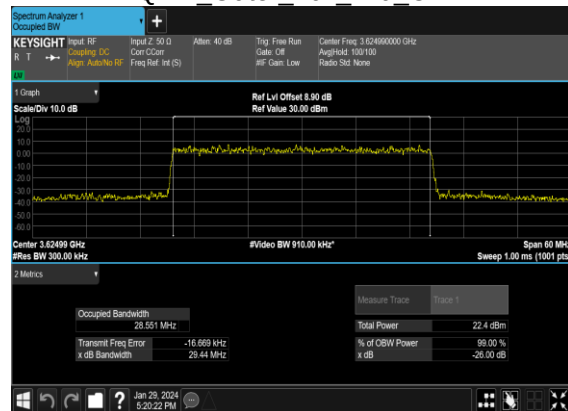


N48(40M)_CP-OFDM_QPSK Outer Full Mid CH

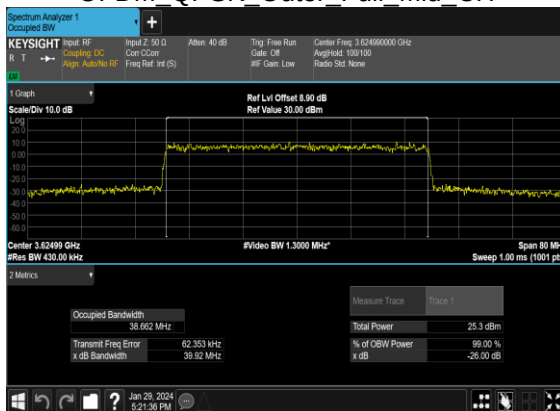

N48(40M)_CP-OFDM_16QAM Outer Full Mid CH

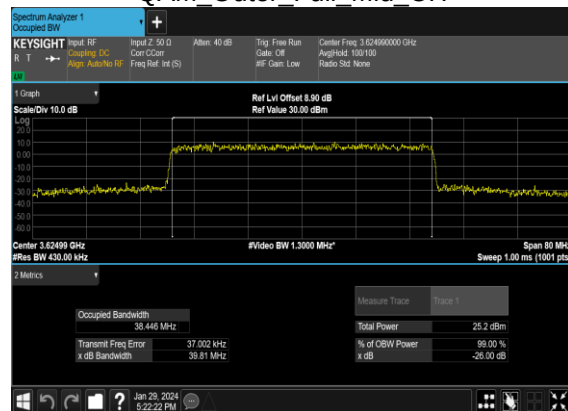

N48(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

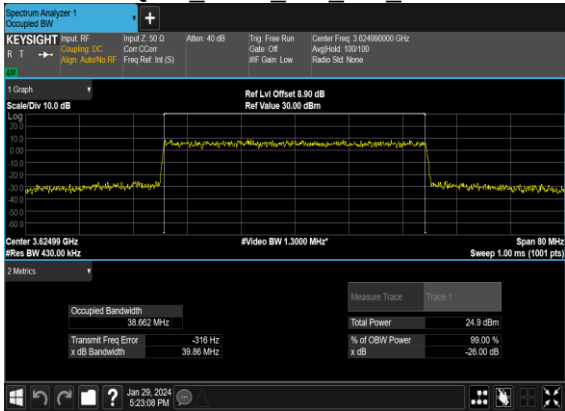

N48(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH




Adjacent Channel Leakage Ratio


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Lower Margin	Upper Margin	Result	Verdict
48	15	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	50@0	-19.2	-19.21	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@0	-15.13	-21.16	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@51	-20.77	-17.3	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	50@0	-18.62	-18.32	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	-15.97	-20.77	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@51	-20.78	-16.95	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	-15.79	-14.78	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-15.34	-18.82	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@51	-19.78	-16.75	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	50@0	-12.92	-12.07	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	-16.09	-18.67	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@51	-19.92	-16.86	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	50@0	-13.95	-13.03	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@0	-14.33	-18.25	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@51	-16.85	-14.66	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	50@0	-10.78	-10.34	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	-14.94	-17.56	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@51	-16.99	-14.55	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	100@0	-17.71	-17.84	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@0	-17.23	-19.8	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@105	-20.4	-17.66	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	100@0	-17.37	-17.3	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	-14.38	-17.34	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@105	-19.15	-16.65	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-14.38	-14.06	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-13.6	-15.51	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@105	-15.15	-13.89	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	100@0	-14.65	-14.18	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	-13.66	-14.16	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@105	-15.29	-13.86	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	100@0	-12.71	-12.42	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@0	-14.78	-15.72	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@105	-15.65	-14.1	see graph	PASS

48	15	20	646000	3690.0	DFT-s-OFDM QPSK	100@0	-10.94	-10.43	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	-14.14	-14.84	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@105	-14.95	-13.6	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	216@0	-12.99	-12.55	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.32	-13.44	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@215	-13.07	-11.29	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	216@0	-12.44	-12.0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	-10.76	-12.16	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@215	-12.08	-10.51	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	216@0	-11.67	-11.39	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.68	-12.9	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@215	-12.06	-10.47	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	216@0	-10.65	-10.5	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	-10.56	-11.43	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@215	-13.5	-11.71	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	216@0	-10.78	-10.43	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@0	-11.4	-12.16	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@215	-14.17	-11.79	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	216@0	-9.46	-9.31	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	-11.33	-12.11	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@215	-11.99	-9.85	see graph	PASS


N48(10M)_DFT-s-OFDM_PI_2-BPSK Outer Full Low CH

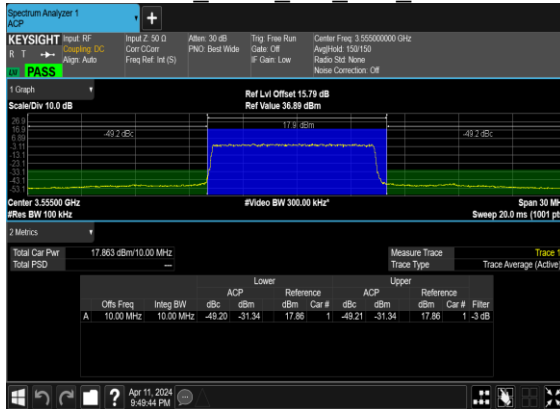


N48(10M)_DFT-s-OFDM_PI_2-BPSK Edge 1RB Left Low CH

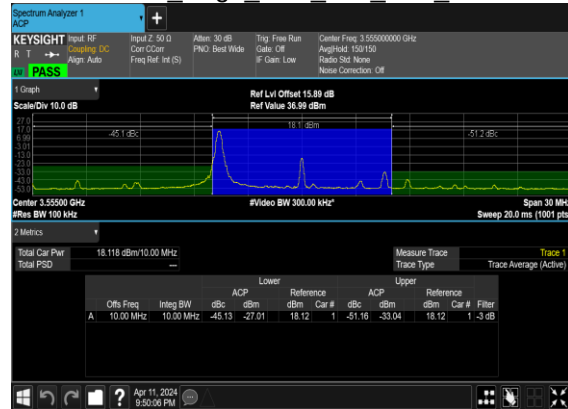


N48(10M)_DFT-s-OFDM_PI_2-BPSK Edge 1RB Right Low CH

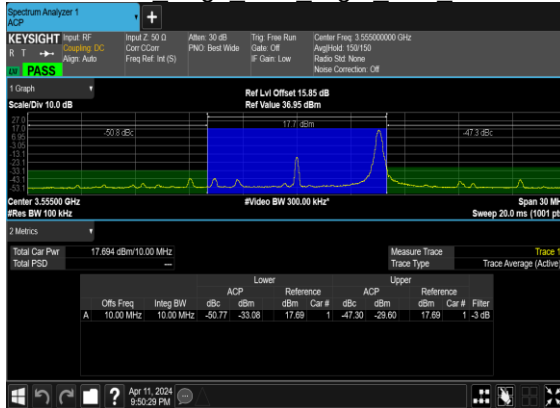


N48(10M)_DFT-s-OFDM QPSK Outer Full Low CH

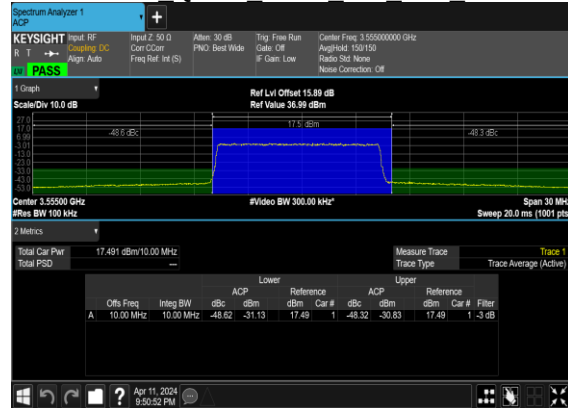


N48(10M)_DFT-s-OFDM QPSK Edge 1RB Left Low CH

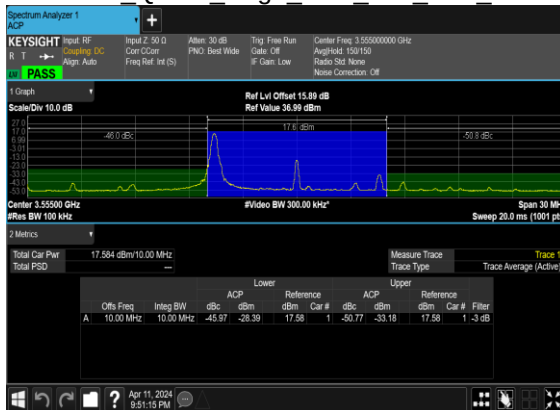


N48(10M)_DFT-s-OFDM QPSK Edge 1RB Right Low CH

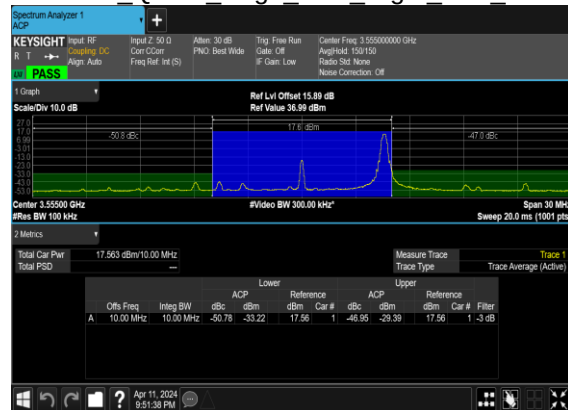


N48(10M)_DFT-s-OFDM_PI_2-
BPSK Outer Full Mid CH

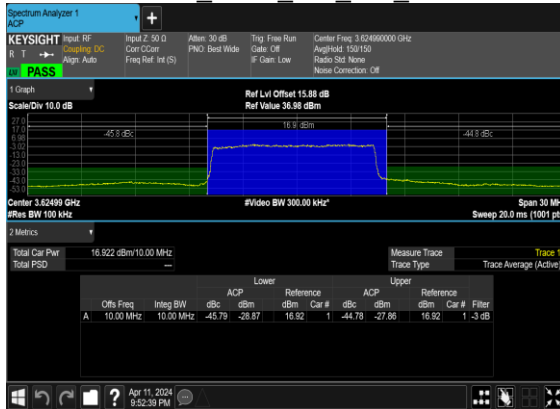


N48(10M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Left Mid CH

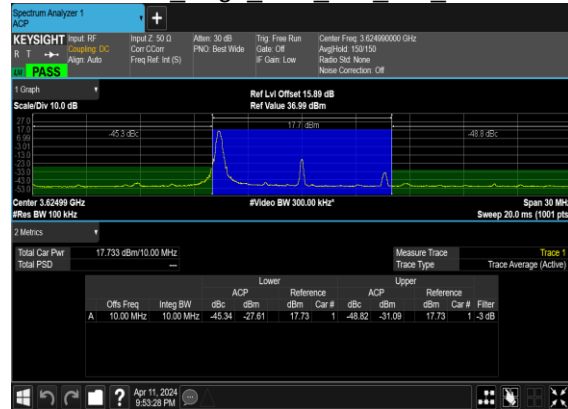


N48(10M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Right Mid CH

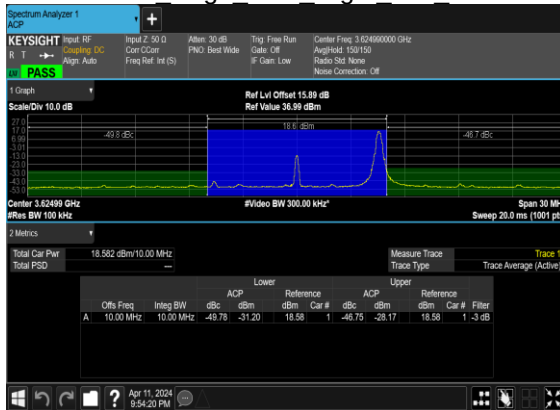


N48(10M)_DFT-s-
OFDM QPSK Outer Full Mid CH

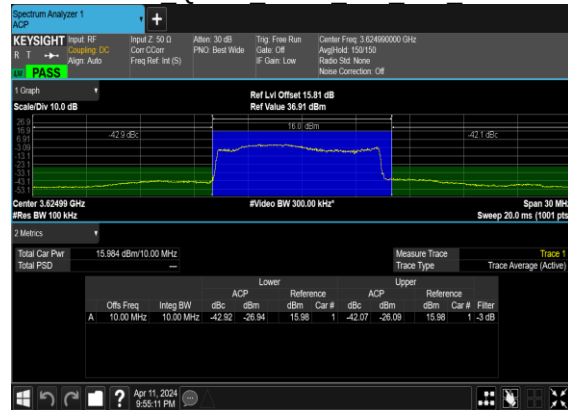


N48(10M)_DFT-s-
OFDM QPSK Edge 1RB Left Mid CH

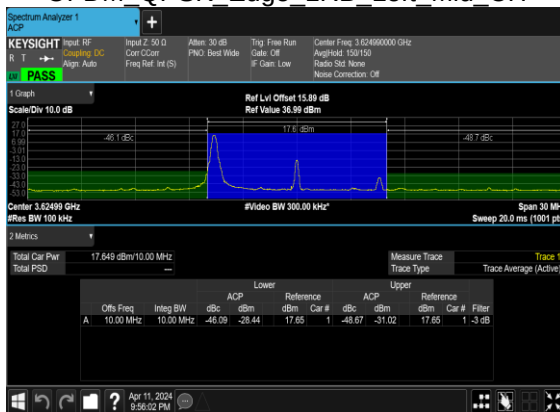


N48(10M)_DFT-s-
OFDM QPSK Edge 1RB Right Mid CH

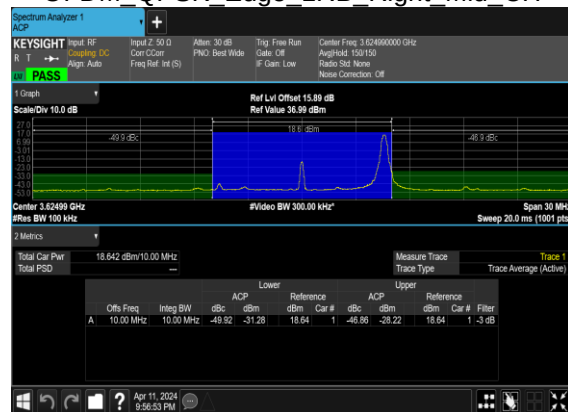


N48(10M)_DFT-s-OFDM_PI_2-
BPSK Outer Full High CH

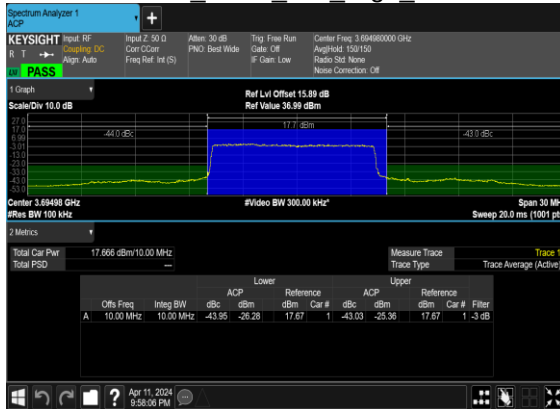


N48(10M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Left High CH

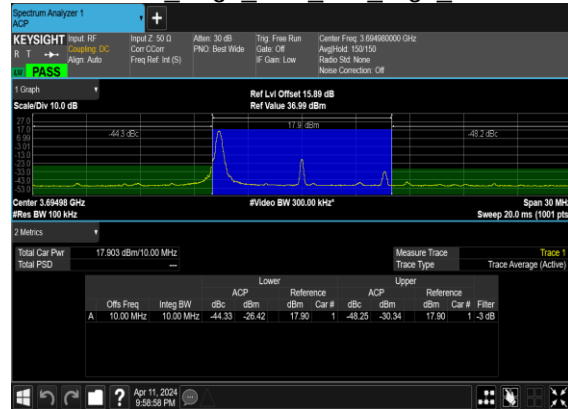


N48(10M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Right High CH

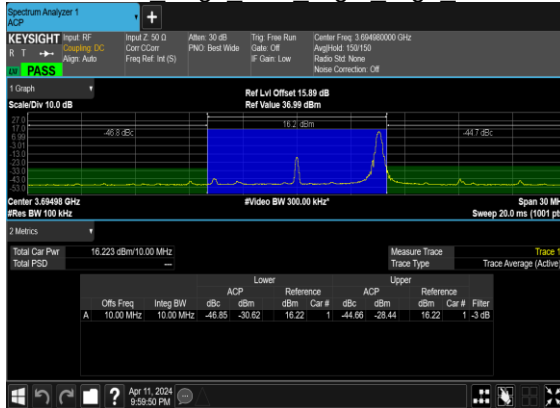


N48(10M)_DFT-s-
OFDM QPSK Outer Full High CH

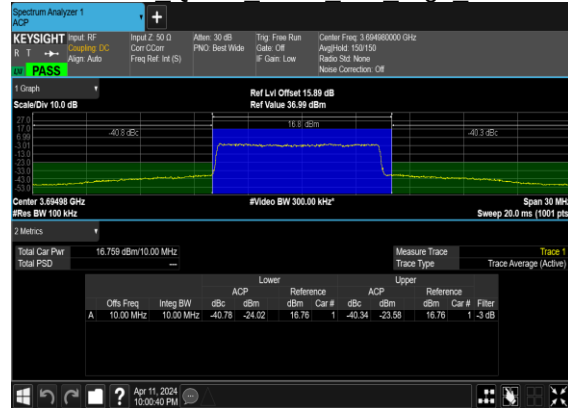

N48(10M)_DFT-s-
OFDM QPSK Edge 1RB Left High CH

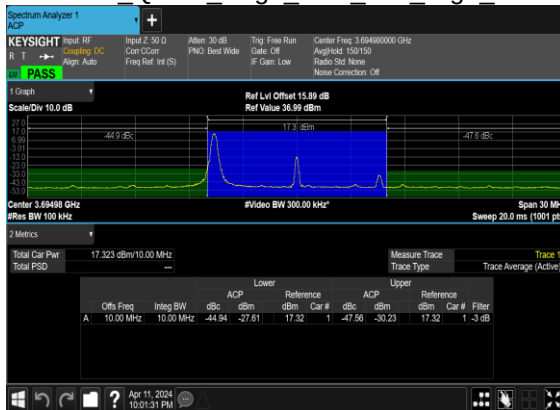

N48(10M)_DFT-s-
OFDM QPSK Edge 1RB Right High CH

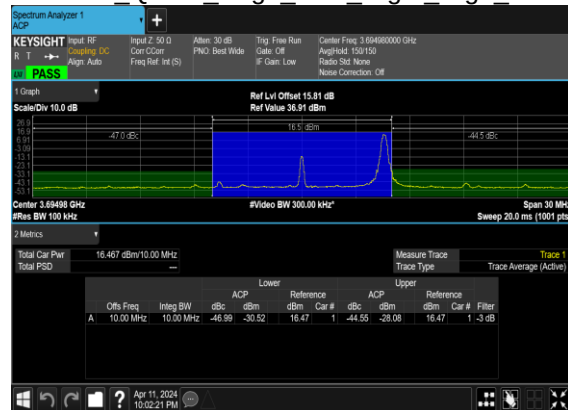

Spectrum Analyzer 1
ACF

KEYSIGHT Input RF
R T $\leftrightarrow$ **Channeling DC**
Align Auto

PASS

1 Graph
Scale/Div 10.0 dB

Ref Lvl Offset 15.99 dBm
Ref Value 36.99 dBm

47.7 dBc

47.7 dBc

Center 2.50001 GHz
Span 60 MHz
BW 100 kHz
Sweep 20.0 ms (1001 pts)

#Video BW 300.0 kHz

2 Metrics

Total Car Pwr 17.994 dBm/20 MHz
Total PSD

Measure Trace
Trace Type Trace Average (Active)

Lower				Upper			
Offs Freq	Integ BW	dBc	ACP	Reference	ACP	Reference	Filter
		dBm	dBm	Car #	dBm	dBm	
A 20.00 MHz	20.00 MHz	-47.71	-29.72	17.99	1	-47.84	-29.85
						17.99	1 -3 dB

Apr 11, 2024 10:02:49 PM

Keysight Spectrum Analyzer 1
KEYSIGHT Input RF Output DC
 R T $\leftrightarrow$ Displaying DC
 Align Auto

Input2 2.40 D
 Core C/Cat
 Freq Ref Int (S)

Attain: 30 dB
 PNO: Best Wide
 Trig: Free Run
 Gate: Off
 IF: Gain: Low
 Center Freq: 3.560010000 GHz
 AugH44: 150150
 Radio Std: None
 Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB

Ref Lvl Offset 15.81 dB
 Ref Value 36.51 dBm

47.2 dBm
 18.5 dBm
 49.1 dBm

Center 3.56001 GHz
 Span BW 100 kHz

Span 60 MHz
 Sweep 20.0 ms (1001 pts)

2 Metrics

Total Car Pwr 18.463 dBm/20.00 MHz
 Total PSD ---

Measure Trace
 Trace Type Trace Average (Active)

		Lower					Upper				
Offs Freq	Integ BW	ACP dBc	ACP dBm	Reference dBm	Car #	ACP dBm	Reference dBm	Car #	Filter		
A 20.00 MHz	20.00 MHz	-47.23	-28.77	18.46	1	-49.80	-31.34	18.46	1 -3 dB		

Apr 11, 2004
 10:03:08 PM

Keysight Spectrum Analyzer 1
ACP

KEYSIGHT Input RF: **16.11 dBm**
 R T → Creating DC: **16.11 dBm**
 Auto Align: **16.11 dBm**

Input Z: 50 Ω
 Corr CCor: **16.11 dBm**
 Freq Ref Int (S): **16.11 dBm**

Atten: 30 dB
 PNO: Best Wide
 Trig Freq Run: **16.11 dBm**
 Gate: Off
 IF Gain: Low

Center Freq: 3.560010000 GHz
 ArgHld: 150150
 Ratls: Std None
 Noise Correction: Off

1 Graph
 Scale/Div: 10.0 dB

Ref Lvl Offset: 15.89 dBm
 Ref Value: 36.89 dBm

50.4 dBc
 16.11 dBm
 47.7 dBc

Center: 3.56001 GHz
 Span: 60 MHz
 RBW: 300 kHz
 Sweep: 20.0 ms (1001 pts)

2 Metrics

Total Car Pwr: 18.978 dBm/20 MHz
 Total PSD: --

Lower				Upper								
Offs Freq	Integ BW	dBc	ACP	Reference	ACP	Reference	Filter					
		dBm	dBm	Car #	dBm	dBm	Car #					
A	20.00 MHz	20.00 MHz	-50.40	-31.42	18.98	1	-47.60	-28.68	18.98	1	-3	dB

Trace Type: Trace Average (Active)

Spectrum Analyzer 1
AC/DC

KEYSIGHT Input RF Input DC
R T $\leftrightarrow$ Channeling DC
Align: Auto

Input 2: 50.0
Con: Cal
Freq Ref: Int (S)

Att: 30 dB
PNO: Best Wtd

Trig: Free Run
Gate: Off
IF: Gain Low

Center Freq: 3.560010000 GHz
Amp/Mod: 150150
Ratio: Std None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB

Ref Lvl Offset 15.63 dB
Ref Value 36.93 dBm

47.4 dBc 17.7 dBm 47.3 dBc

Center 3.56001 GHz
#Res BW 100 kHz
#Video BW 300.00 MHz

Span 60 MHz
Sweep 20.0 ms (1001 pts)

2 Metrics

Total Car Pwr 17.669 dBm/20.00 MHz
Total PSD

Measure Trace
Trace Type Trace Average (Active)

Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Car #	Filter
		dBc	dBm	dBm	dBm		
A	20.00 MHz	20.00 MHz	-47.37	-29.70	17.67	1	-47.30 -29.63 17.67 1 -3 dB

Apr 11, 2004
10:03:49 PM

Spectrum Analyzer 1
ACP

KEYSIGHT Input Ref
R T → ← Creating DC
Align Auto

IN PASS

1 Graph
Scale/Div 10.0 dB

Ref Lvl Offset 15.89 dB
Ref Value 36.99 dBm

44.4 dBc 16.1 dBm 47.3 dBc

Center 2.50001 GHz
Span 60 MHz
RBW 100 kHz
Sweep 20.0 ms (1001 pts)

2 Metrics

Total Car Pwr 16.071 dBm/20 MHz
Total PSD

Measure Trace
Trace Type Trace Average (Active)

Lower				Upper			
Offs Freq	Integ BW	dBc	ACP	Reference	ACP	Reference	Filter
		dBm	dBm	Car #	dBm	dBm	Car #
A 20.00 MHz	20.00 MHz	-44.38	-28.31	16.07	1	-47.34	-31.27
				16.07			1 -3 dB

Apr 11, 2024
10:24:08 PM

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
Coupling DC
Align Auto

Input2 2.50 D
Corr CCarr
Freq Ref Int (S)

Attain: 30 dB
PNO: Best Wide

Trig: Free Run
Gate: Off
IF: Gain: Low

Center Freq: 3.560010000 GHz
AmpHd4: 150150
Noise Std: None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB

Ref Lvl Offset 15.89 dB
Ref Value 36.99 dBm

49.2 dBc
17.7 dBm
48.1 dBc

Center 5.56001 GHz
Res BW 300 kHz

#Video BW 300.0 kHz

Span 60 MHz
Sweep 20.0 ms (1001 pt)

2 Metrics


Total Car Pwr 17.657 dBm/20.00 MHz
Total PSD

Measure Trace
Trace Type Trace Average (Active)


Offs Freq	Integ BW	Lower			Upper		
		ACP dBc	ACP dBm	Reference dBm Car #	ACP dBm	Reference dBm Car #	Filter
A 20.00 MHz	20.00 MHz	-48.15	-31.50	17.66	1	-46.65 -28.99	17.66 1 -3 dB

Apr 11, 2004
10:04:30 PM


N48(20M)_DFT-s-OFDM_PI_2-
BPSK Outer Full_Mid_CH

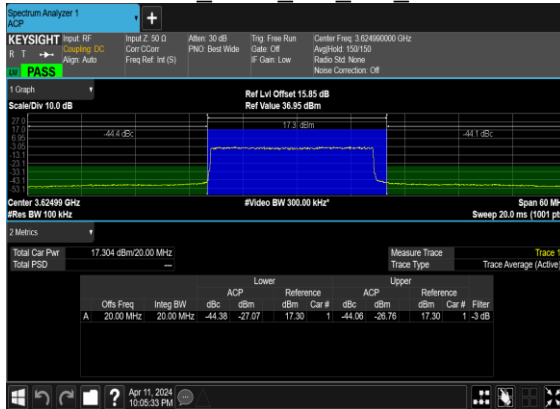


N48(20M)_DFT-s-OFDM_PI_2-
BPSK Edge_1RB Left_Mid_CH

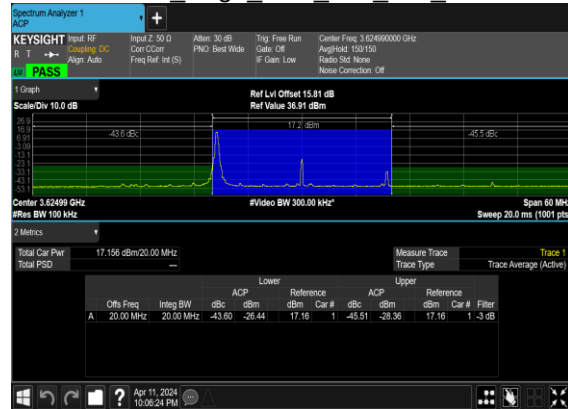


N48(20M)_DFT-s-OFDM_PI_2-
BPSK Edge_1RB Right_Mid_CH

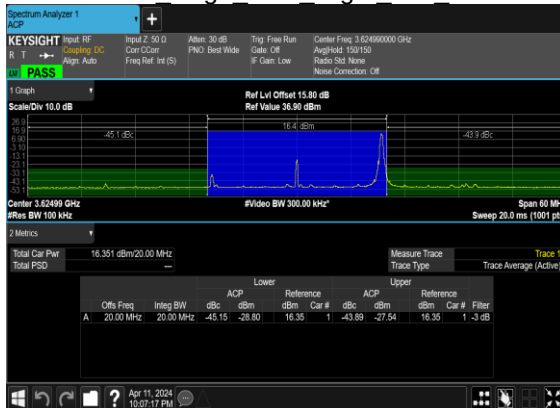


N48(20M)_DFT-s-
OFDM QPSK Outer Full_Mid_CH

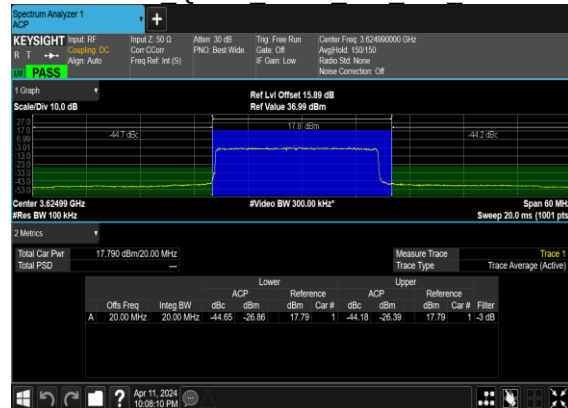


N48(20M)_DFT-s-
OFDM QPSK Edge_1RB Left_Mid_CH

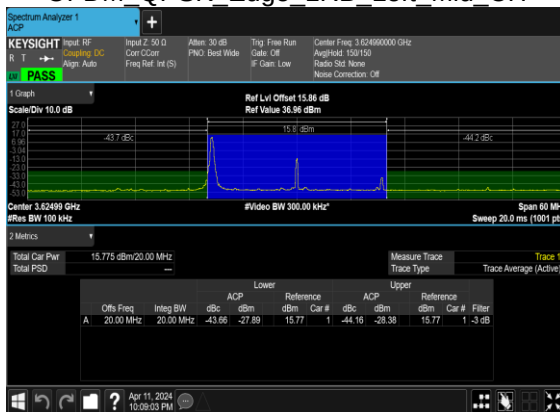


N48(20M)_DFT-s-
OFDM QPSK Edge_1RB Right_Mid_CH

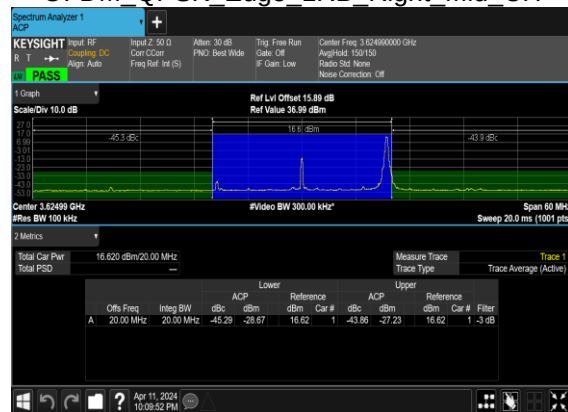


N48(20M)_DFT-s-OFDM_PI_2-
BPSK Outer Full High CH

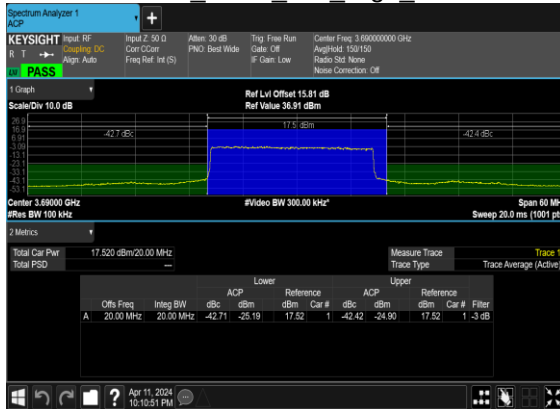


N48(20M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Left High CH

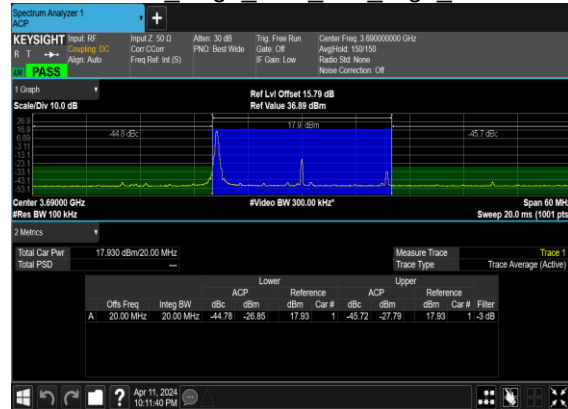


N48(20M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Right High CH

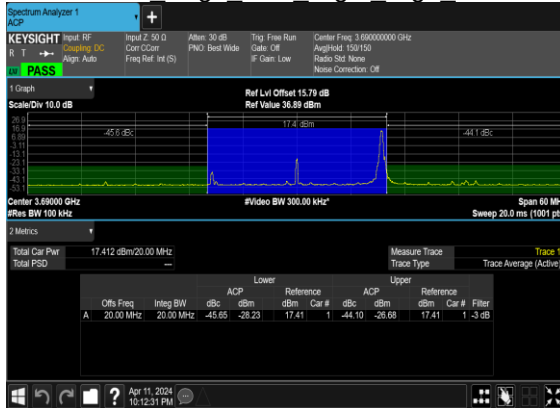


N48(20M)_DFT-s-
OFDM QPSK Outer Full High CH

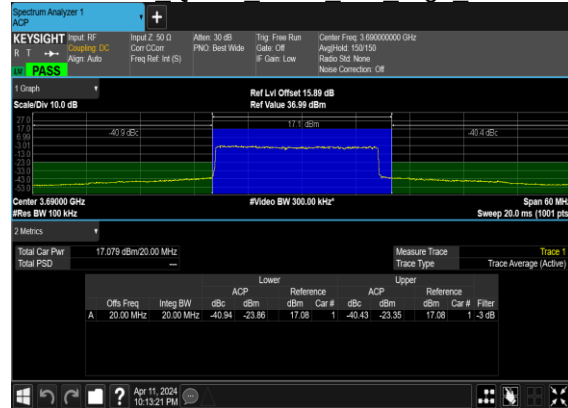


N48(20M)_DFT-s-
OFDM QPSK Edge 1RB Left High CH

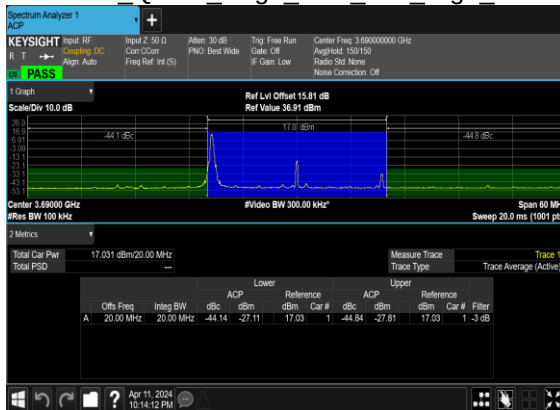


N48(20M)_DFT-s-
OFDM QPSK Edge 1RB Right High CH

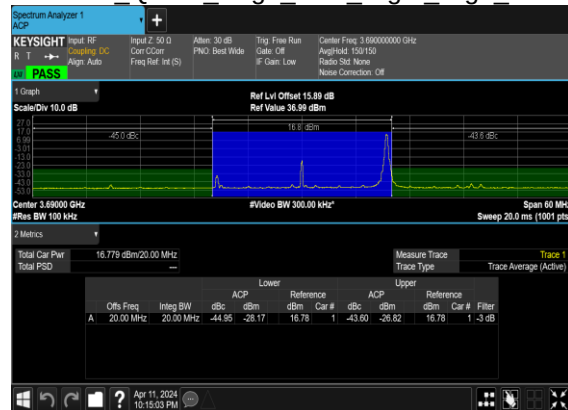


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Outer Full Low CH

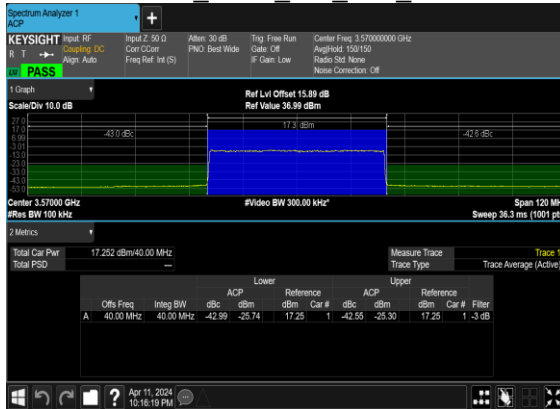

N48(40M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Left Low CH

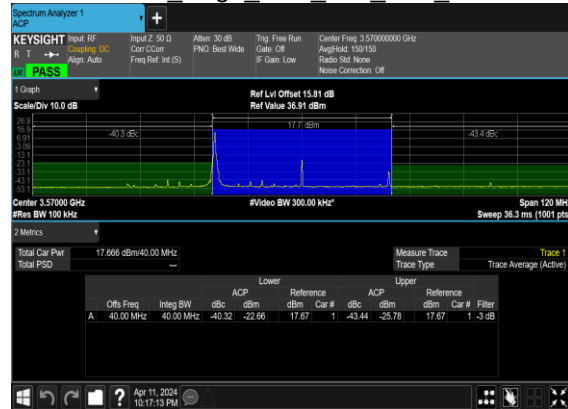


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Right Low CH

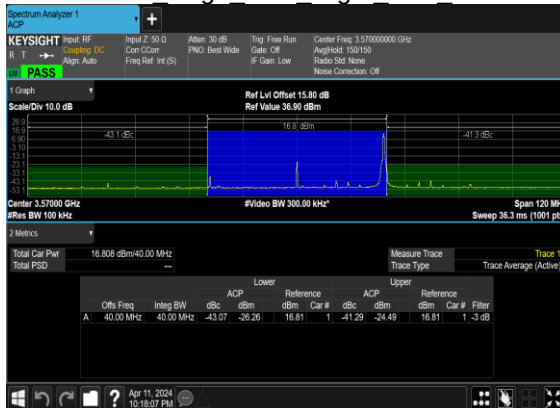


N48(40M)_DFT-s-
OFDM QPSK Outer Full Low CH




N48(40M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH

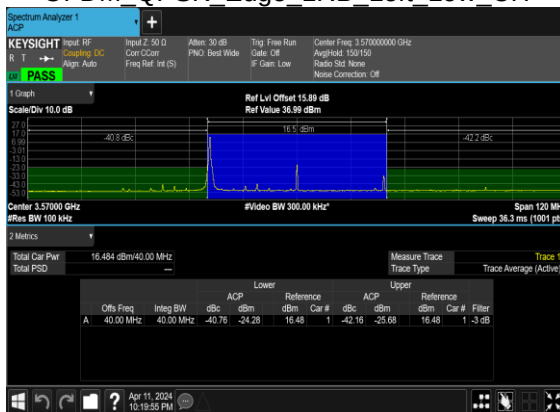


N48(40M)_DFT-s-
OFDM QPSK Edge 1RB Right Low CH

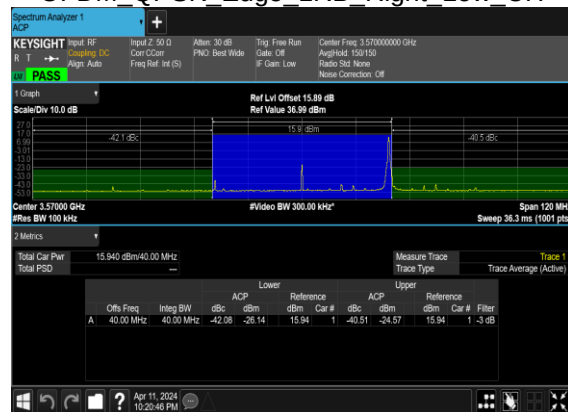


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Outer Full_Mid_CH

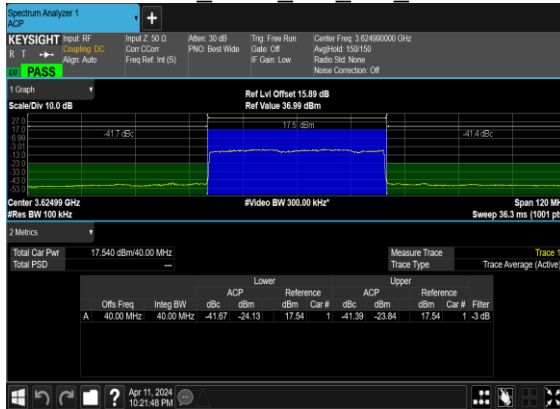


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Edge_1RB Left_Mid_CH

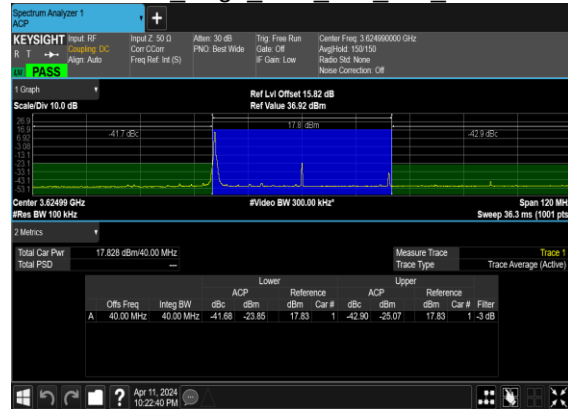


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Edge_1RB Right_Mid_CH

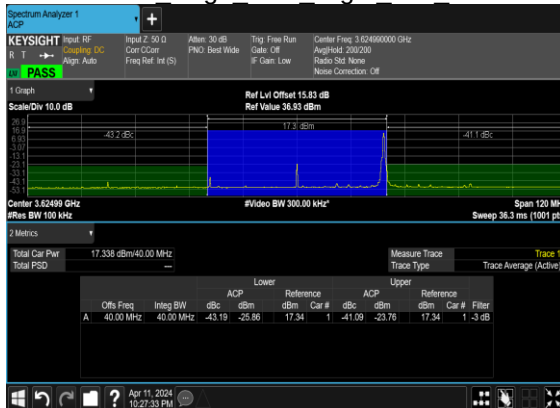


N48(40M)_DFT-s-
OFDM QPSK Outer Full_Mid_CH

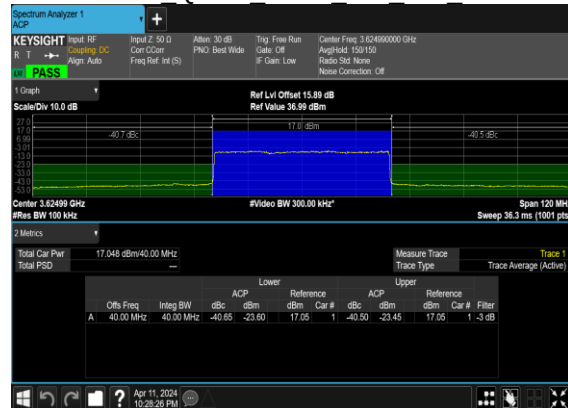


N48(40M)_DFT-s-
OFDM QPSK Edge_1RB Left_Mid_CH

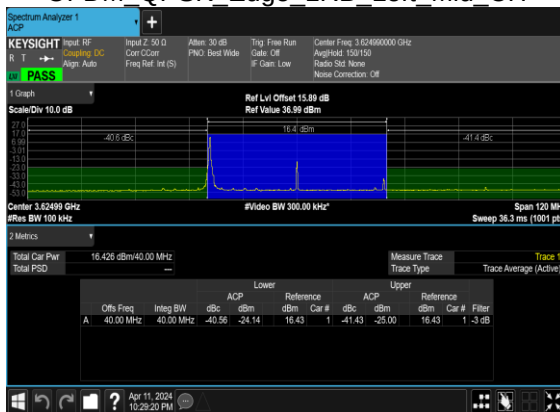


N48(40M)_DFT-s-
OFDM QPSK Edge_1RB Right_Mid_CH

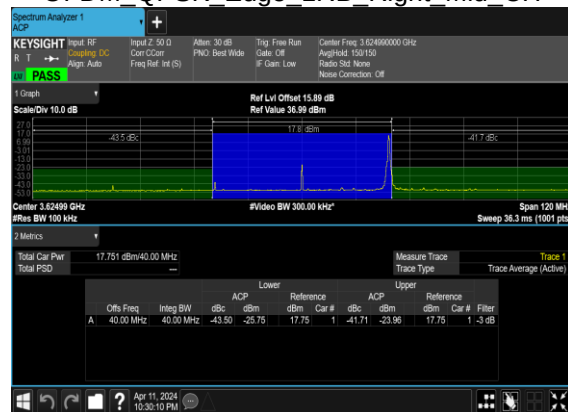


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Outer Full High CH

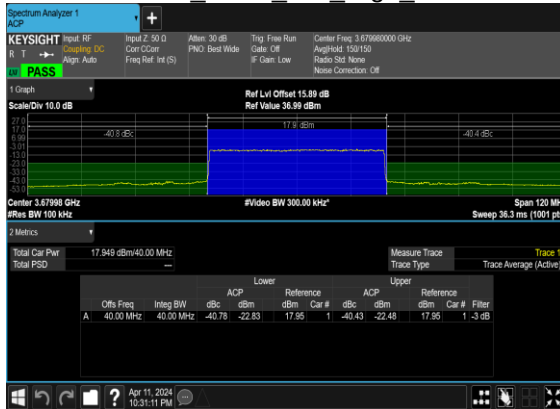


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Left High CH

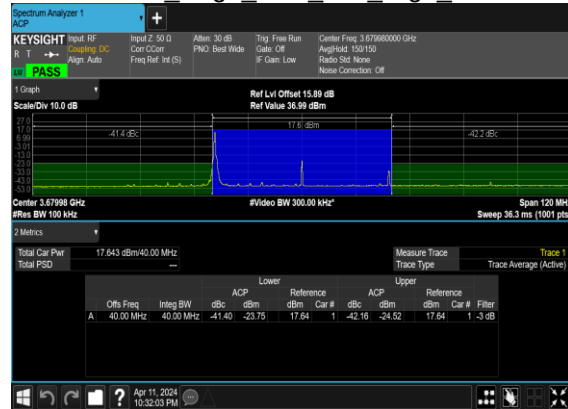


N48(40M)_DFT-s-OFDM_PI_2-
BPSK Edge 1RB Right High CH

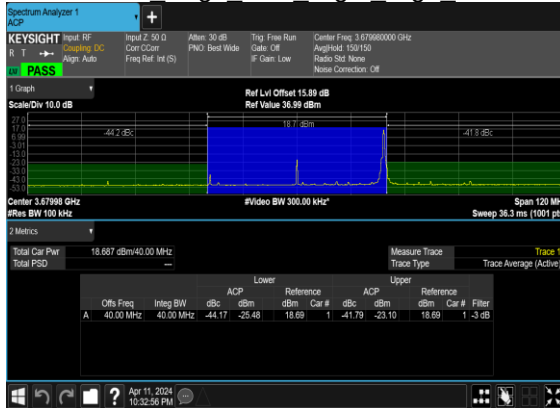


N48(40M)_DFT-s-OFDM
QPSK Outer Full High CH

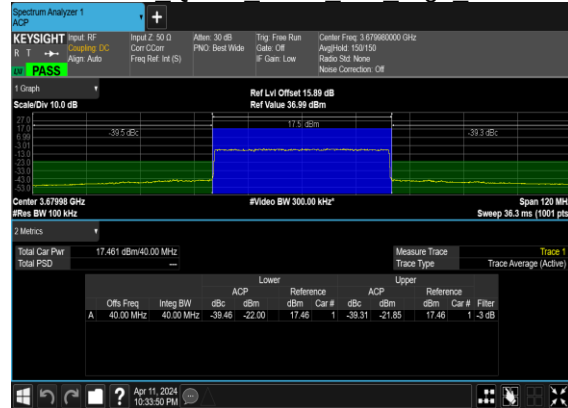

N48(40M)_DFT-s-OFDM
QPSK Edge 1RB Left High CH

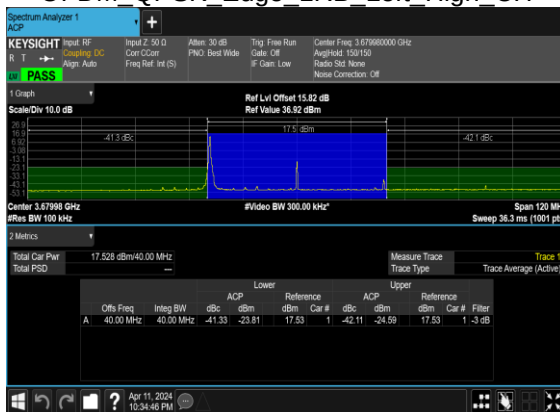

N48(40M)_DFT-s-OFDM
QPSK Edge 1RB Right High CH

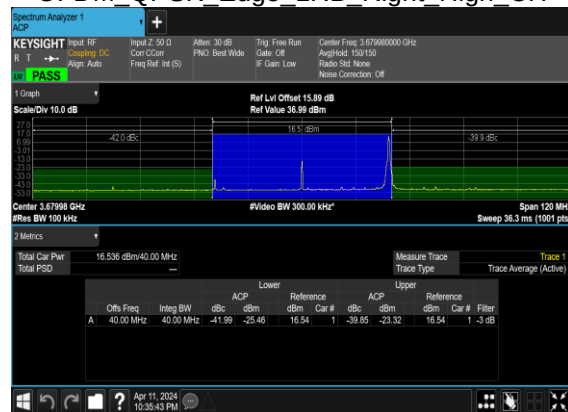

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
48	15	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS

48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	15	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	15	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS

N48(10M)_DFT-s-
OFDM BPSK Edge 1RB Left Low CH



N48(10M)_DFT-s-
OFDM BPSK Edge 1RB Left Low CH




N48(10M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH




N48(10M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH



N48(10M)_DFT-s-
OFDM BPSK Edge 1RB Left Mid CH

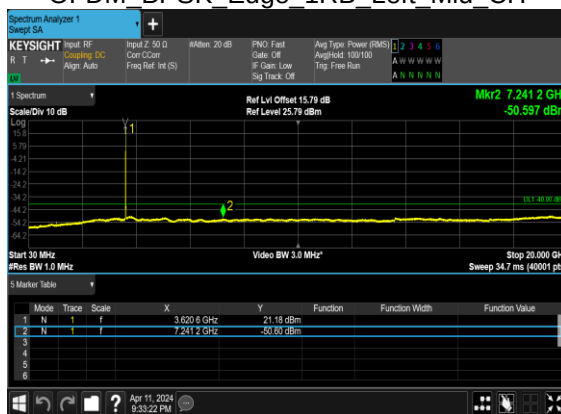

N48(10M)_DFT-s-
OFDM BPSK Edge 1RB Left Mid CH

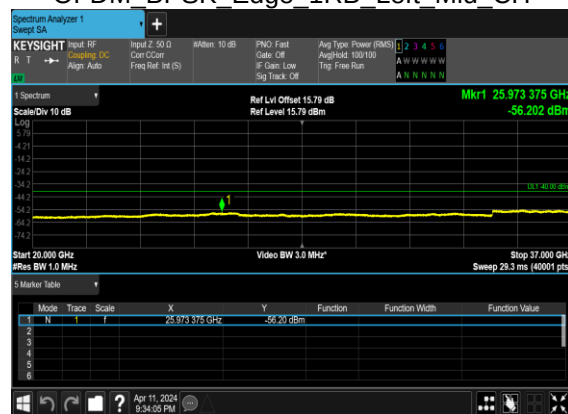

N48(10M)_DFT-s-OFDM QPSK Edge 1RB Left Mid CH



N48(10M)_DFT-s-OFDM QPSK Edge 1RB Left Mid CH



N48(10M)_DFT-s-OFDM BPSK Edge 1RB Left High CH



N48(10M)_DFT-s-OFDM BPSK Edge 1RB Left High CH



N48(10M)_DFT-s-OFDM QPSK Edge 1RB Left High CH



N48(10M)_DFT-s-OFDM QPSK Edge 1RB Left High CH

