



FCC RF Test Report

APPLICANT : Fibocom Wireless Inc.
EQUIPMENT : 5G Module
BRAND NAME : Fibocom
MODEL NAME : FG370-NA
FCC ID : ZMOFG370NA
STANDARD : 47 CFR Part 2, 22, 24
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Jan. 27, 2024 ~ Apr. 28, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum Conducted Power and Emission Designator	7
1.7 Testing Location	10
1.8 Test Software	10
1.9 Applicable Standards	10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	11
2.1 Test Mode	11
2.2 Connection Diagram of Test System	13
2.3 Support Unit used in test configuration and system	13
2.4 Measurement Results Explanation Example	14
2.5 Frequency List of Low/Middle/High Channels	14
3 CONDUCTED TEST ITEMS	17
3.1 Measuring Instruments	17
3.2 Test Setup	17
3.3 Test Result of Conducted Test	17
3.4 Conducted Output Power and ERP/EIRP	18
3.5 Peak-to-Average Ratio	19
3.6 Occupied Bandwidth	20
3.7 Conducted Band Edge	21
3.8 Conducted Spurious Emission	22
3.9 Frequency Stability	23
4 RADIATED TEST ITEMS	24
4.1 Measuring Instruments	24
4.2 Test Setup	24
4.3 Test Result of Radiated Test	25
4.4 Radiated Spurious Emission	26
5 LIST OF MEASURING EQUIPMENT	27
6 MEASUREMENT UNCERTAINTY	28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG3D1101J	Rev. 01	Initial issue of report	May 13, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5, n26)	ERP < 7 Watt		
	§24.232(c)	Equivalent Isotropic Radiated Power (5G NR n2, n25)	EIRP < 2Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	Conducted Band Edge Measurement (5G NR n5, n26) (5G NR n2, n25)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission (5G NR n5, n26) (5G NR n2, n25)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n2, n25)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 10.13 dB at 4611.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,,Shenzhen, China

1.2 Manufacturer

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,,Shenzhen, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Module
Brand Name	Fibocom
Model Name	FG370-NA
FCC ID	ZMOFG370NA
IMEI Code	Conducted : 864952060076756 Radiation : 864952060020580
HW Version	V1.0
SW Version	81140.7000.00.11.01.14
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 824 MHz ~ 849 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n25 : 1930 MHz ~ 1995 MHz 5G NR n26 : 869 MHz ~ 894 MHz
Bandwidth	SCS 15K: n2: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz n5: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz* n25: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz / 45MHz* n26: 5MHz / 10MHz / 15MHz / 20MHz SCS 30K: n2: 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz

	n5: 10MHz / 15MHz / 20MHz / 25MHz* n25: 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 35MHz / 40MHz / 45MHz* n26: 10MHz / 15MHz / 20MHz (* means Downlink only)
SCS	15kHz, 30kHz
Antenna Gain	<Ant. 3/8>: n2: 0.98 dBi n5: 1.32 dBi n25: 0.98 dBi <Ant.8>: n26: 1.32 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP are shown in the report, 5G NR n5/n26/n5B for Ant. 8 and n2/n25 for Ant. 3 and n2/n25_UL MIMO for Ant.(3+8).
2. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are tested in the report.
3. 5G NR support SA (n2/n5/n25/n26/5B) mode and NSA (n2/n5/n25) mode. According to the maximum power between SA and NSA mode, SA covers NSA mode and SCS 15kHz cover 30kHz.
4. 5G NR n26 supports SA mode only.
5. The EN-DC mode combination could be referred to the product spec.
6. 5G NR n2/n25 supports UL MIMO mode is correlated, the MIMO Antenna gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$. The conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{ANT})$ according to KDB 662911 D01.
7. There are two paths, one path for SA and other path for NSA, the two paths are same RF components thus RF only verify the power for two paths, and full test the path with maximum power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum Conducted Power and Emission Designator

5G NR n2		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.2133	4M46G7D	0.1879	4M47W7D
10	1855.0 ~ 1905.0	0.2382	9M28G7D	0.1879	9M30W7D
15	1857.5 ~ 1902.5	0.2355	14M1G7D	0.1977	14M1W7D
20	1860.0 ~ 1900.0	0.2208	19M0G7D	0.1932	18M9W7D
25	1862.5 ~ 1897.5	0.2382	23M7G7D	0.1982	23M7W7D
30	1865.0 ~ 1895.0	0.2275	28M4G7D	0.1932	28M5W7D
35	1867.5 ~ 1892.5	0.2218	33M4G7D	0.1919	33M5W7D
40	1870.0 ~ 1890.0	0.2404	38M5G7D	0.2042	38M5W7D

5G NR n2 UL MIMO		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.2483	4M46G7D	0.1986	4M47W7D
10	1855.0 ~ 1905.0	0.2535	9M27G7D	0.2113	9M30W7D
15	1857.5 ~ 1902.5	0.2483	14M1G7D	0.1991	14M1W7D
20	1860.0 ~ 1900.0	0.2518	18M9G7D	0.2133	18M9W7D
25	1862.5 ~ 1897.5	0.2761	23M8G7D	0.2188	23M7W7D
30	1865.0 ~ 1895.0	0.2729	28M5G7D	0.2208	28M6W7D
35	1867.5 ~ 1892.5	0.2673	33M5G7D	0.2163	33M6W7D
40	1870.0 ~ 1890.0	0.2812	38M5G7D	0.2193	38M6W7D

5G NR n25		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.2339	4M46G7D	0.1862	4M47W7D
10	1855.0 ~ 1910.0	0.2355	9M28G7D	0.1910	9M30W7D
15	1857.5 ~ 1907.5	0.2371	14M1G7D	0.1897	14M1W7D
20	1860.0 ~ 1905.0	0.2265	19M0G7D	0.1875	18M9W7D
25	1862.5 ~ 1902.5	0.2382	23M7G7D	0.1991	23M7W7D
30	1865.0 ~ 1900.0	0.2198	28M4G7D	0.1866	28M5W7D
35	1867.5 ~ 1897.5	0.2148	33M4G7D	0.1820	33M5W7D
40	1870.0 ~ 1895.0	0.2443	38M5G7D	0.2128	38M5W7D

5G NR n25 UL MIMO		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.2483	4M46G7D	0.1991	4M47W7D
10	1855.0 ~ 1910.0	0.2518	9M27G7D	0.2000	9M30W7D
15	1857.5 ~ 1907.5	0.2460	14M1G7D	0.1982	14M1W7D
20	1860.0 ~ 1905.0	0.2500	18M9G7D	0.2113	18M9W7D
25	1862.5 ~ 1902.5	0.2831	23M8G7D	0.2301	23M7W7D
30	1865.0 ~ 1900.0	0.2818	28M5G7D	0.2265	28M6W7D
35	1867.5 ~ 1897.5	0.2773	33M5G7D	0.2249	33M6W7D
40	1870.0 ~ 1895.0	0.2838	38M5G7D	0.2317	38M6W7D

5G NR n5		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.2871	4M46G7D	0.2600	4M47W7D
10	829.0 ~ 844.0	0.2897	9M28G7D	0.2655	9M28W7D
15	831.5 ~ 841.5	0.2891	14M1G7D	0.2679	14M1W7D
20	834.0 ~ 839.0	0.2911	18M9G7D	0.2655	19M0W7D

5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.3112	4M46G7D	0.2529	4M47W7D
10	829.0 ~ 844.0	0.3119	9M28G7D	0.2564	9M28W7D
15	831.5 ~ 841.5	0.3133	14M1G7D	0.2541	14M1W7D
20	834.0 ~ 839.0	0.3141	18M9G7D	0.2553	19M0W7D



5G NR CA_5B	PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
5MHz+5MHz	0.0168	9M21G7D	0.0162	9M21W7D
5MHz+10MHz	0.0467	14M0G7D	0.0473	14M1W7D
5MHz+15MHz	0.2529	18M7G7D	0.2312	18M9W7D
10MHz+5MHz	0.0472	14M1G7D	0.0449	14M1W7D
15MHz+5MHz	0.2388	18M9G7D	0.2249	18M9W7D
10MHz+10MHz	0.2931	19M1G7D	0.2495	19M1W7D

Note:

1. 5G NR n26 overlaps the entire frequency range of 5G NR n5. Therefore, the test results provided in this report covers 5G NR n5 and the portion of 5G NR n26 subject to Part 22.
2. 5G NR n25 overlaps the entire frequency range of 5G NR n2. Therefore, the test results provided in this report covers 5G NR n25 as well as 5G NR n2.
3. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			


Test Items	5G NR	Bandwidth (MHz)													Modulation				RB #		Test Channel			
		5	10	15	20	25	30~35	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n2	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Peak-to- Average Ratio	n25				v				-	-	-	-	-	-	v	v					v		v	
	n26				v	-	-	-	-	-	-	-	-	-	v	v					v		v	
26dB and 99% Bandwidth	n25	v	v	v	v	v	v	v	-	-	-	-	-	-		v	v	v	v		v		v	
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v	
Conducted Band Edge	n25	v			v			v	-	-	-	-	-	-	v	v				v	v	v		v
	n26	v	v		v	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
Conducted Spurious Emission	n25	v			v			v	-	-	-	-	-	-	v	v				v		v	v	v
	n26	v	v		v	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
Frequency Stability	n25				v				-	-	-	-	-	-		v					v		v	
	n26				v	-	-	-	-	-	-	-	-	-		v					v		v	
E.R.P / E.I.R.P	n2	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v



Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30~35	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n25	Worst Case																				v		
	n26	Worst Case																				v		
Note	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.3V. ; High Voltage =4.4V																							

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5+5M, 5+10M, 5+15, 10+5M, 15+5M, 10+10M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	n5B	All supported Bandwidth	All Modulation	1RB, Partial RB, Full RB	L, M, H
26dB and 99% Bandwidth	n5B	All supported Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	Full RB	M
Conducted Band Edge	n5B	5+5M, 5+10M, 10+10M	PI/2 BPSK, QPSK	1RB, Full RB,	L, H
Conducted Spurious Emission	n5B	5+5M, 5+10M, 10+10M	PI/2 BPSK, QPSK	1RB, Full RB,	L, M, H
E.R.P	n5B	All supported Bandwidth	All Modulation	1RB, Partial RB, Full RB	L, M, H
Radiated Spurious Emission	n5B	Worst case from maximum power			M
Note:					
1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.					
2. Frequency Stability : Normal Voltage = 3.8V ; Low Voltage =3.3V. ; High Voltage =4.4V					

2.2 Connection Diagram of Test System

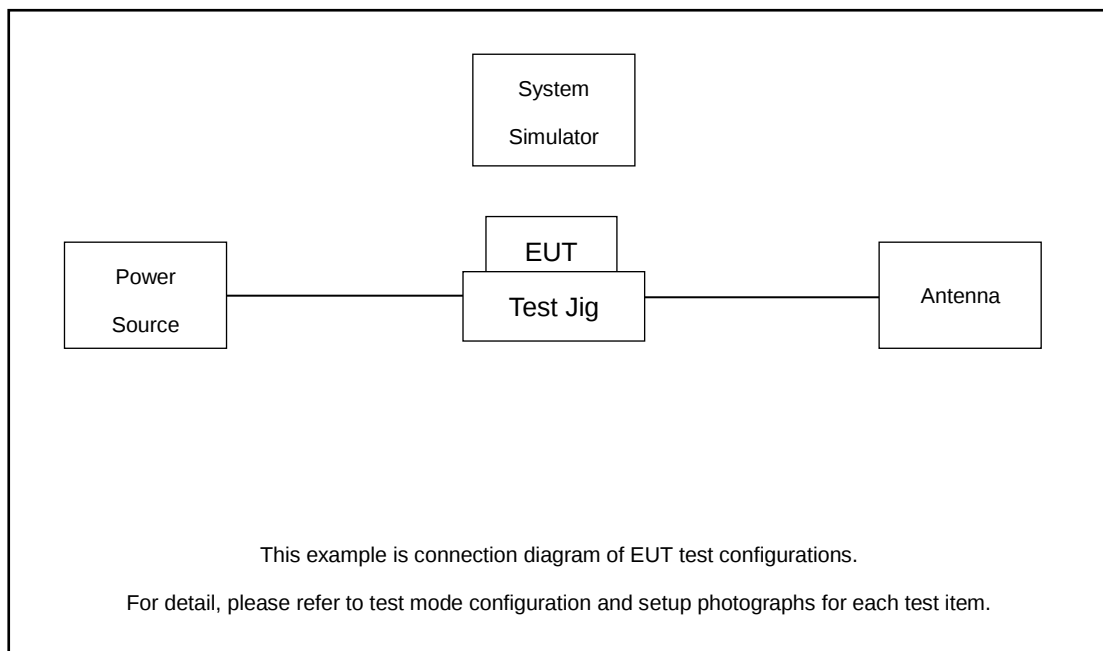

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Antenna	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	Test Jig	N/A	N/A	N/A	N/A	N/A



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.0 dB.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 8.0 \text{ (dB)}\end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376000	378000
	Frequency	1870	1880	1890
35	Channel	373500	376000	378500
	Frequency	1867.5	1880	1892.5
30	Channel	373000	376000	379000
	Frequency	1865	1880	1895
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5



5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376500	379000
	Frequency	1870	1882.5	1895
35	Channel	373500	376500	379500
	Frequency	1867.5	1882.5	1897.5
30	Channel	373000	376500	380000
	Frequency	1865	1882.5	1900
25	Channel	372500	376500	380500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5



5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

Note: SCS 15kHz Covers SCS 30kHz for Bandwidths.


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

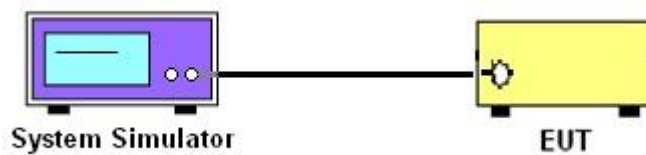

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

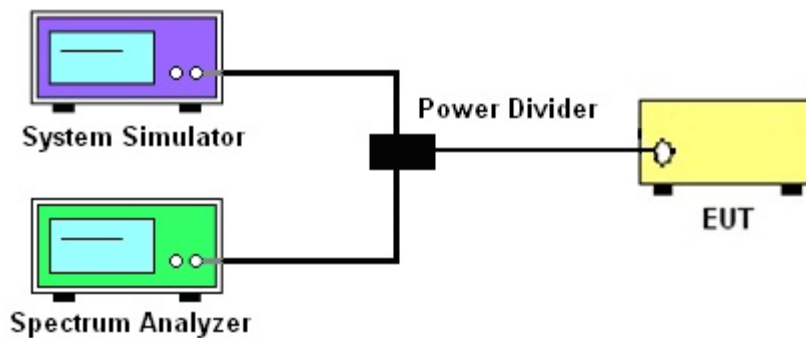

3.2.3 Frequency Stability

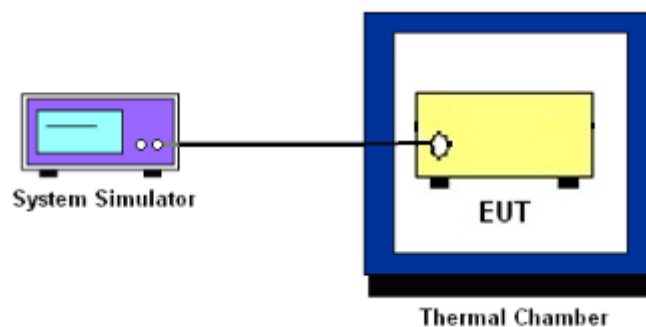

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power $P(\text{Watts})$

$$= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$$

$$= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB}) = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

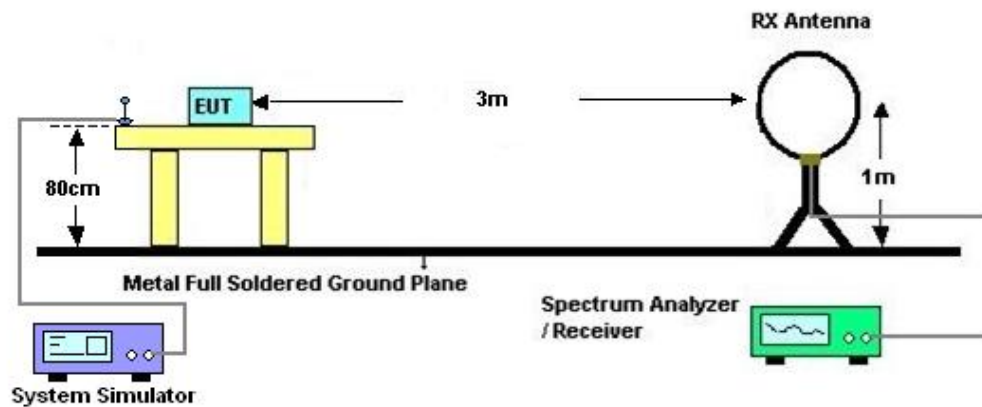

4.2.2 For radiated test from 30MHz to 1GHz

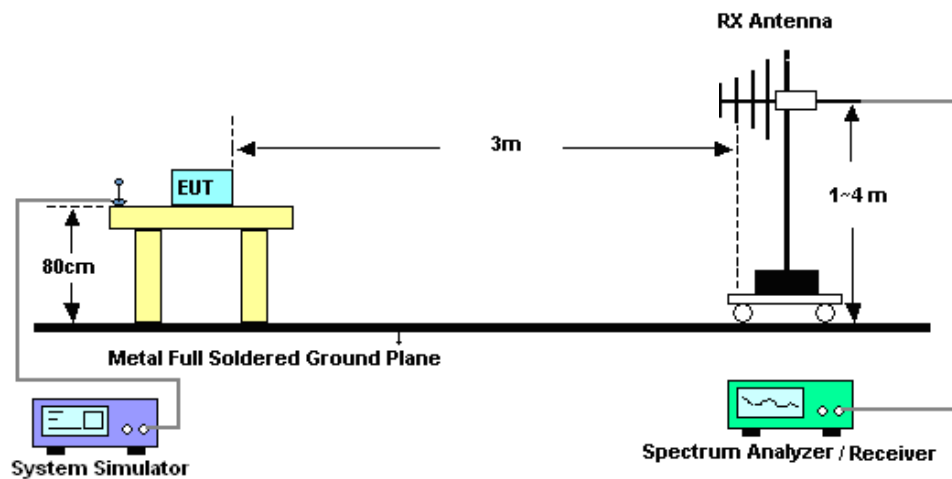

4.2.3 For radiated test above 1GHz

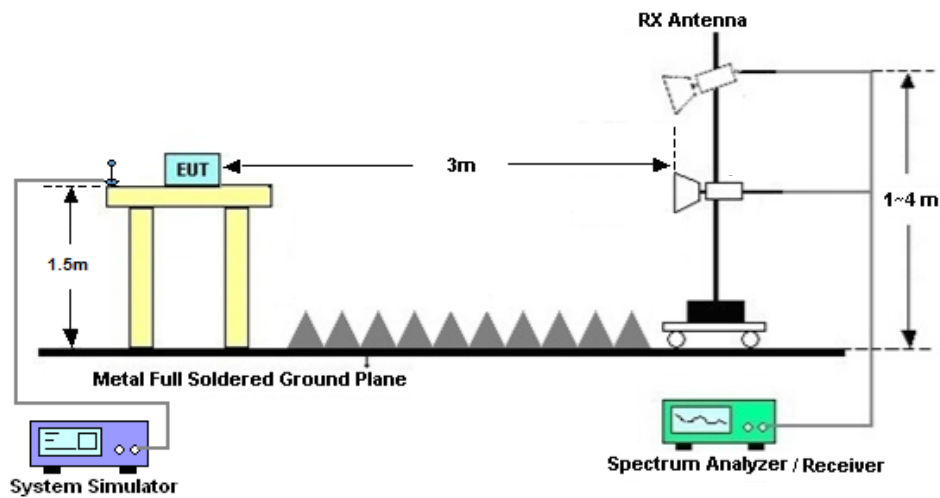

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 05, 2023	Jan. 27, 2024~ Apr. 25, 2024	Apr. 04, 2024	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 04, 2024		Apr. 03, 2025	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jan. 27, 2024~ Apr. 25, 2024	Jul. 06, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Jan. 27, 2024~ Apr. 25, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Jan. 27, 2024~ Apr. 25, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Feb. 01, 2024~ Apr. 28, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Feb. 01, 2024~ Apr. 28, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 18, 2023	Feb. 01, 2024~ Apr. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Feb. 01, 2024~ Apr. 28, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Feb. 01, 2024~ Apr. 28, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 08, 2023	Feb. 01, 2024~ Apr. 28, 2024	Apr. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 07, 2024		Apr. 06, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Feb. 01, 2024~ Apr. 28, 2024	Apr. 03, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 03, 2024		Apr. 02, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Feb. 01, 2024~ Apr. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 07, 2023	Feb. 01, 2024~ Apr. 28, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	Oct. 18, 2023	Feb. 01, 2024~ Apr. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 01, 2024~ Apr. 28, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 01, 2024~ Apr. 28, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.80dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.48dB
---	--------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.53dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.02dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N2 (ANT3)

Transmitter Conducted Output Power And EIRP, $(G_T-L_C)=0.98\text{dB}$

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	23.29	24.27	0.2673
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.71	23.69	0.2339
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	23.03	24.01	0.2518
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.74	23.72	0.2355
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.28	24.26	0.2667
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.44	23.42	0.2198
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.77	24.75	0.2985
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.61	23.59	0.2286
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	23.49	24.47	0.2799
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.74	23.72	0.2355
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	22.82	23.8	0.2399
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	21.98	22.96	0.1977
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	23.72	24.7	0.2951
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.96	23.94	0.2477
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	23.46	24.44	0.2780
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.2	23.18	0.2080
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.39	24.37	0.2735
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.07	23.05	0.2018
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.44	24.42	0.2767
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.86	23.84	0.2421
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	23.25	24.23	0.2649
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.55	23.53	0.2254
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	23.17	24.15	0.2600
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.83	23.81	0.2404
2	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	23.54	24.04	0.2535
2	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	22.57	23.07	0.2028
2	15	25	376000	1880	DFT-s-OFDM QPSK	1@1	23.77	24.27	0.2673
2	15	25	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.97	23.47	0.2223
2	15	25	379500	1897.5	DFT-s-OFDM QPSK	1@1	23.43	23.93	0.2472
2	15	25	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	22.59	23.09	0.2037

2	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	23.34	23.84	0.2421
2	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	22.64	23.14	0.2061
2	15	30	376000	1880	DFT-s-OFDM QPSK	1@1	23.57	24.07	0.2553
2	15	30	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.86	23.36	0.2168
2	15	30	379000	1895	DFT-s-OFDM QPSK	1@1	23.39	23.89	0.2449
2	15	30	379000	1895	DFT-s-OFDM 16 QAM	1@1	22.74	23.24	0.2109
2	15	35	373500	1867.5	DFT-s-OFDM QPSK	1@1	23.27	23.77	0.2382
2	15	35	373500	1867.5	DFT-s-OFDM 16 QAM	1@1	22.51	23.01	0.2
2	15	35	376000	1880	DFT-s-OFDM QPSK	1@1	23.46	23.96	0.2489
2	15	35	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.74	23.24	0.2109
2	15	35	378500	1892.5	DFT-s-OFDM QPSK	1@1	23.44	23.94	0.2477
2	15	35	378500	1892.5	DFT-s-OFDM 16 QAM	1@1	22.83	23.33	0.2153
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	23.68	24.18	0.2618
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	23.4	23.9	0.2455
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	23.43	23.93	0.2472
2	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	23.67	24.17	0.2612
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	23.43	23.93	0.2472
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	23.42	23.92	0.2466
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	22.95	23.45	0.2213
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	22.61	23.11	0.2046
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	22.68	23.18	0.208
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	21.48	21.98	0.1578
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	21.15	21.65	0.1462
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	21.24	21.74	0.1493
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	19.42	19.92	0.0982
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	19.16	19.66	0.0925
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	19.29	19.79	0.0953
2	15	40	374000	1870	CP-OFDM QPSK	108@54	22.46	22.96	0.1977
2	15	40	374000	1870	CP-OFDM QPSK	1@1	21.98	22.48	0.177
2	15	40	374000	1870	CP-OFDM QPSK	1@214	22.18	22.68	0.1854
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	108@54	23.42	23.92	0.2466
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.44	23.94	0.2477
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@214	23.78	24.31	0.2698
2	15	40	376000	1880	DFT-s-OFDM QPSK	108@54	23.43	23.93	0.2472
2	15	40	376000	1880	DFT-s-OFDM QPSK	1@1	23.38	23.88	0.2443
2	15	40	376000	1880	DFT-s-OFDM QPSK	1@214	23.7	24.2	0.263

2	15	40	376000	1880	DFT-s-OFDM 16 QAM	108@54	22.76	23.26	0.2118
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.61	23.11	0.2046
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@214	22.94	23.44	0.2208
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	108@54	21.26	21.76	0.15
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@1	21.24	21.74	0.1493
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@214	21.47	21.97	0.1574
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	108@54	19.21	19.71	0.0935
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@1	19.19	19.69	0.0931
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@214	19.53	20.03	0.1007
2	15	40	376000	1880	CP-OFDM QPSK	108@54	22.26	22.76	0.1888
2	15	40	376000	1880	CP-OFDM QPSK	1@1	22.08	22.58	0.1811
2	15	40	376000	1880	CP-OFDM QPSK	1@214	22.29	22.79	0.1901
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	108@54	23.45	23.95	0.2483
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@1	23.67	24.17	0.2612
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@214	23.81	24.35	0.2723
2	15	40	378000	1890	DFT-s-OFDM QPSK	108@54	23.49	23.99	0.2506
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@1	23.6	24.1	0.257
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@214	23.73	24.23	0.2649
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	108@54	22.77	23.27	0.2123
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@1	22.97	23.47	0.2223
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@214	23.1	23.6	0.2291
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	108@54	21.28	21.78	0.1507
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@1	21.44	21.94	0.1563
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@214	21.55	22.05	0.1603
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	108@54	19.17	19.67	0.0927
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@1	19.56	20.06	0.1014
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@214	19.64	20.14	0.1033
2	15	40	378000	1890	CP-OFDM QPSK	108@54	22.23	22.73	0.1875
2	15	40	378000	1890	CP-OFDM QPSK	1@1	22.15	22.65	0.1841
2	15	40	378000	1890	CP-OFDM QPSK	1@214	22.56	23.06	0.2023

FR1 N2 MIMO-ANT(8+3)

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=3.99dB

NR Band	SCS (kHz)	BandWidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	ANT8 Power (dBm)	ANT3 Power (dBm)	Conducted Power (dBm)	EIRP (dBm)	EIRP (W)
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	21.12	20.75	23.95	27.94	0.6223
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	20.06	19.84	22.96	26.95	0.4955
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	21.2	20.66	23.95	27.94	0.6223
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	20.18	19.75	22.98	26.97	0.4977
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	20.71	20.45	23.59	27.58	0.5728
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	19.68	19.48	22.59	26.58	0.4550
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	21.18	20.87	24.04	28.03	0.6353
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	20.21	19.89	23.06	27.05	0.5070
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	21.25	20.59	23.94	27.93	0.6209
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	20.66	19.77	23.25	27.24	0.5297
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	20.89	20.63	23.77	27.76	0.5970
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	19.9	19.77	22.85	26.84	0.4831
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	21.1	20.77	23.95	27.94	0.6223
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	20.12	19.84	22.99	26.98	0.4989
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	21.17	20.6	23.90	27.89	0.6152
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	20.11	19.66	22.90	26.89	0.4887
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	20.89	20.75	23.83	27.82	0.6053
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	19.95	19.82	22.90	26.89	0.4887
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	21.14	20.77	23.97	27.96	0.6252
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	20.14	19.85	23.01	27	0.5012
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	21.23	20.68	23.97	27.96	0.6252
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	20.26	19.69	22.99	26.98	0.4989
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	21.12	20.88	24.01	28	0.6310
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	20.14	20.41	23.29	27.28	0.5346
2	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	21.51	21.29	24.41	28.4	0.6918
2	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	20.63	20.14	23.40	27.39	0.5483
2	15	25	376000	1880	DFT-s-OFDM QPSK	1@1	21.36	21.29	24.34	28.33	0.6808
2	15	25	376000	1880	DFT-s-OFDM 16 QAM	1@1	20.41	20.32	23.38	27.37	0.5458
2	15	25	379500	1897.5	DFT-s-OFDM QPSK	1@1	21.07	21.37	24.23	28.22	0.6637

2	15	25	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	20.17	20.48	23.34	27.33	0.5408
2	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	21.63	21.05	24.36	28.35	0.6839
2	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	20.69	20.15	23.44	27.43	0.5534
2	15	30	376000	1880	DFT-s-OFDM QPSK	1@1	21.37	21.22	24.31	28.3	0.6761
2	15	30	376000	1880	DFT-s-OFDM 16 QAM	1@1	20.41	20.17	23.30	27.29	0.5358
2	15	30	379000	1895	DFT-s-OFDM QPSK	1@1	21.26	21.36	24.32	28.31	0.6776
2	15	30	379000	1895	DFT-s-OFDM 16 QAM	1@1	20.29	20.4	23.36	27.35	0.5433
2	15	35	373500	1867.5	DFT-s-OFDM QPSK	1@1	21.52	20.96	24.26	28.25	0.6683
2	15	35	373500	1867.5	DFT-s-OFDM 16 QAM	1@1	20.58	20.08	23.35	27.34	0.5420
2	15	35	376000	1880	DFT-s-OFDM QPSK	1@1	21.3	21.09	24.21	28.2	0.6607
2	15	35	376000	1880	DFT-s-OFDM 16 QAM	1@1	20.41	20.16	23.30	27.29	0.5358
2	15	35	378500	1892.5	DFT-s-OFDM QPSK	1@1	21.21	21.3	24.27	28.26	0.6699
2	15	35	378500	1892.5	DFT-s-OFDM 16 QAM	1@1	20.25	20.32	23.30	27.29	0.5358
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	21.51	21.28	24.41	28.4	0.6918
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	21.11	20.61	23.88	27.87	0.6124
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	20.64	20.88	23.77	27.76	0.5970
2	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	21.52	21.44	24.49	28.48	0.7047
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	21.07	20.57	23.84	27.83	0.6067
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	20.51	20.85	23.69	27.68	0.5861
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	20.5	20.29	23.41	27.4	0.5495
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	20.22	19.7	22.98	26.97	0.4977
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	19.7	19.92	22.82	26.81	0.4797
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	19.07	18.76	21.93	25.92	0.3908
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	19.25	18.69	21.99	25.98	0.3963
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	18.8	18.99	21.91	25.9	0.3890
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	17	16.8	19.91	23.9	0.2455
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	17.31	16.75	20.05	24.04	0.2535
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	16.83	17.01	19.93	23.92	0.2466
2	15	40	374000	1870	CP-OFDM QPSK	108@54	20.01	19.77	22.90	26.89	0.4887
2	15	40	374000	1870	CP-OFDM QPSK	1@1	20.03	19.59	22.83	26.82	0.4808
2	15	40	374000	1870	CP-OFDM QPSK	1@214	19.59	19.96	22.79	26.78	0.4764
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	108@54	21.31	21.41	24.37	28.36	0.6855
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	20.92	20.73	23.84	27.83	0.6067
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@214	20.33	20.95	23.66	27.65	0.5821
2	15	40	376000	1880	DFT-s-OFDM QPSK	108@54	21.28	21.38	24.34	28.33	0.6808
2	15	40	376000	1880	DFT-s-OFDM QPSK	1@1	20.89	20.7	23.81	27.8	0.6026

2	15	40	376000	1880	DFT-s-OFDM QPSK	1@214	20.32	20.84	23.60	27.59	0.5741
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	108@54	20.26	20.37	23.33	27.32	0.5395
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@1	19.98	19.78	22.89	26.88	0.4875
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@214	19.4	19.81	22.62	26.61	0.4581
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	108@54	18.81	18.98	21.91	25.9	0.3890
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@1	19.07	18.84	21.97	25.96	0.3945
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@214	18.47	19.03	21.77	25.76	0.3767
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	108@54	16.8	16.84	19.83	23.82	0.2410
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@1	16.99	16.7	19.86	23.85	0.2427
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@214	16.55	17.07	19.83	23.82	0.2410
2	15	40	376000	1880	CP-OFDM QPSK	108@54	19.77	19.87	22.83	26.82	0.4808
2	15	40	376000	1880	CP-OFDM QPSK	1@1	19.85	19.68	22.78	26.77	0.4753
2	15	40	376000	1880	CP-OFDM QPSK	1@214	19.34	19.89	22.63	26.62	0.4592
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	108@54	21.12	21.46	24.30	28.29	0.6745
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@1	20.89	20.88	23.90	27.89	0.6152
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@214	20.26	20.79	23.54	27.53	0.5662
2	15	40	378000	1890	DFT-s-OFDM QPSK	108@54	21.16	21.47	24.33	28.32	0.6792
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@1	20.9	20.84	23.88	27.87	0.6124
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@214	20.19	20.74	23.48	27.47	0.5585
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	108@54	20.14	20.5	23.33	27.32	0.5395
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@1	19.97	19.92	22.96	26.95	0.4955
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@214	19.36	19.89	22.64	26.63	0.4603
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	108@54	18.58	19	21.81	25.8	0.3802
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@1	19	18.97	22.00	25.99	0.3972
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@214	18.38	18.95	21.68	25.67	0.3690
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	108@54	16.57	16.96	19.78	23.77	0.2382
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@1	17.06	17.01	20.05	24.04	0.2535
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@214	16.46	16.97	19.73	23.72	0.2355
2	15	40	378000	1890	CP-OFDM QPSK	108@54	19.63	19.98	22.82	26.81	0.4797
2	15	40	378000	1890	CP-OFDM QPSK	1@1	19.8	19.89	22.86	26.85	0.4842
2	15	40	378000	1890	CP-OFDM QPSK	1@214	19.21	19.82	22.54	26.53	0.4498

FR1 N5 (ANT8)

Transmitter Conducted Output Power And ERP, ($G_T - L_C$)=1.32dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	ERP (dBm)	ERP (W)
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	24.55	23.72	0.2355
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	24.15	23.32	0.2148
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	24.58	23.75	0.2371
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.07	23.24	0.2109
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	24.41	23.58	0.2280
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	24.1	23.27	0.2123
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	24.57	23.74	0.2366
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	24.11	23.28	0.2128
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	24.62	23.79	0.2393
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.24	23.41	0.2193
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	24.45	23.62	0.2301
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	24.09	23.26	0.2118
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	24.51	23.68	0.2333
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	24.11	23.28	0.2128
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	24.61	23.78	0.2388
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.28	23.45	0.2213
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	24.49	23.66	0.2323
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	24.01	23.18	0.2080
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	50@25	24.48	23.65	0.2317
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@1	24.52	23.69	0.2339
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@104	24.39	23.56	0.2270
5	15	20	166800	834	DFT-s-OFDM QPSK	50@25	24.5	23.67	0.2328
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	24.51	23.68	0.2333
5	15	20	166800	834	DFT-s-OFDM QPSK	1@104	24.37	23.54	0.2259
5	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	24.09	23.26	0.2118
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	24.17	23.34	0.2158
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	24.09	23.26	0.2118
5	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	22.59	21.76	0.1500
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	22.55	21.72	0.1486

5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	22.53	21.7	0.1479
5	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	20.58	19.75	0.0944
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	20.73	19.9	0.0977
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	20.72	19.89	0.0975
5	15	20	166800	834	CP-OFDM QPSK	53@26	23.57	22.74	0.1879
5	15	20	166800	834	CP-OFDM QPSK	1@1	23.48	22.65	0.1841
5	15	20	166800	834	CP-OFDM QPSK	1@104	23.54	22.71	0.1866
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	24.55	23.72	0.2355
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	24.6	23.77	0.2382
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	24.48	23.65	0.2317
5	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	24.52	23.69	0.2339
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	24.57	23.74	0.2366
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	24.47	23.64	0.2312
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	24.17	23.34	0.2158
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	24.21	23.38	0.2178
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	24.21	23.38	0.2178
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	22.68	21.85	0.1531
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	22.71	21.88	0.1542
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	22.58	21.75	0.1496
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	20.65	19.82	0.0959
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	20.82	19.99	0.0998
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	20.76	19.93	0.0984
5	15	20	167300	836.5	CP-OFDM QPSK	53@26	23.69	22.86	0.1932
5	15	20	167300	836.5	CP-OFDM QPSK	1@1	23.77	22.94	0.1968
5	15	20	167300	836.5	CP-OFDM QPSK	1@104	23.38	22.55	0.1799
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	50@25	24.46	23.63	0.2307
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@1	24.64	23.81	0.2404
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@104	24.53	23.7	0.2344
5	15	20	167800	839	DFT-s-OFDM QPSK	50@25	24.46	23.63	0.2307
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	24.55	23.72	0.2355
5	15	20	167800	839	DFT-s-OFDM QPSK	1@104	24.45	23.62	0.2301
5	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	24.11	23.28	0.2128
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	24.24	23.41	0.2193
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	24.03	23.2	0.2089
5	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	22.66	21.83	0.1524

5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	22.69	21.86	0.1535
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	22.48	21.65	0.1462
5	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	20.65	19.82	0.0959
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	20.86	20.03	0.1007
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	20.64	19.81	0.0957
5	15	20	167800	839	CP-OFDM QPSK	53@26	23.62	22.79	0.1901
5	15	20	167800	839	CP-OFDM QPSK	1@1	23.62	22.79	0.1901
5	15	20	167800	839	CP-OFDM QPSK	1@104	23.37	22.54	0.1795

FR1 N25(ANT3)

Transmitter Conducted Output Power and EIRP, ($G_T - L_C$)=0.98dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	23.69	24.67	0.2931
25	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.7	23.68	0.2333
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.52	24.5	0.2818
25	15	5	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.65	23.63	0.2307
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@1	23.27	24.25	0.2661
25	15	5	382500	1912.5	DFT-s-OFDM 16 QAM	1@1	22.26	23.24	0.2109
25	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.72	24.7	0.2951
25	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.81	23.79	0.2393
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.57	24.55	0.2851
25	15	10	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.55	23.53	0.2254
25	15	10	382000	1910	DFT-s-OFDM QPSK	1@1	23.3	24.28	0.2679
25	15	10	382000	1910	DFT-s-OFDM 16 QAM	1@1	22.29	23.27	0.2123
25	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	23.75	24.73	0.2972
25	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.78	23.76	0.2377
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.54	24.52	0.2831
25	15	15	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.62	23.6	0.2291
25	15	15	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.36	24.34	0.2716
25	15	15	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.44	23.42	0.2198
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.55	24.53	0.2838
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.7	23.68	0.2333
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.45	24.43	0.2773
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.73	23.71	0.2350
25	15	20	381000	1905	DFT-s-OFDM QPSK	1@1	23.24	24.22	0.2642
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@1	22.62	23.6	0.2291
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	23.77	24.75	0.2985
25	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	22.99	23.97	0.2495
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.59	24.57	0.2864
25	15	25	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.79	23.77	0.2382
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.3	24.28	0.2679
25	15	25	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.58	23.56	0.2270

25	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	23.14	24.12	0.2582
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	22.29	23.27	0.2123
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.42	24.4	0.2754
25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.71	23.69	0.2339
25	15	30	380000	1900	DFT-s-OFDM QPSK	1@1	23.1	24.08	0.2559
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.46	23.44	0.2208
25	15	35	373500	1867.5	DFT-s-OFDM QPSK	1@1	23.05	24.03	0.2529
25	15	35	373500	1867.5	DFT-s-OFDM 16 QAM	1@1	22.19	23.17	0.2075
25	15	35	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.32	24.3	0.2692
25	15	35	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.6	23.58	0.2280
25	15	35	379500	1897.5	DFT-s-OFDM QPSK	1@1	23.13	24.11	0.2576
25	15	35	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	22.57	23.55	0.2265
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	23.77	24.75	0.2985
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	22.98	23.96	0.2489
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	23.18	24.16	0.2606
25	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	23.82	24.8	0.3020
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	22.94	23.92	0.2466
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	23.09	24.07	0.2553
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	23.13	24.11	0.2576
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	22.14	23.12	0.2051
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	22.46	23.44	0.2208
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	21.64	22.62	0.1828
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	20.67	21.65	0.1462
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	21.03	22.01	0.1589
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	19.59	20.57	0.1140
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	18.71	19.69	0.0931
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	19.13	20.11	0.1026
25	15	40	374000	1870	CP-OFDM QPSK	108@54	22.57	23.55	0.2265
25	15	40	374000	1870	CP-OFDM QPSK	1@1	21.57	22.55	0.1799
25	15	40	374000	1870	CP-OFDM QPSK	1@214	21.87	22.85	0.1928
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	108@54	23.48	24.46	0.2793
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	23.54	24.52	0.2831
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@214	22.88	23.86	0.2432
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	108@54	23.49	24.47	0.2799
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@1	23.51	24.49	0.2812
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@214	22.82	23.8	0.2399

25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	108@54	22.87	23.85	0.2427
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	22.86	23.84	0.2421
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@214	22.01	22.99	0.1991
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	108@54	21.31	22.29	0.1694
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@1	21.33	22.31	0.1702
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@214	20.57	21.55	0.1429
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	108@54	19.27	20.25	0.1059
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@1	19.44	20.42	0.1102
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@214	18.6	19.58	0.0908
25	15	40	376500	1882.5	CP-OFDM QPSK	108@54	22.34	23.32	0.2148
25	15	40	376500	1882.5	CP-OFDM QPSK	1@1	22.3	23.28	0.2128
25	15	40	376500	1882.5	CP-OFDM QPSK	1@214	21.47	22.45	0.1758
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	108@54	23.07	24.05	0.2541
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@1	23.88	24.86	0.3062
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@214	23.37	24.35	0.2723
25	15	40	379000	1895	DFT-s-OFDM QPSK	108@54	23.07	24.05	0.2541
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@1	23.78	24.76	0.2992
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@214	23.26	24.24	0.2655
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	108@54	22.32	23.3	0.2138
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@1	23.28	24.26	0.2667
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@214	22.8	23.78	0.2388
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	108@54	20.81	21.79	0.1510
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@1	21.76	22.74	0.1879
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@214	21.38	22.36	0.1722
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	108@54	18.79	19.77	0.0948
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@1	19.89	20.87	0.1222
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@214	19.44	20.42	0.1102
25	15	40	379000	1895	CP-OFDM QPSK	108@54	21.8	22.78	0.1897
25	15	40	379000	1895	CP-OFDM QPSK	1@1	22.77	23.75	0.2371
25	15	40	379000	1895	CP-OFDM QPSK	1@214	22.31	23.29	0.2133


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0059	PASS	NV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0055	PASS	LV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0032	PASS	HV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0057	PASS	-30°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0050	PASS	-20°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0057	PASS	-10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0030	PASS	0°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0027	PASS	10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0059	PASS	20°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0025	PASS	30°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0048	PASS	40°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0032	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	100@0	4.41	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	5.15	13	PASS

N25(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

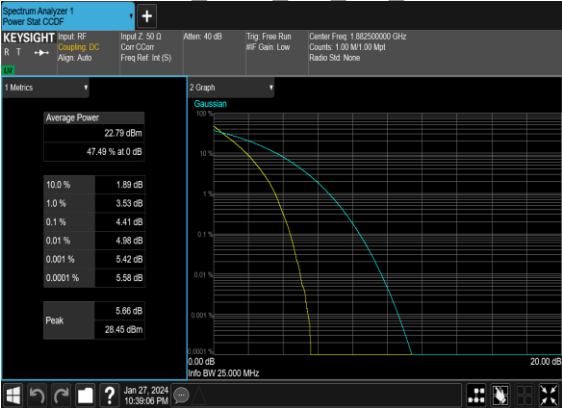


N25(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

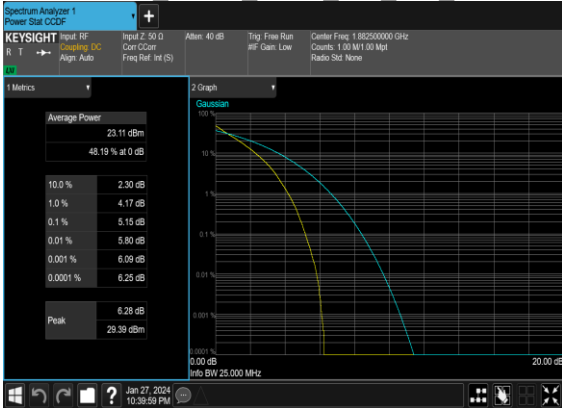


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
25	15	5	376500	1882.5	CP-OFDM QPSK	25@0	4.4585	5.003
25	15	5	376500	1882.5	CP-OFDM 16 QAM	25@0	4.4647	4.811
25	15	5	376500	1882.5	CP-OFDM 64 QAM	25@0	4.4645	4.803
25	15	5	376500	1882.5	CP-OFDM 256 QAM	25@0	4.4664	4.777
25	15	10	376500	1882.5	CP-OFDM QPSK	52@0	9.2761	9.736
25	15	10	376500	1882.5	CP-OFDM 16 QAM	52@0	9.2719	9.733
25	15	10	376500	1882.5	CP-OFDM 64 QAM	52@0	9.3038	9.713
25	15	10	376500	1882.5	CP-OFDM 256 QAM	52@0	9.3022	9.732
25	15	15	376500	1882.5	CP-OFDM QPSK	79@0	14.094	14.78
25	15	15	376500	1882.5	CP-OFDM 16 QAM	79@0	14.126	14.69
25	15	15	376500	1882.5	CP-OFDM 64 QAM	79@0	14.08	14.64
25	15	15	376500	1882.5	CP-OFDM 256 QAM	79@0	14.068	14.63
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	18.962	19.7
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	18.896	19.72
25	15	20	376500	1882.5	CP-OFDM 64 QAM	106@0	18.945	19.59
25	15	20	376500	1882.5	CP-OFDM 256 QAM	106@0	18.892	19.67
25	15	25	376500	1882.5	CP-OFDM QPSK	133@0	23.669	24.67
25	15	25	376500	1882.5	CP-OFDM 16 QAM	133@0	23.707	24.61
25	15	25	376500	1882.5	CP-OFDM 64 QAM	133@0	23.743	24.59
25	15	25	376500	1882.5	CP-OFDM 256 QAM	133@0	23.703	24.67
25	15	30	376500	1882.5	CP-OFDM QPSK	160@0	28.442	29.68
25	15	30	376500	1882.5	CP-OFDM 16 QAM	160@0	28.494	29.67
25	15	30	376500	1882.5	CP-OFDM 64 QAM	160@0	28.405	29.58
25	15	30	376500	1882.5	CP-OFDM 256 QAM	160@0	28.472	29.58
25	15	35	376500	1882.5	CP-OFDM QPSK	188@0	33.424	34.67
25	15	35	376500	1882.5	CP-OFDM 16 QAM	188@0	33.513	34.81
25	15	35	376500	1882.5	CP-OFDM 64 QAM	188@0	33.397	34.72
25	15	35	376500	1882.5	CP-OFDM 256 QAM	188@0	33.45	34.64
25	15	40	376500	1882.5	CP-OFDM QPSK	216@0	38.542	39.87
25	15	40	376500	1882.5	CP-OFDM 16 QAM	216@0	38.518	39.85
25	15	40	376500	1882.5	CP-OFDM 64 QAM	216@0	38.526	39.86
25	15	40	376500	1882.5	CP-OFDM 256 QAM	216@0	38.495	39.84


N25(5M)_CP-OFDM_QPSK Outer Full Mid CH

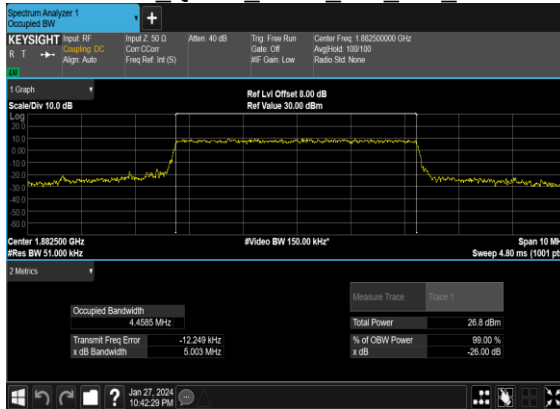


N25(5M)_CP-OFDM_16QAM Outer Full Mid CH

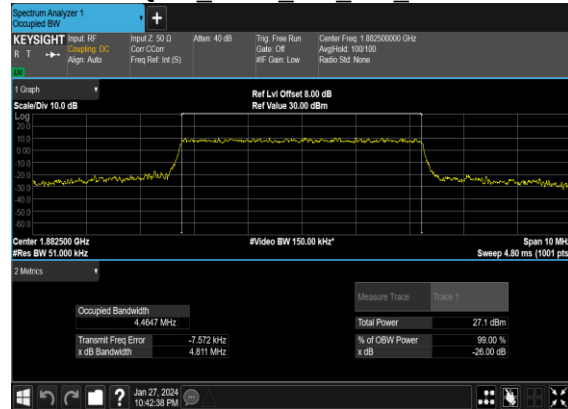


N25(5M)_CP-OFDM_64QAM Outer Full Mid CH

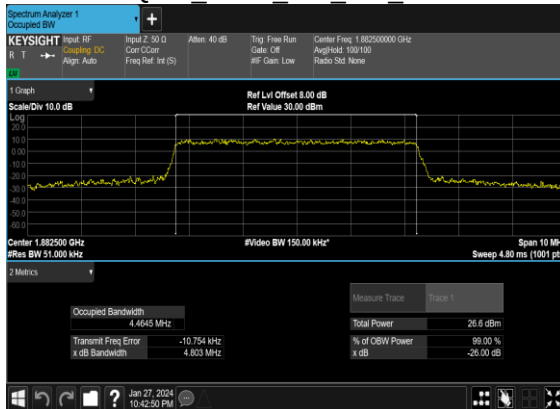


N25(5M)_CP-OFDM_256QAM Outer Full Mid CH

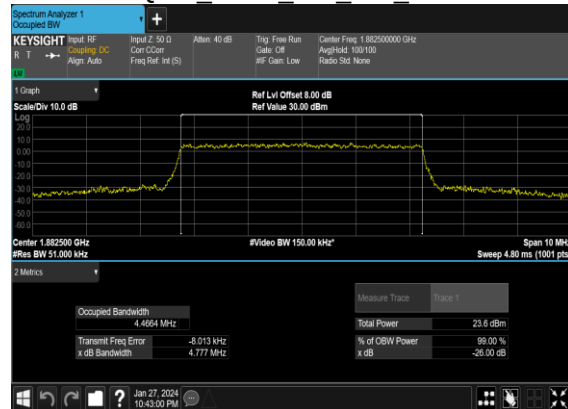


N25(10M)_CP-OFDM_QPSK Outer Full Mid CH

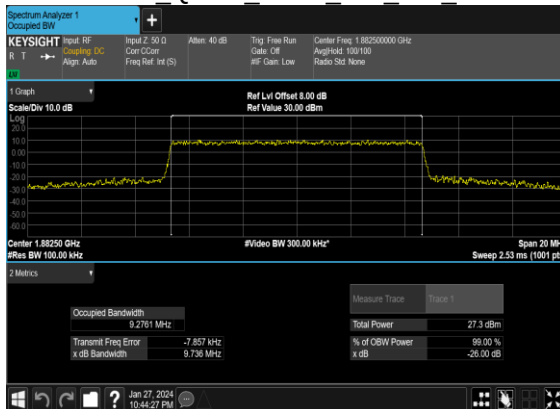


N25(10M)_CP-OFDM_16QAM Outer Full Mid CH

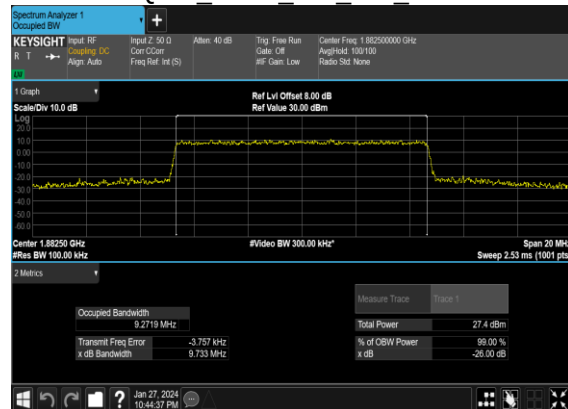


N25(10M)_CP-OFDM_64
QAM Outer Full Mid CH

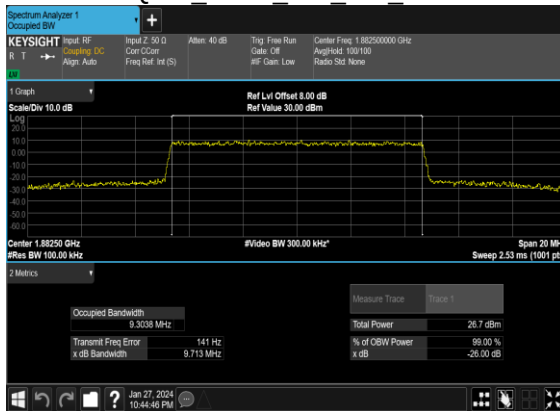


N25(10M)_CP-OFDM_256
QAM Outer Full Mid CH

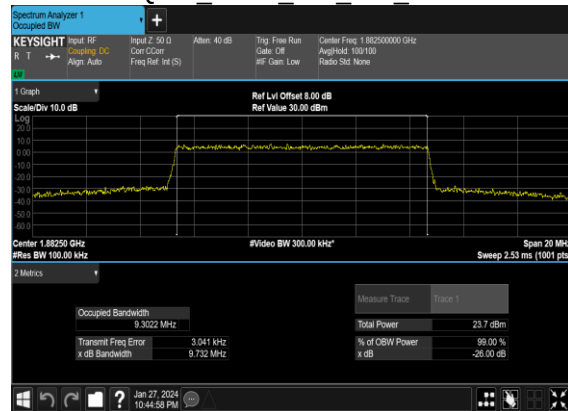


N25(15M)_CP-OFDM_QPSK Outer Full Mid CH

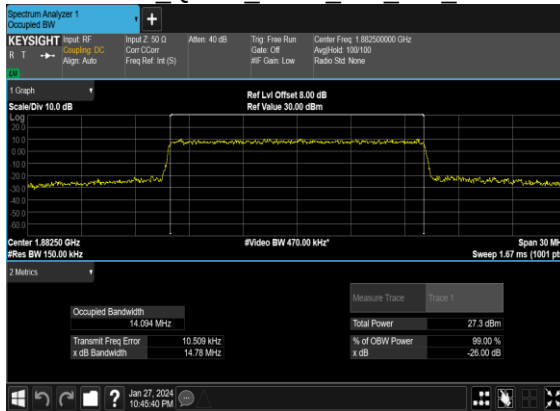


N25(15M)_CP-OFDM_16
QAM Outer Full Mid CH

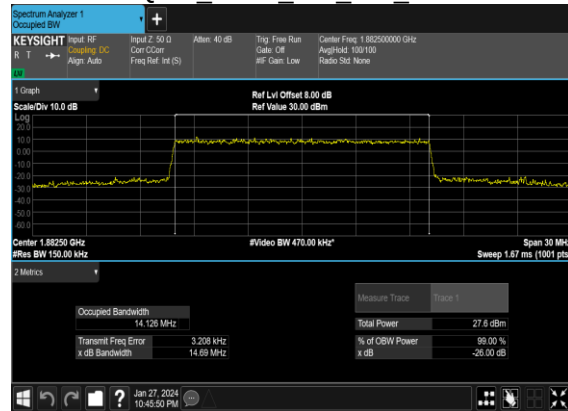


N25(15M)_CP-OFDM_64
QAM Outer Full Mid CH

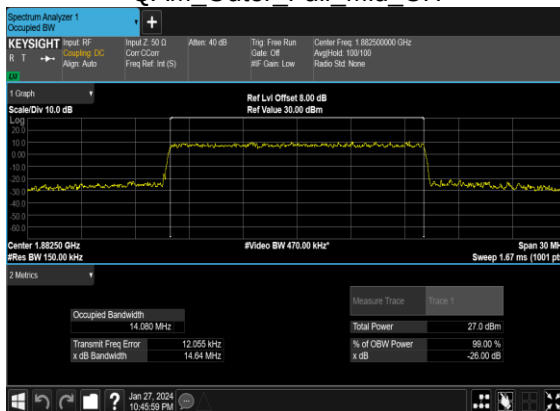


N25(15M)_CP-OFDM_256
QAM Outer Full Mid CH

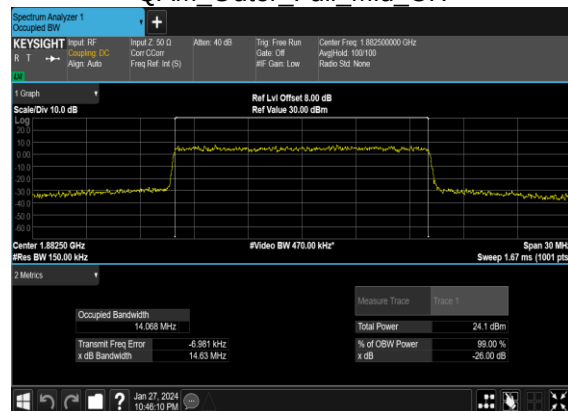


N25(20M)_CP-OFDM_QPSK Outer Full Mid CH

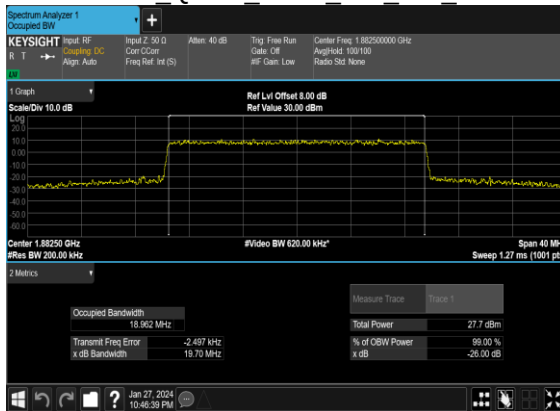


N25(20M)_CP-OFDM_16QAM Outer Full Mid CH

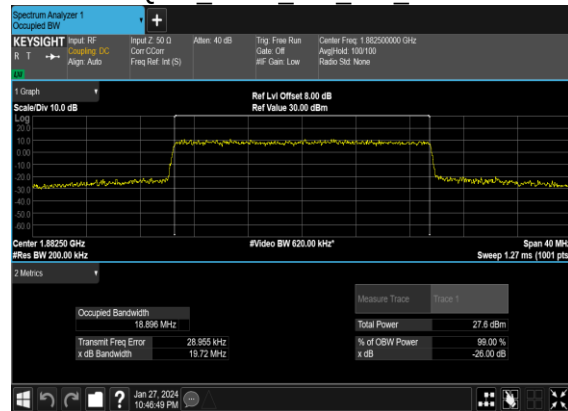


N25(20M)_CP-OFDM_64QAM Outer Full Mid CH

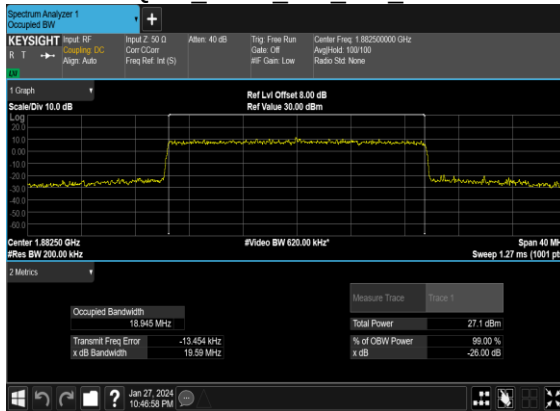


N25(20M)_CP-OFDM_256QAM Outer Full Mid CH

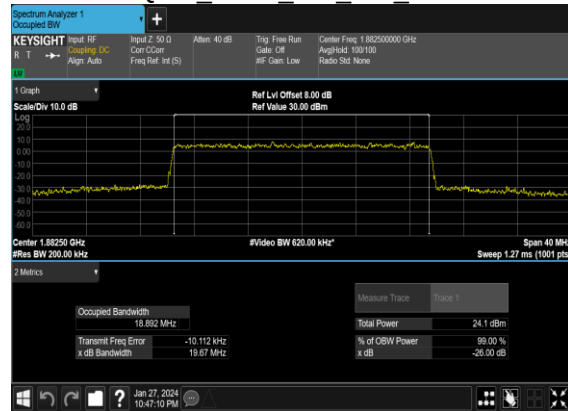


N25(25M)_CP-OFDM_QPSK Outer Full Mid CH

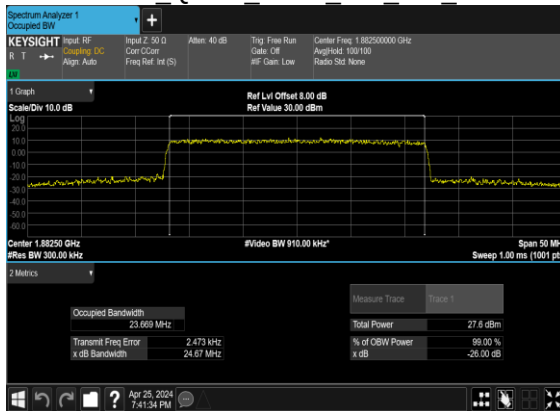


N25(25M)_CP-OFDM_16QAM Outer Full Mid CH

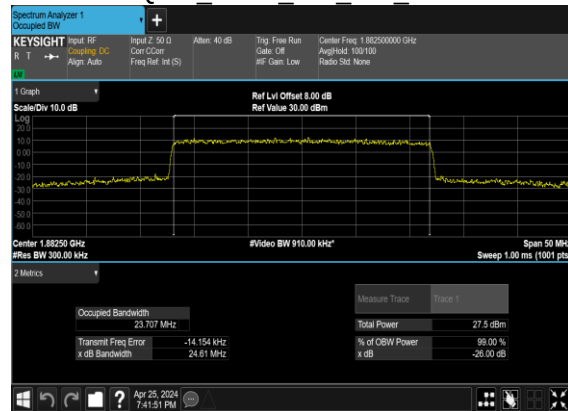


N25(25M)_CP-OFDM_64
QAM Outer Full Mid CH

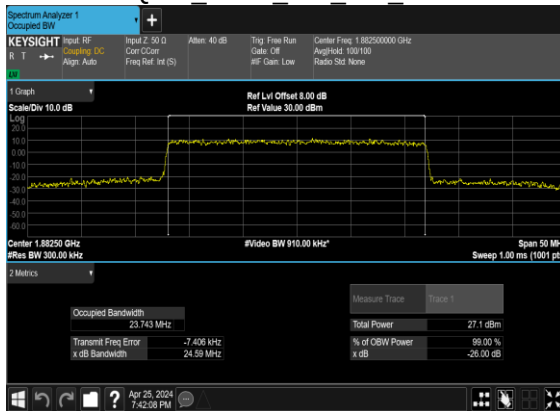


N25(25M)_CP-OFDM_256
QAM Outer Full Mid CH

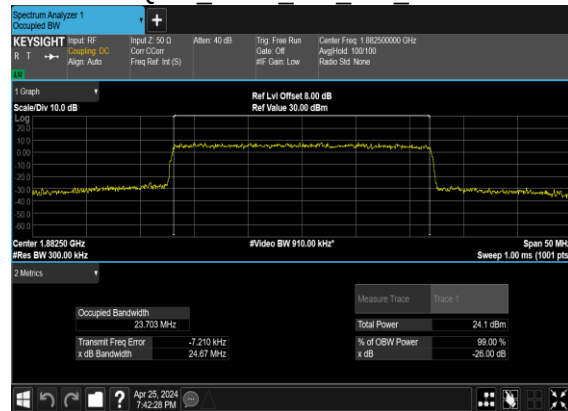


N25(30M)_CP-OFDM_QPSK Outer Full Mid CH

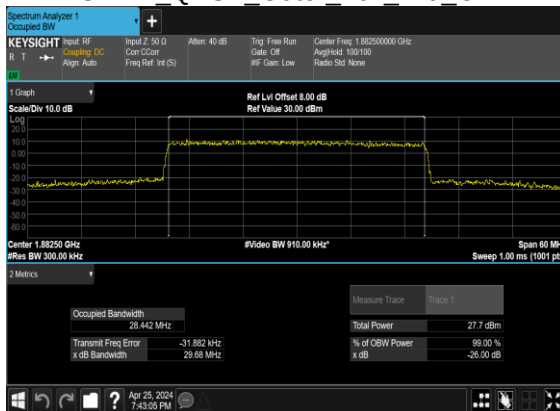


N25(30M)_CP-OFDM_16
QAM Outer Full Mid CH

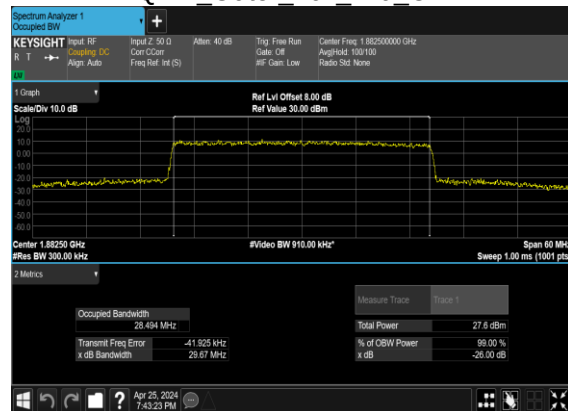


N25(30M)_CP-OFDM_64
QAM Outer Full Mid CH

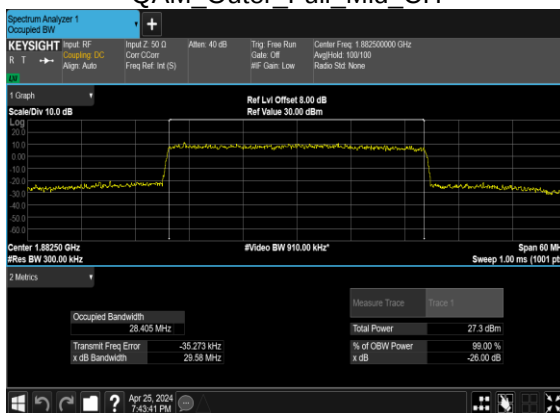


N25(30M)_CP-OFDM_256
QAM Outer Full Mid CH

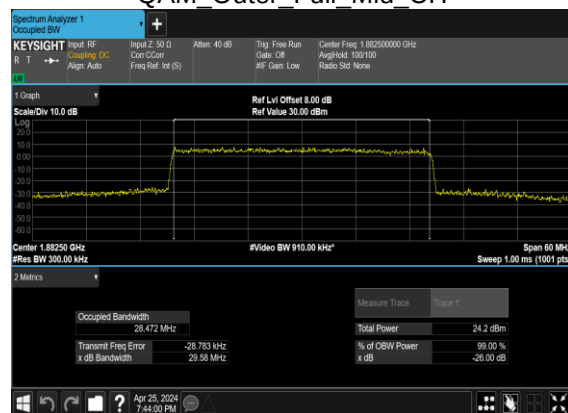


N25(35M)_CP-OFDM_QPSK Outer Full Mid CH

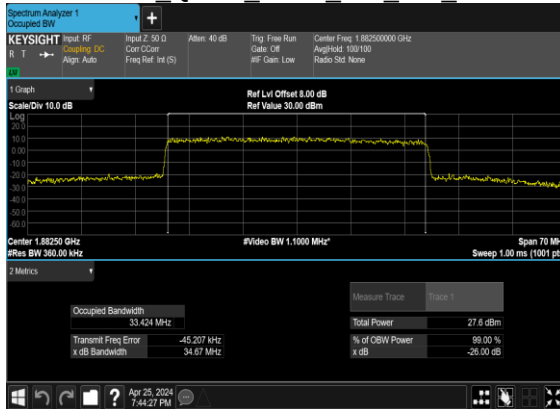


N25(35M)_CP-OFDM_16QAM Outer Full Mid CH

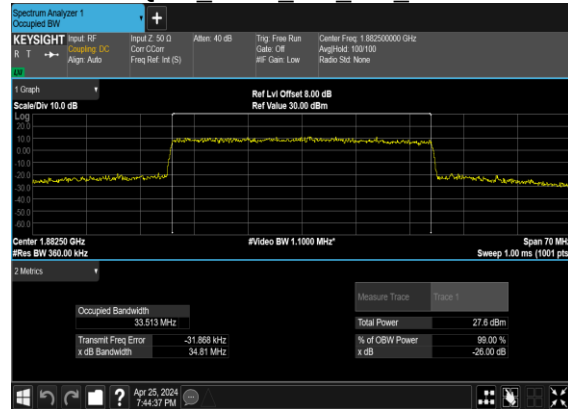


N25(35M)_CP-OFDM_64QAM Outer Full Mid CH

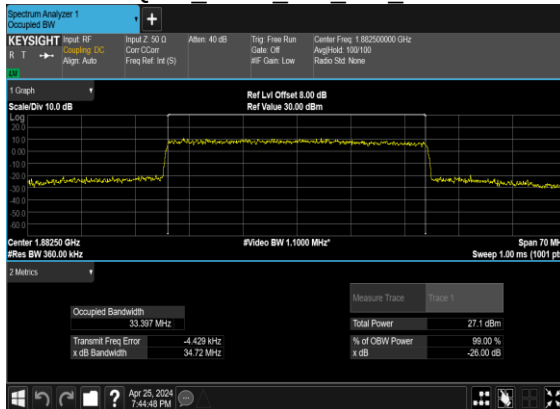


N25(35M)_CP-OFDM_256QAM Outer Full Mid CH

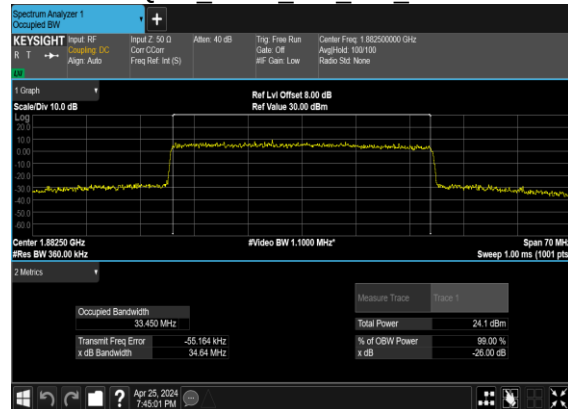

N25(40M)_CP-OFDM_QPSK Outer Full Mid CH

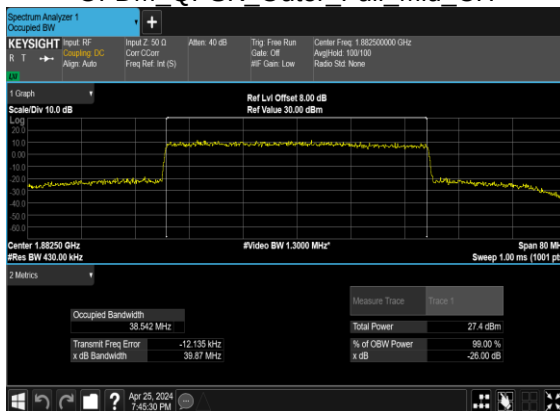

N25(40M)_CP-OFDM_16QAM Outer Full Mid CH

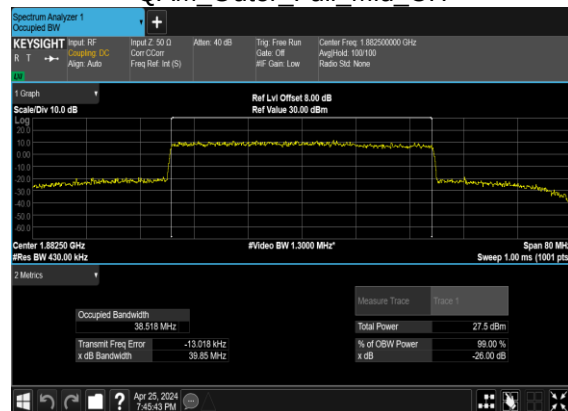

N25(40M)_CP-OFDM_64
QAM Outer Full Mid CH



N25(40M)_CP-OFDM_256
QAM Outer Full Mid CH



Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	20	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	20	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	20	381000	1905.0	DFT-s-OFDM BPSK	1@0	see graph	PASS

25	15	20	381000	1905.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	40	376500	1882.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	1@0	see graph	---
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	1@0	see graph	---
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	1@0	see graph	PASS

N25(5M)_DFT-s- OFDM BPSK Edge 1RB Left Low CH



N25(5M)_DFT-s- OFDM QPSK Edge 1RB Left Low CH




N25(5M)_DFT-s- OFDM BPSK Edge 1RB Left Mid CH




N25(5M)_DFT-s- OFDM QPSK Edge 1RB Left Mid CH



N25(5M)_DFT-s- OFDM BPSK Edge 1RB Left High CH

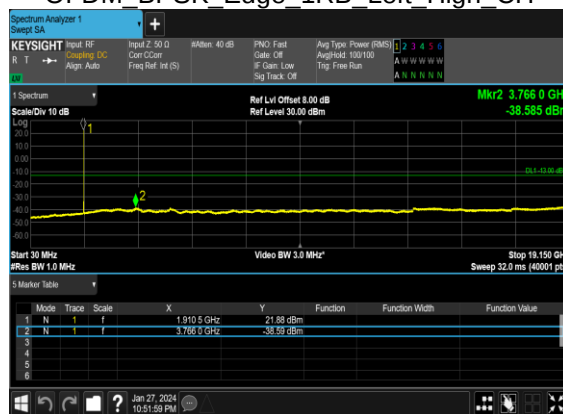

N25(5M)_DFT-s- OFDM QPSK Edge 1RB Left High CH

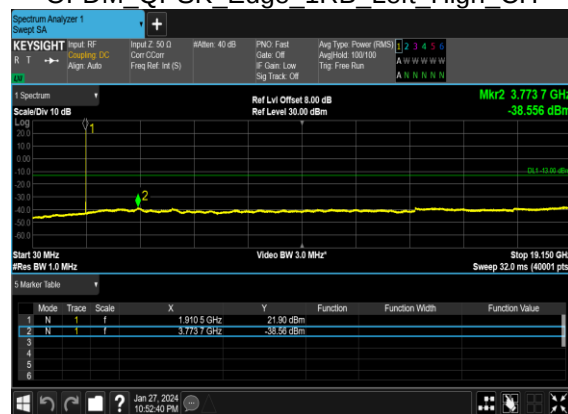


N25(20M)_DFT-s-OFDM BPSK Edge 1RB Left Low CH



N25(20M)_DFT-s-OFDM QPSK Edge 1RB Left Low CH



N25(20M)_DFT-s-OFDM BPSK Edge 1RB Left Mid CH

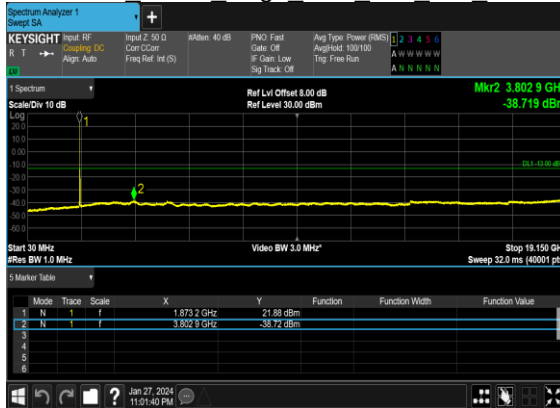

N25(20M)_DFT-s-OFDM QPSK Edge 1RB Left Mid CH



N25(20M)_DFT-s-OFDM BPSK Edge 1RB Left High CH



N25(20M)_DFT-s-OFDM QPSK Edge 1RB Left High CH




N25(40M)_DFT-s-
OFDM BPSK Edge 1RB Left Low CH




N25(40M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH



N25(40M)_DFT-s-
OFDM BPSK Edge 1RB Left Mid CH

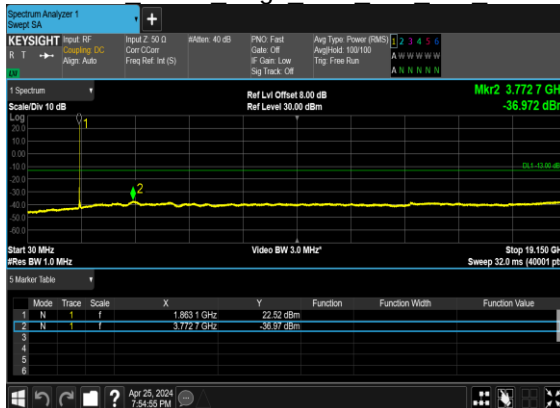

N25(40M)_DFT-s-
OFDM QPSK Edge 1RB Left Mid CH

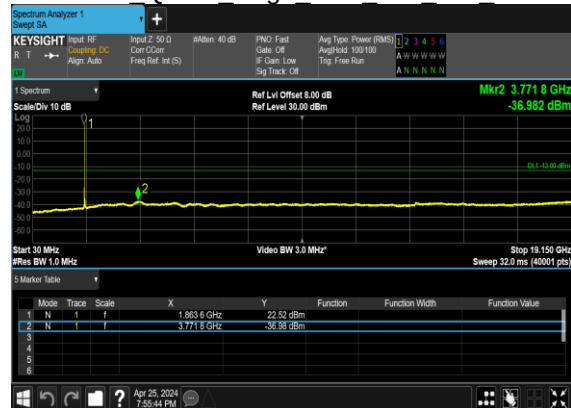

N25(40M)_DFT-s-
OFDM BPSK Edge 1RB Left High CH




N25(40M)_DFT-s-
OFDM QPSK Edge 1RB Left High CH




Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
25	15	20	372000	1860.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
25	15	20	381000	1905.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM BPSK	216@0	see graph	PASS
25	15	40	374000	1870.0	DFT-s-OFDM QPSK	216@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	1@215	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	1@215	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM BPSK	216@0	see graph	PASS
25	15	40	379000	1895.0	DFT-s-OFDM QPSK	216@0	see graph	PASS


N25(5M)_DFT-s-
OFDM BPSK Edge 1RB Left Low CH

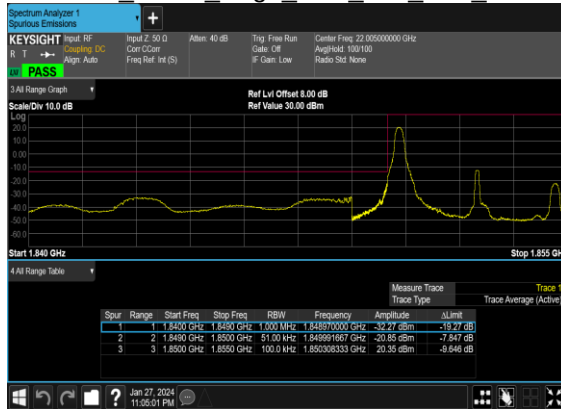


N25(5M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH

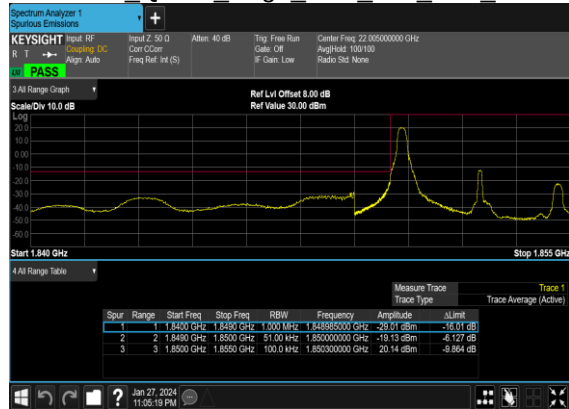


N25(5M)_DFT-s-
OFDM BPSK Outer Full Low CH

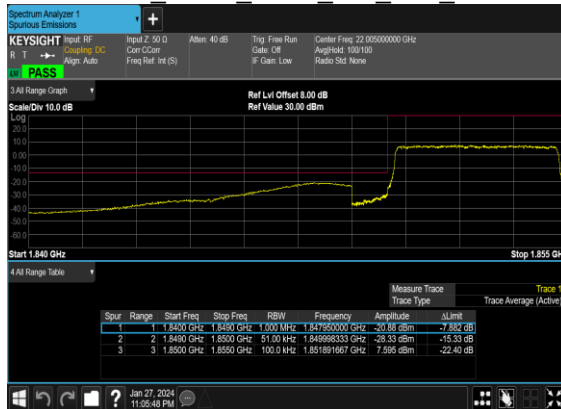


N25(5M)_DFT-s-
OFDM QPSK Outer Full Low CH

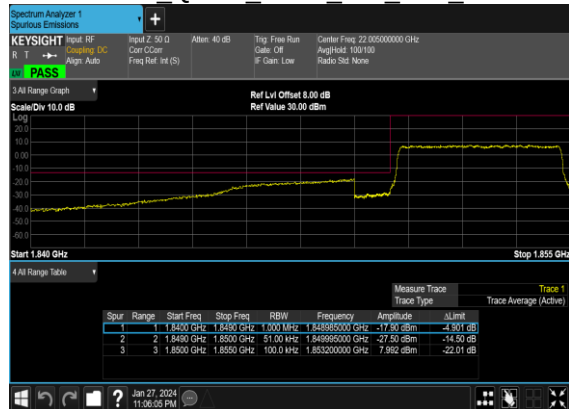


N25(5M)_DFT-s-
OFDM BPSK Edge 1RB Right High CH

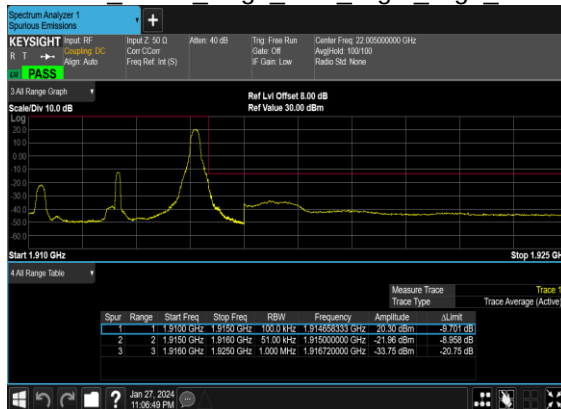

N25(5M)_DFT-s-
OFDM QPSK Edge 1RB Right High CH

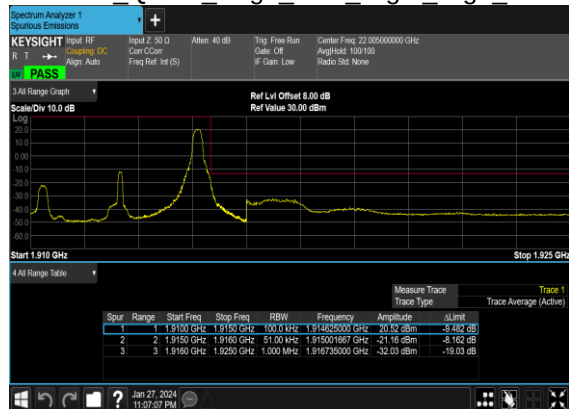


N25(5M)_DFT-s-OFDM BPSK Outer Full High CH

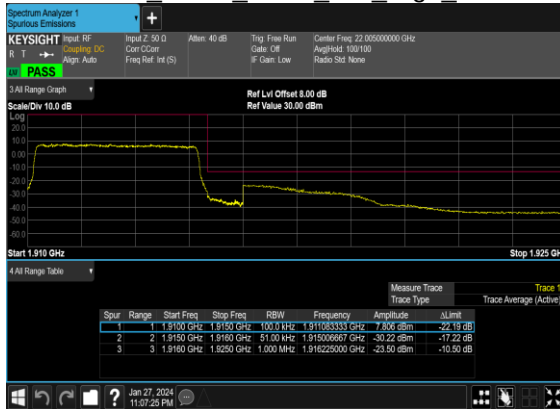


N25(5M)_DFT-s-OFDM QPSK Outer Full High CH




N25(20M)_DFT-s-OFDM BPSK Edge 1RB Left Low CH

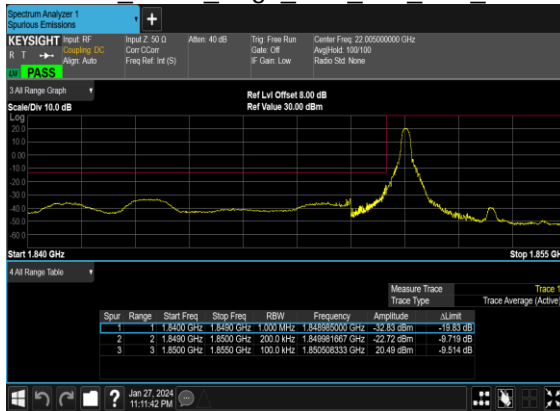


N25(20M)_DFT-s-OFDM QPSK Edge 1RB Left Low CH

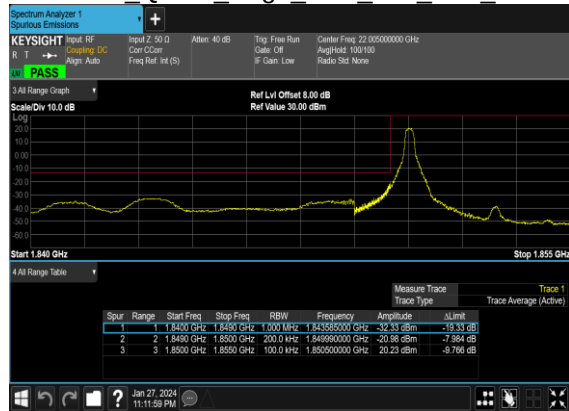

N25(20M)_DFT-s-OFDM BPSK Outer Full Low CH

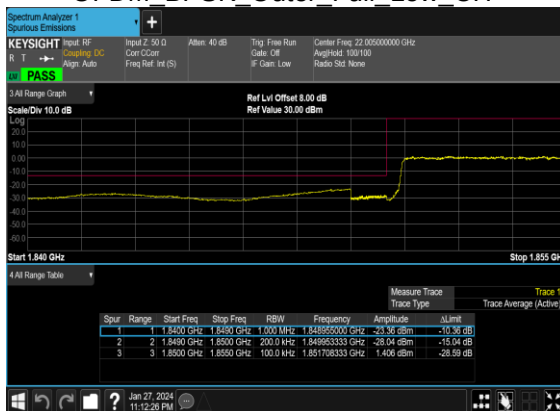

N25(20M)_DFT-s-OFDM QPSK Outer Full Low CH

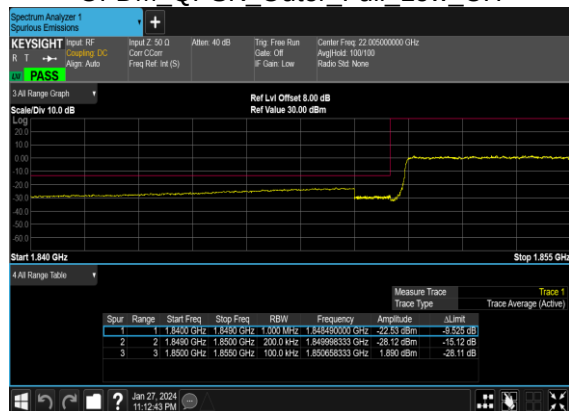

The screenshot displays the Keysight Spectrum Analyzer 1 interface. The top panel shows the input signal as 'Input 2: 50.0 dBm' and the output as 'Center Freq: 22.00000000 GHz'. The main display area shows a spectrum plot with a prominent peak at 1.915 GHz. The plot is labeled 'Scale/Div: 10.0 dB' and 'Ref Lvl Offset: 8.00 dB'. The bottom panel shows the 'Start 1.915 GHz' and 'Stop 1.925 GHz' range. A table at the bottom right lists the signal parameters:

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	AJunc
1	1	1.9100 GHz	1.9150 GHz	100.0 kHz	1.914483333 GHz	-20.40 dBm	-9.805 dB
2	2	1.9150 GHz	1.9160 GHz	200.0 kHz	1.915018333 GHz	-23.57 dBm	-10.57 dB
3	3	1.9160 GHz	1.9250 GHz	1.000 MHz	1.916600000 GHz	-35.25 dBm	-22.25 dB

Spectrum Analyzer 1
Spurious Emissions

KEYSIGHT Input RF
R T **Pass** **Calig** **DC**
Align Auto

Input Z: 50 Ω
Att: 40 dB
Corr: Off
Freq Ref: Int (S)

Trig: Free Run
Gate: Off
RF Gain: Low

Center Freq: 22.05000000 GHz
Agt: 100/100
Radio Set: None

3 All Range Graph

Scale/Div: 10.0 dB

Log

Start: 1.910 GHz
Stop: 1.925 GHz

Ref Level Offset: 8.00 dB
Ref Value: 30.00 dBm

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	dBm
1	1	1.9101 GHz	1.9150 GHz	100.0 MHz	1.914245000 GHz	-20.4 dBm	-3.50 dB
2	2	1.9150 GHz	1.9160 GHz	200.0 MHz	1.915020000 GHz	-22.6 dBm	-6.66 dB
3	3	1.9160 GHz	1.9250 GHz	1.000 MHz	1.916645000 GHz	-33.72 dBm	-20.72 dB

Trace Type: Measure Trace
Trace Average: (Active)

The screenshot displays the Keysight Spectrum Analyzer interface. The top panel shows the input signal as a yellow trace on a logarithmic scale. The main display area shows a detailed view of the signal trace, which is a yellow line on a black background. The trace shows a signal at 1.910 GHz with a power level of approximately -26.18 dBm. The signal is identified as a 1.910 GHz signal with a bandwidth of 100.1 kHz. The table below the trace lists the detected signals.

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Level
1	1.91001 GHz	1.9101 GHz	100.1 kHz	1.910250000 GHz	-26.18 dBm	-26.18 dB	
2	1.9150 GHz	1.9160 GHz	200.0 kHz	1.915036667 GHz	-33.74 dBm	-20.74 dB	
3	1.9160 GHz	1.9250 GHz	1.000 MHz	1.916060000 GHz	-30.12 dBm	-17.12 dB	

Spectrum Analyzer 1
Spurious Emissions

KEYSIGHT Input: RF
Coupling: DC
Align: Auto
R T → **PASS**

Input Z: 50 Ω
Conn: COAX
Freq Ref: 10 (S)
Att: 40 dB
Trig: Free Run
Gate: Off
IF Gain: Low
Center Freq: 22.05000000 GHz
Avg/Res: 100/10
Radio Std: None

3 All Range Graph
Scale/Div: 10.0 dB
Log
Ref Lvl Offset: 0.00 dB
Ref Value: 30.00 dBm

Start: 1.910 GHz
Stop: 1.925 GHz

4 All Range Table

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	dBm
1	1	1.91001 GHz	1.91512 GHz	100.1 kHz	1.915126333 GHz	-28.98 dBm	-28.98 dBm
2	2	1.91501 GHz	1.9160 GHz	200.0 kHz	1.915255000 GHz	-28.08 dBm	-15.08 dBm
3	3	1.91601 GHz	1.92250 GHz	1.000 MHz	1.916030000 GHz	-23.14 dBm	-10.14 dBm

Measure Trace
Trace Type
Trace Average (Active)

The screenshot displays the Keysight Spectrum Analyzer interface. At the top, the 'KEYSIGHT' logo is visible. The main display area shows a spectrum plot with a yellow trace. A peak is identified at 1.840 GHz. The plot has a logarithmic scale for the y-axis (dBm) ranging from -60 to 30. The x-axis represents frequency in GHz, ranging from 1.835 to 1.845. A red vertical line marks the peak at 1.840 GHz. The plot is titled 'Start 1.840 GHz' and 'Stop 1.855 GHz'. The y-axis is labeled 'Scale/Div 10.0 dB' and 'Log'. The x-axis is labeled '4 All Range Table'. The plot shows a signal with a peak at 1.840 GHz and a smaller peak at 1.845 GHz. The peak at 1.840 GHz is labeled with its frequency, amplitude, and offset. The peak at 1.845 GHz is also labeled with its frequency, amplitude, and offset. The plot shows a signal with a peak at 1.840 GHz and a smaller peak at 1.845 GHz. The peak at 1.840 GHz is labeled with its frequency, amplitude, and offset. The peak at 1.845 GHz is also labeled with its frequency, amplitude, and offset.

KEYSIGHT Input RF
R T → ← Create DC
DC FAIL Align Auto

Input Z: 50 Ω
Corr CCOR
Freq Ref Int (S)

Att'n: 40 dB

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 22.000000000 GHz
AverHdd: 1000/1000
Radio Std: None

3 All Range Graph

Scale/Div 10.0 dB

Ref Lvl Offset: 0.0 dB
Ref Value 30.00 dBm

Start 1.840 GHz

Stop 1.855 GHz

4 All Range Table


Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	ΔLvl
1	1	1.8200 GHz	1.8300 GHz	1.000 MHz	1.835000000 GHz	-35.0 dBm	-24.1 dB
2	2	1.8490 GHz	1.8500 GHz	430.0 kHz	1.850000000 GHz	-11.86 dBm	-1.36 dB
3	3	1.8500 GHz	1.8550 GHz	100.0 kHz	1.850616667 GHz	-20.78 dBm	-8.217 dB

Measure Trace
Trace Type Trace Average (Active)


The screenshot displays a Spectrum Analyzer interface with the following components:

- Top Panel:**
 - Buttons: Spectrum Analyzer 1, Channel Power, and a plus icon.
 - KEYSIGHT** logo.
 - Input: RF (highlighted in orange), Channeling DC, and Auto.
 - Input 2: 50 Ω, Core CCAr, Frequency: 1st (S).
 - Attenuation: 30 dB, #FNO: Fast.
 - Trigger: Free Run, Gate: Off, #F Gain: Low.
 - Center Frequency: 1.849785000 GHz, Arg/Hold: 500/500, Radio Set: None.
- Graph Area:**
 - 1 Graph selected.
 - Scale/Div: 10.0 dB.
 - Log scale.
 - Ref Lvl Offset: 8.00 dB, Ref Value: 30.00 dBm.
 - #Video BW: 91.000 kHz.
 - Span: 860 kHz, Sweep: 1.20 ms (1001 pts).
- Bottom Panel:**
 - 2 Metrics selected.
 - Total Channel Power: -23.07 dBm / 430 kHz.
 - Total Power Spectral Density: -79.40 dBm/kHz.
- System Bar:**
 - Windows taskbar showing the Start button, taskbar icons, and system clock: Apr 25, 2004, 7:58:47 PM.


N25(40M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH

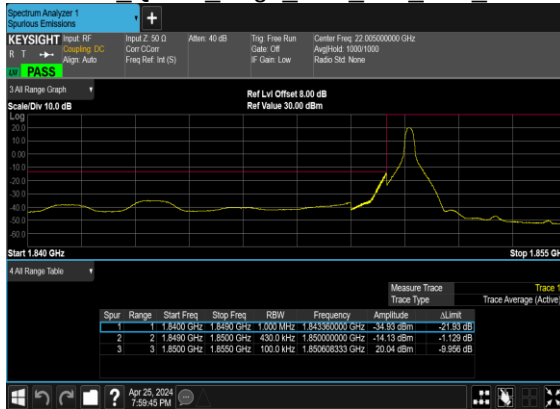


N25(40M)_DFT-s-
OFDM BPSK Outer Full Low CH

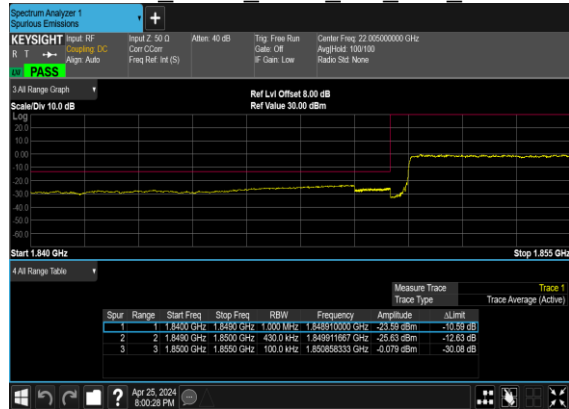


N25(40M)_DFT-s-
OFDM QPSK Outer Full Low CH

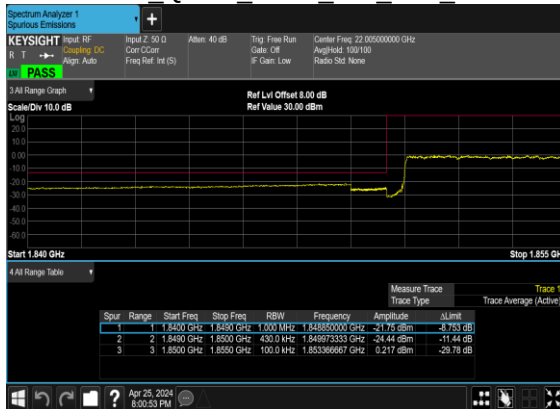


N25(40M)_DFT-s-
OFDM BPSK Edge 1RB Right High CH

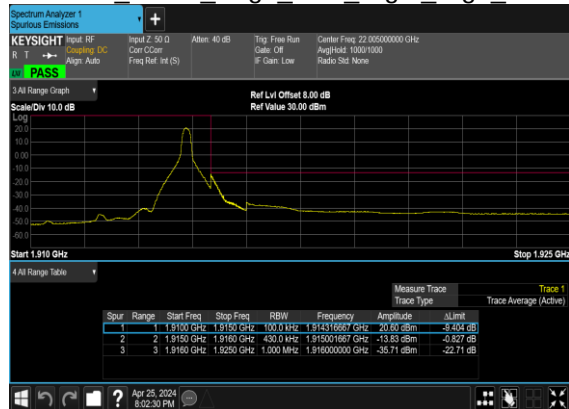

N25(40M)_DFT-s-
OFDM QPSK Edge 1RB Right High CH

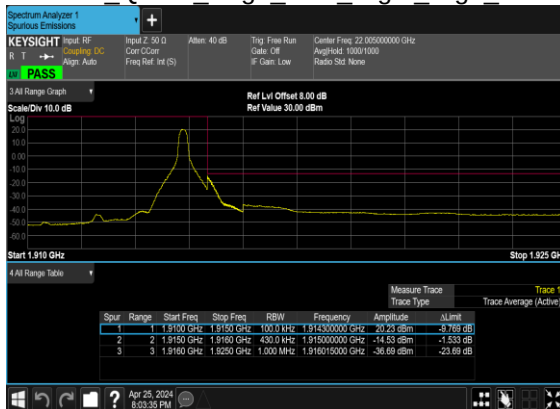

N25(40M)_DFT-s-
OFDM BPSK Outer Full High CH

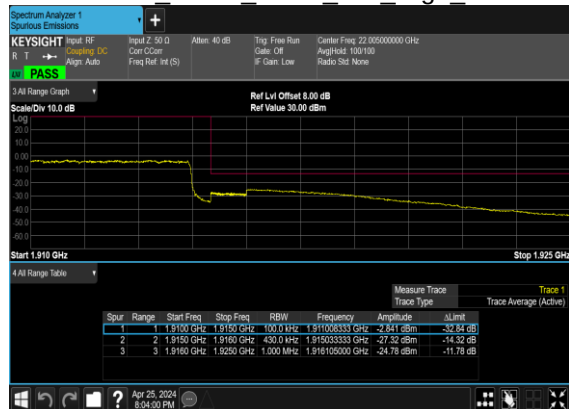

N25(40M)_DFT-s-OFDM QPSK Outer Full High CH



FR1 N25 MIMO-ANT(8+3)_ANT3

Transmitter Conducted Output Power and EIRP, ($G_T - L_C$)=3.99dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	ANT8 Power(dBm)	ANT3 Power(dBm)	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	21.02	20.64	23.84	27.83	0.6067
25	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	20.06	19.73	22.91	26.9	0.4898
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@1	21.14	20.74	23.95	27.94	0.6223
25	15	5	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	20.16	19.8	22.99	26.98	0.4989
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@1	20.72	20.35	23.55	27.54	0.5675
25	15	5	382500	1912.5	DFT-s-OFDM 16 QAM	1@1	19.56	19.35	22.47	26.46	0.4426
25	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	21.11	20.74	23.94	27.93	0.6209
25	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	20.12	19.82	22.98	26.97	0.4977
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	1@1	21.21	20.77	24.01	28	0.6310
25	15	10	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	20.16	19.84	23.01	27	0.5012
25	15	10	382000	1910	DFT-s-OFDM QPSK	1@1	20.71	20.52	23.63	27.62	0.5781
25	15	10	382000	1910	DFT-s-OFDM 16 QAM	1@1	19.69	19.56	22.64	26.63	0.4603
25	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	21.09	20.66	23.89	27.88	0.6138
25	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	20.05	19.76	22.92	26.91	0.4909
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	1@1	21.18	20.61	23.91	27.9	0.6166
25	15	15	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	20.16	19.76	22.97	26.96	0.4966
25	15	15	381500	1907.5	DFT-s-OFDM QPSK	1@1	20.72	20.69	23.72	27.71	0.5902
25	15	15	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	19.76	19.72	22.75	26.74	0.4721
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	21.13	20.73	23.94	27.93	0.6209
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	20.12	19.8	22.97	26.96	0.4966
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@1	21.18	20.68	23.95	27.94	0.6223
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	20.11	19.66	22.90	26.89	0.4887
25	15	20	381000	1905	DFT-s-OFDM QPSK	1@1	21.03	20.9	23.98	27.97	0.6266
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@1	20.52	19.95	23.25	27.24	0.5297
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	20.94	21.32	24.14	28.13	0.6501
25	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	20	20.43	23.23	27.22	0.5272
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@1	21.48	21.49	24.50	28.49	0.7063
25	15	25	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	20.6	20.62	23.62	27.61	0.5768
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@1	21.28	21.72	24.52	28.51	0.7096

25	15	25	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	20.27	20.88	23.60	27.59	0.5741
25	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	20.97	21.3	24.15	28.14	0.6516
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	20.02	20.29	23.17	27.16	0.5200
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@1	21.43	21.48	24.47	28.46	0.7015
25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	20.5	20.53	23.53	27.52	0.5649
25	15	30	380000	1900	DFT-s-OFDM QPSK	1@1	21.17	21.78	24.50	28.49	0.7063
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	1@1	20.2	20.86	23.55	27.54	0.5675
25	15	35	373500	1867.5	DFT-s-OFDM QPSK	1@1	20.88	21.24	24.07	28.06	0.6397
25	15	35	373500	1867.5	DFT-s-OFDM 16 QAM	1@1	19.97	20.33	23.16	27.15	0.5188
25	15	35	376500	1882.5	DFT-s-OFDM QPSK	1@1	21.31	21.36	24.35	28.34	0.6823
25	15	35	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	20.4	20.45	23.44	27.43	0.5534
25	15	35	379500	1897.5	DFT-s-OFDM QPSK	1@1	21.22	21.61	24.43	28.42	0.6950
25	15	35	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	20.3	20.71	23.52	27.51	0.5636
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	21.54	21.48	24.52	28.51	0.7096
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	20.54	20.83	23.70	27.69	0.5875
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	20.8	21.18	24.00	27.99	0.6295
25	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	21.57	21.47	24.53	28.52	0.7112
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	20.52	20.82	23.68	27.67	0.5848
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	20.75	21.15	23.96	27.95	0.6237
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	20.56	20.51	23.55	27.54	0.5675
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	19.64	19.92	22.79	26.78	0.4764
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	19.86	20.28	23.09	27.08	0.5105
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	19.1	19	22.06	26.05	0.4027
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	18.64	18.96	21.81	25.8	0.3802
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	18.92	19.3	22.12	26.11	0.4083
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	17.06	16.93	20.01	24	0.2512
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	16.72	17.01	19.88	23.87	0.2438
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	16.97	17.33	20.16	24.15	0.2600
25	15	40	374000	1870	CP-OFDM QPSK	108@54	20.03	19.97	23.01	27	0.5012
25	15	40	374000	1870	CP-OFDM QPSK	1@1	19.46	19.76	22.62	26.61	0.4581
25	15	40	374000	1870	CP-OFDM QPSK	1@214	19.79	20.14	22.98	26.97	0.4977
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	108@54	21.28	21.67	24.49	28.48	0.7047
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	20.81	20.88	23.86	27.85	0.6095
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@214	21.03	21.21	24.13	28.12	0.6486
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	108@54	21.26	21.68	24.49	28.48	0.7047

25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@1	20.79	20.86	23.84	27.83	0.6067
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@214	21.04	21.18	24.12	28.11	0.6471
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	108@54	20.3	20.67	23.50	27.49	0.5610
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	19.9	19.99	22.96	26.95	0.4955
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@214	20.1	20.26	23.19	27.18	0.5224
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	108@54	18.81	19.19	22.01	26	0.3981
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@1	18.95	18.95	21.96	25.95	0.3936
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@214	19.16	19.33	22.26	26.25	0.4217
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	108@54	16.81	17.13	19.98	23.97	0.2495
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@1	17.02	17.04	20.04	24.03	0.2529
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@214	17.26	17.34	20.31	24.3	0.2692
25	15	40	376500	1882.5	CP-OFDM QPSK	108@54	19.81	20.17	23.00	26.99	0.5000
25	15	40	376500	1882.5	CP-OFDM QPSK	1@1	19.84	19.84	22.85	26.84	0.4831
25	15	40	376500	1882.5	CP-OFDM QPSK	1@214	20.05	20.26	23.17	27.16	0.5200
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	108@54	21.46	21.53	24.51	28.5	0.7079
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@1	21	21.18	24.10	28.09	0.6442
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@214	21.05	21.15	24.11	28.1	0.6457
25	15	40	379000	1895	DFT-s-OFDM QPSK	108@54	21.46	21.54	24.51	28.5	0.7079
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@1	21.02	21.12	24.08	28.07	0.6412
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@214	21.06	21.11	24.10	28.09	0.6442
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	108@54	20.5	20.78	23.65	27.64	0.5808
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@1	20.08	20.2	23.15	27.14	0.5176
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@214	20.12	20.23	23.19	27.18	0.5224
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	108@54	18.99	19.31	22.16	26.15	0.4121
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@1	19.14	19.23	22.20	26.19	0.4159
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@214	19.15	19.23	22.20	26.19	0.4159
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	108@54	17	17.26	20.14	24.13	0.2588
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@1	17.18	17.25	20.23	24.22	0.2642
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@214	17.23	17.31	20.28	24.27	0.2673
25	15	40	379000	1895	CP-OFDM QPSK	108@54	19.95	20.26	23.12	27.11	0.5140
25	15	40	379000	1895	CP-OFDM QPSK	1@1	19.94	20.17	23.07	27.06	0.5082
25	15	40	379000	1895	CP-OFDM QPSK	1@214	20.06	20.12	23.10	27.09	0.5117


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0025	PASS	NV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0029	PASS	LV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0066	PASS	HV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0043	PASS	-30℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0035	PASS	-20℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0042	PASS	-10℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0045	PASS	0℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0040	PASS	10℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0025	PASS	20℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0046	PASS	30℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0046	PASS	40℃
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0020	PASS	50℃


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	100@0	4.45	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	5.69	13	PASS

N25(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

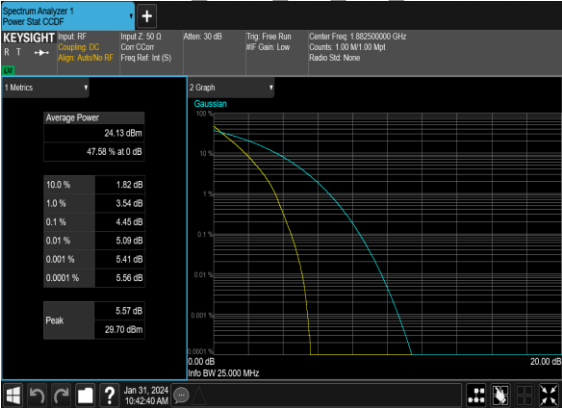

N25(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

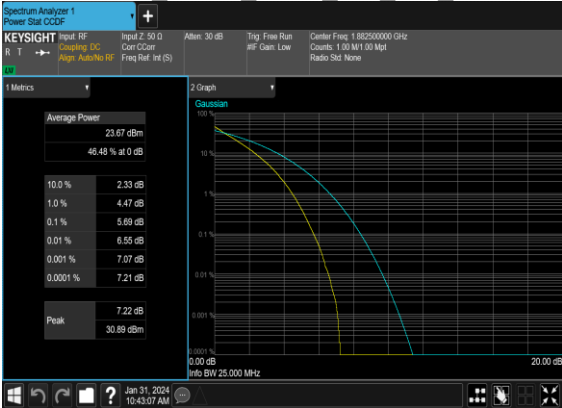


Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
25	15	5	376500	1882.5	CP-OFDM QPSK	25@0	4.4551	4.774
25	15	5	376500	1882.5	CP-OFDM 16 QAM	25@0	4.4686	4.786
25	15	5	376500	1882.5	CP-OFDM 64 QAM	25@0	4.4629	4.808
25	15	5	376500	1882.5	CP-OFDM 256 QAM	25@0	4.4612	4.812
25	15	10	376500	1882.5	CP-OFDM QPSK	52@0	9.2678	9.741
25	15	10	376500	1882.5	CP-OFDM 16 QAM	52@0	9.2909	9.73
25	15	10	376500	1882.5	CP-OFDM 64 QAM	52@0	9.3043	9.764
25	15	10	376500	1882.5	CP-OFDM 256 QAM	52@0	9.2801	9.691
25	15	15	376500	1882.5	CP-OFDM QPSK	79@0	14.086	14.72
25	15	15	376500	1882.5	CP-OFDM 16 QAM	79@0	14.077	14.71
25	15	15	376500	1882.5	CP-OFDM 64 QAM	79@0	14.103	14.68
25	15	15	376500	1882.5	CP-OFDM 256 QAM	79@0	14.089	14.61
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	18.936	19.59
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	18.899	19.57
25	15	20	376500	1882.5	CP-OFDM 64 QAM	106@0	18.889	19.6
25	15	20	376500	1882.5	CP-OFDM 256 QAM	106@0	18.93	19.68
25	15	25	376500	1882.5	CP-OFDM QPSK	133@0	23.758	24.66
25	15	25	376500	1882.5	CP-OFDM 16 QAM	133@0	23.732	24.61
25	15	25	376500	1882.5	CP-OFDM 64 QAM	133@0	23.727	24.67
25	15	25	376500	1882.5	CP-OFDM 256 QAM	133@0	23.729	24.72
25	15	30	376500	1882.5	CP-OFDM QPSK	160@0	28.468	29.57
25	15	30	376500	1882.5	CP-OFDM 16 QAM	160@0	28.564	29.61
25	15	30	376500	1882.5	CP-OFDM 64 QAM	160@0	28.528	29.7
25	15	30	376500	1882.5	CP-OFDM 256 QAM	160@0	28.558	29.61
25	15	35	376500	1882.5	CP-OFDM QPSK	188@0	33.519	34.67

25	15	35	376500	1882.5	CP-OFDM 16 QAM	188@0	33.498	34.71
25	15	35	376500	1882.5	CP-OFDM 64 QAM	188@0	33.483	34.71
25	15	35	376500	1882.5	CP-OFDM 256 QAM	188@0	33.492	34.7
25	15	40	376500	1882.5	CP-OFDM QPSK	216@0	38.521	39.93
25	15	40	376500	1882.5	CP-OFDM 16 QAM	216@0	38.49	39.88
25	15	40	376500	1882.5	CP-OFDM 64 QAM	216@0	38.526	39.86
25	15	40	376500	1882.5	CP-OFDM 256 QAM	216@0	38.453	39.86


N25(5M)_CP-OFDM_QPSK Outer Full Mid CH

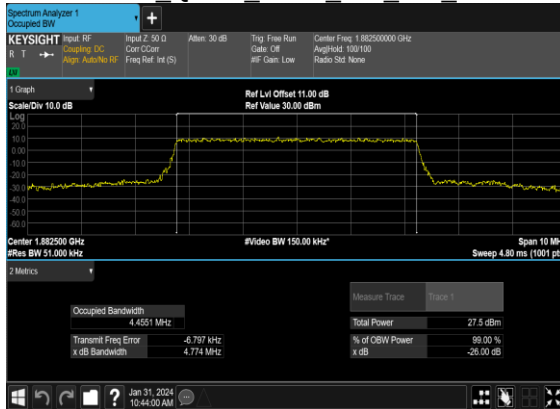


N25(5M)_CP-OFDM_16QAM Outer Full Mid CH

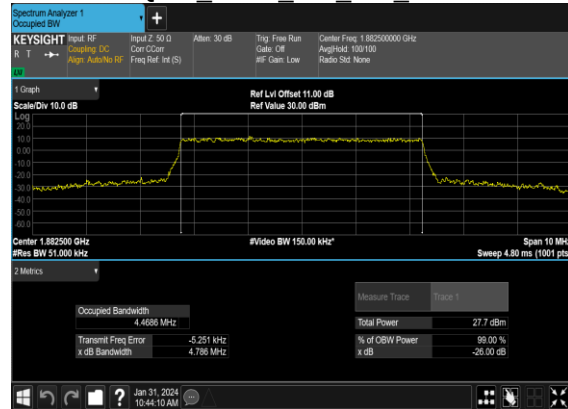


N25(5M)_CP-OFDM_64QAM Outer Full Mid CH

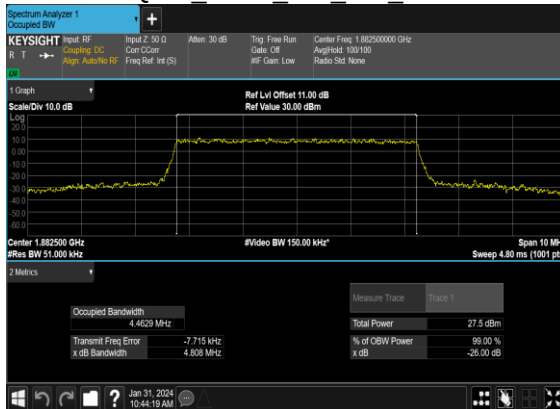

N25(5M)_CP-OFDM_256QAM Outer Full Mid CH

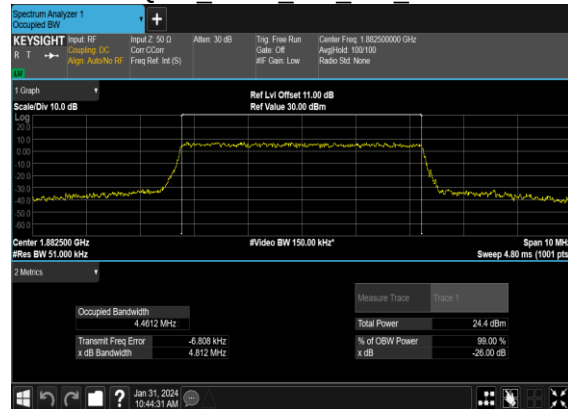

N25(10M)_CP-OFDM_QPSK Outer Full Mid CH

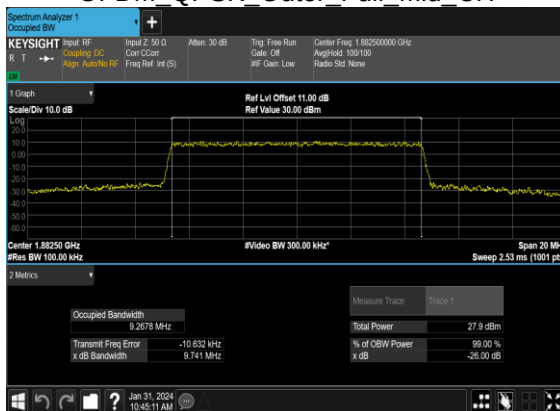

N25(10M)_CP-OFDM_16QAM Outer Full Mid CH

