



L850-GL-03-10 Label Design Document_V1.0


Material: MatteHeat-resistant

版本记录

文档版本	更新日期	说明
V1.0	2020-07-17	NA

Front label:

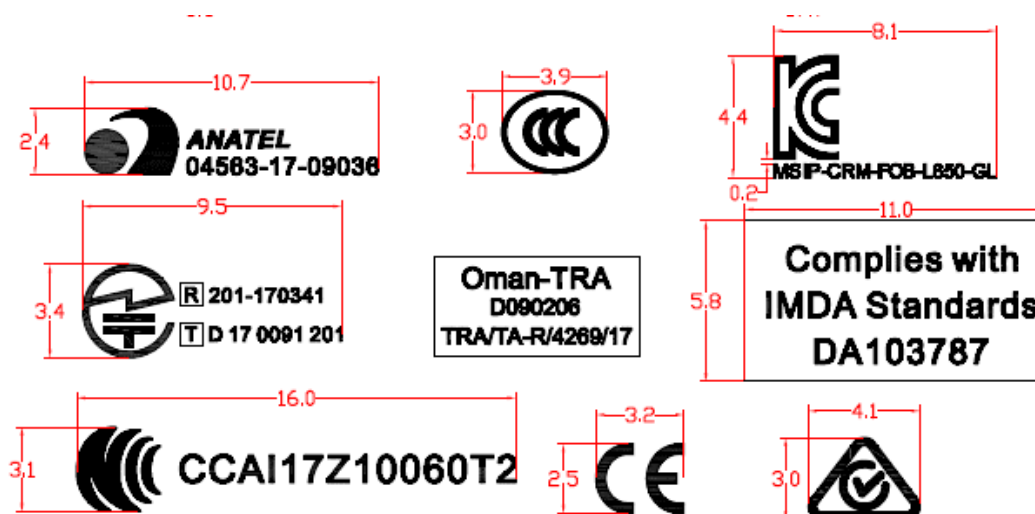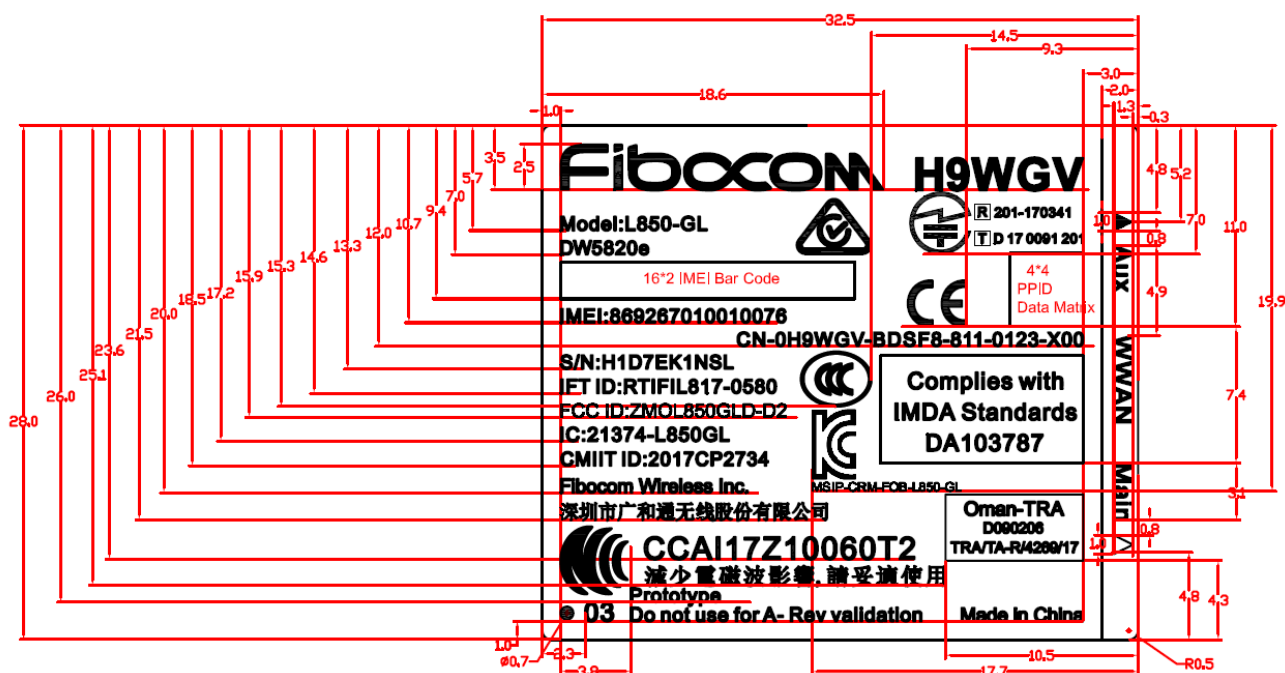

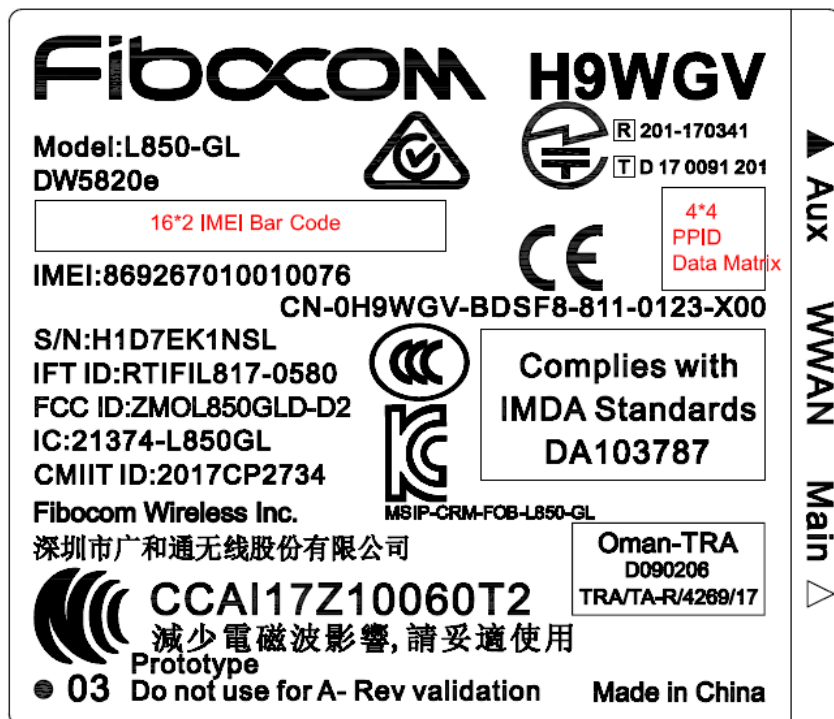

Back label:



Illustration

S/N	S/N number, 10 Numbers. Please refer to the latest version of the product and packing box SN encoding rules for the actual S/N number.
IMEI	IMEI number, 15 digits. The label sample is just an example number.

PPID definition

PPID – 20 and 3 Character Bar Codes - The 20 character code will contain the country of origin ISO code, DELL Part Number, supplier identification code, date of manufacture and unique sequence number. The 3 character code contains the part revision.

Dell PPID code coding rules

Dell custom L850-GL-03-10 label, added a PPID number, for example:

CN-0H9WGV-BDSF8-811-0123-X00

Code rule: Country of Origin+Dell P/N+MFG ID+Date Code+Serial Numbe+Part Number Revision(X or A)

Element	Coding rule
PPID	For example: CN-0H9WGV -BDSF8-811-0123-X00
CN	Country of Origin(fixed quantity)
0H9WGV	Dell P/N (fixed quantity)
BDSF8	MFG ID (fixed quantity)
XXX	Date Code (variable)
XXXX	Serial Numbe (variable)
X00	Part Number Revision(fixed quantity,X00)

Refer to the information provided by DELL:

1. Two-dimensional code does not need to reflect dash "-"

Note - Dashes are included in the Human Readable portion ONLY. Do not include dashes in the barcode.

2. Date Code (811 in PPID) also needs variables and has certain rules;

Date Code - The first character will be a number representing the last digit of the **year** of manufacture (2002 would be a 2). There is no distinction between decades, ex. 1992, 2002, 2012, and should be ignored. The second alphanumeric character will represent the **month** per the table below. The third alphanumeric character will represent the **day** of manufacture beginning with 1 through 9, and then with the letters A through V representing the 10th through 31st of a month per the table below.

1st Character Year Codes

Year	2006	2007	2008	2009	2010	2011	2012	So on
Code	6	7	8	9	0	1	2	

2nd Character Month codes

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Code	1	2	3	4	5	6	7	8	9	A	B	C
------	---	---	---	---	---	---	---	---	---	---	---	---

3rd Character Day Codes																			
Day	1 nd	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th	9 th	10 th	11 th	12 th	13 th	14 th	15 th	16 th	17 th	18 th	19 th
Code	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	I	J

Date	20 th	21 st	22 nd	23 rd	24 th	25 th	26 th	27 th	28 th	29 th	30 th	31 st
Code	K	L	M	N	O	P	Q	R	S	T	U	V

3. Serial Number has certain rules;

Serial Number Detail - Suppliers will be allowed the use of characters 0-9, A-O in the first position of the sequence number, with no restrictions on the 2nd through 4th positions provided that each sequence number is indeed unique

*.Suppliers ONLY

0123

1 st Character	2 nd Character	3 rd Character	4 th Character
Numbers 0 - 9 and Letters A – O	Any number* And Any letter*	Any number* And Any letter*	Any number* And Any letter*

* 2nd-4th characters will provide a unique serial number*.


Dell Factories use the characters P through Z in the first position of the serial number. DELL reserves these for use internally, for labels that DELL prints itself.

Paste instruction:

Front label: The label antenna id is aligned with the antenna interface of the module, 0.5mm + / - 0.3mm is reserved on the upper and lower sides



Back label:

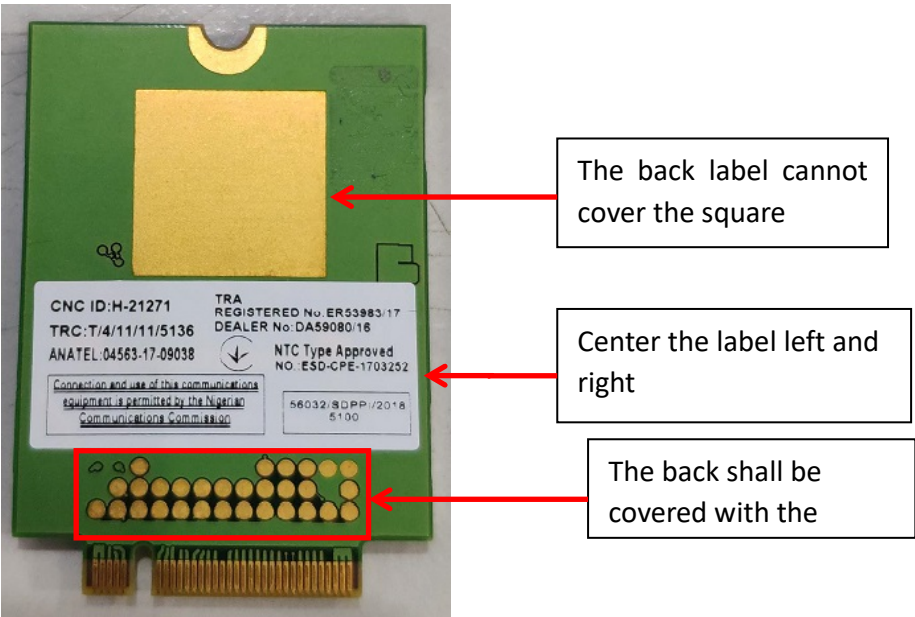

Note: the pasting instructions are for reference only, and the actual label style is subject to the document

说明部分译文如下:

说明:

S/N	S/N 号码，10 个号码。标签样图上面只是举例号码，实际 S/N 号请参考《产品及包装箱 SN 编码规则》最新版本，字体以标签样图为准
IMEI	IMEI 号码，15 位数字组成。标签样图上面只是举例号码，字体以标签样图为准

PPID 定义

PPID——20 和 3 个字符条码——20 个字符代码将包含原产国 ISO 代码、戴尔零件号、制造商识别代码、制造日期和唯一序列号。3 字符代码是版本号。

戴尔 PPID 编码规则

戴尔自定义 L850-GL-03-10 标签，添加了一个 PPID 号，例如：CN-0H9WGV-BDSF8-811-0123-X00。

代码规则：原产国+戴尔 p/n+制造商编号+日期代码+序列号+版本号修订（X 或 A）

Element	Coding rule
PPID	例如: CN-0H9WGV -BDSF8-811-0123-X00
CN	原产地 （固定量）
0H9WGV	戴尔 P / N（固定量，每个型号有唯一的 P/N）,0 为数字非字母 O
BDSF8	制造商编号（固定量）
XXX	日期代码 （变量）
XXXX	序列号（变量）

Element	Coding rule
X00	版本号（目前为 X00）

参考戴尔提供的信息：

1. 二维代码不需要反映破折号“-”

注意-破折号只包含在人类可读部分中。不要在条形码中加入破折号。

2. 日期代码（PPID 中的 811）也需要变量，并且有特定的规则；

日期代码-第一个字符将是一个数字代表了制造年的最后一个数字（2002 年是 2）。在 1992 年、2002 年、2012 年，没有任何区别，应该被忽略。第二个字母数字字符代表下表的每个月。第三个字母数字字符将代表从 1 到 9 开始的制造日，然后是字母 A 到 V 表示每个月的第 10 到第 31 个日。

第一、年份编号

年	2006	2007	2008	2009	2010	2011	2012	So on
编号	6	7	8	9	0	1	2	

第二、月份编号

月	一月	二月	三月	四月	五月	六月	七月	八月	九月	十月	十一月	十二月
编号	1	2	3	4	5	6	7	8	9	A	B	C


第三、日期编号

日	1 nd	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th	9 th	10 th	11 th	12 th	13 th	14 th	15 th	16 th	17 th	18 th	19 th
编号	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	I	J

日期	20 th	21 st	22 nd	23 rd	24 th	25 th	26 th	27 th	28 th	29 th	30 th	31 st
编号	K	L	M	N	O	P	Q	R	S	T	U	V

3. 序列号有一定的规则；

序列号细节-供应商将被允许在序列编号的第一个位置使用 0-9，A-O，在第 2 到第 4 个位置没有限制，前提是每个序列号确实是唯一的。

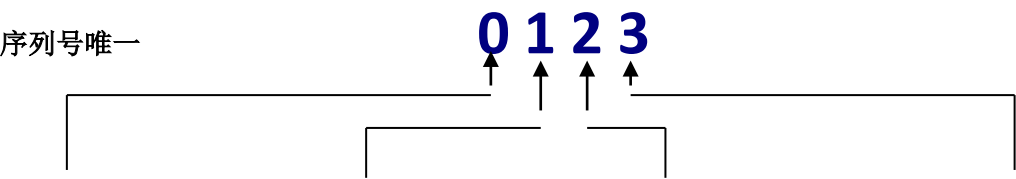

第一位	第二位	第三位	第四位
数字 0-9 和 字母 A – O	任何数字和 任何字母	任何数字和 任何字母	任何数字和 任何字母

第二到第四个字符将提供一个唯一的序列号。

戴尔工厂在序列号的第一个位置使用字符 P 到 Z。戴尔将这些用于内部使用，用于戴尔打印自己的标签。

正面标签：标签天线标识对准模块天线接口，上下左右预留 0.5mm±0.3mm



背面标签：



背面标签不可盖住此正方形

标签左右居中

背面以不可盖住下方测试点

注：粘贴说明仅供参考，图片仅供参考！实际标签样式以文档为准