


Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

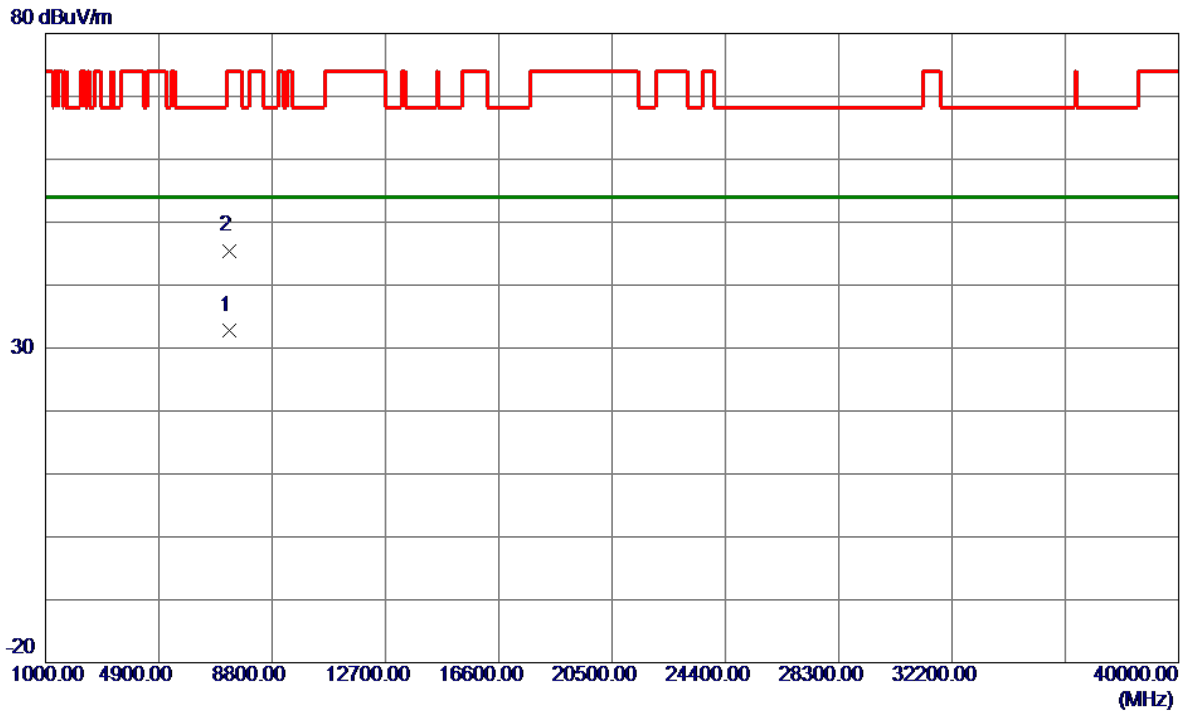


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7317.4550	25.09	7.71	32.80	54.00	-21.20	AVG	
2	7322.2550	37.79	7.71	45.50	74.00	-28.50	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

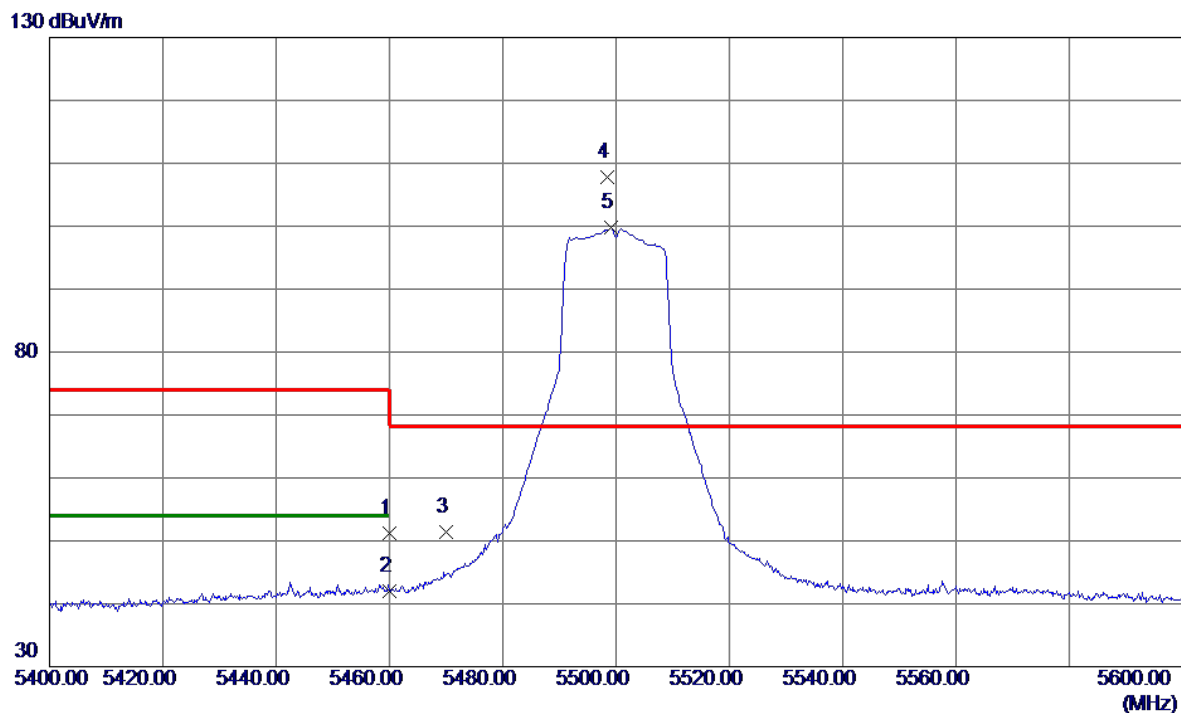


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.31	12.89	51.20	74.00	-22.80	Peak	
2	5460.0000	29.18	12.89	42.07	54.00	-11.93	AVG	
3	5470.0000	38.52	12.90	51.42	68.20	-16.78	Peak	
4 *	5498.4000	94.92	12.91	107.83	68.20	39.63	Peak	No Limit
5	5499.2000	86.84	12.91	99.75	999.00	-899.25	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

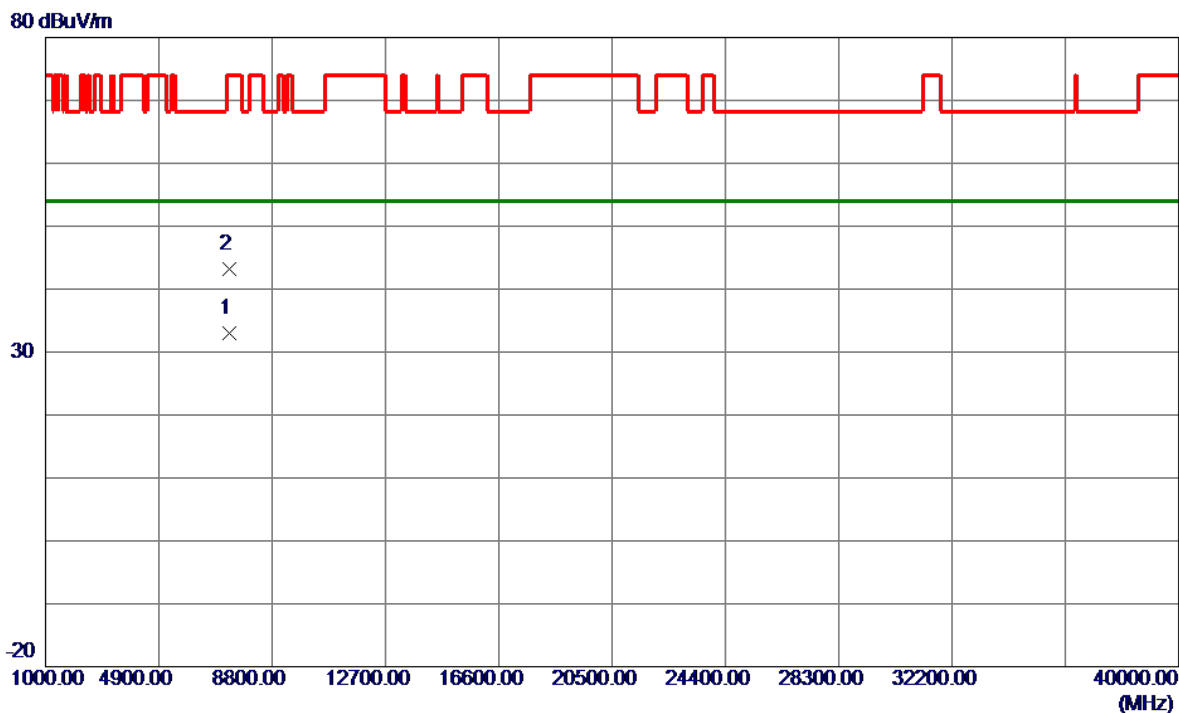


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7311.0050	25.22	7.70	32.92	54.00	-21.08	AVG	
2	7318.2800	35.57	7.71	43.28	74.00	-30.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

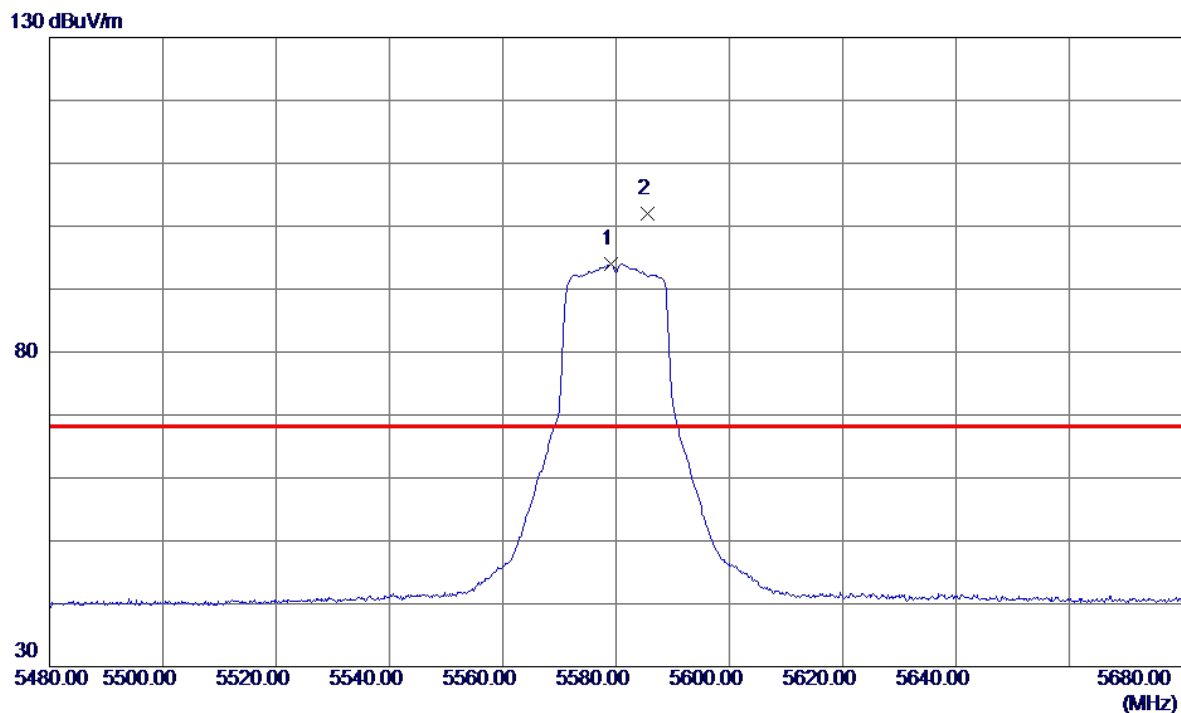


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5579.2000	80.86	13.18	94.04	999.00	-904.96	AVG	No Limit
2 *	5585.6000	88.85	13.21	102.06	68.20	33.86	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

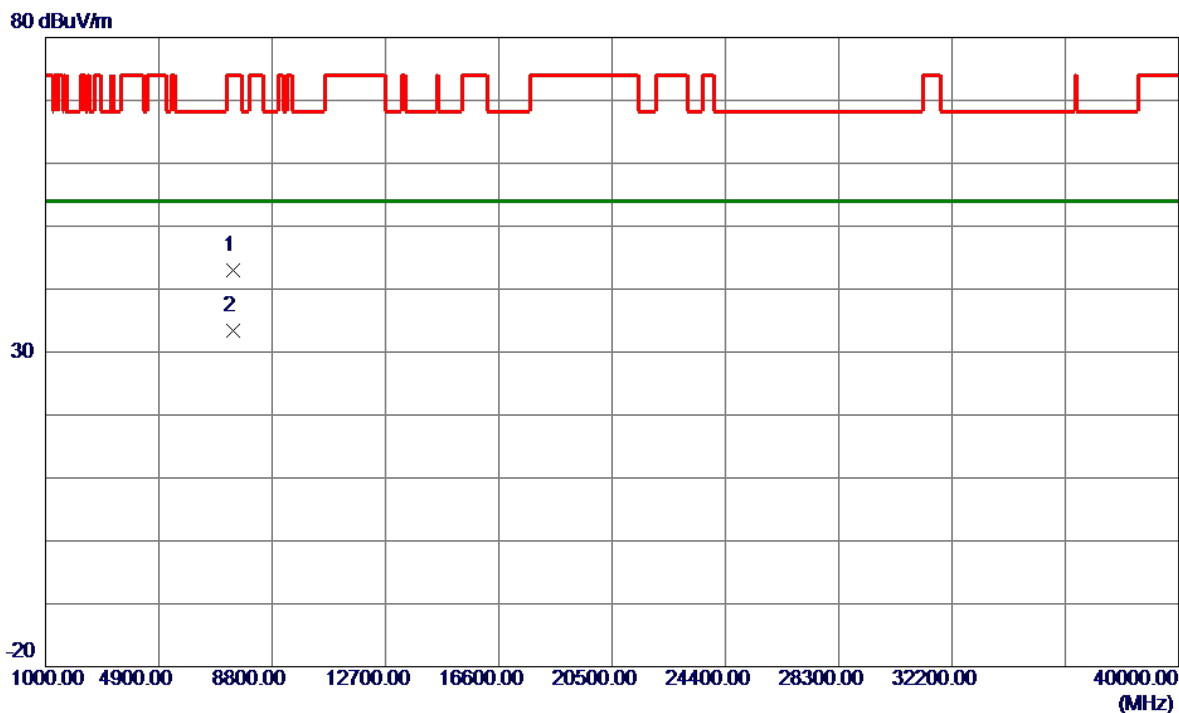


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7437.1500	35.21	7.86	43.07	74.00	-30.93	Peak	
2 *	7437.8500	25.52	7.86	33.38	54.00	-20.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

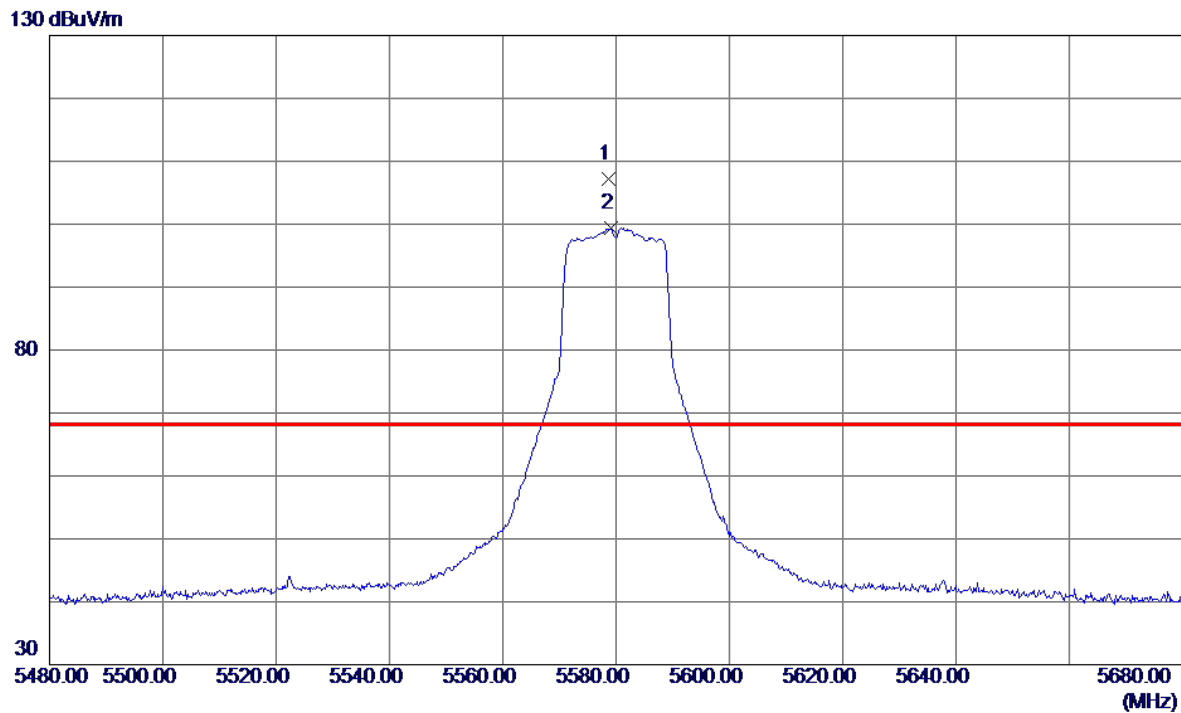


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5578.7000	94.04	13.18	107.22	68.20	39.02	Peak	No Limit
2	5579.2000	86.30	13.18	99.48	999.00	-899.52	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

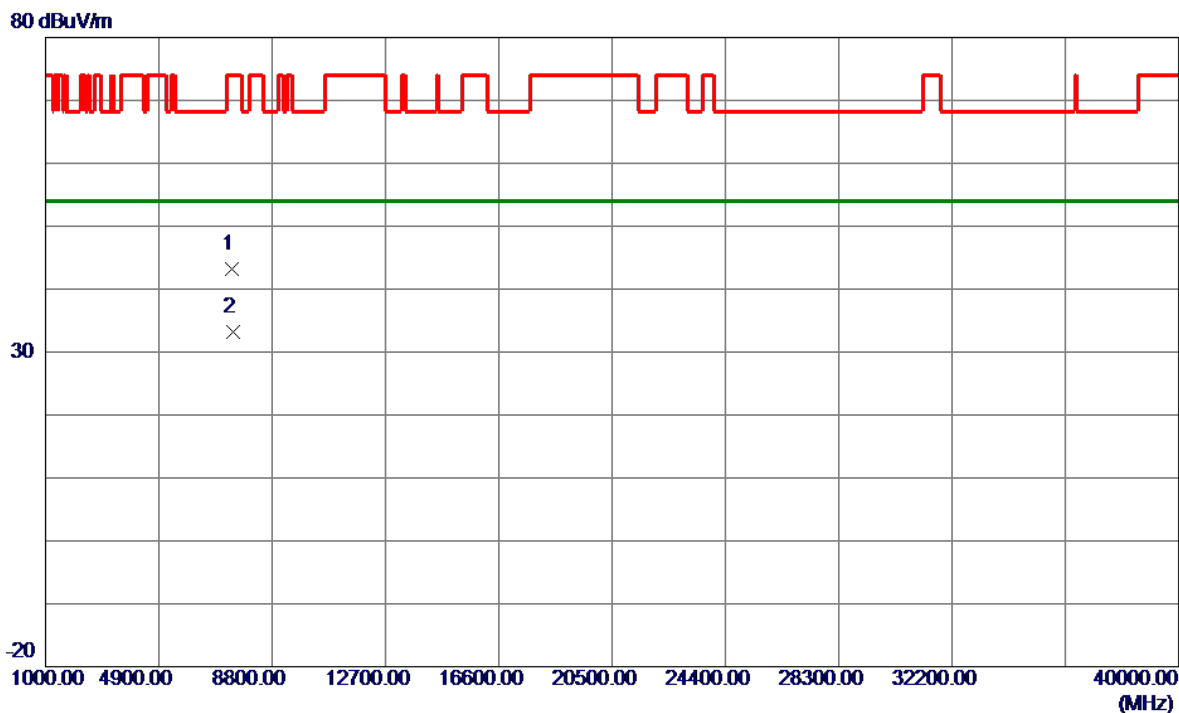


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7422.1000	35.45	7.84	43.29	54.00	-10.71	AVG	
2	7452.3750	25.32	7.88	33.20	74.00	-40.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

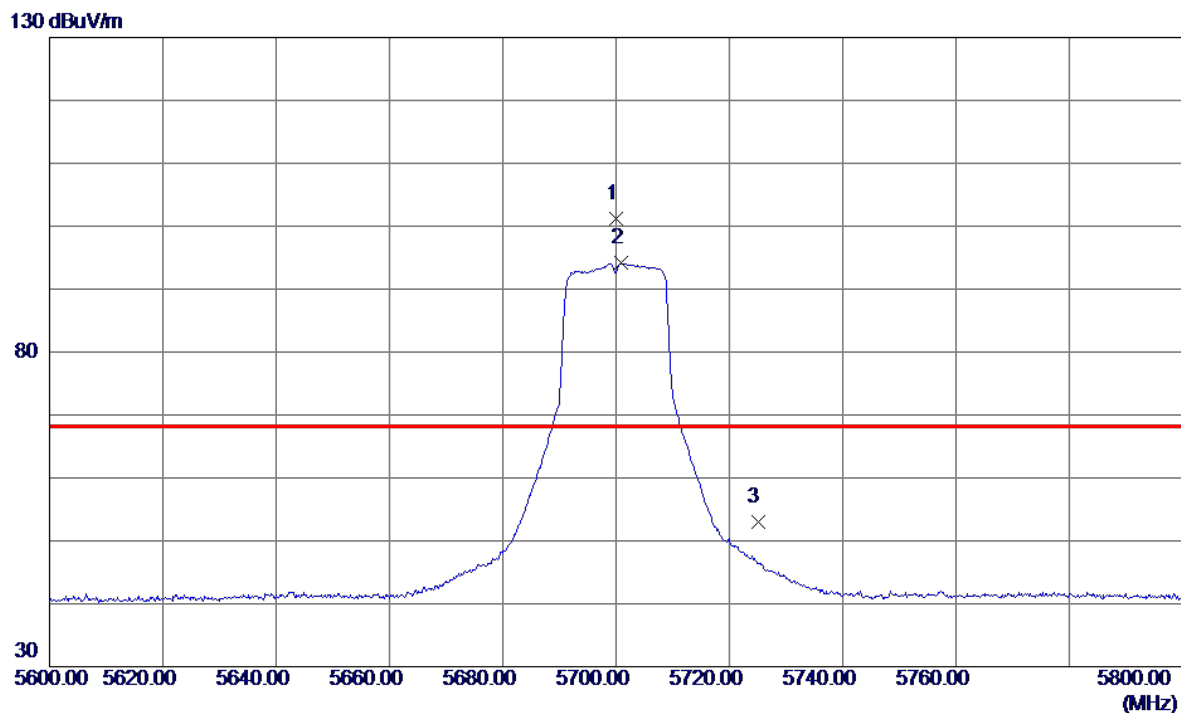


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5700.0000	87.55	13.59	101.14	68.20	32.94	Peak	No Limit
2	5700.8000	80.54	13.60	94.14	999.00	-904.86	AVG	No Limit
3	5725.0000	39.33	13.68	53.01	68.20	-15.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

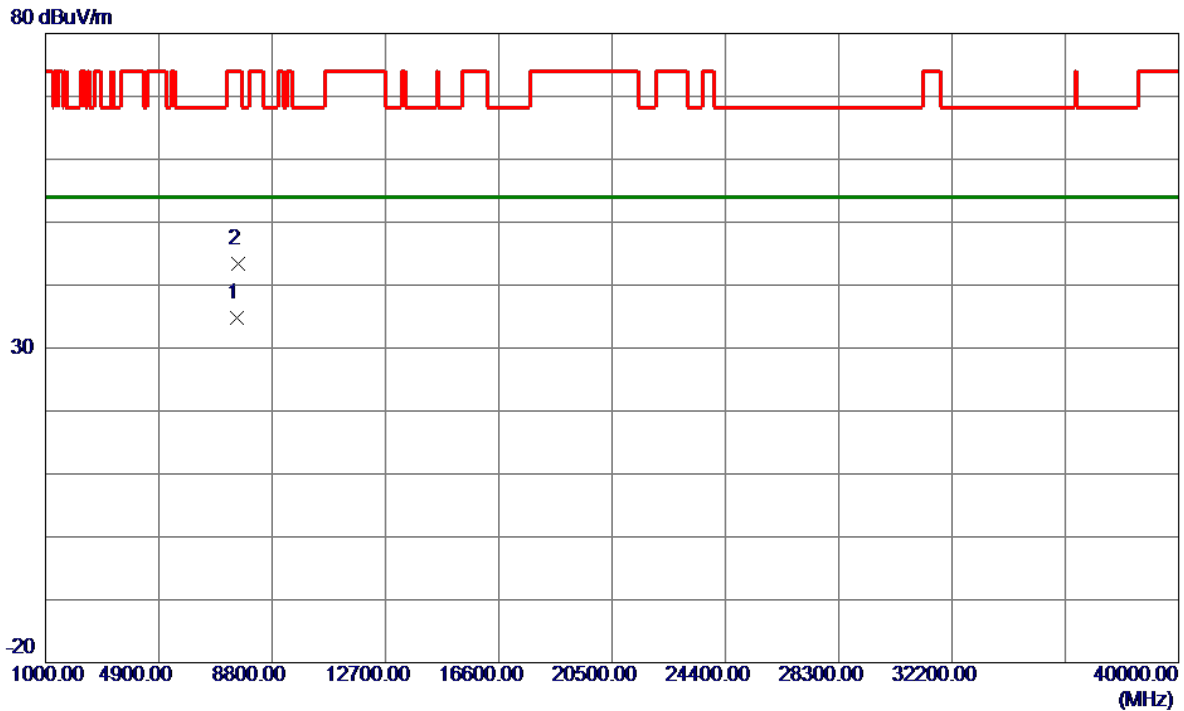


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7599.9750	26.90	7.89	34.79	54.00	-19.21	AVG	
2	7618.1250	35.46	7.88	43.34	74.00	-30.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

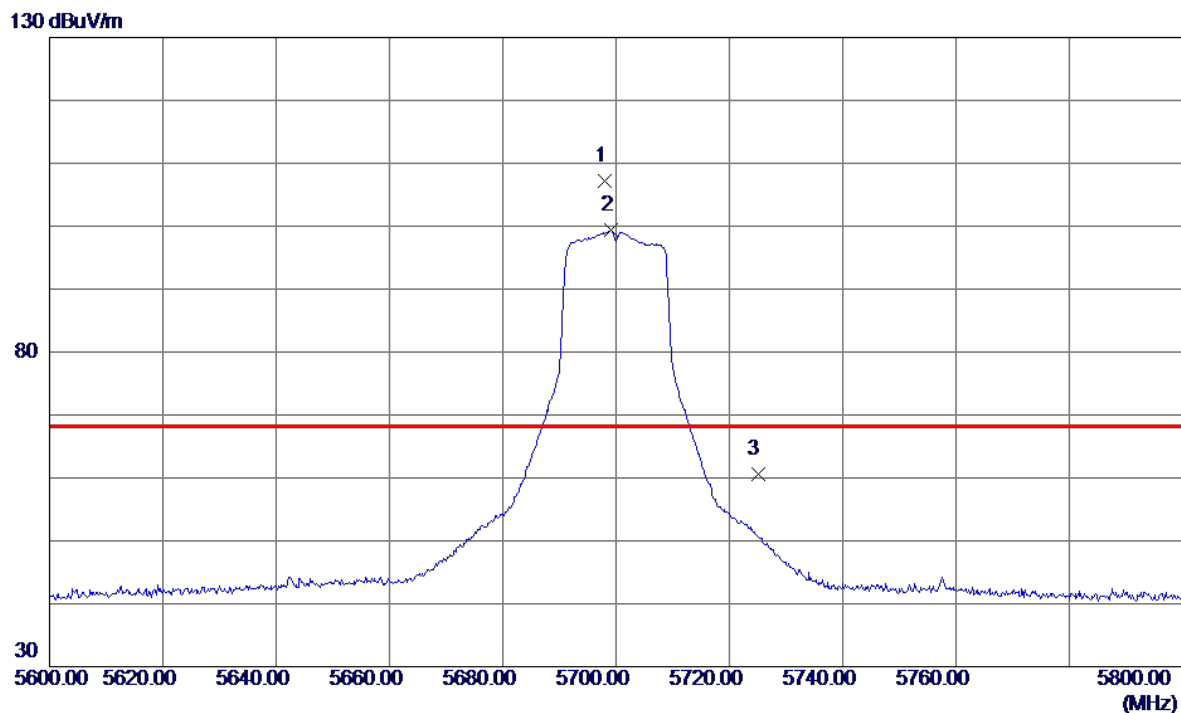


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5698.1000	93.53	13.59	107.12	68.20	38.92	Peak	No Limit
2	5699.2000	85.75	13.59	99.34	999.00	-899.66	AVG	No Limit
3	5725.0000	46.99	13.68	60.67	68.20	-7.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

80 dBuV/m

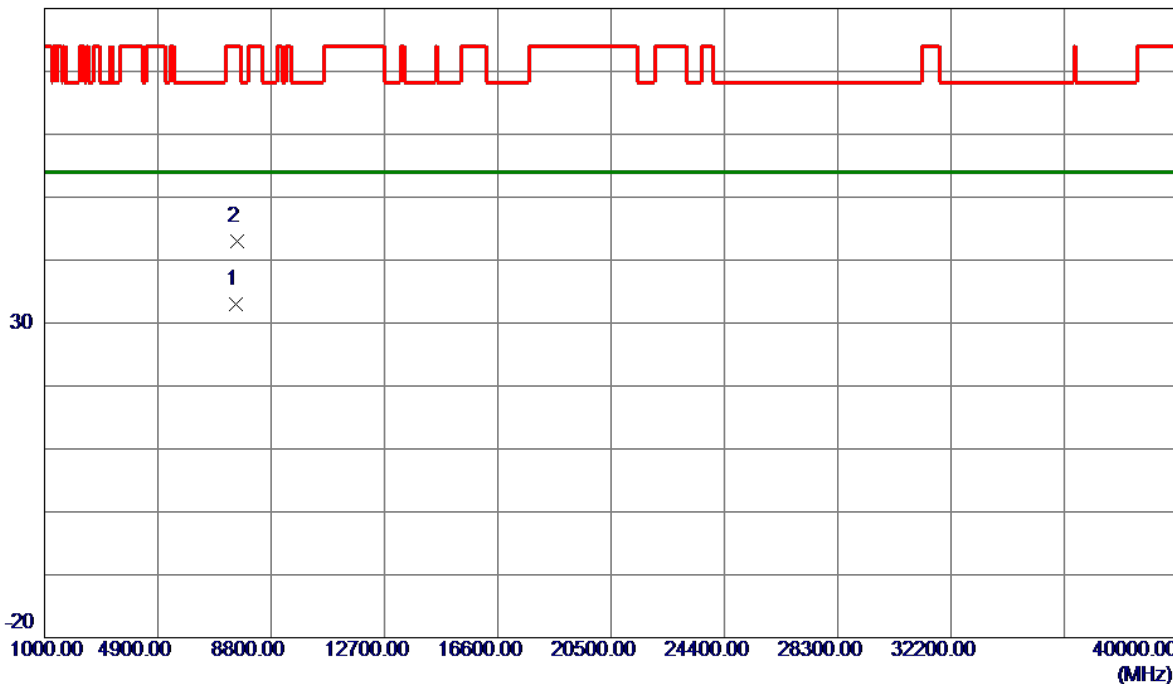


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7592.5500	25.13	7.90	33.03	54.00	-20.97	AVG	
2	7614.7000	35.05	7.89	42.94	74.00	-31.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

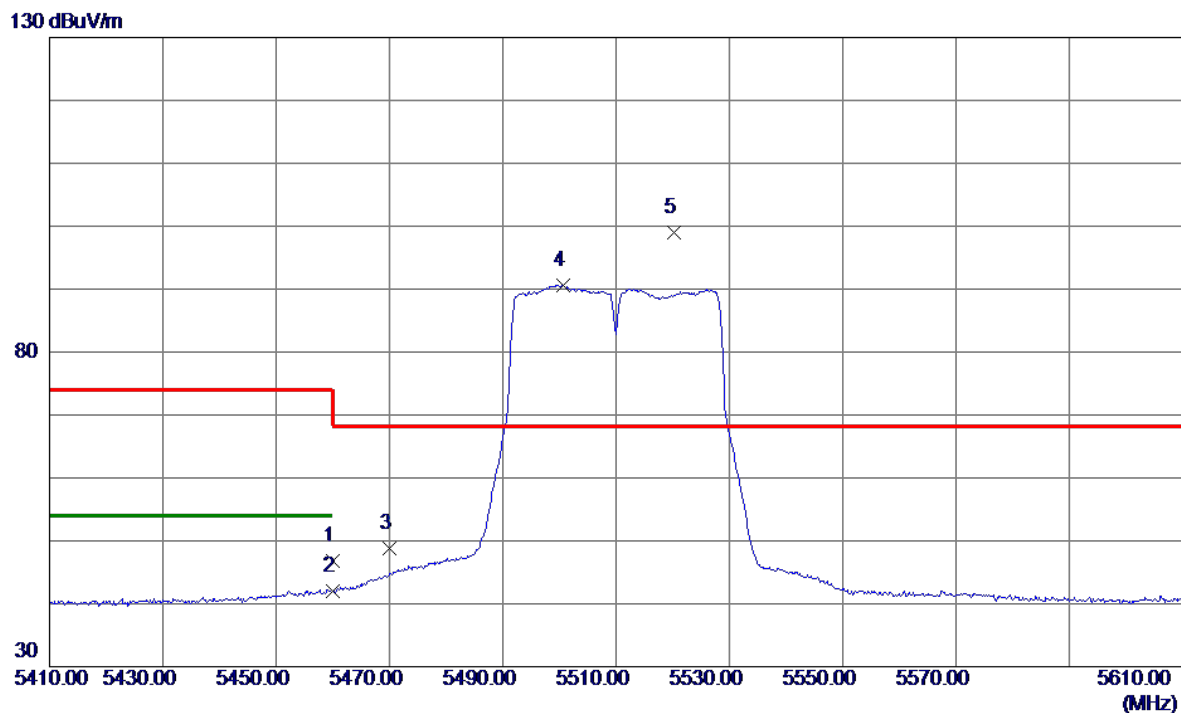


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	33.86	12.89	46.75	74.00	-27.25	Peak	
2	5460.0000	29.09	12.89	41.98	54.00	-12.02	AVG	
3	5470.0000	35.89	12.90	48.79	68.20	-19.41	Peak	
4	5500.6000	77.74	12.92	90.66	999.00	-908.34	AVG	No Limit
5 *	5520.3000	85.98	12.98	98.96	68.20	30.76	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

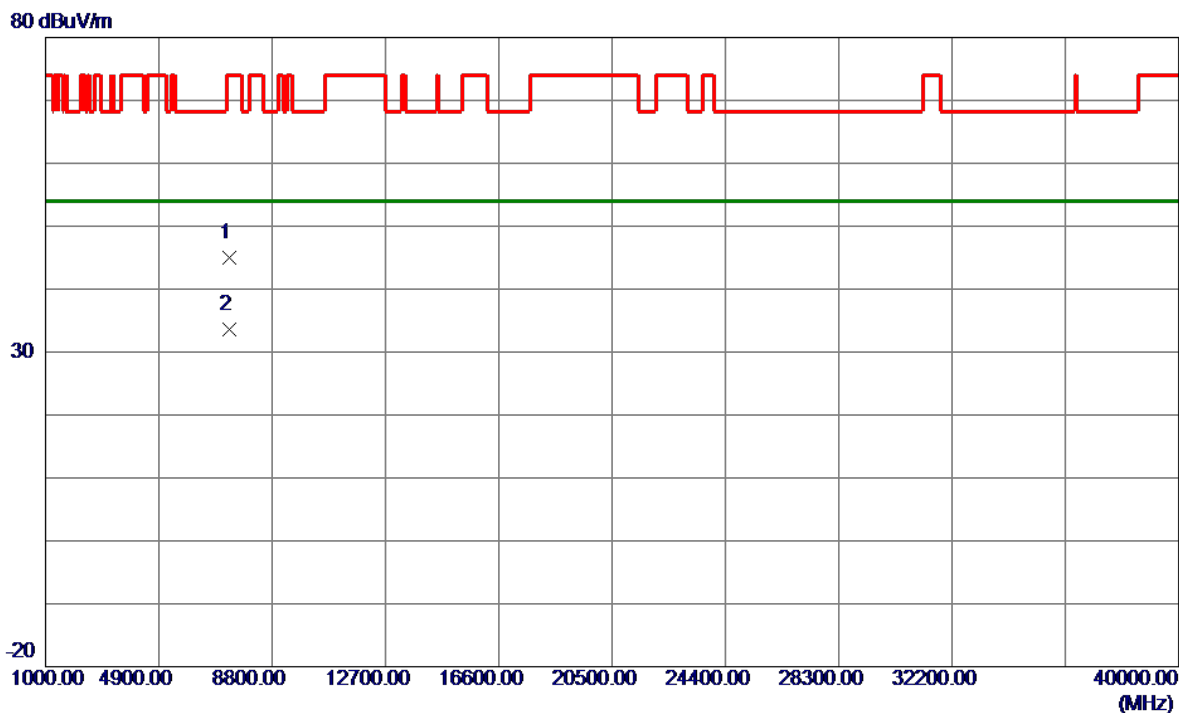


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7346.5200	37.34	7.74	45.08	74.00	-28.92	Peak	
2 *	7346.6700	25.84	7.74	33.58	54.00	-20.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

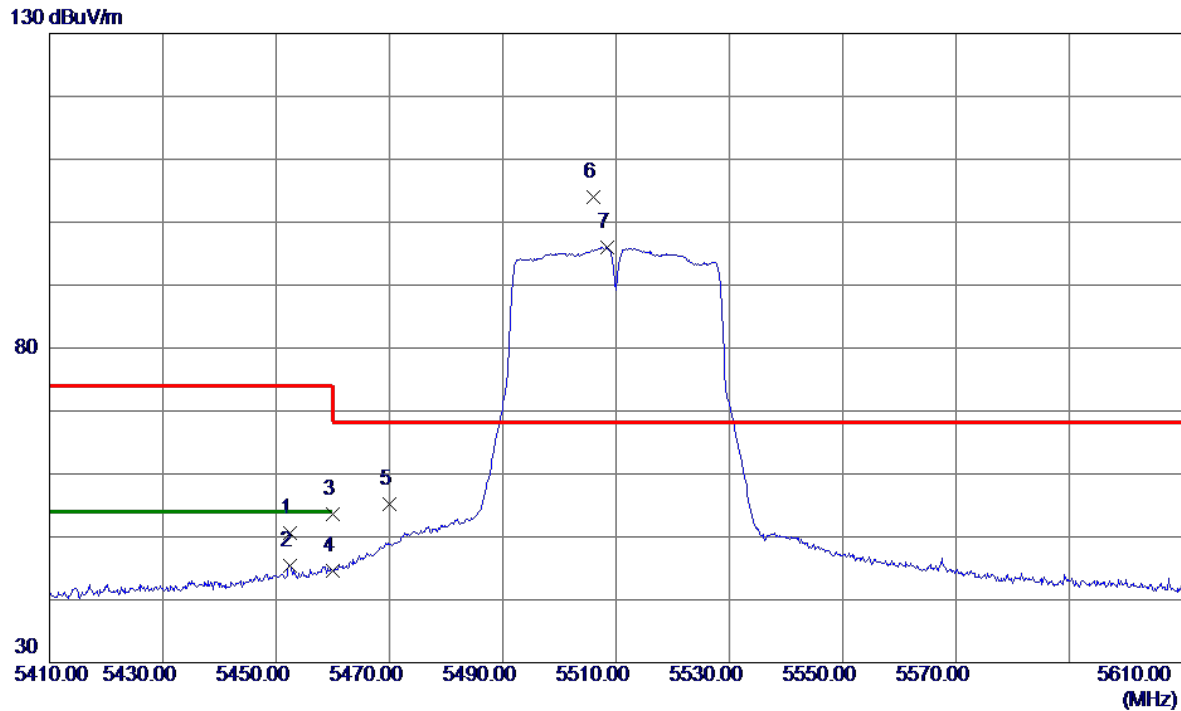


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5452.4000	37.69	12.88	50.57	74.00	-23.43	Peak	
2	5452.4000	32.60	12.88	45.48	54.00	-8.52	AVG	
3	5460.0000	40.68	12.89	53.57	74.00	-20.43	Peak	
4	5460.0000	31.76	12.89	44.65	54.00	-9.35	AVG	
5	5470.0000	42.25	12.90	55.15	68.20	-13.05	Peak	
6 *	5506.1000	91.16	12.94	104.10	68.20	35.90	Peak	No Limit
7	5508.4000	83.15	12.94	96.09	999.00	-902.91	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

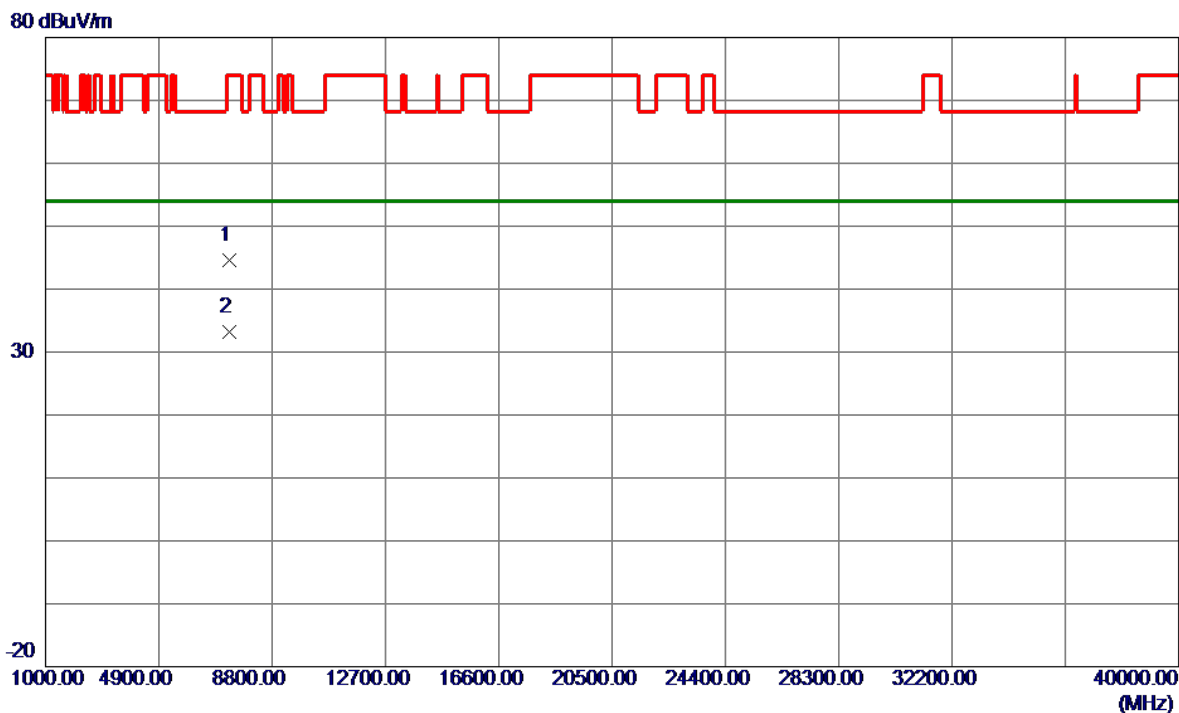


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7343.3780	36.86	7.74	44.60	74.00	-29.40	Peak	
2 *	7346.6700	25.40	7.74	33.14	54.00	-20.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5550 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

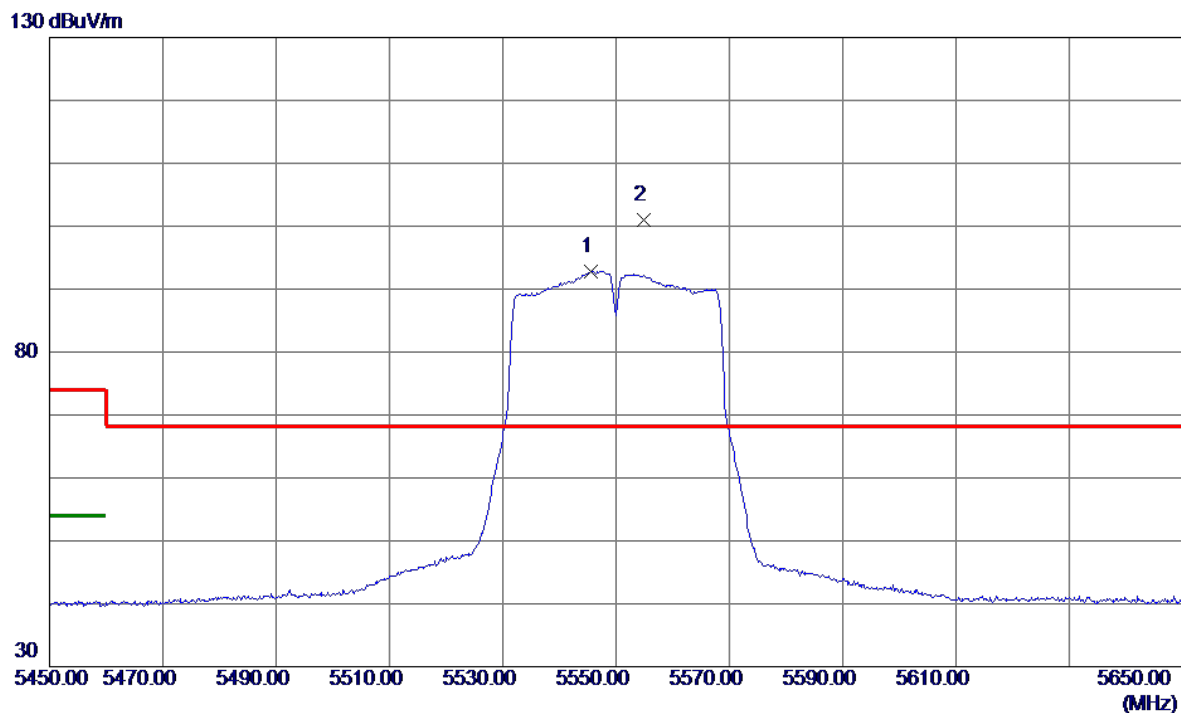


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5545.6000	79.82	13.07	92.89	999.00	-906.11	AVG	No Limit
2 *	5554.9000	87.95	13.10	101.05	68.20	32.85	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5550 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

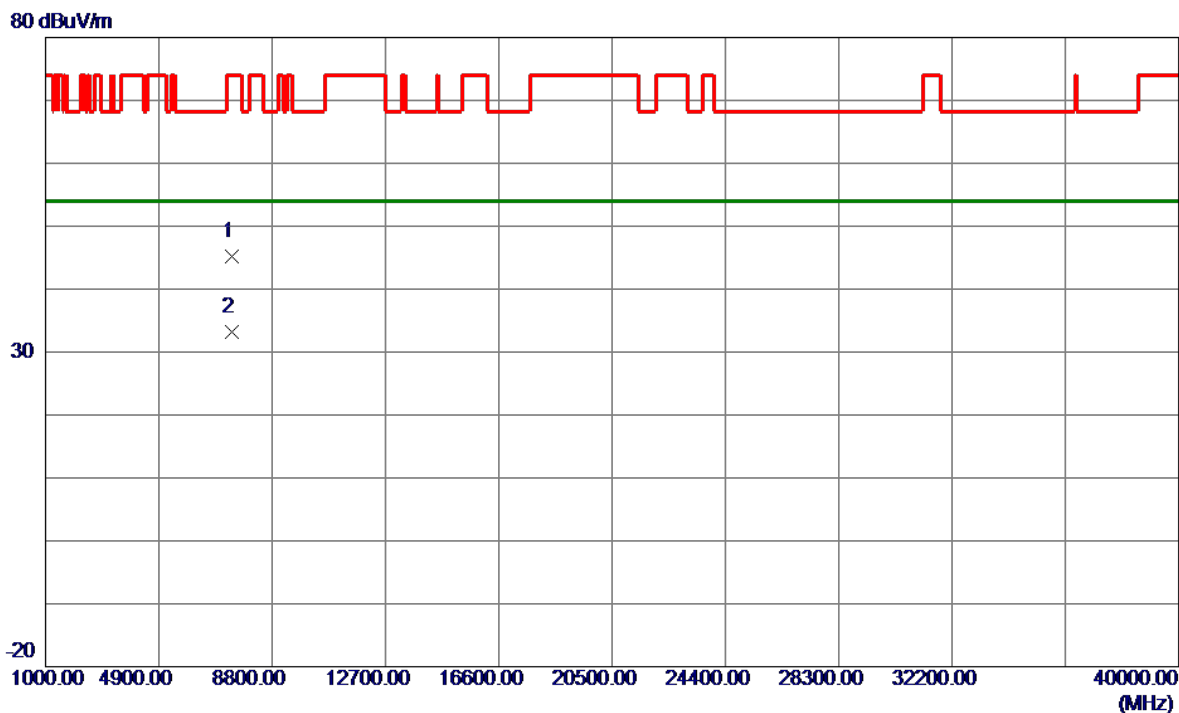


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7400.4350	37.37	7.81	45.18	74.00	-28.82	Peak	
2 *	7401.5300	25.40	7.81	33.21	54.00	-20.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5550 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

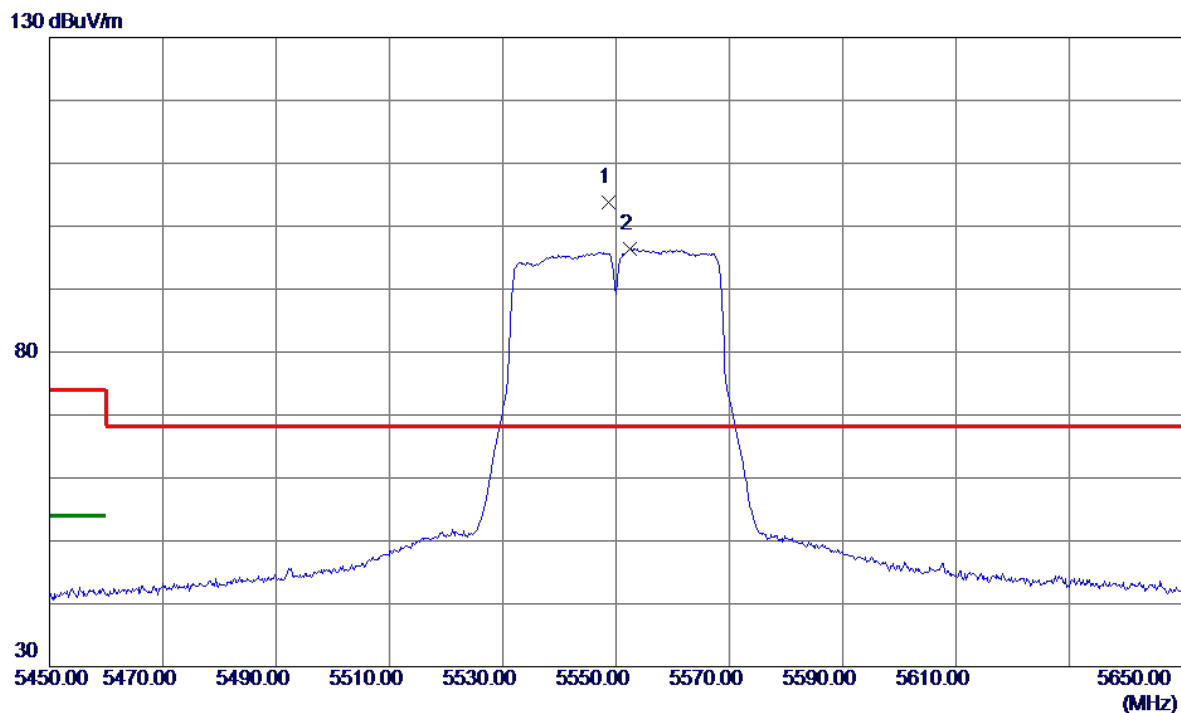


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5548.6000	90.81	13.08	103.89	68.20	35.69	Peak	No Limit
2	5552.5000	83.35	13.09	96.44	999.00	-902.56	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5550 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

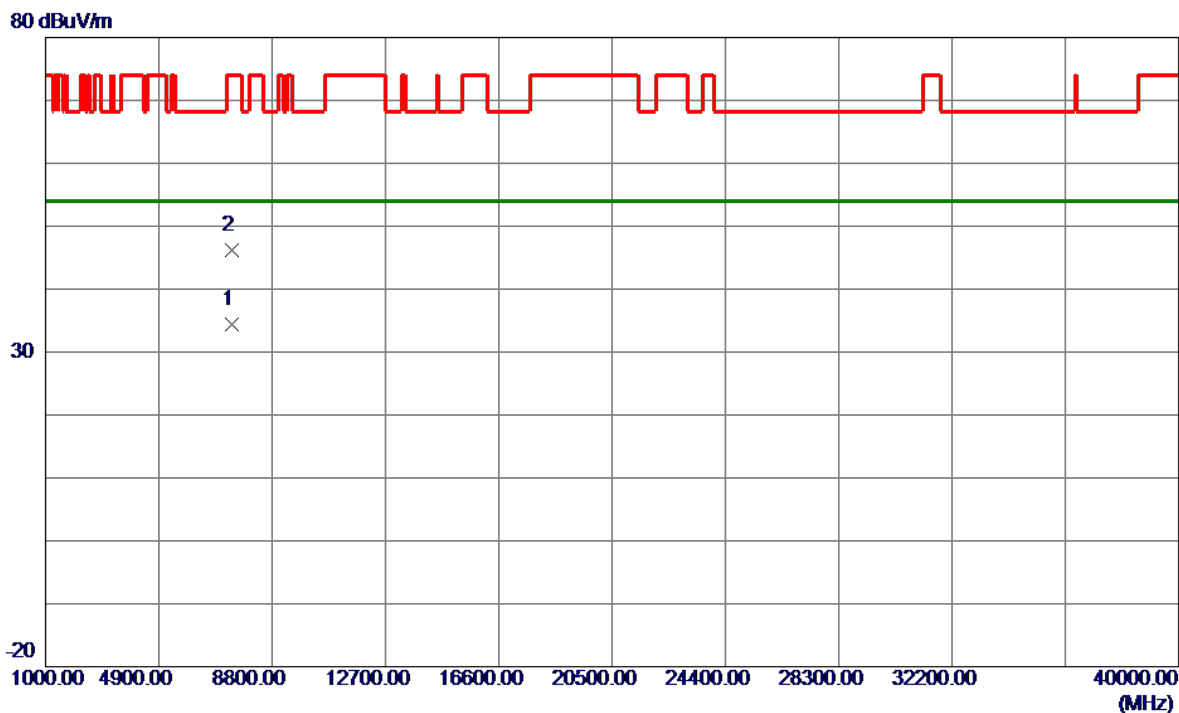


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7401.2500	26.59	7.81	34.40	54.00	-19.60	AVG	
2	7401.7300	38.33	7.81	46.14	74.00	-27.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

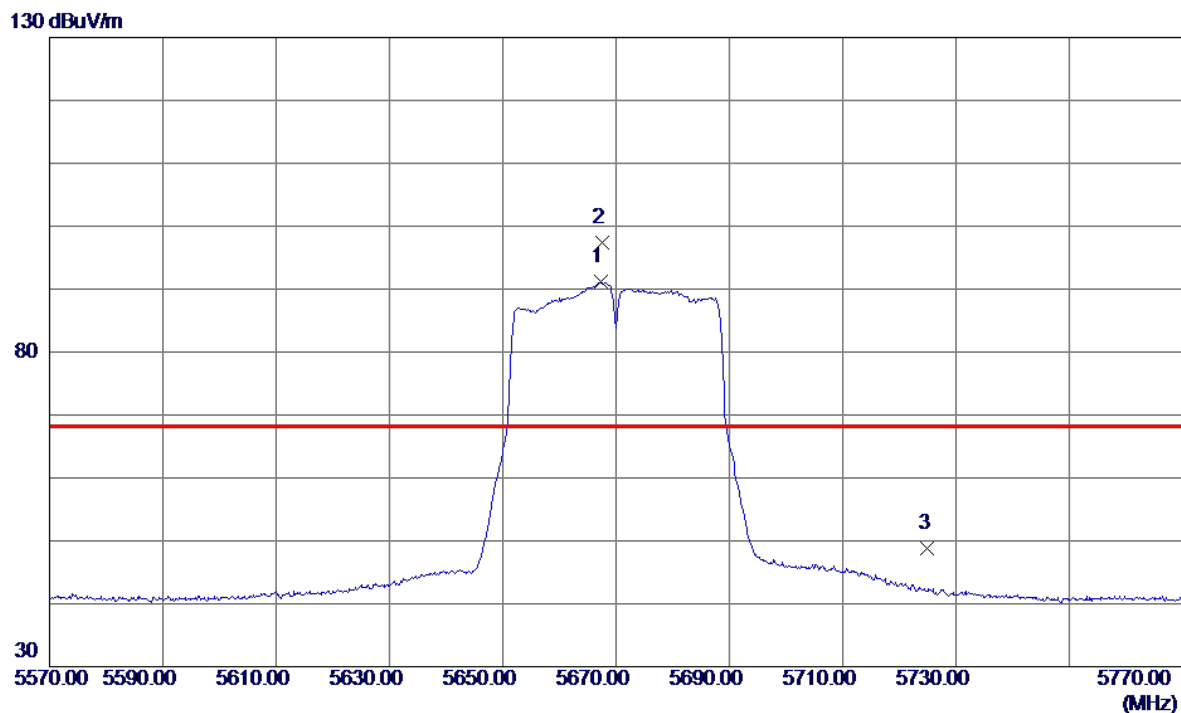


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5667.3000	77.65	13.48	91.13	999.00	-907.87	AVG	No Limit
2 *	5667.6000	83.89	13.48	97.37	68.20	29.17	Peak	No Limit
3	5725.0000	35.10	13.68	48.78	68.20	-19.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

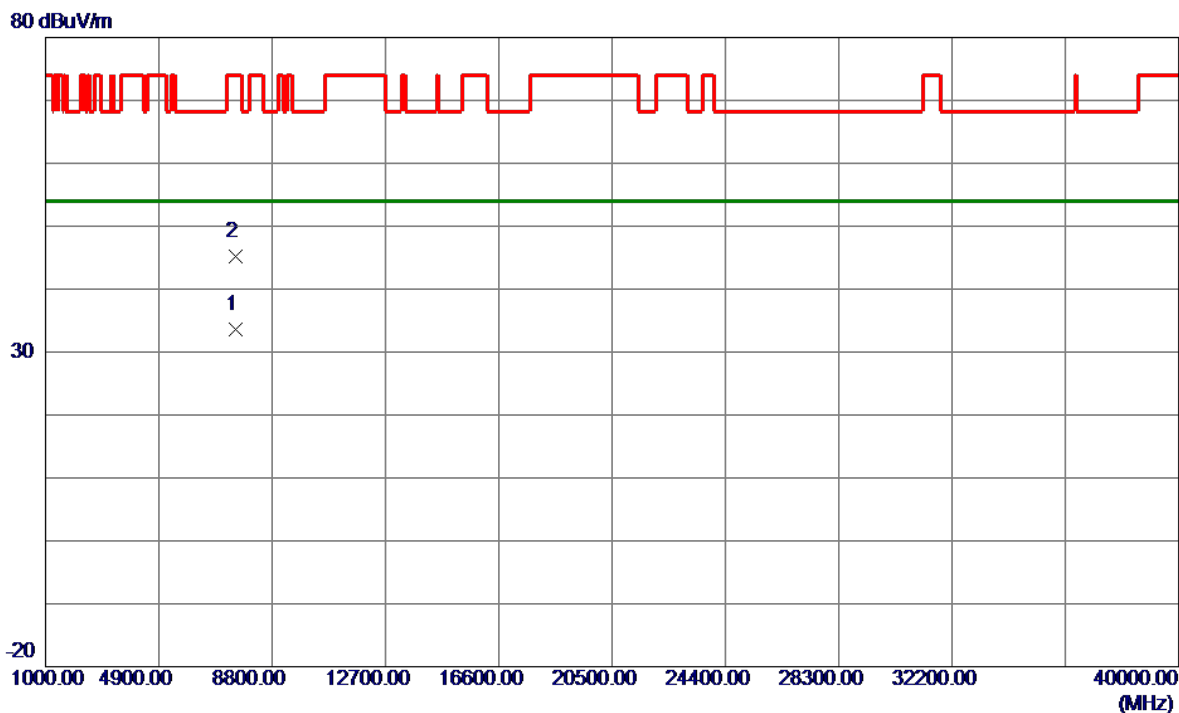


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7561.2500	25.73	7.91	33.64	54.00	-20.36	AVG	
2	7561.4300	37.23	7.91	45.14	74.00	-28.86	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

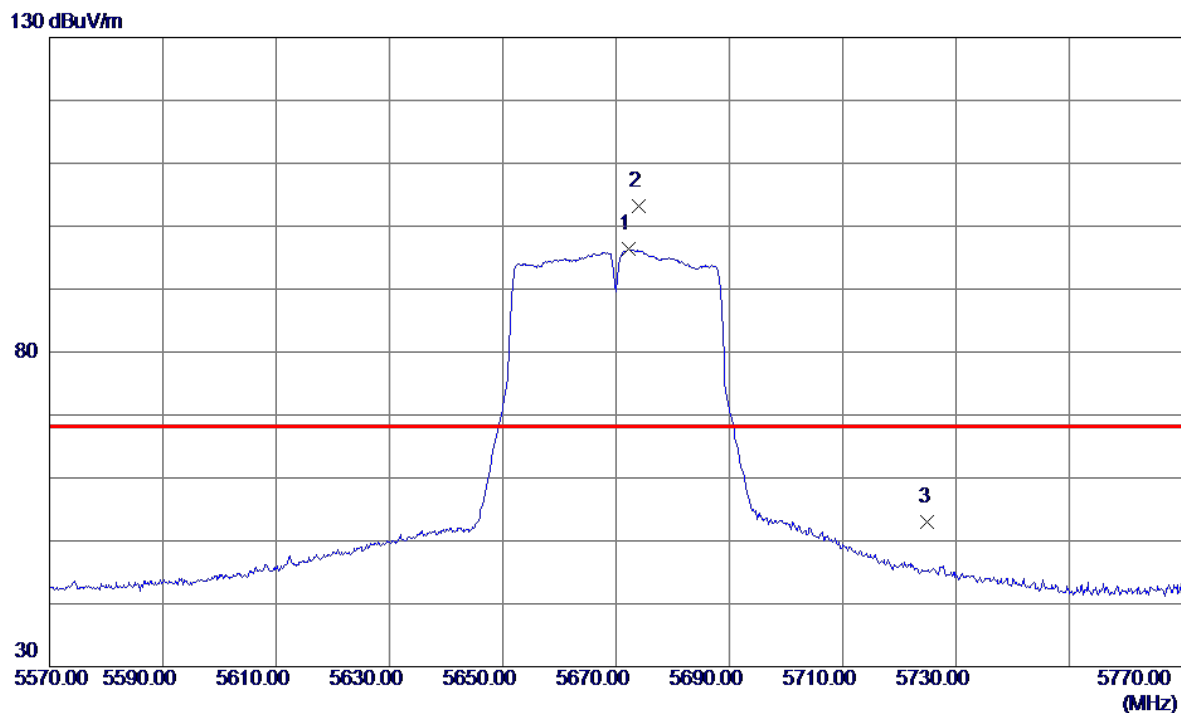


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5672.3000	82.82	13.50	96.32	999.00	-902.68	AVG	No Limit
2 *	5673.9000	89.62	13.50	103.12	68.20	34.92	Peak	No Limit
3	5725.0000	39.33	13.68	53.01	68.20	-15.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

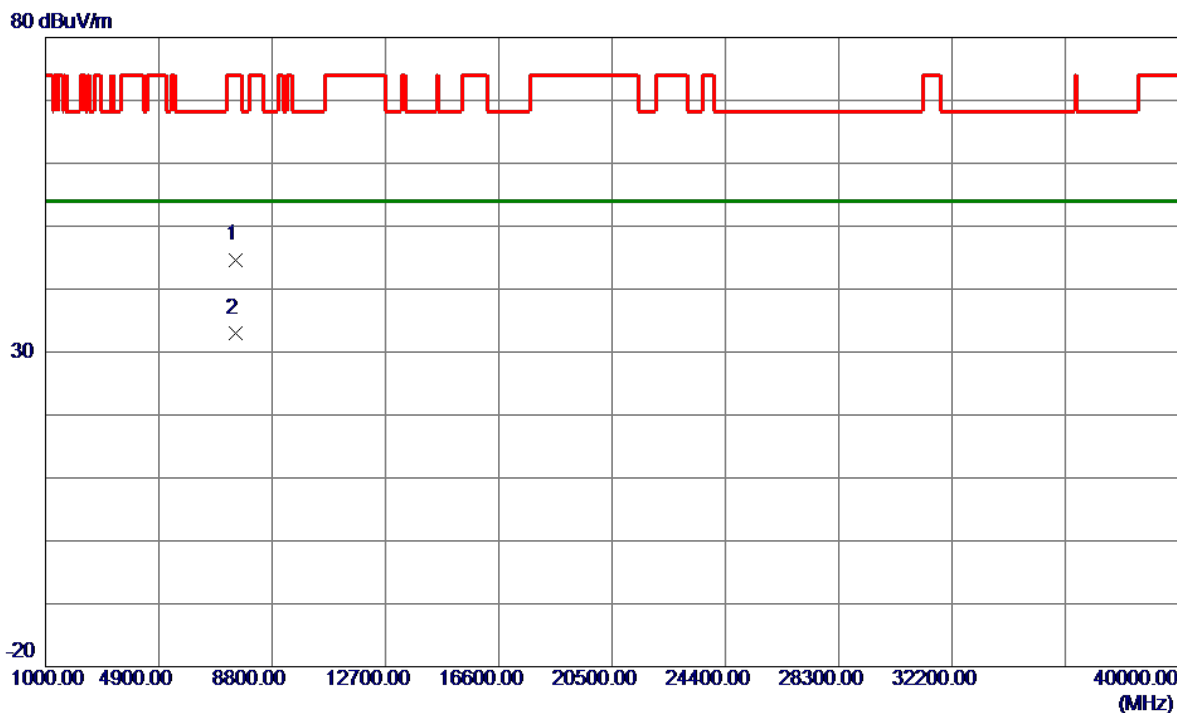


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7559.3000	36.79	7.91	44.70	74.00	-29.30	Peak	
2 *	7559.3700	25.08	7.91	32.99	54.00	-21.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

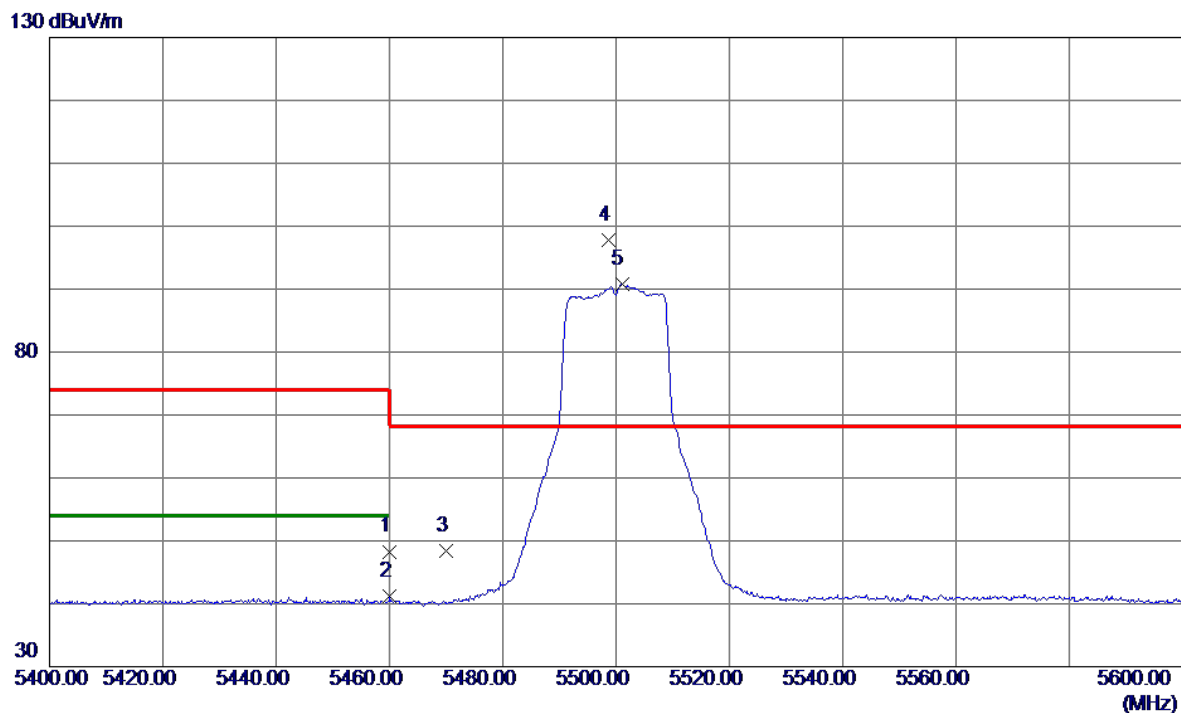


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	35.41	12.89	48.30	74.00	-25.70	Peak	
2	5460.0000	28.22	12.89	41.11	54.00	-12.89	AVG	
3	5470.0000	35.53	12.90	48.43	68.20	-19.77	Peak	
4 *	5498.7000	84.89	12.91	97.80	68.20	29.60	Peak	No Limit
5	5501.0000	77.86	12.92	90.78	999.00	-908.22	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

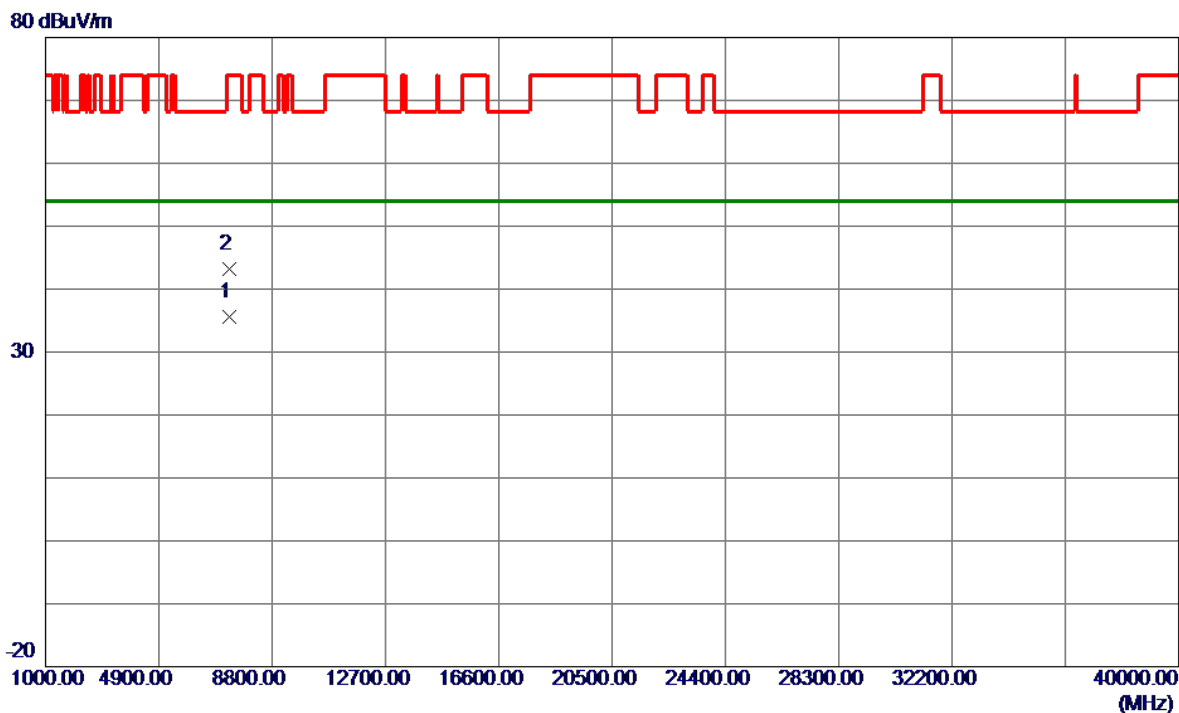


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7333.3050	27.82	7.73	35.55	54.00	-18.45	AVG	
2	7347.3300	35.52	7.74	43.26	74.00	-30.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

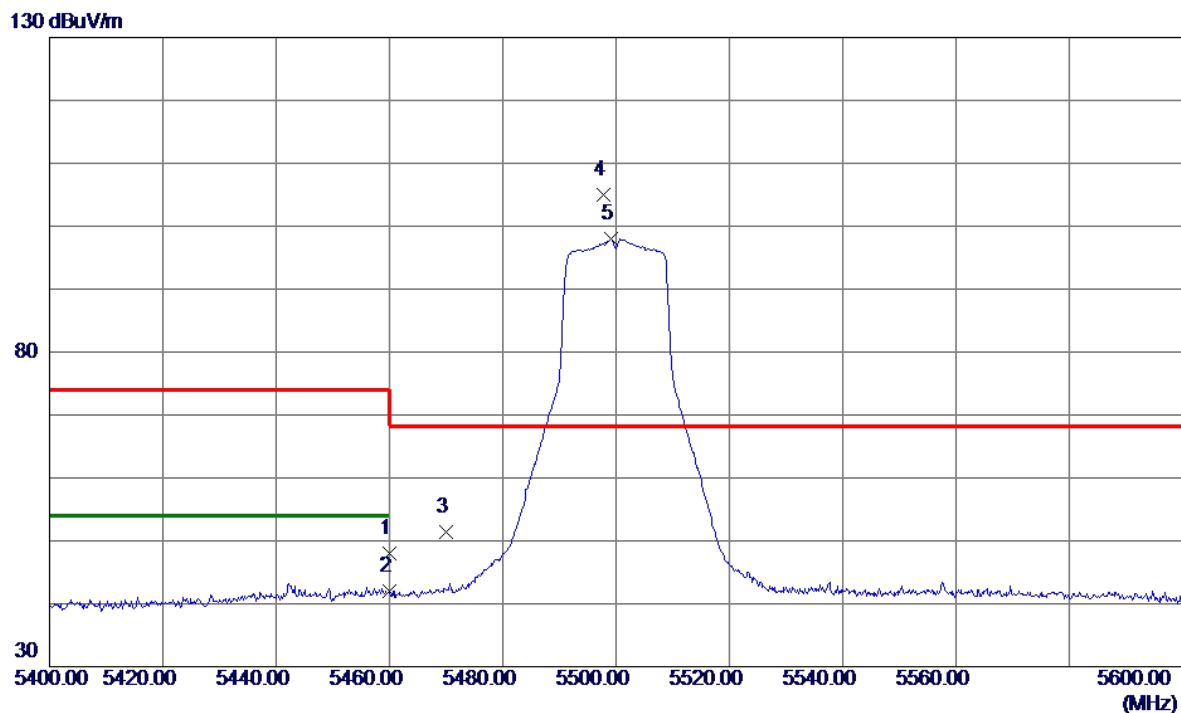


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	35.09	12.89	47.98	74.00	-26.02	Peak	
2	5460.0000	29.05	12.89	41.94	54.00	-12.06	AVG	
3	5470.0000	38.47	12.90	51.37	68.20	-16.83	Peak	
4 *	5497.7000	92.17	12.91	105.08	68.20	36.88	Peak	No Limit
5	5499.1000	85.07	12.91	97.98	999.00	-901.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

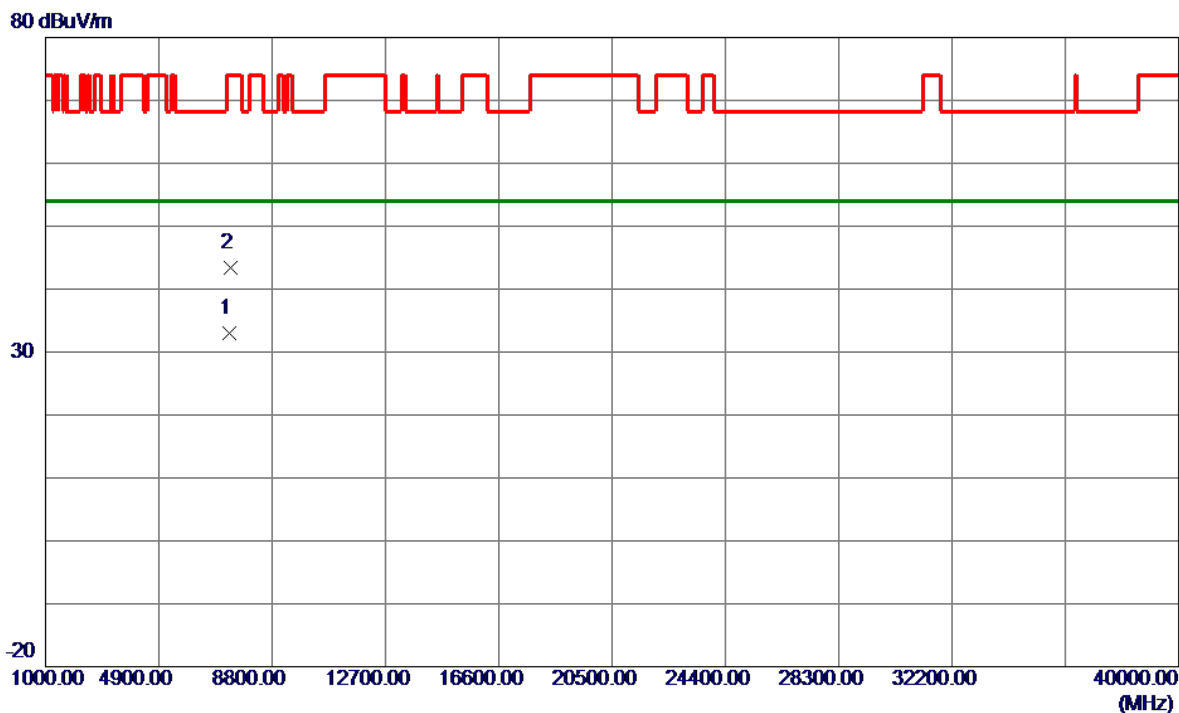


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7333.3800	25.23	7.73	32.96	54.00	-21.04	AVG	
2	7351.3050	35.63	7.75	43.38	74.00	-30.62	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

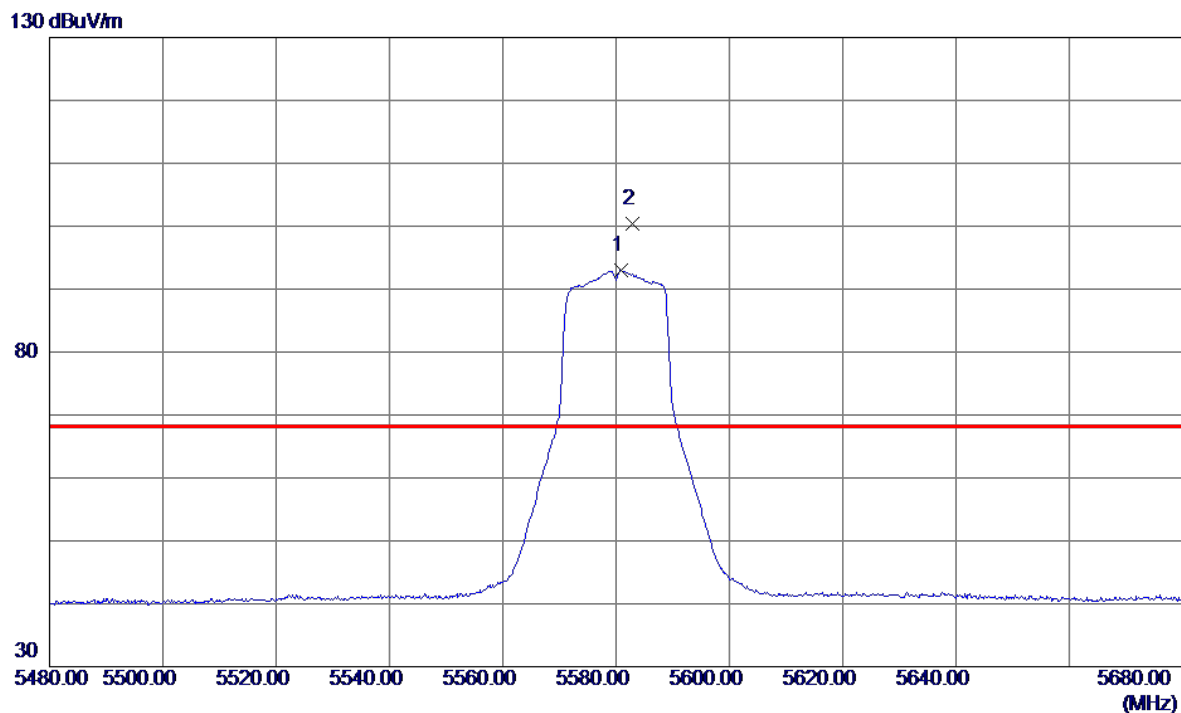


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.9000	79.83	13.19	93.02	999.00	-905.98	AVG	No Limit
2 *	5582.8000	87.29	13.20	100.49	68.20	32.29	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

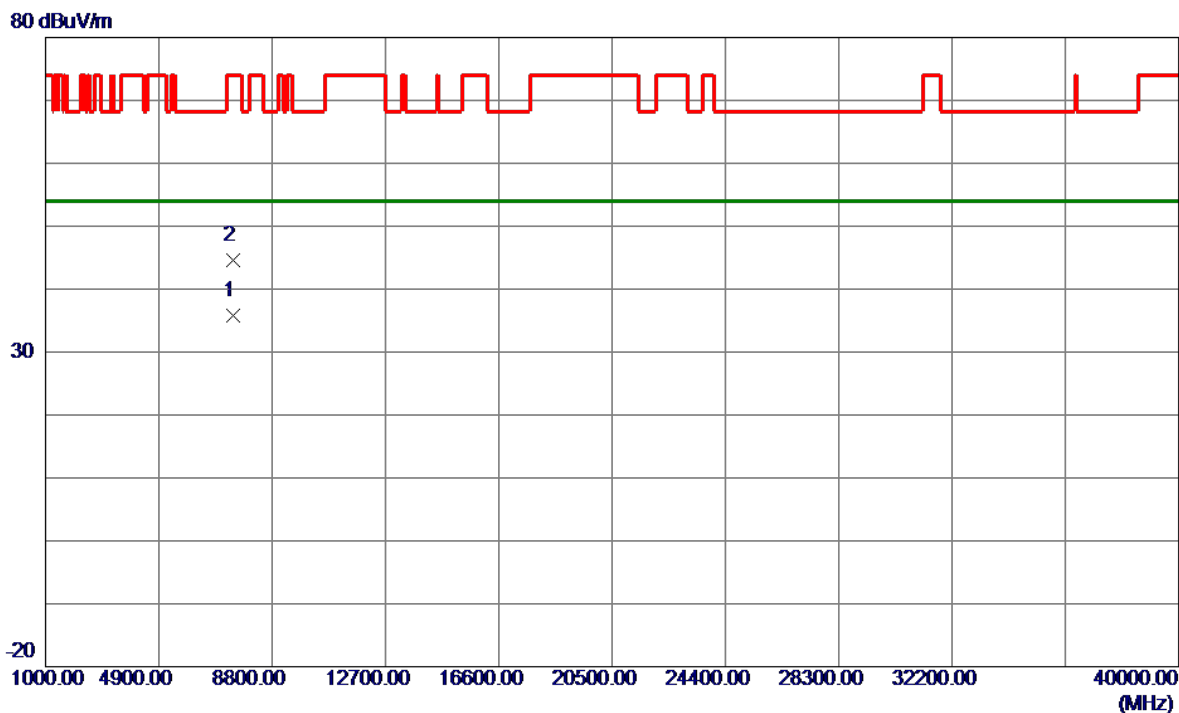


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7440.0250	27.92	7.86	35.78	54.00	-18.22	AVG	
2	7442.7250	36.70	7.86	44.56	74.00	-29.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

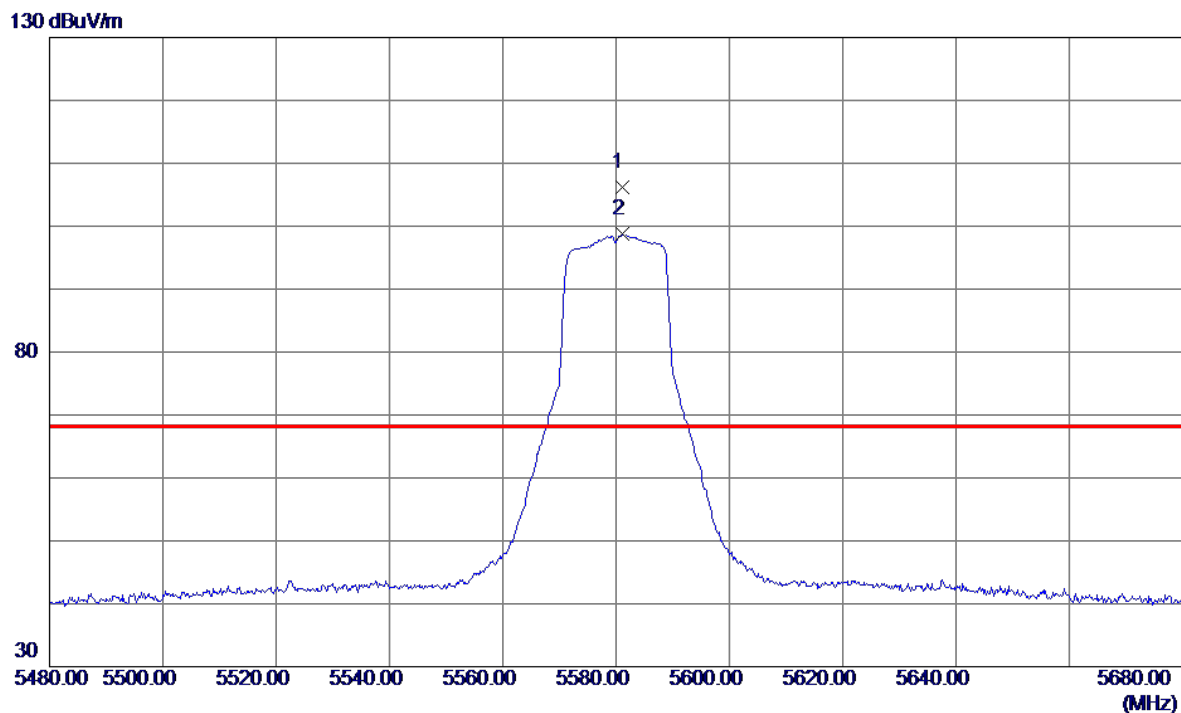


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5581.0000	93.00	13.19	106.19	68.20	37.99	Peak	No Limit
2	5581.2000	85.64	13.19	98.83	999.00	-900.17	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

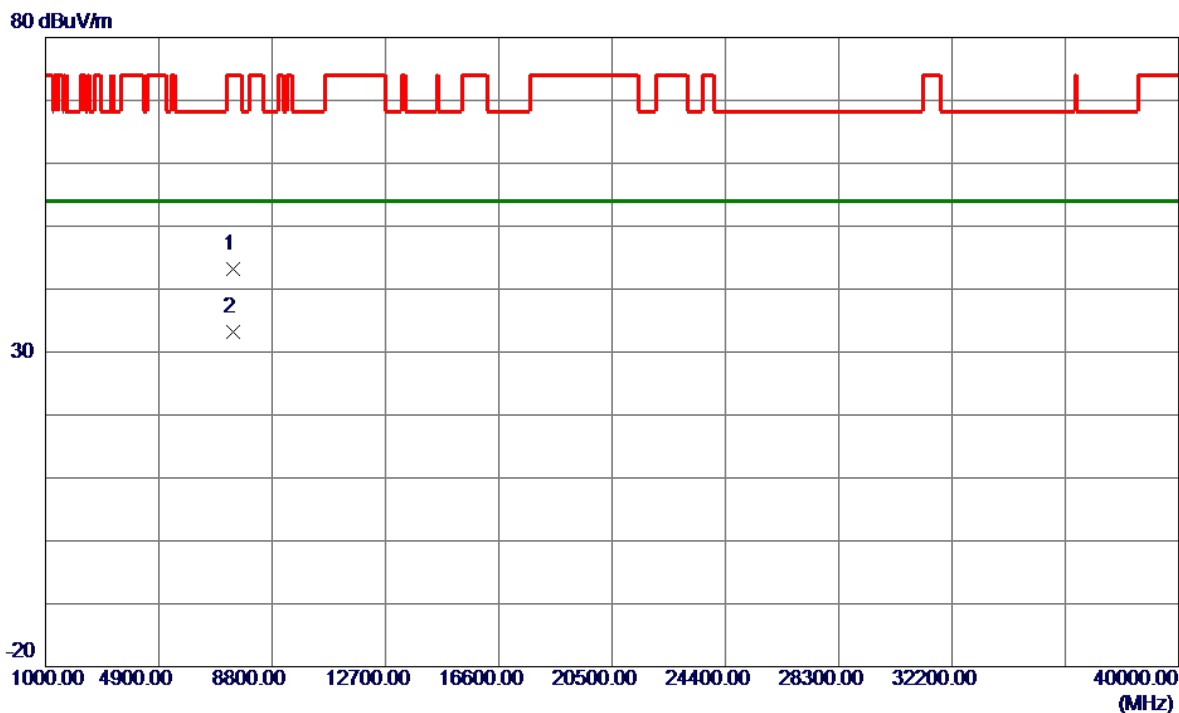


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7440.3250	35.29	7.86	43.15	74.00	-30.85	Peak	
2 *	7446.2500	25.26	7.87	33.13	54.00	-20.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

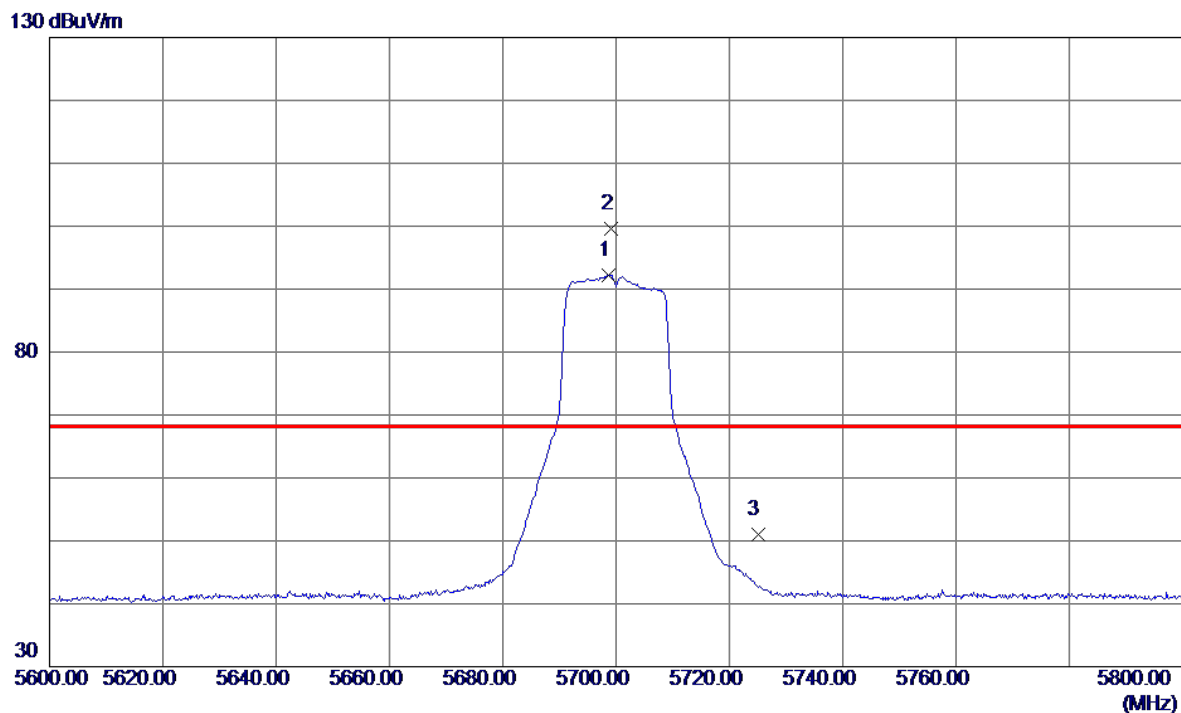


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.7000	78.65	13.59	92.24	999.00	-906.76	AVG	No Limit
2 *	5699.2000	85.93	13.59	99.52	68.20	31.32	Peak	No Limit
3	5725.0000	37.25	13.68	50.93	68.20	-17.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

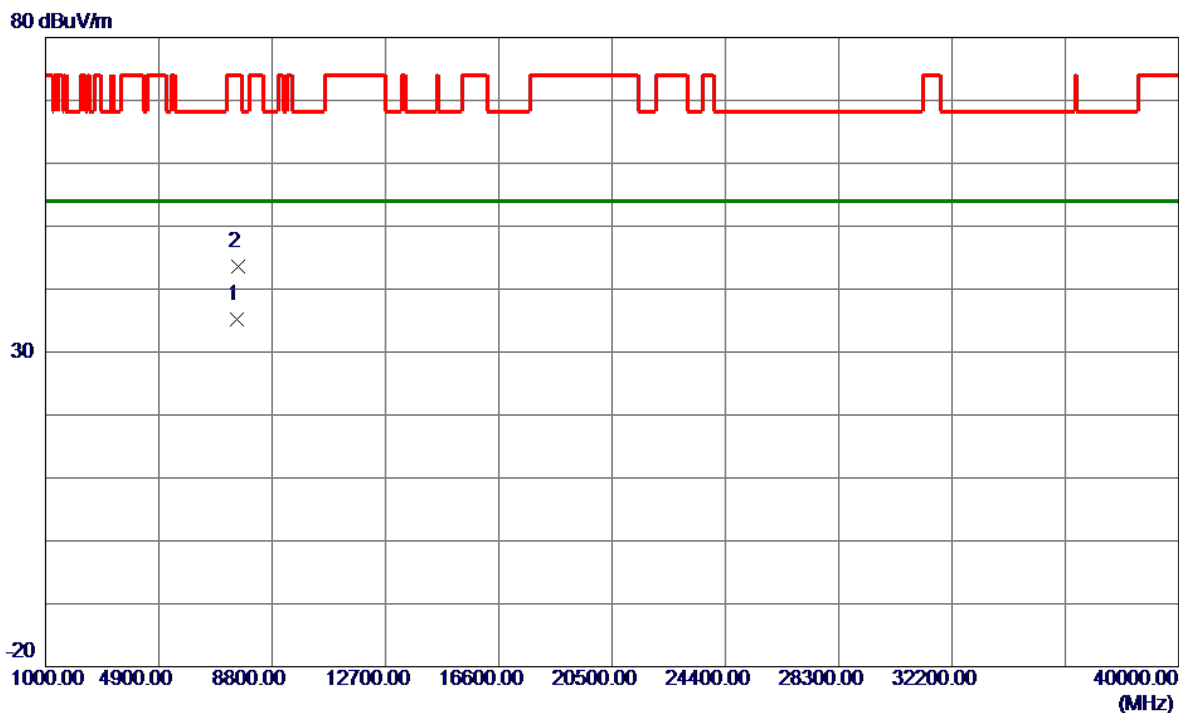


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7599.9750	27.27	7.89	35.16	54.00	-18.84	AVG	
2	7622.0000	35.81	7.88	43.69	74.00	-30.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

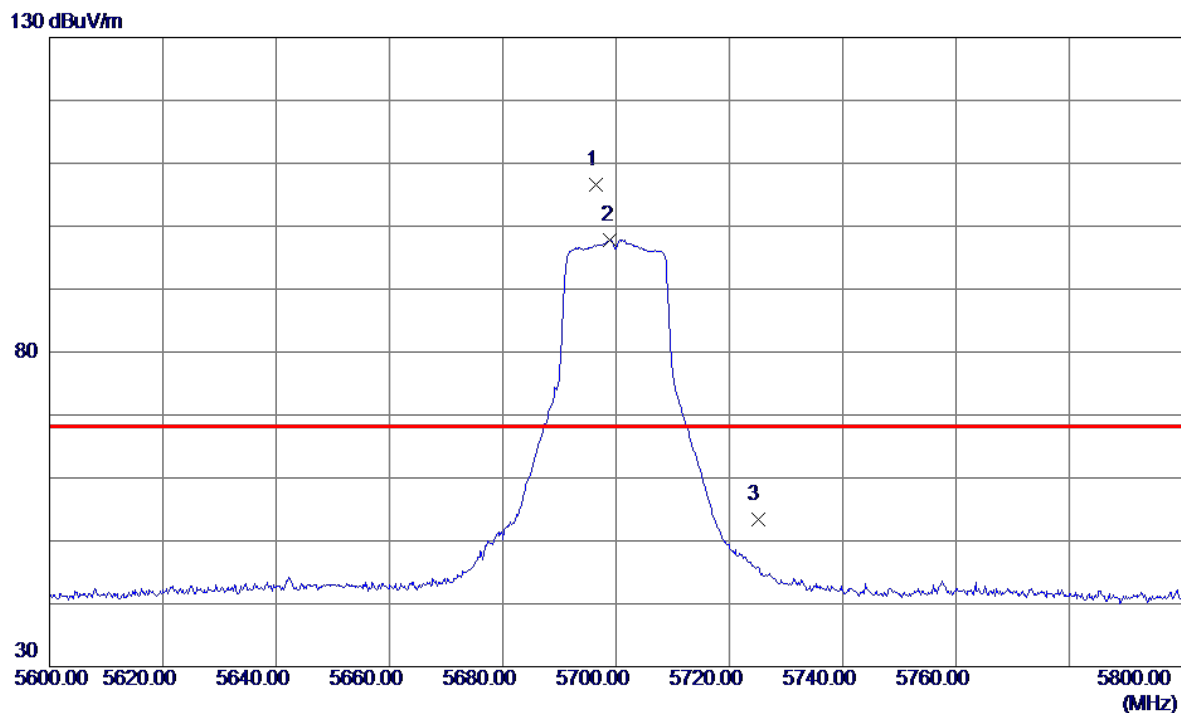


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5696.4000	93.05	13.58	106.63	68.20	38.43	Peak	No Limit
2	5699.0000	84.28	13.59	97.87	999.00	-901.13	AVG	No Limit
3	5725.0000	39.76	13.68	53.44	68.20	-14.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

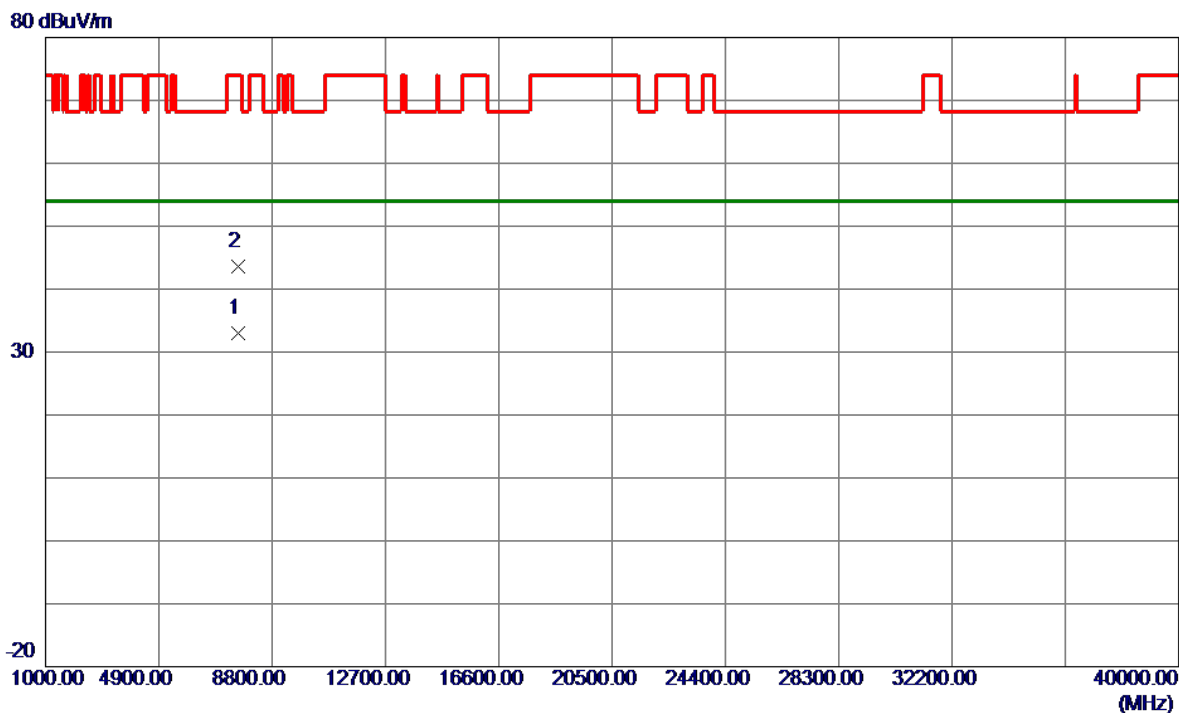


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7619.6750	25.12	7.88	33.00	54.00	-21.00	AVG	
2	7619.9000	35.65	7.88	43.53	74.00	-30.47	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

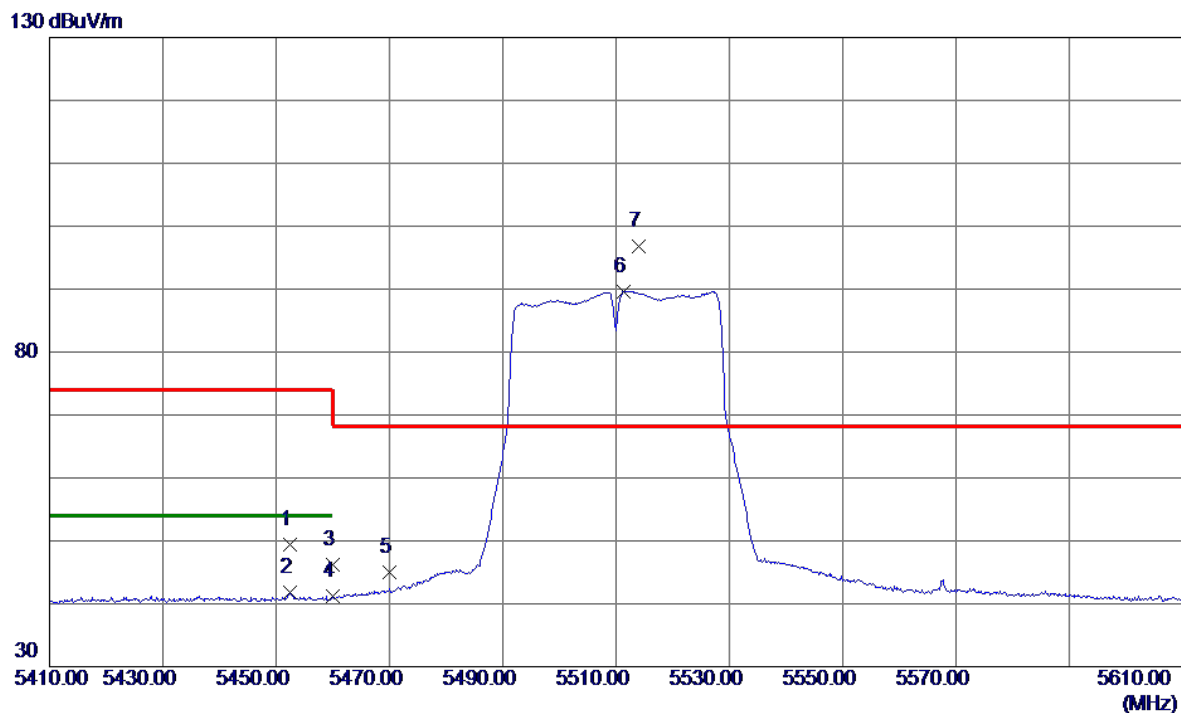


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5452.4000	36.55	12.88	49.43	74.00	-24.57	Peak	
2	5452.4000	28.89	12.88	41.77	54.00	-12.23	AVG	
3	5460.0000	33.29	12.89	46.18	74.00	-27.82	Peak	
4	5460.0000	28.25	12.89	41.14	54.00	-12.86	AVG	
5	5470.0000	32.05	12.90	44.95	68.20	-23.25	Peak	
6	5511.4000	76.74	12.95	89.69	999.00	-909.31	AVG	No Limit
7 *	5514.0000	83.92	12.96	96.88	68.20	28.68	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

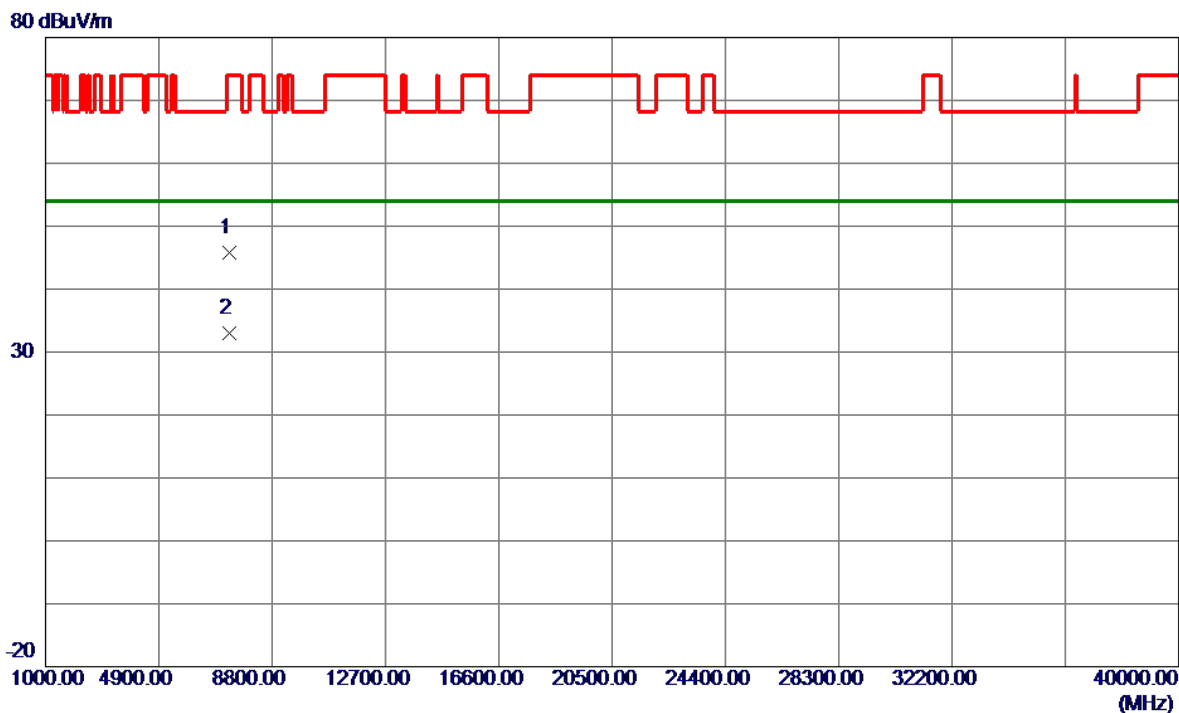


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7345.3700	37.97	7.74	45.71	74.00	-28.29	Peak	
2 *	7345.9700	25.34	7.74	33.08	54.00	-20.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

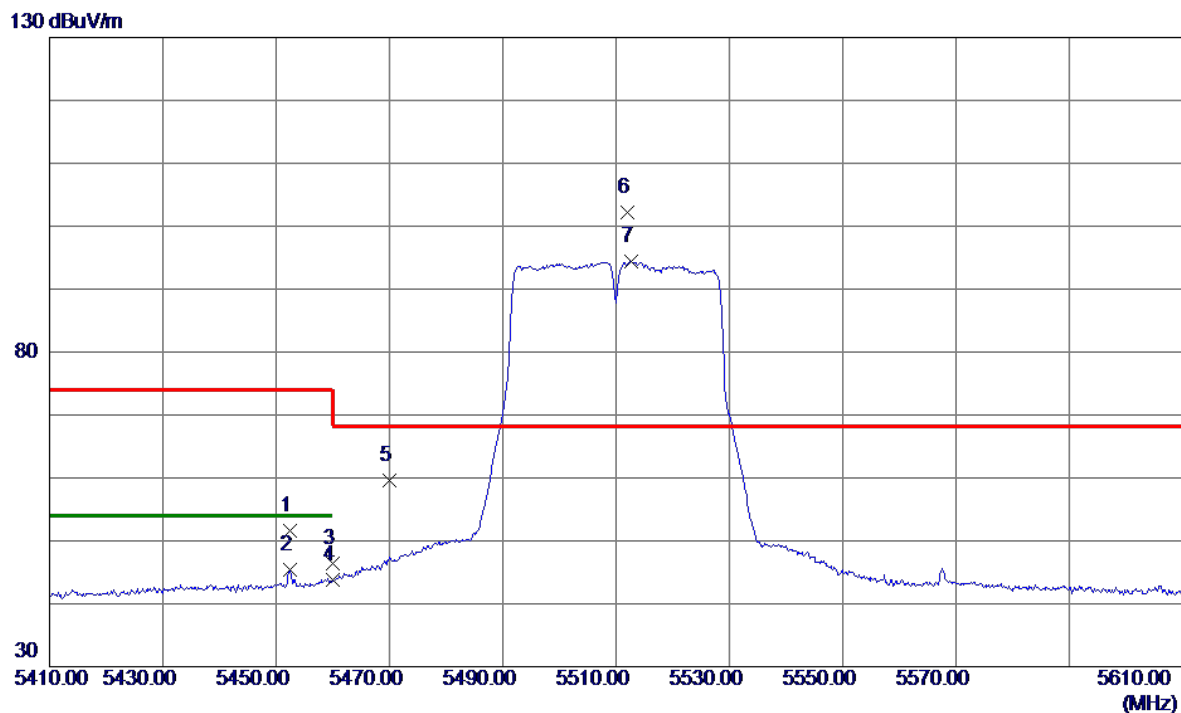


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5452.4000	38.66	12.88	51.54	74.00	-22.46	Peak	
2	5452.4000	32.50	12.88	45.38	54.00	-8.62	AVG	
3	5460.0000	33.49	12.89	46.38	74.00	-27.62	Peak	
4	5460.0000	30.94	12.89	43.83	54.00	-10.17	AVG	
5	5470.0000	46.64	12.90	59.54	68.20	-8.66	Peak	
6 *	5511.9000	89.21	12.96	102.17	68.20	33.97	Peak	No Limit
7	5512.6000	81.45	12.96	94.41	999.00	-904.59	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

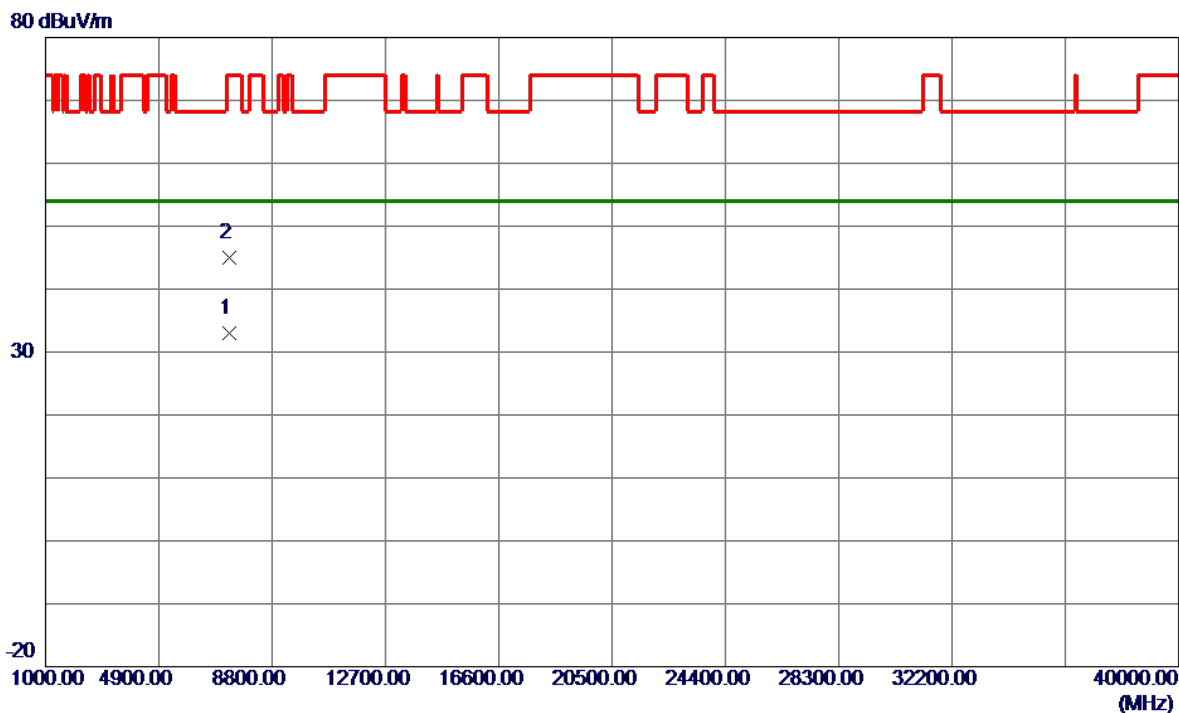


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7346.4350	25.20	7.74	32.94	54.00	-21.06	AVG	
2	7346.8680	37.28	7.74	45.02	74.00	-28.98	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

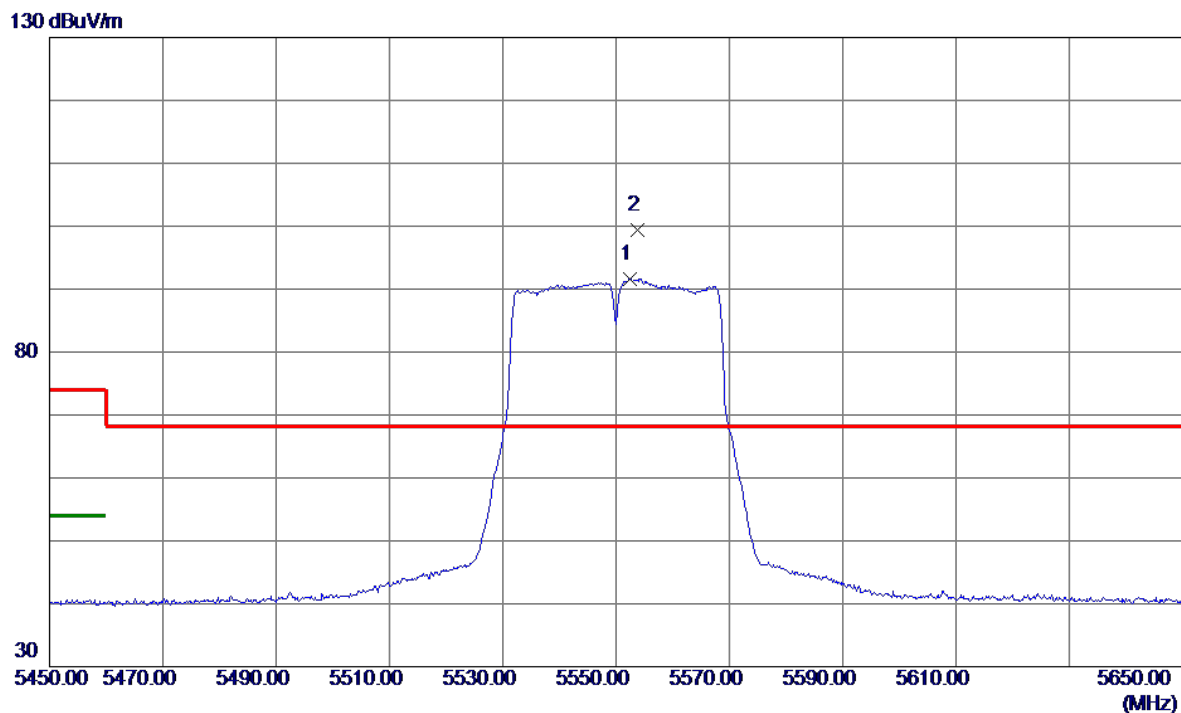


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5552.5000	78.58	13.09	91.67	999.00	-907.33	AVG	No Limit
2 *	5553.8000	86.22	13.10	99.32	68.20	31.12	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

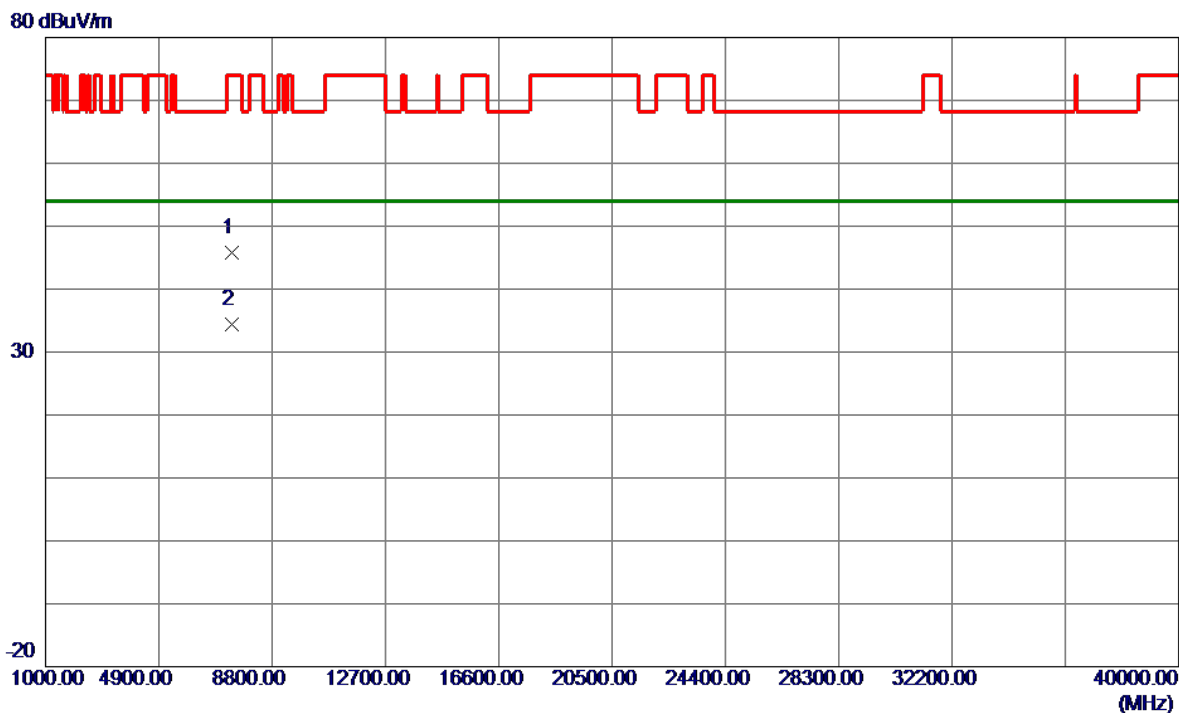


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7401.7520	37.99	7.81	45.80	74.00	-28.20	Peak	
2 *	7401.7930	26.64	7.81	34.45	54.00	-19.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

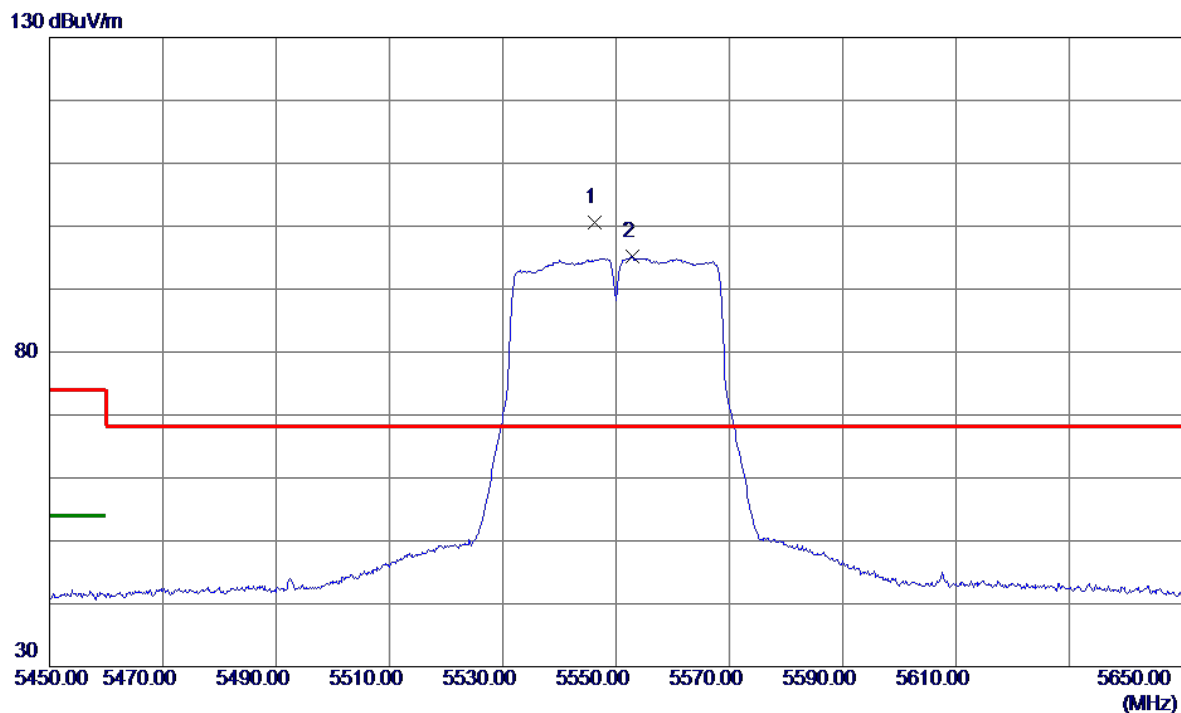


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5546.2000	87.52	13.07	100.59	68.20	32.39	Peak	No Limit
2	5552.8000	82.11	13.09	95.20	999.00	-903.80	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

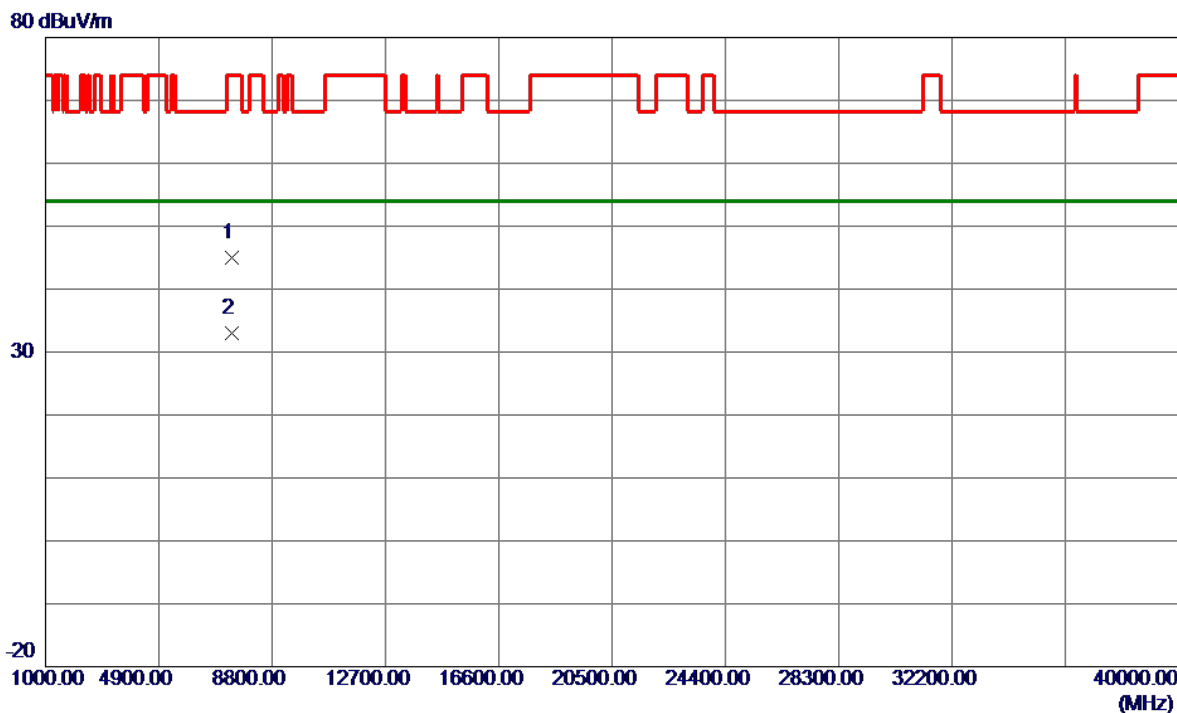


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7401.2570	37.20	7.81	45.01	74.00	-28.99	Peak	
2 *	7401.2800	25.16	7.81	32.97	54.00	-21.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

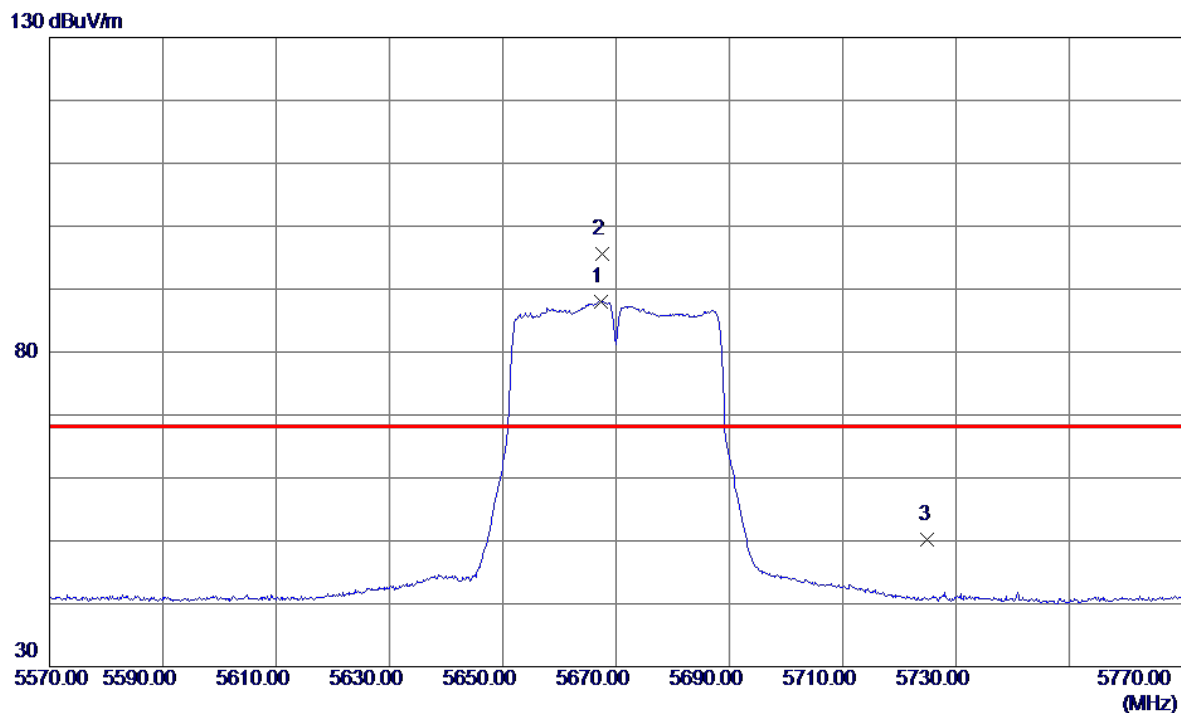


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5667.3000	74.60	13.48	88.08	999.00	-910.92	AVG	No Limit
2 *	5667.5000	82.11	13.48	95.59	68.20	27.39	Peak	No Limit
3	5725.0000	36.59	13.68	50.27	68.20	-17.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

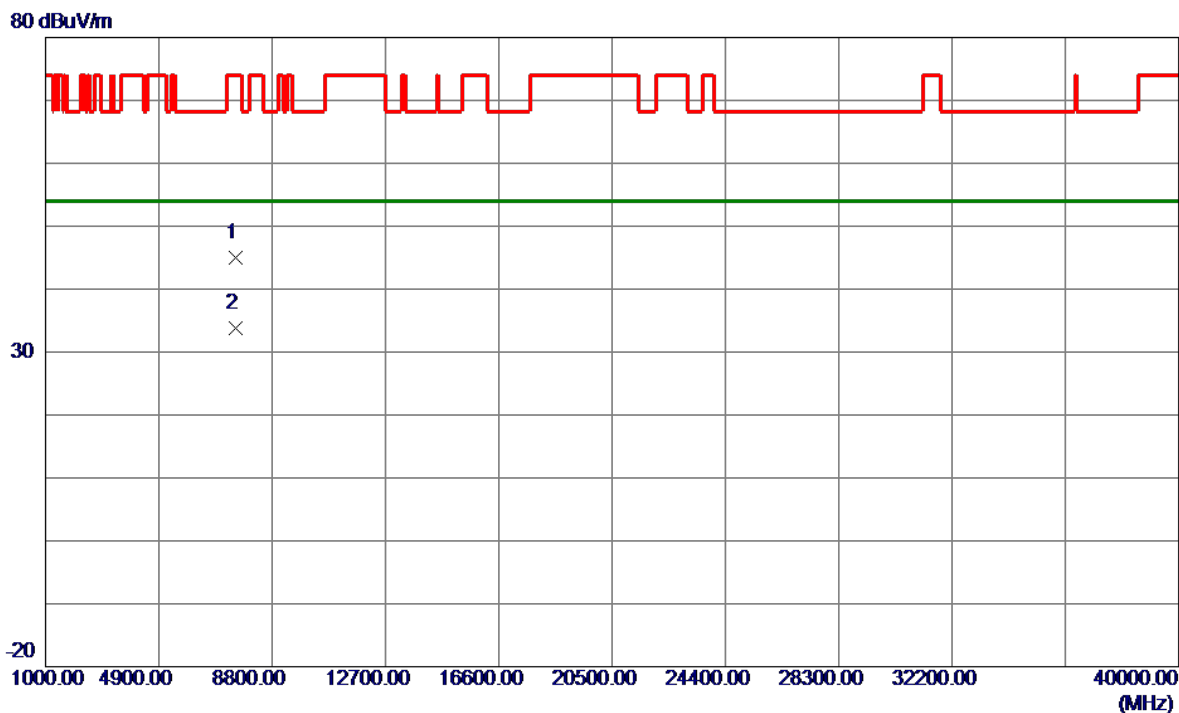


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7561.5200	37.18	7.91	45.09	74.00	-28.91	Peak	
2 *	7561.6330	25.83	7.91	33.74	54.00	-20.26	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

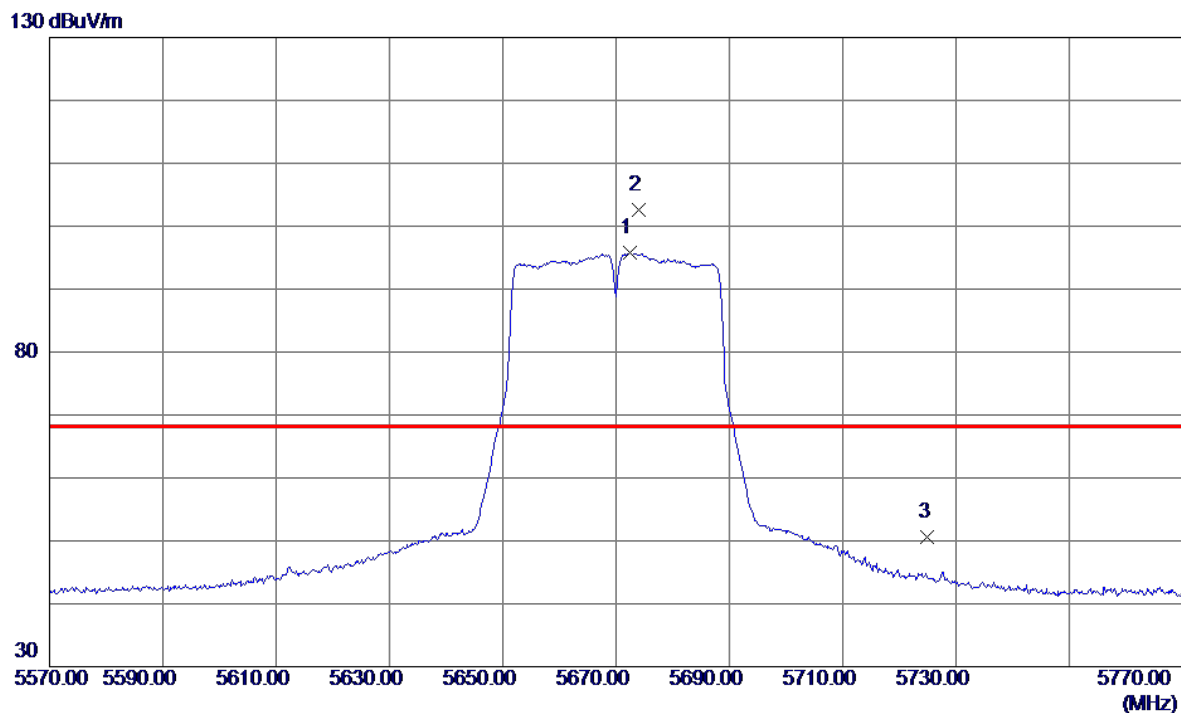


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5672.5000	82.27	13.50	95.77	999.00	-903.23	AVG	No Limit
2 *	5674.0000	89.17	13.50	102.67	68.20	34.47	Peak	No Limit
3	5725.0000	36.83	13.68	50.51	68.20	-17.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

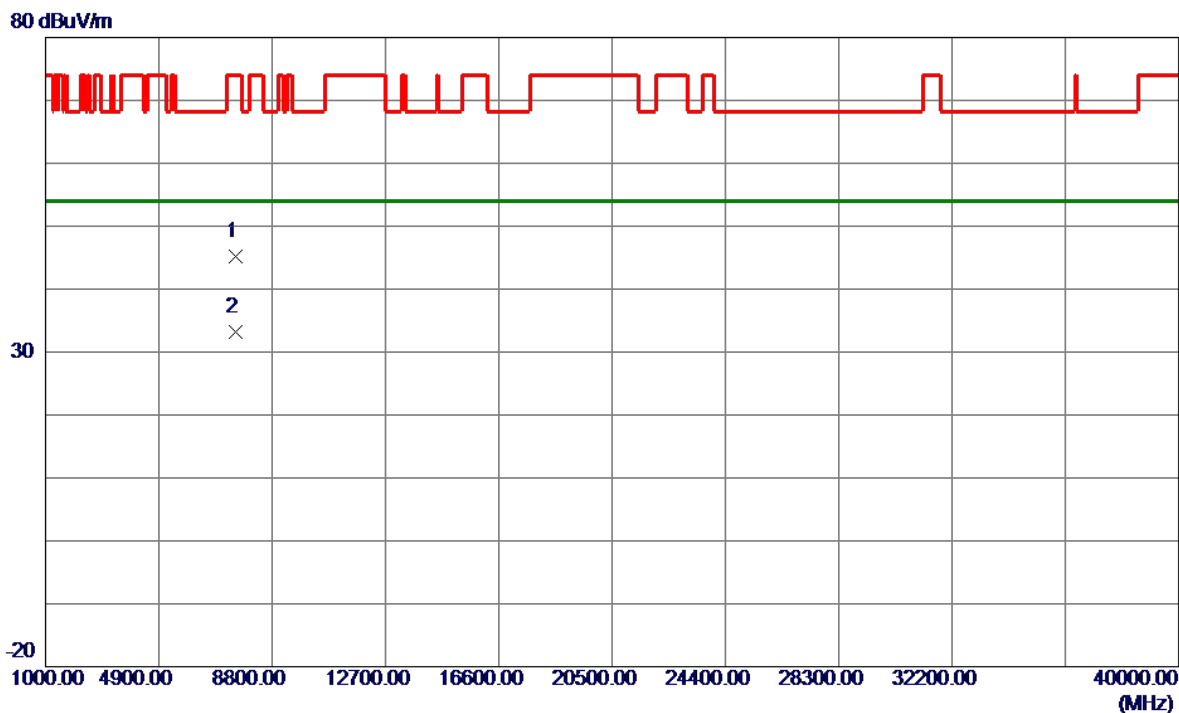


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7559.5270	37.38	7.91	45.29	74.00	-28.71	Peak	
2 *	7560.0540	25.34	7.91	33.25	54.00	-20.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

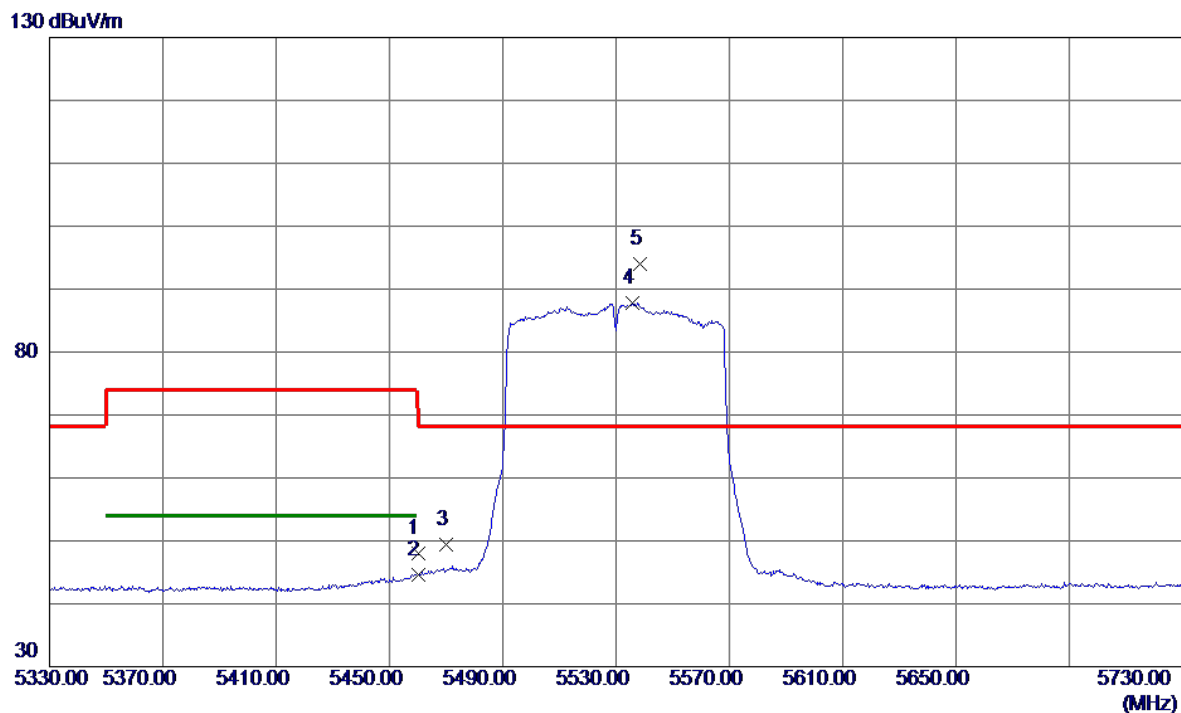


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	35.13	12.89	48.02	74.00	-25.98	Peak	
2	5460.0000	31.77	12.89	44.66	54.00	-9.34	AVG	
3	5470.0000	36.52	12.90	49.42	68.20	-18.78	Peak	
4	5535.8000	74.71	13.04	87.75	999.00	-911.25	AVG	No Limit
5 *	5538.4000	80.91	13.05	93.96	68.20	25.76	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

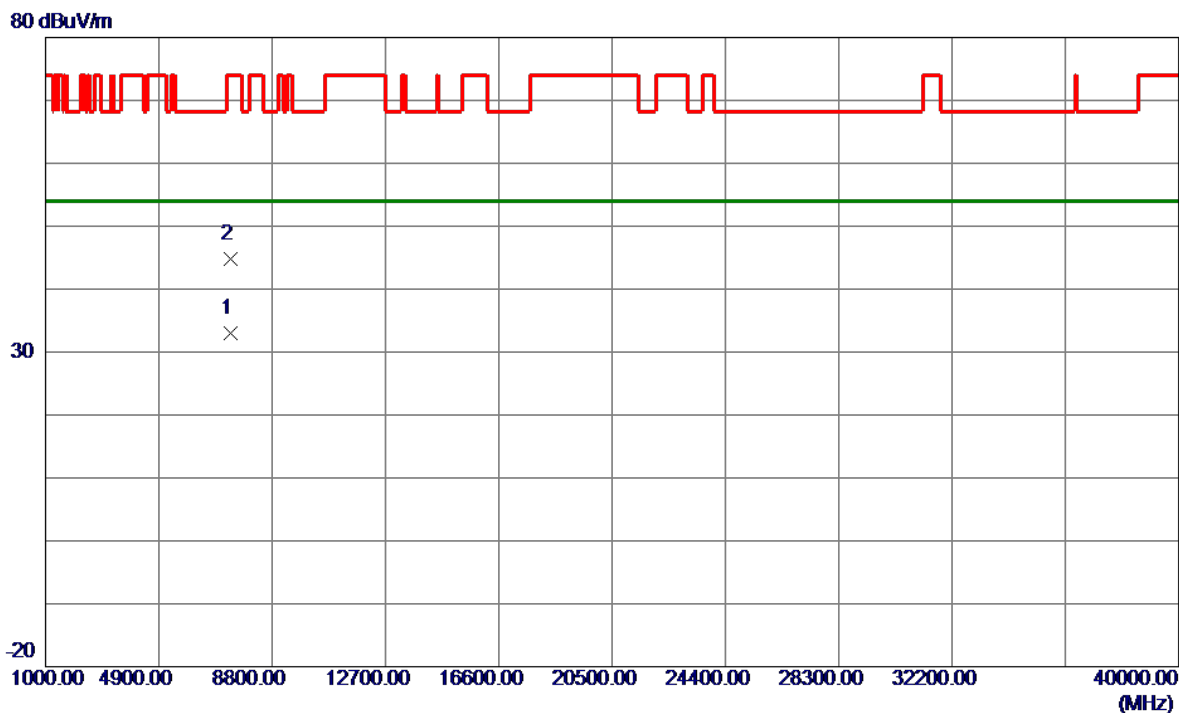


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7373. 2700	25. 27	7. 78	33. 05	54. 00	-20. 95	AVG	
2	7373. 8730	37. 00	7. 78	44. 78	74. 00	-29. 22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

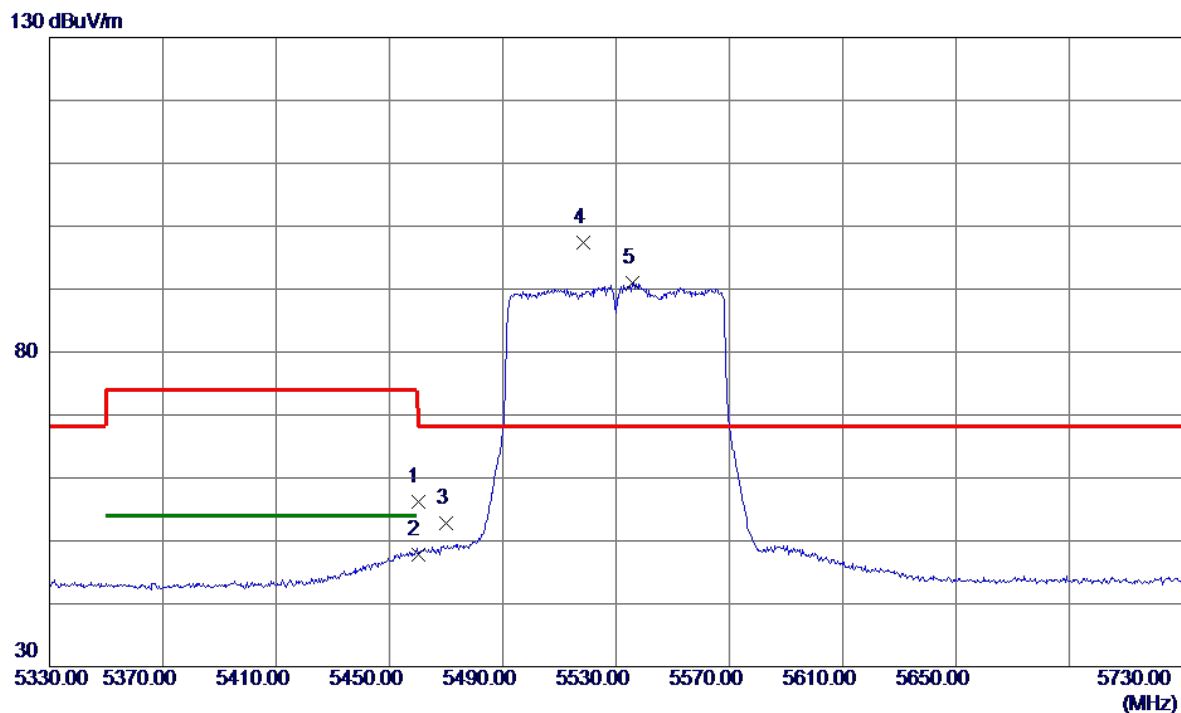


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	43.22	12.89	56.11	74.00	-17.89	Peak	
2	5460.0000	34.86	12.89	47.75	54.00	-6.25	AVG	
3	5470.0000	39.96	12.90	52.86	68.20	-15.34	Peak	
4 *	5518.4000	84.51	12.98	97.49	68.20	29.29	Peak	No Limit
5	5535.8000	77.98	13.04	91.02	999.00	-907.98	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

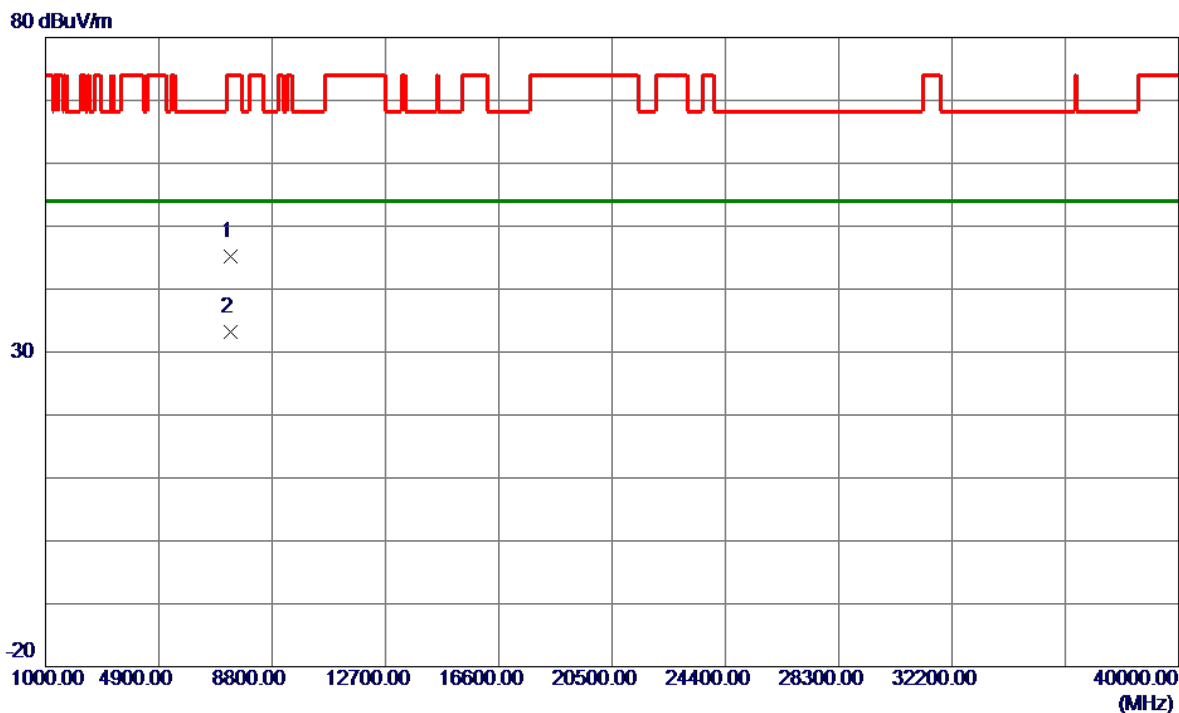


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7373.7200	37.48	7.78	45.26	74.00	-28.74	Peak	
2 *	7373.7380	25.50	7.78	33.28	54.00	-20.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

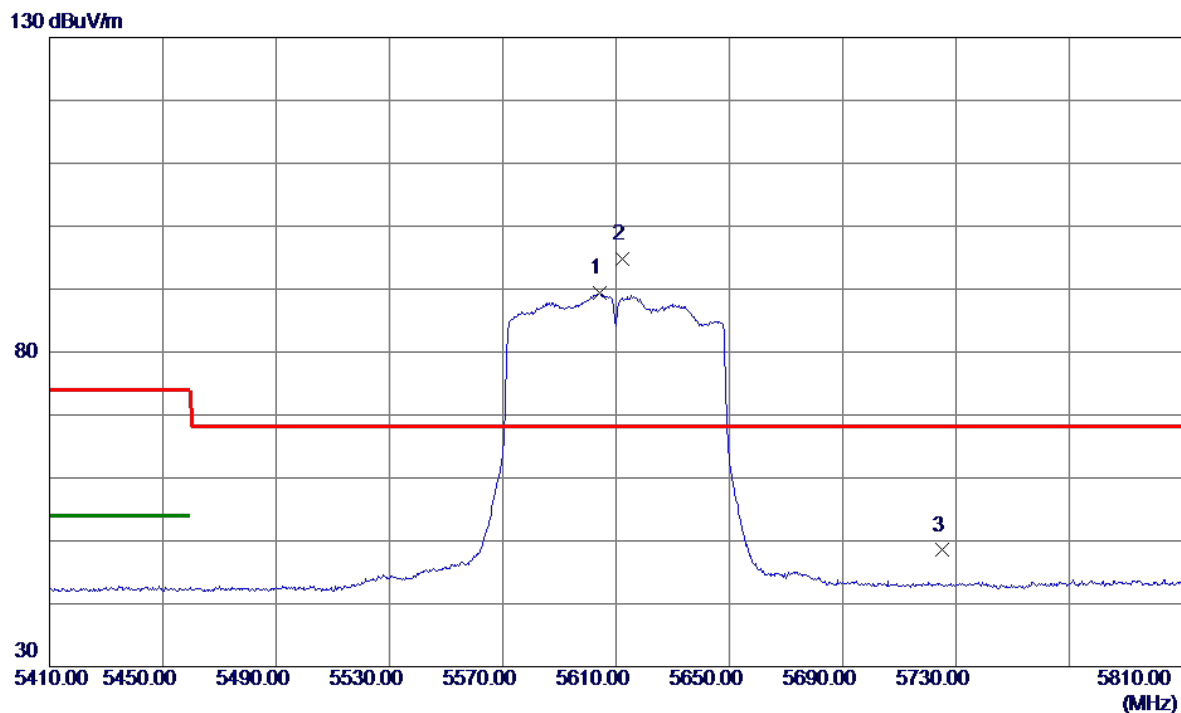


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5604.4000	76.11	13.27	89.38	999.00	-909.62	AVG	No Limit
2 *	5612.4000	81.57	13.30	94.87	68.20	26.67	Peak	No Limit
3	5725.0000	34.82	13.68	48.50	68.20	-19.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

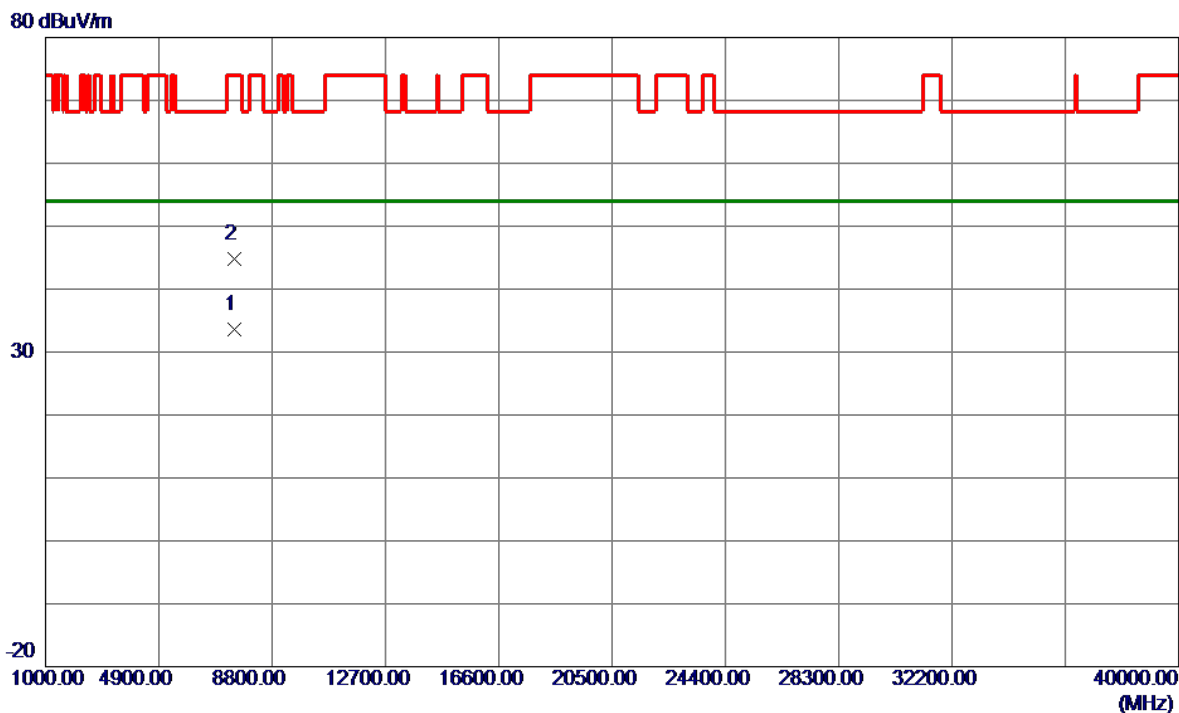


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7481.2500	25.78	7.91	33.69	54.00	-20.31	AVG	
2	7481.3570	36.98	7.91	44.89	74.00	-29.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

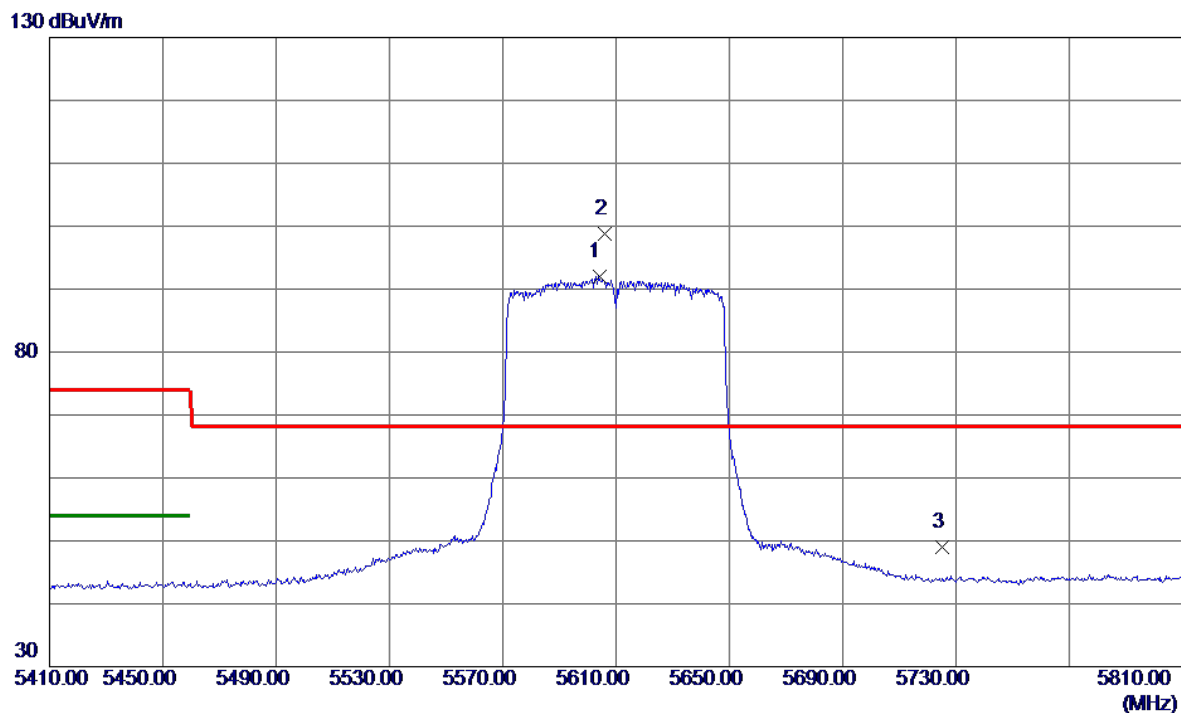


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5604.0000	78.80	13.27	92.07	999.00	-906.93	AVG	No Limit
2 *	5606.0000	85.55	13.27	98.82	68.20	30.62	Peak	No Limit
3	5725.0000	35.29	13.68	48.97	68.20	-19.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

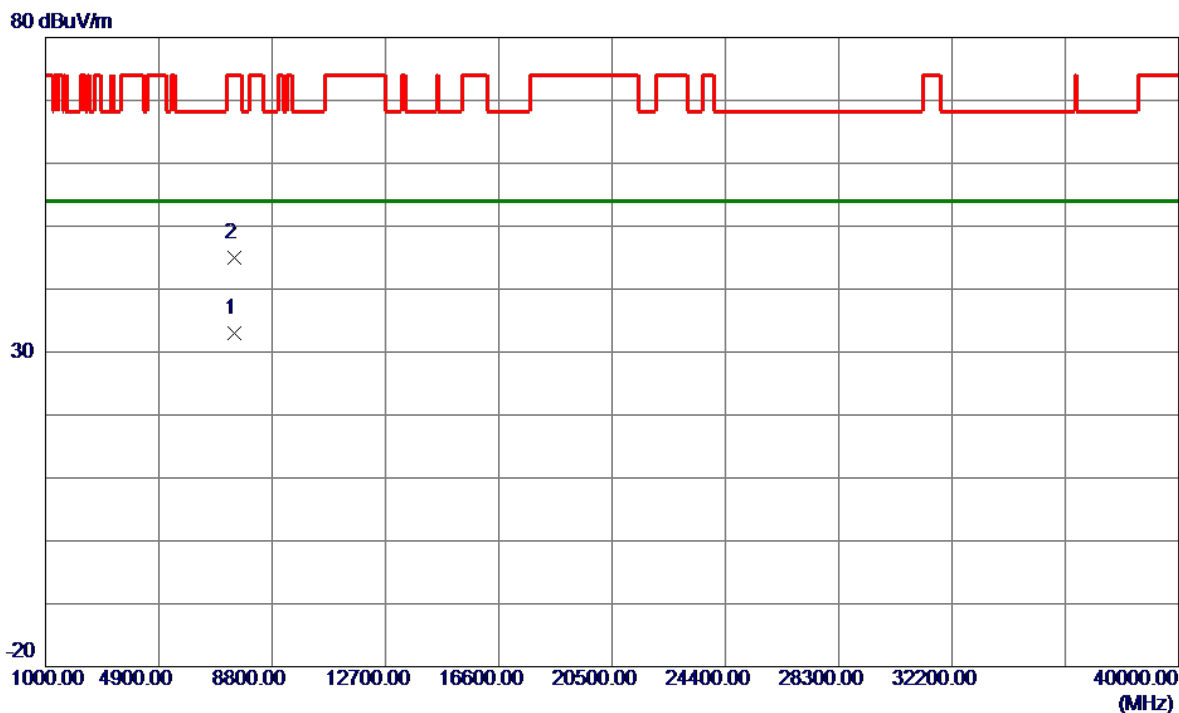


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7481.2700	25.07	7.91	32.98	54.00	-21.02	AVG	
2	7481.9870	37.10	7.91	45.01	74.00	-28.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

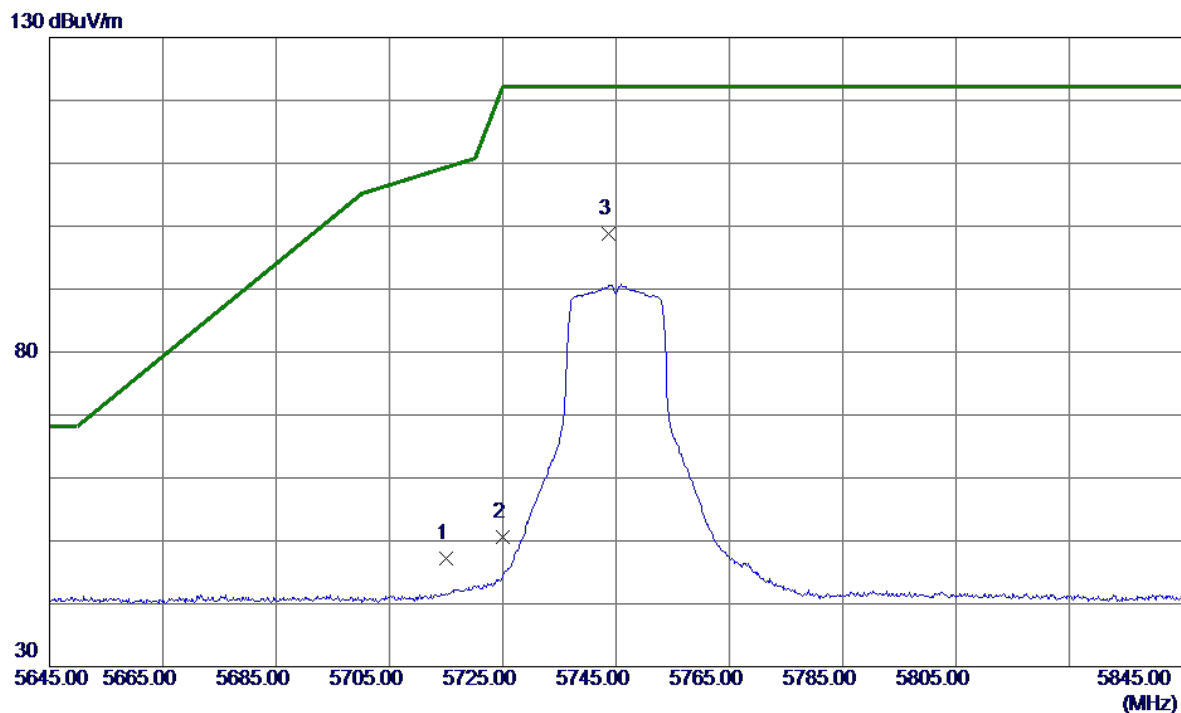


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	33.59	13.64	47.23	109.40	-62.17	Peak	
2	5725.0000	36.89	13.68	50.57	122.20	-71.63	Peak	
3 *	5743.7000	85.01	13.74	98.75	122.20	-23.45	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

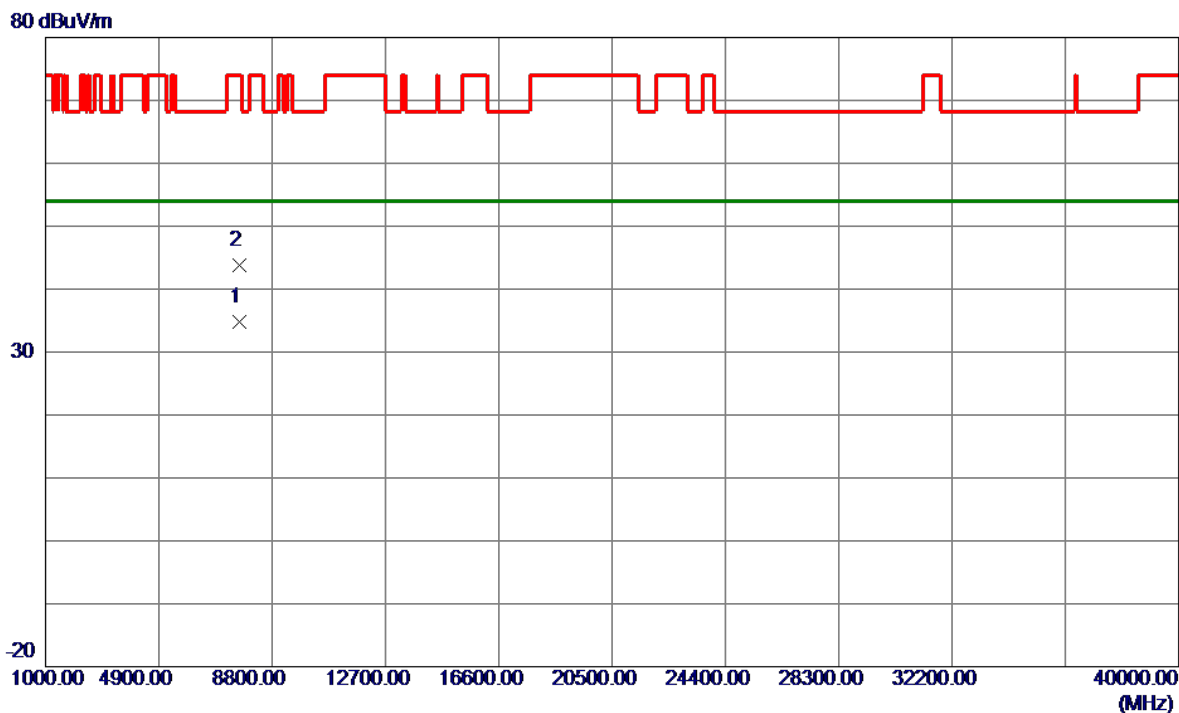


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7659.9500	26.84	7.87	34.71	54.00	-19.29	AVG	
2	7680.6250	35.91	7.86	43.77	74.00	-30.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

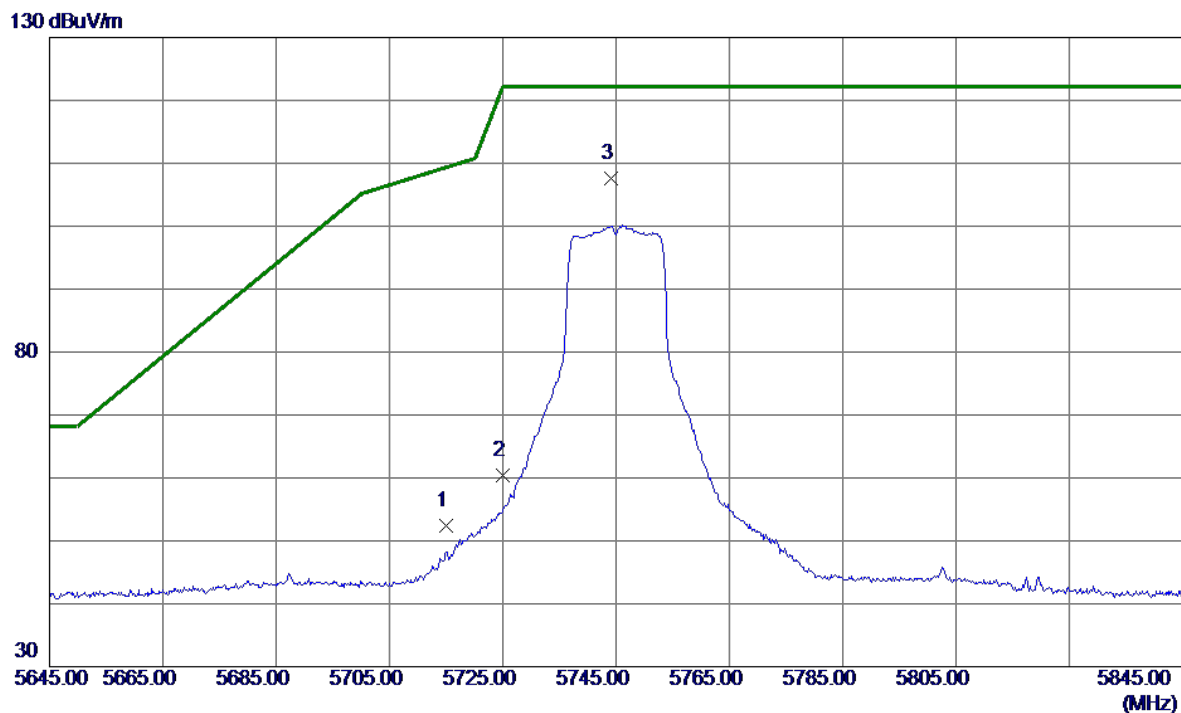


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.75	13.64	52.39	109.40	-57.01	Peak	
2	5725.0000	46.66	13.68	60.34	122.20	-61.86	Peak	
3 *	5744.1000	93.87	13.74	107.61	122.20	-14.59	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

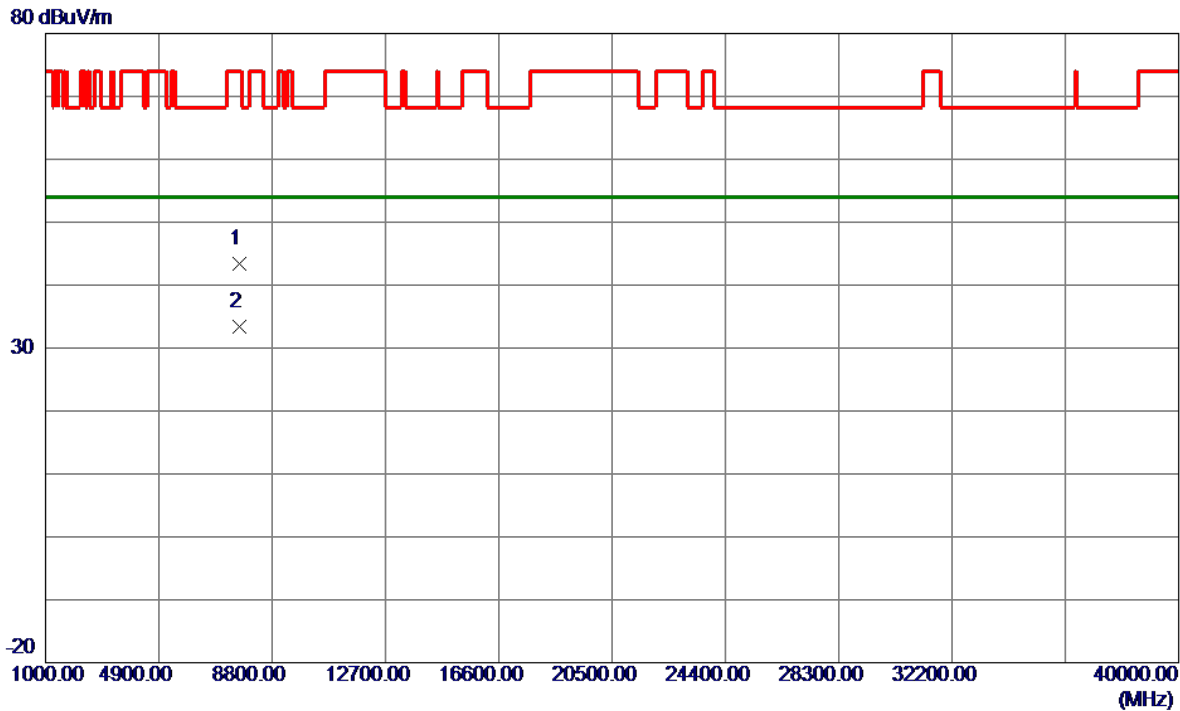


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7671.7250	35.62	7.86	43.48	74.00	-30.52	Peak	
2 *	7673.5250	25.53	7.86	33.39	54.00	-20.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

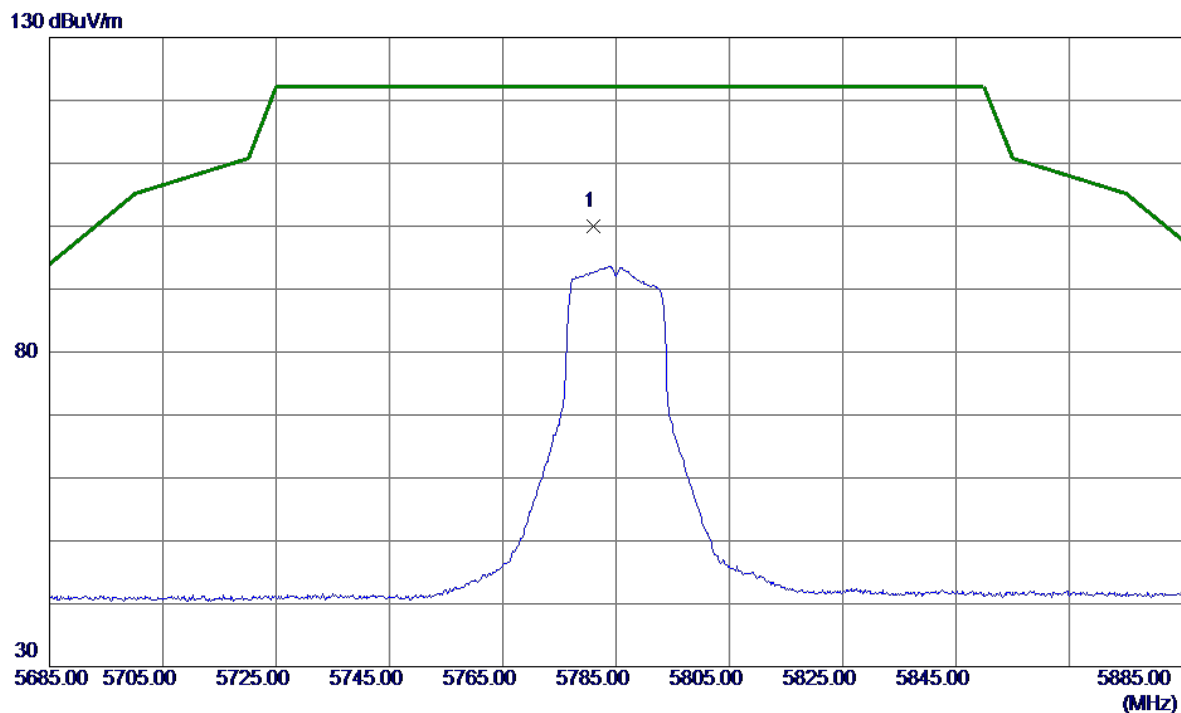


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5781.0000	86.18	13.87	100.05	122.20	-22.15	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

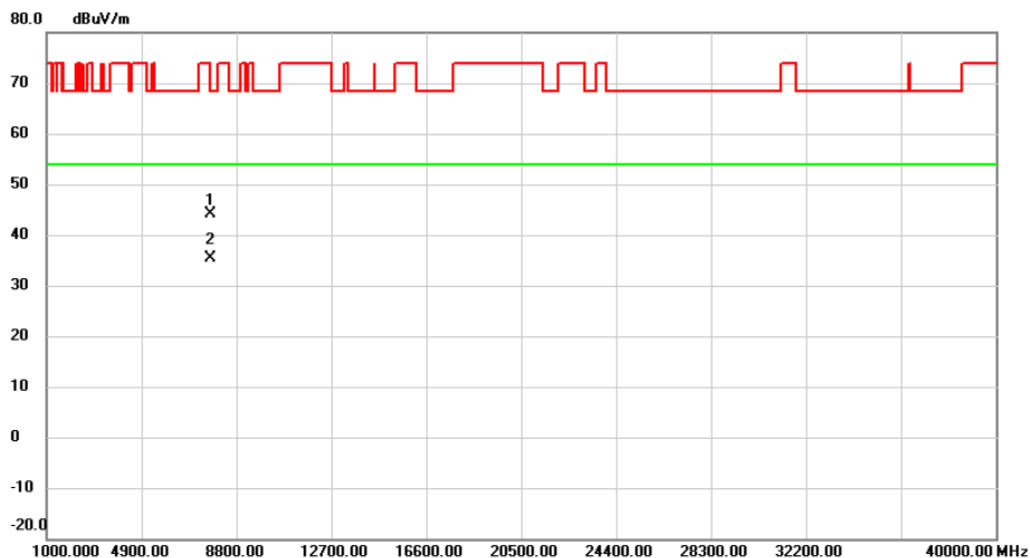


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7713.155	36.34	7.84	44.18	74.00	-29.82	peak	
2	*	7713.330	27.51	7.84	35.35	54.00	-18.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

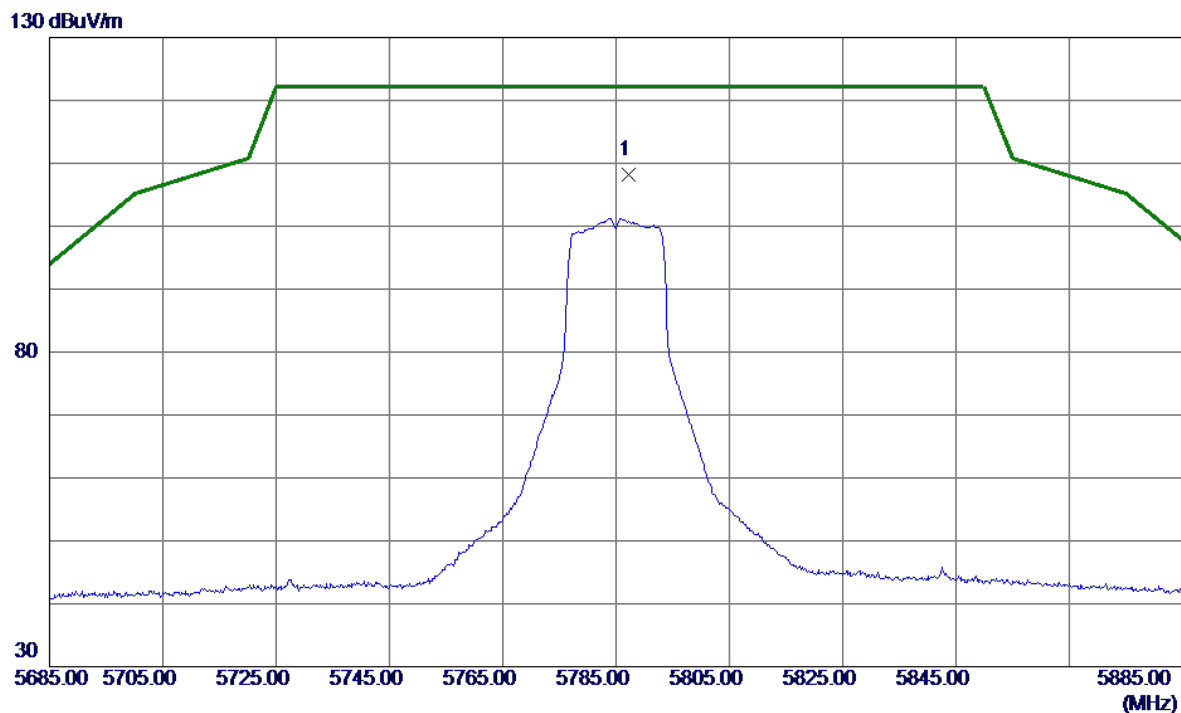


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.2000	94.37	13.89	108.26	122.20	-13.94	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

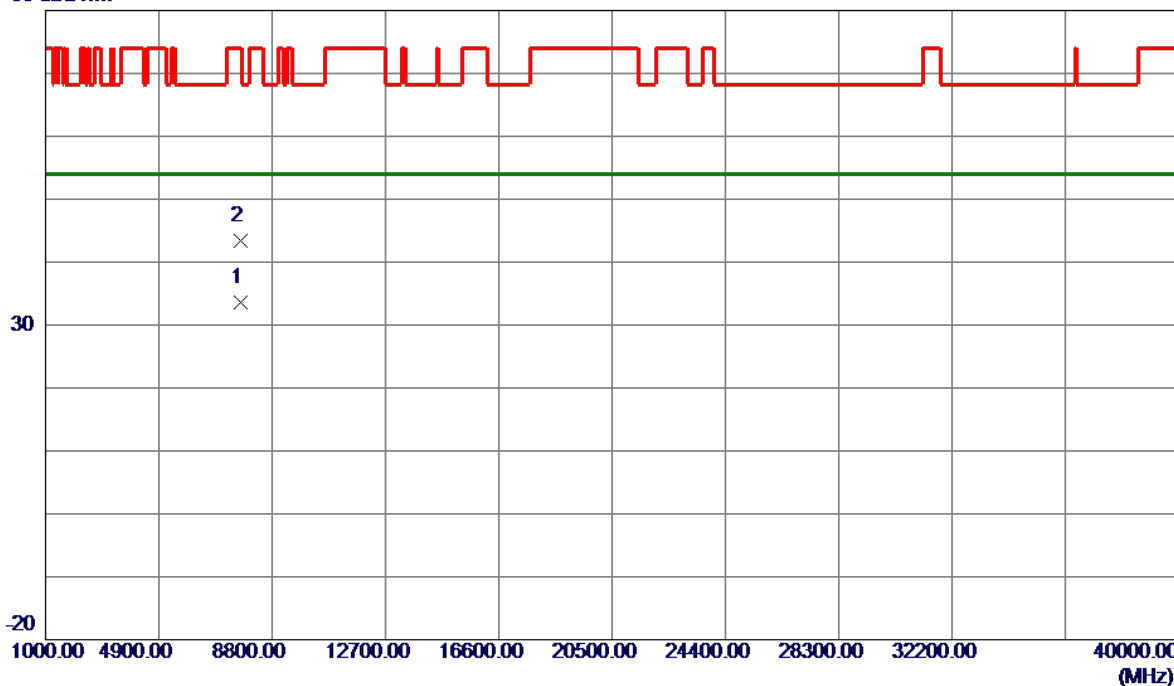


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.6800	25.73	7.84	33.57	54.00	-20.43	AVG	
2	7722.8050	35.65	7.84	43.49	74.00	-30.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

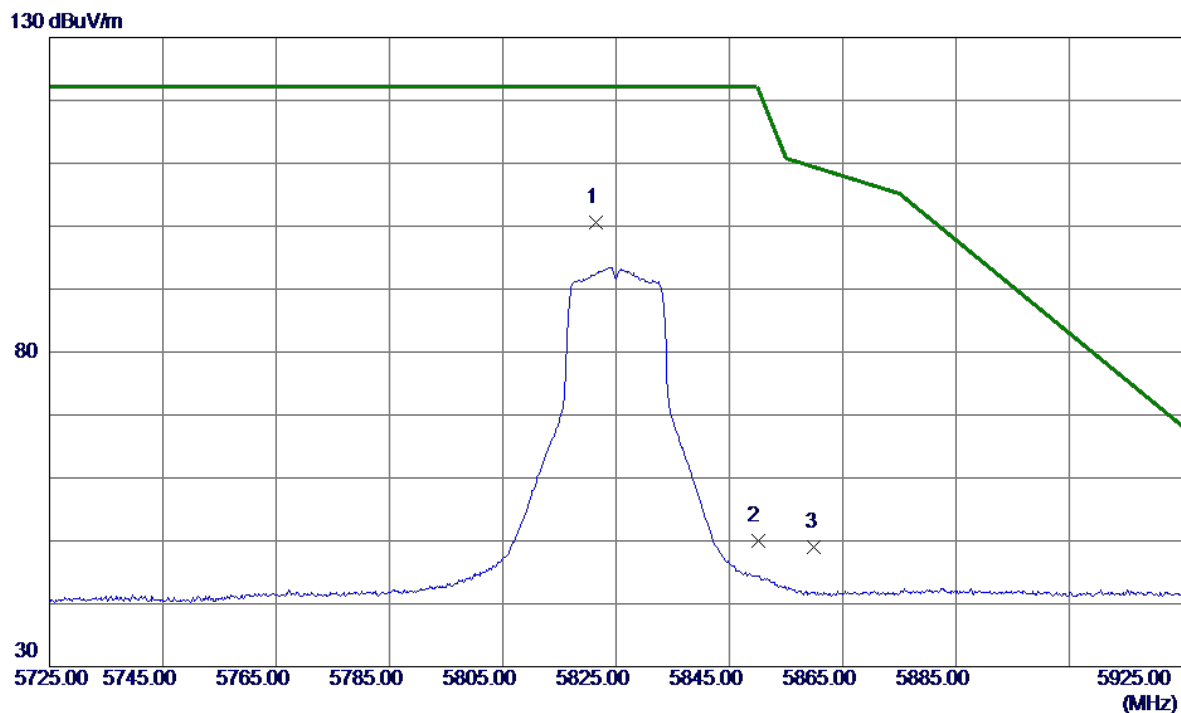


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.4000	86.52	14.00	100.52	122.20	-21.68	Peak	No Limit
2	5850.0000	35.98	14.10	50.08	122.20	-72.12	Peak	
3	5860.0000	34.84	14.14	48.98	109.40	-60.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

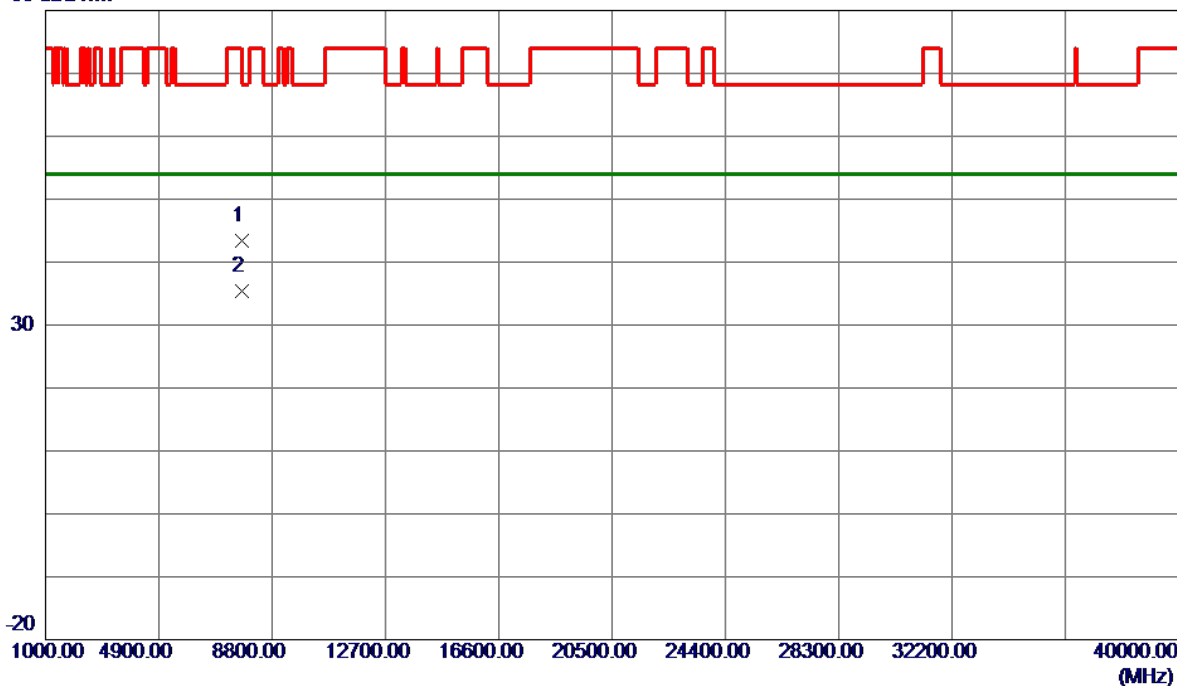


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7741.9200	35.63	7.83	43.46	74.00	-30.54	Peak	
2 *	7766.6950	27.54	7.82	35.36	54.00	-18.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

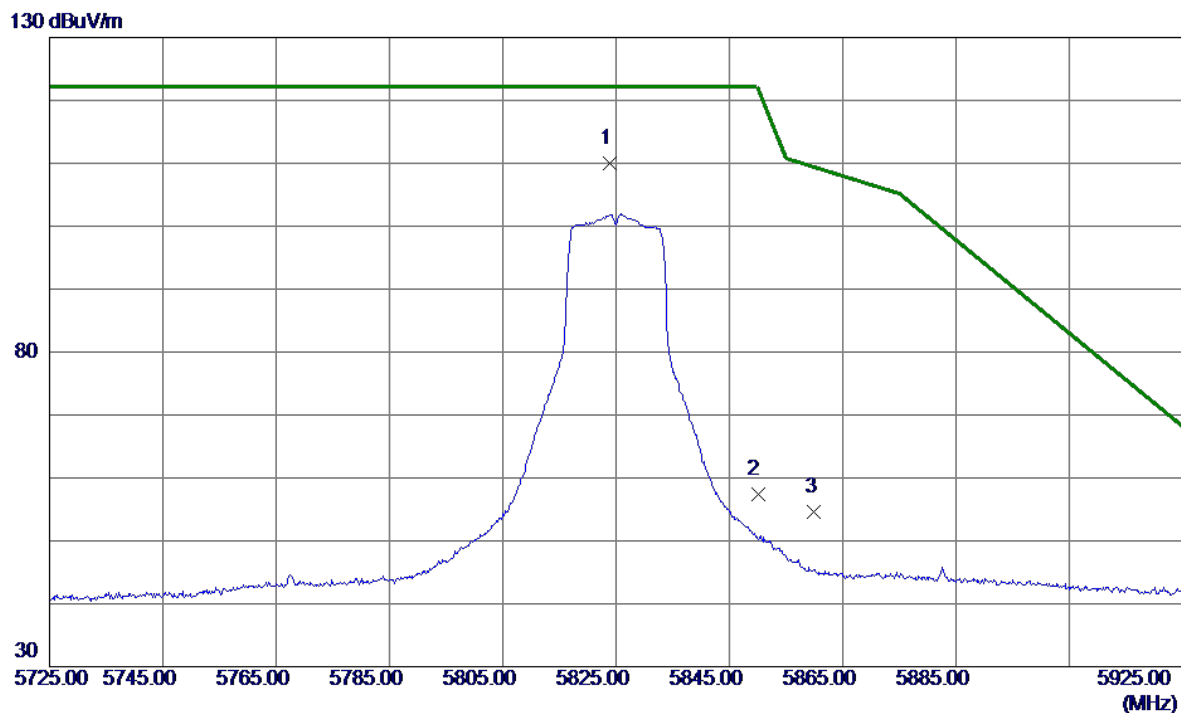


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.9000	96.06	14.01	110.07	122.20	-12.13	Peak	No Limit
2	5850.0000	43.22	14.10	57.32	122.20	-64.88	Peak	
3	5860.0000	40.54	14.14	54.68	109.40	-54.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

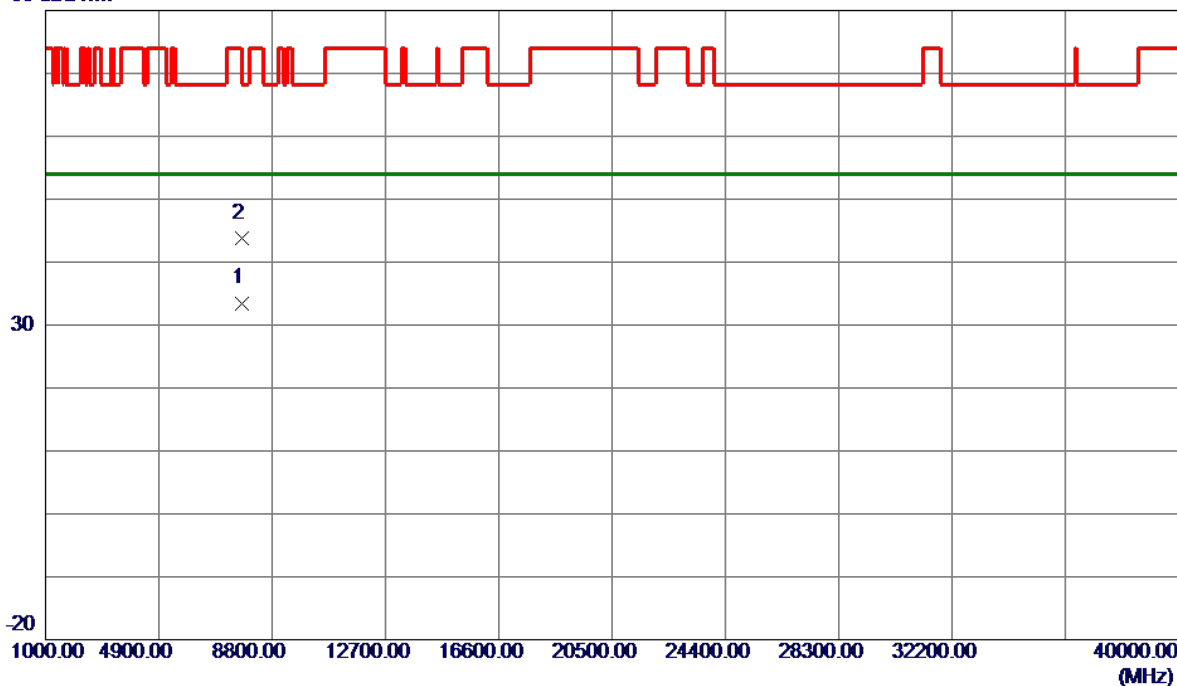


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7745.1450	25.67	7.83	33.50	74.00	-40.50	Peak	
2 *	7777.0700	36.02	7.82	43.84	54.00	-10.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

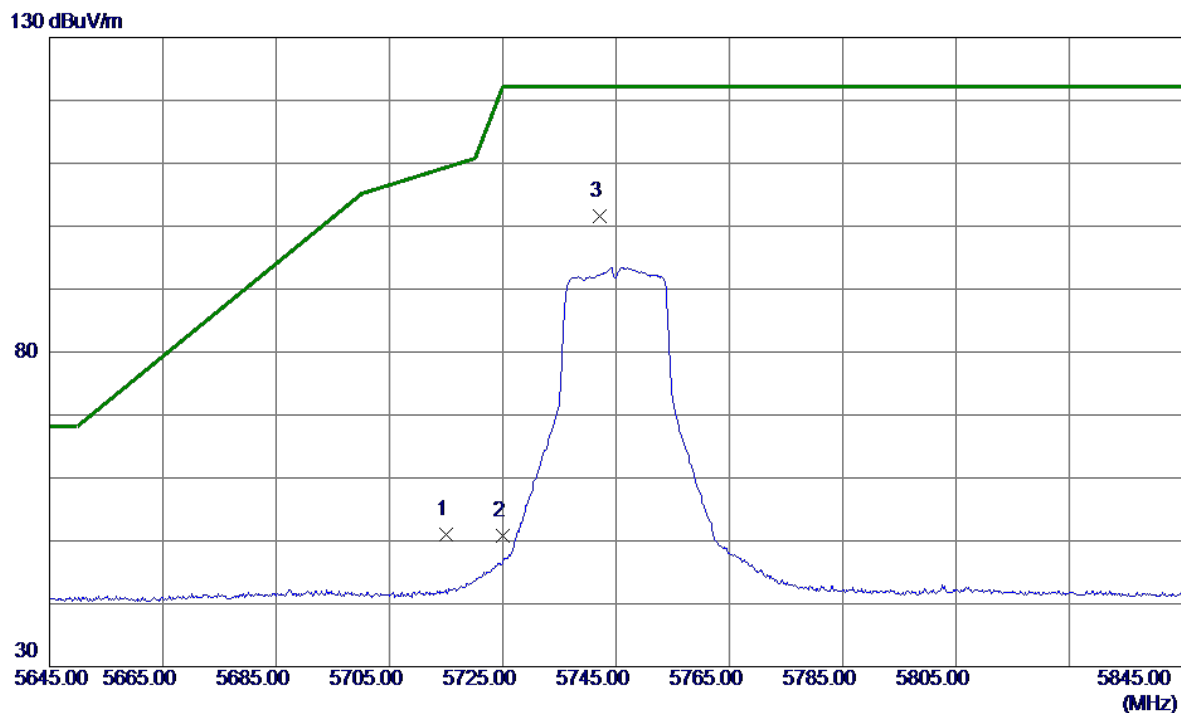


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.33	13.64	50.97	109.40	-58.43	Peak	
2	5725.0000	37.05	13.68	50.73	122.20	-71.47	Peak	
3 *	5742.2000	87.90	13.74	101.64	122.20	-20.56	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

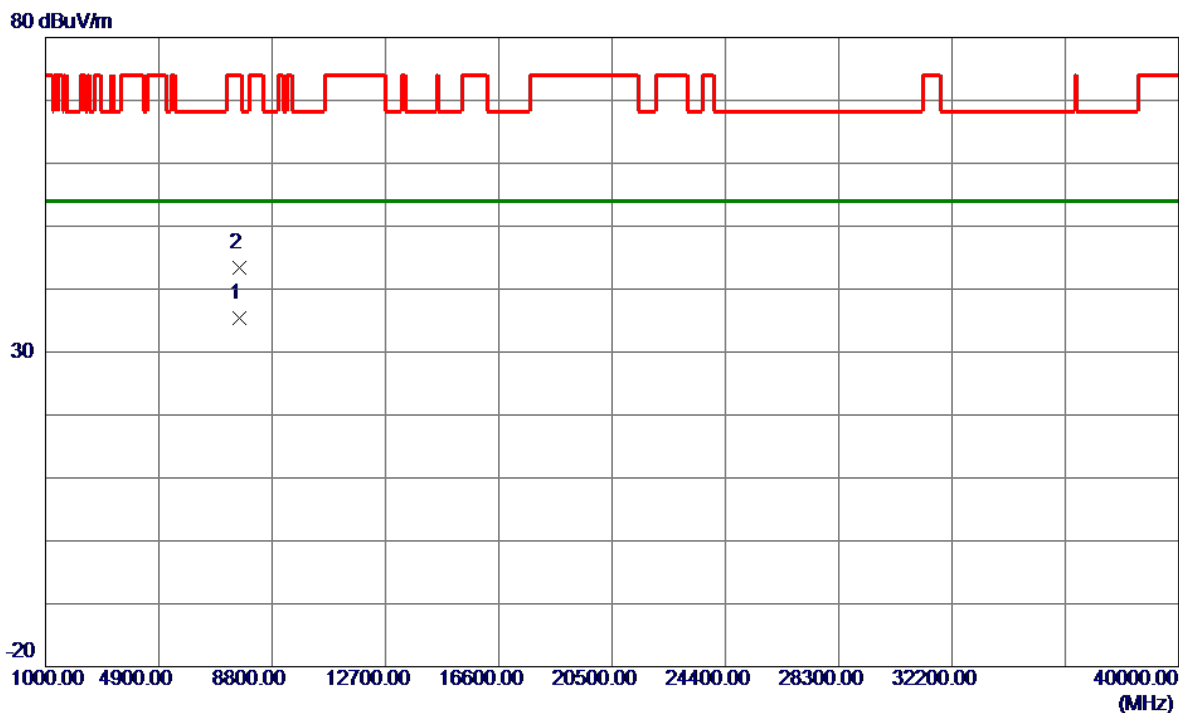


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7659.9500	27.60	7.87	35.47	74.00	-38.53	Peak	
2 *	7664.5500	35.56	7.86	43.42	54.00	-10.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

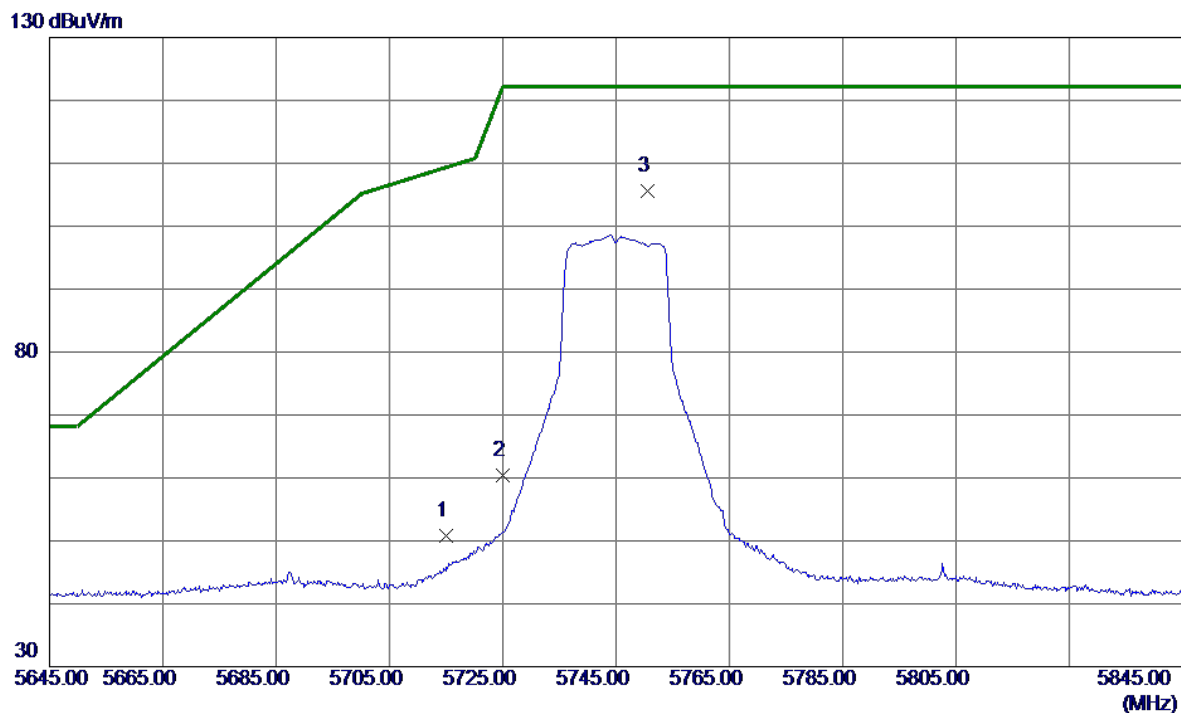


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.16	13.64	50.80	109.40	-58.60	Peak	
2	5725.0000	46.66	13.68	60.34	122.20	-61.86	Peak	
3 *	5750.5000	91.81	13.76	105.57	122.20	-16.63	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

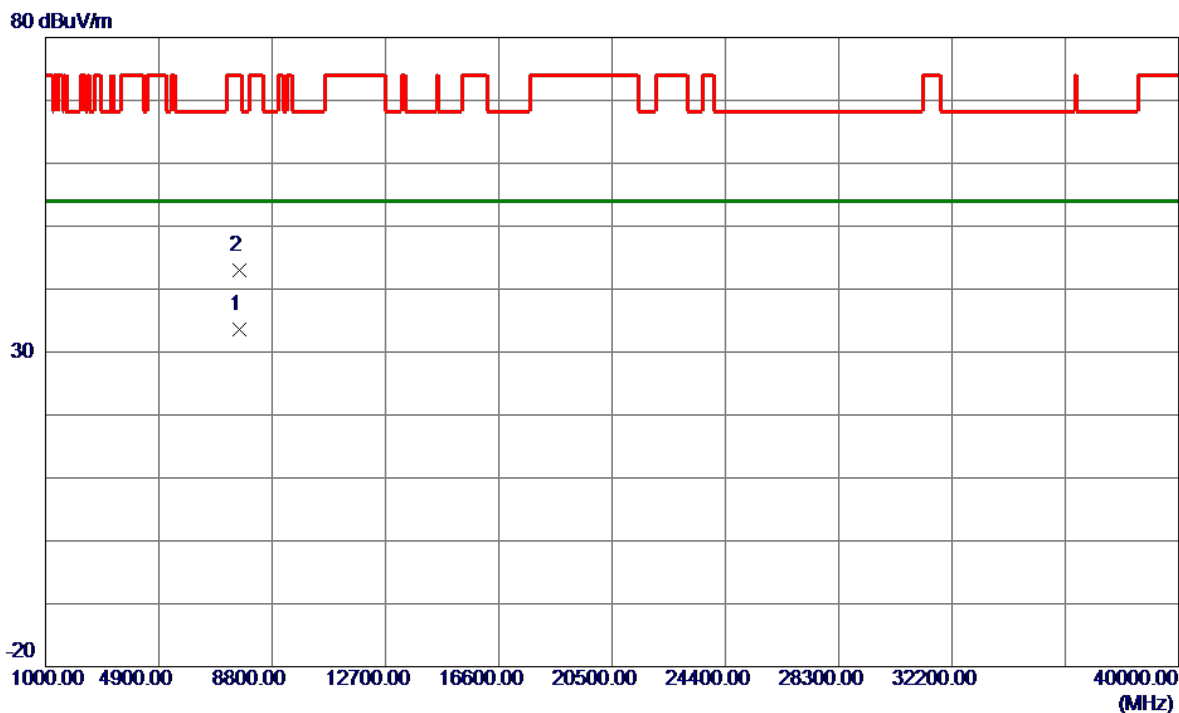


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7663.9000	25.65	7.86	33.51	54.00	-20.49	AVG	
2	7664.7250	35.12	7.86	42.98	74.00	-31.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

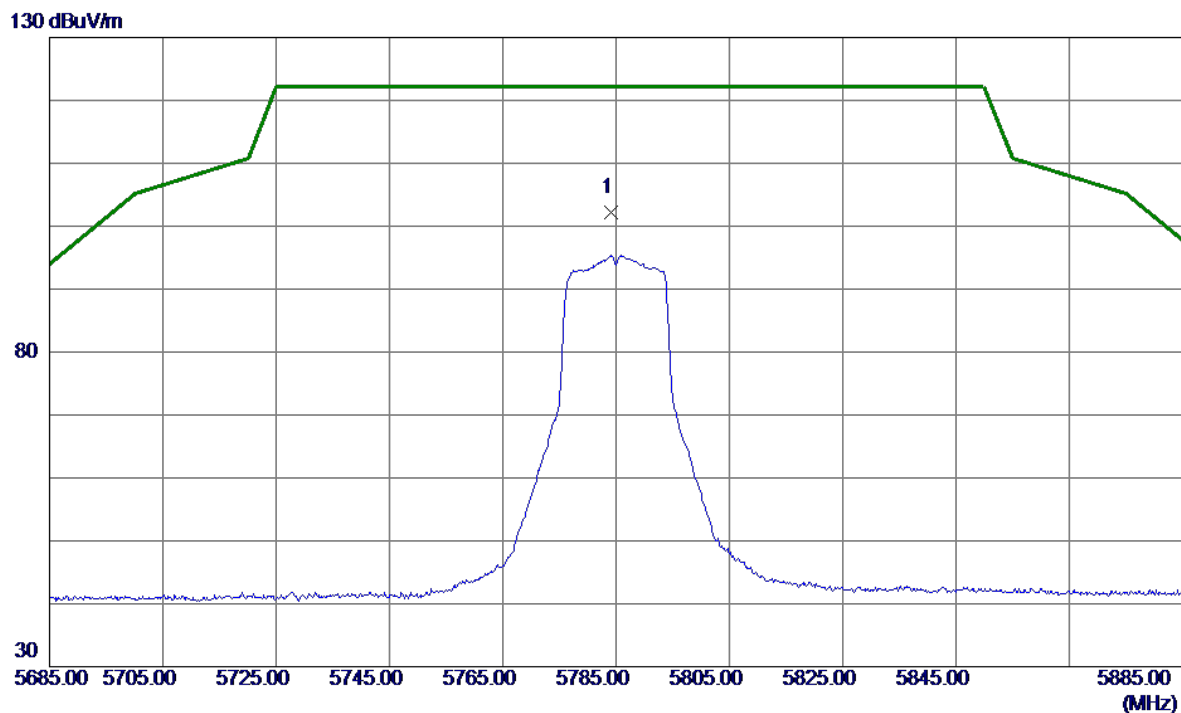


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	5784.2000	88.24	13.88	102.12	122.20	-20.08	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

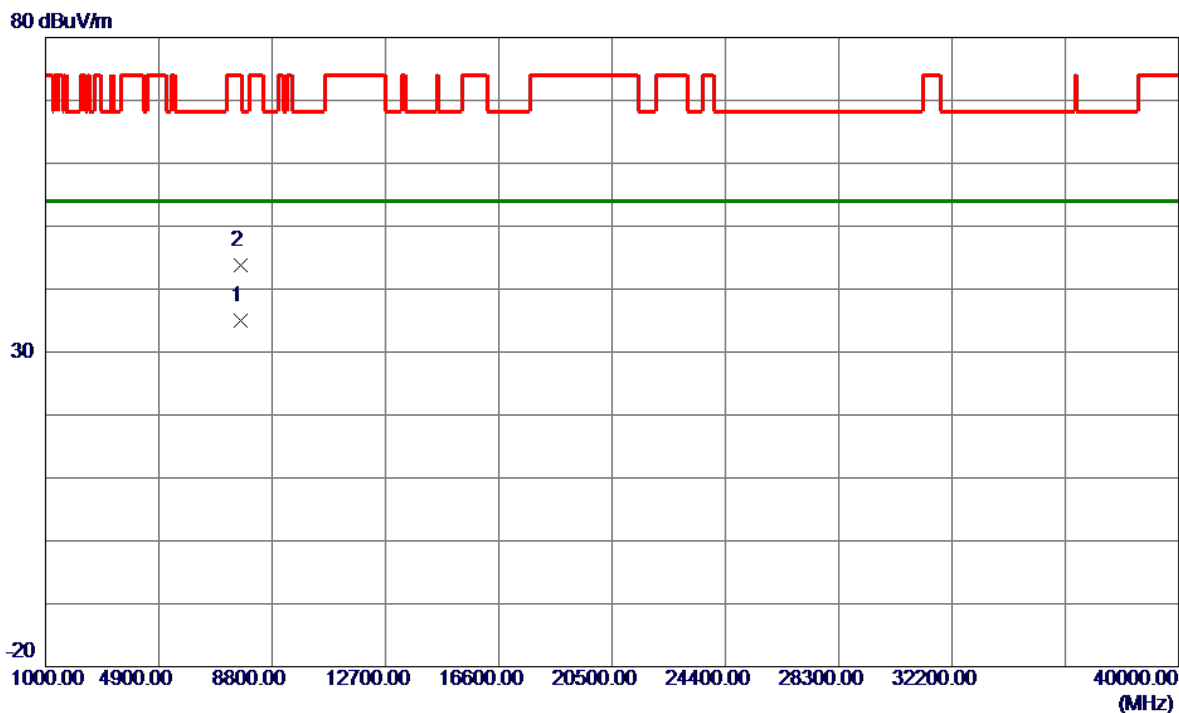


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7713.2050	27.15	7.84	34.99	54.00	-19.01	AVG	
2	7713.3050	35.89	7.84	43.73	74.00	-30.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

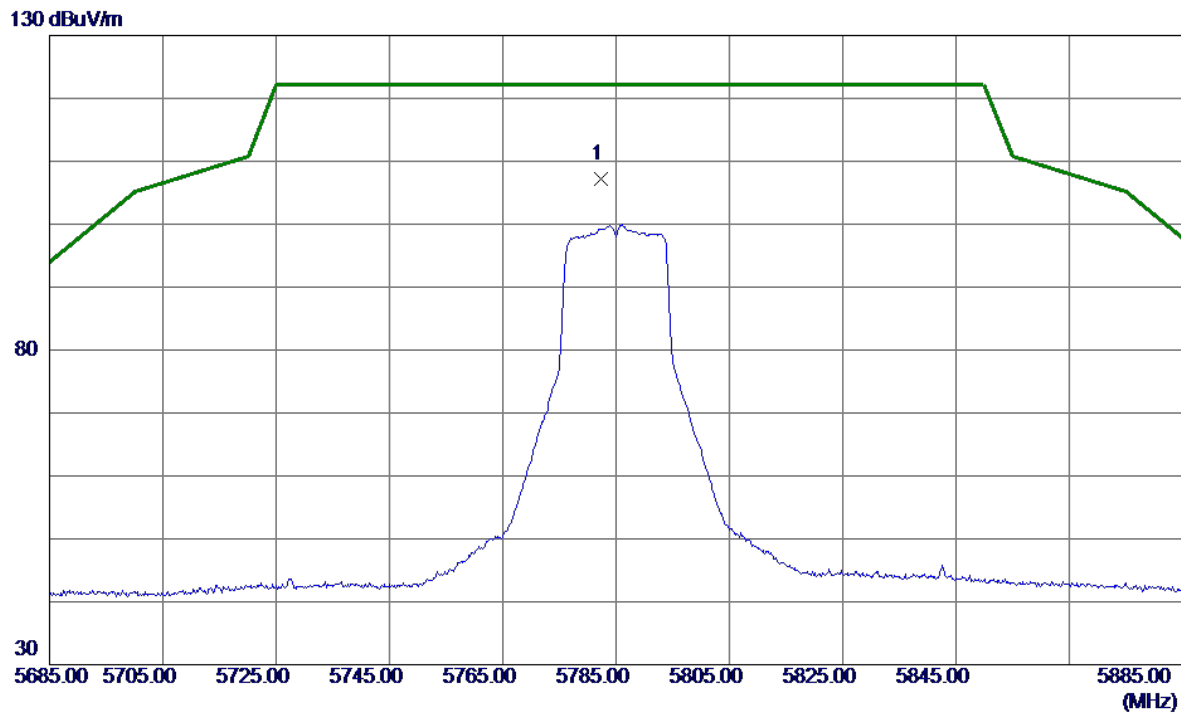


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5782.4000	93.42	13.87	107.29	122.20	-14.91	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

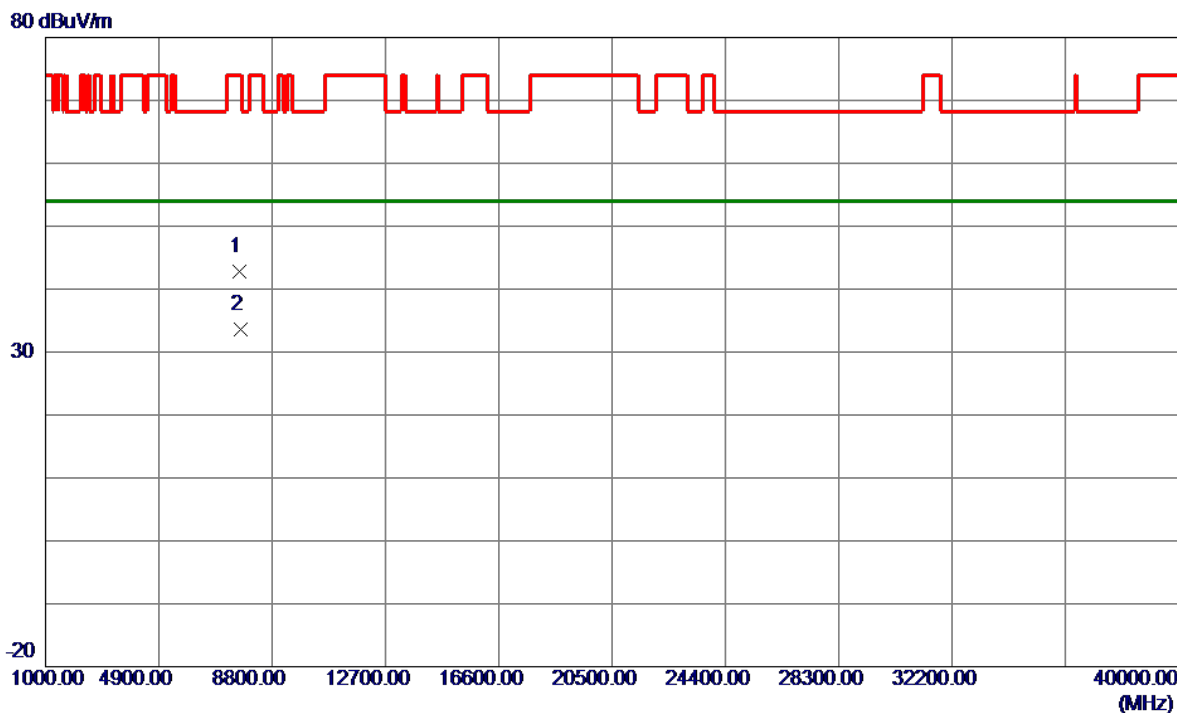


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7688.5550	35.04	7.85	42.89	74.00	-31.11	Peak	
2 *	7719.3300	25.72	7.84	33.56	54.00	-20.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

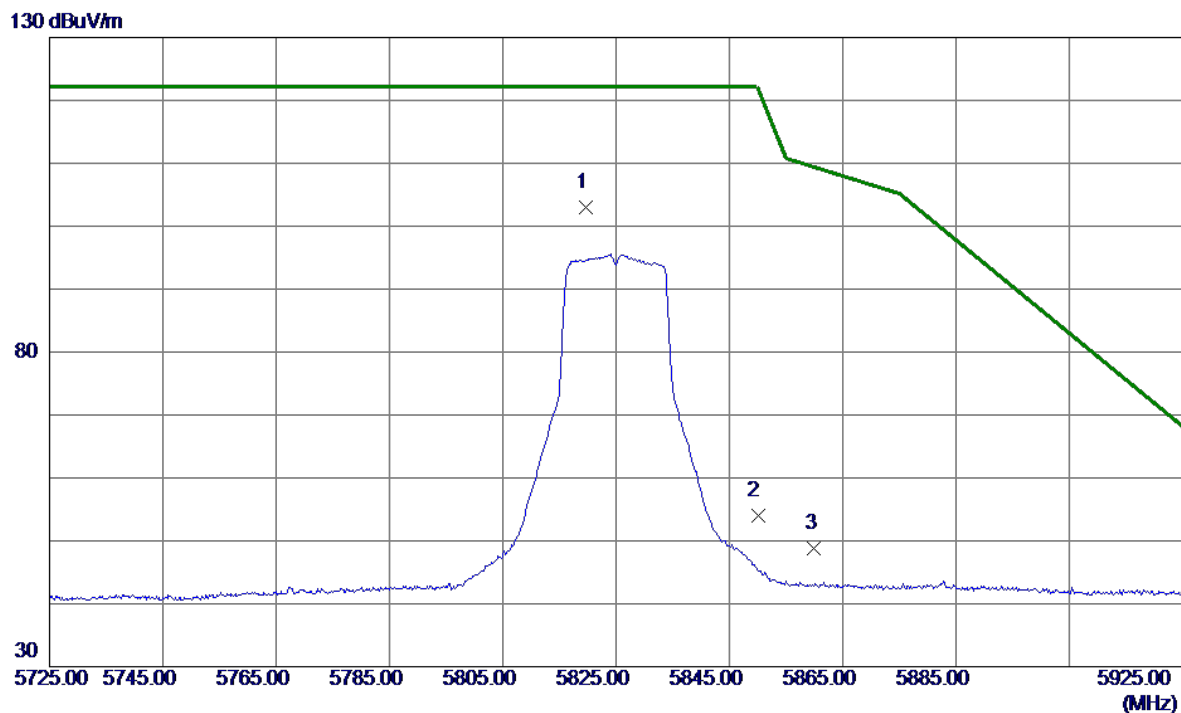


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.7000	89.08	14.00	103.08	122.20	-19.12	Peak	No Limit
2	5850.0000	39.82	14.10	53.92	122.20	-68.28	Peak	
3	5860.0000	34.57	14.14	48.71	109.40	-60.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

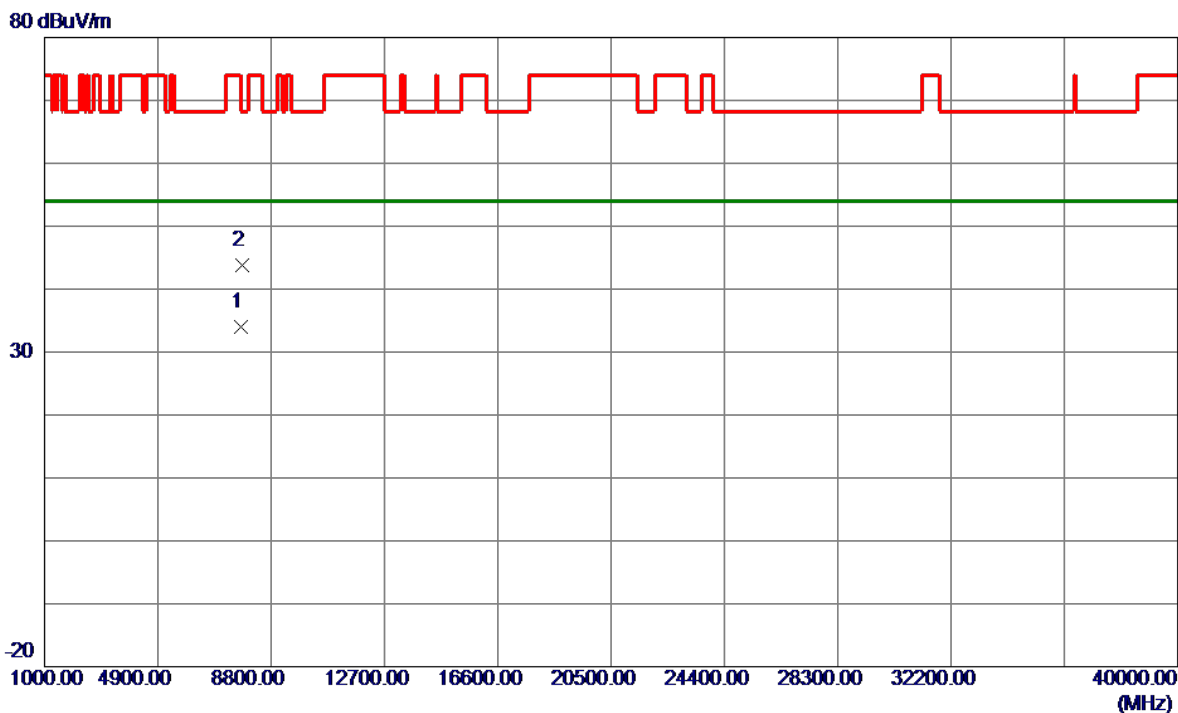


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.7450	26.23	7.82	34.05	54.00	-19.95	AVG	
2	7788.8950	36.07	7.81	43.88	68.30	-24.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

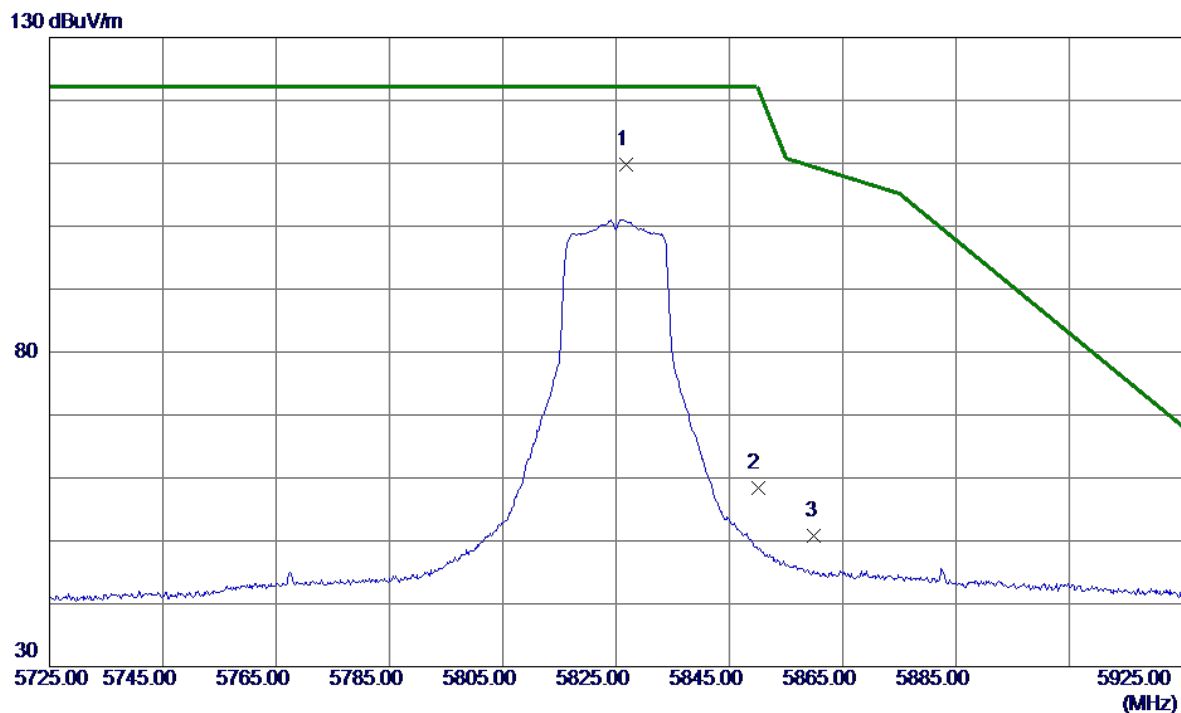


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.8000	95.76	14.02	109.78	122.20	-12.42	Peak	No Limit
2	5850.0000	44.28	14.10	58.38	122.20	-63.82	Peak	
3	5860.0000	36.59	14.14	50.73	109.40	-58.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

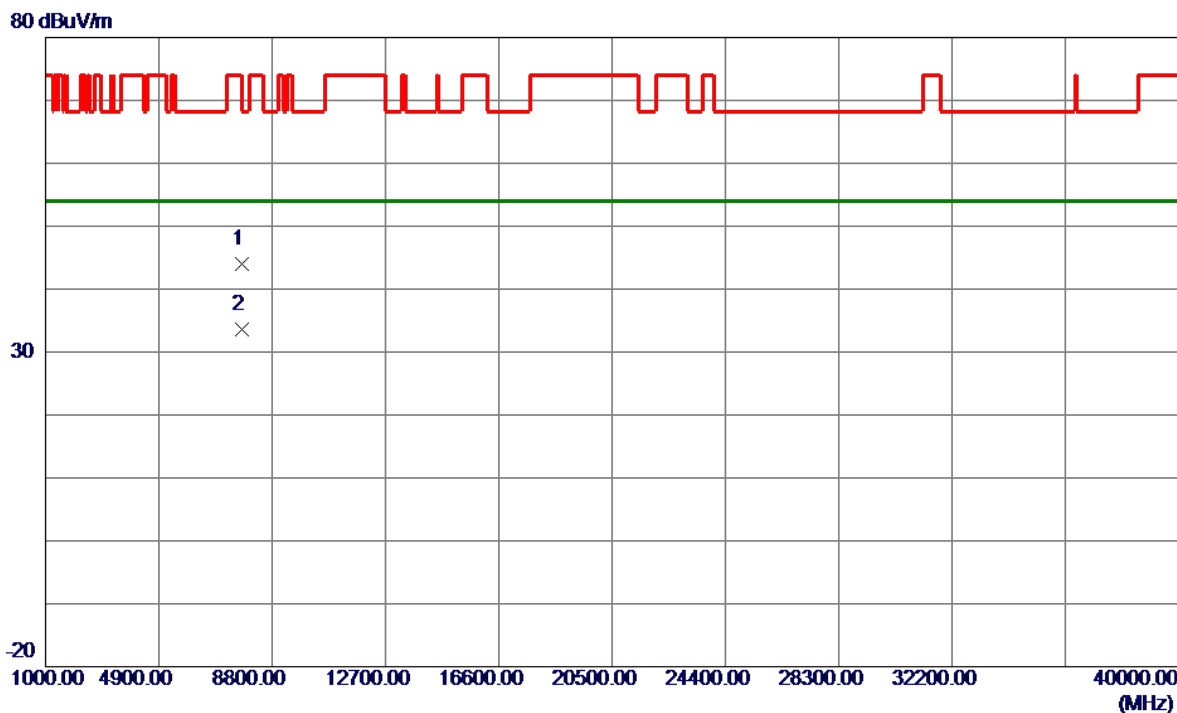


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7743.2950	36.11	7.83	43.94	74.00	-30.06	Peak	
2 *	7748.9450	25.70	7.83	33.53	54.00	-20.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

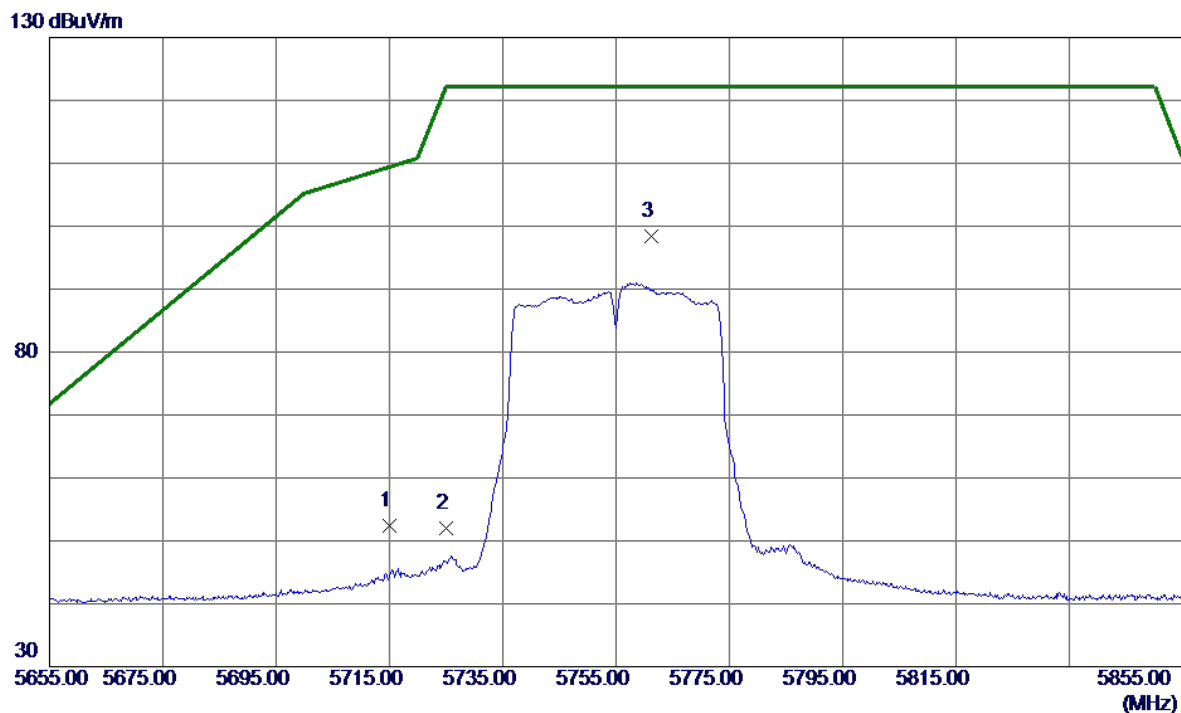


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.83	13.64	52.47	109.40	-56.93	Peak	
2	5725.0000	38.32	13.68	52.00	122.20	-70.20	Peak	
3 *	5761.3000	84.61	13.80	98.41	122.20	-23.79	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

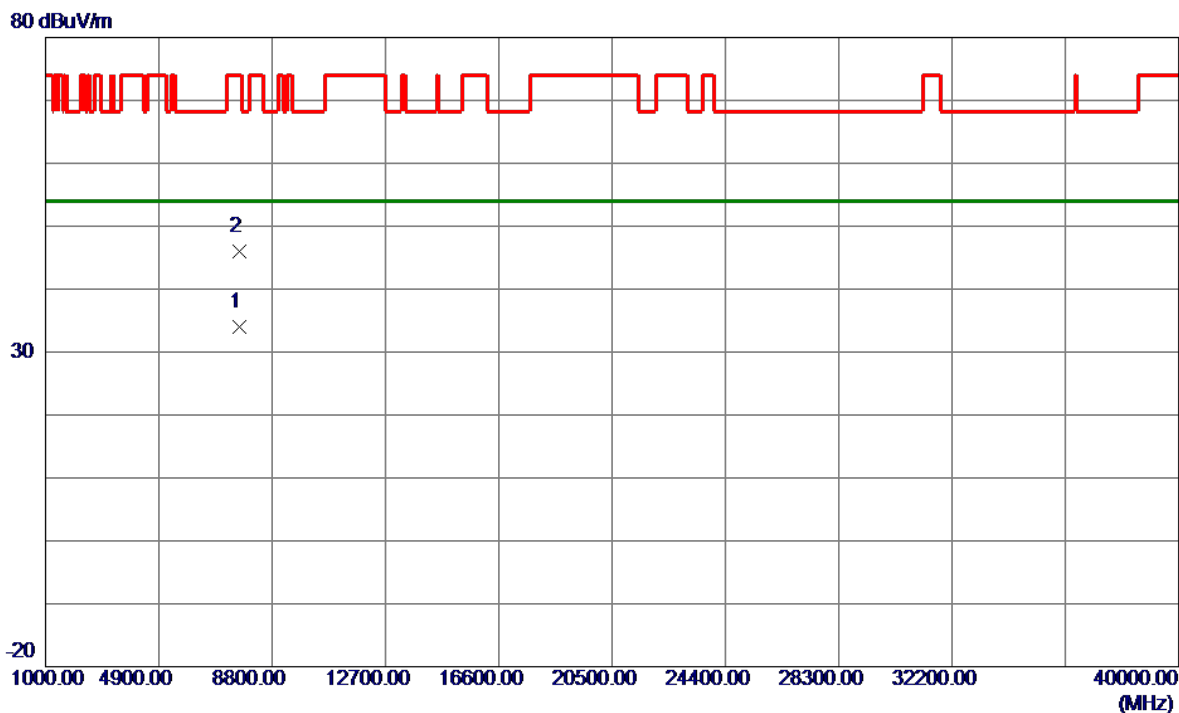


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7672.3650	26.16	7.86	34.02	54.00	-19.98	AVG	
2	7672.6980	38.22	7.86	46.08	74.00	-27.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

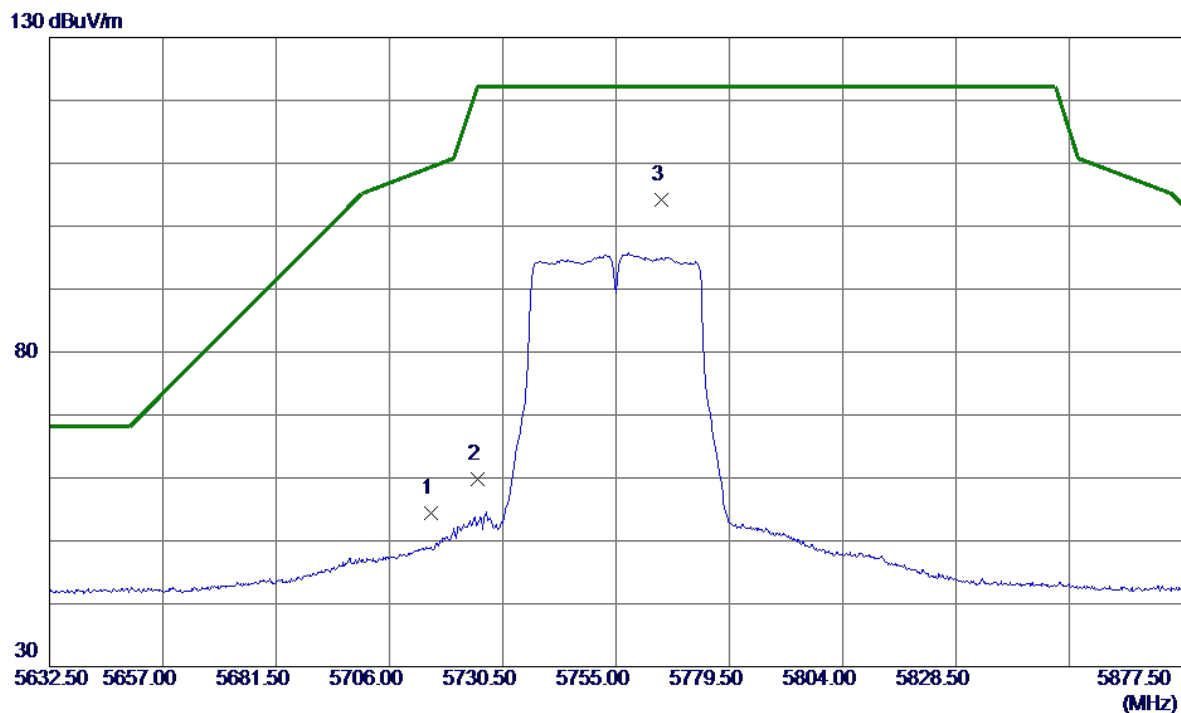


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	40.67	13.64	54.31	109.40	-55.09	Peak	
2	5725.0000	46.14	13.68	59.82	122.20	-62.38	Peak	
3 *	5764.8000	90.35	13.81	104.16	122.20	-18.04	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

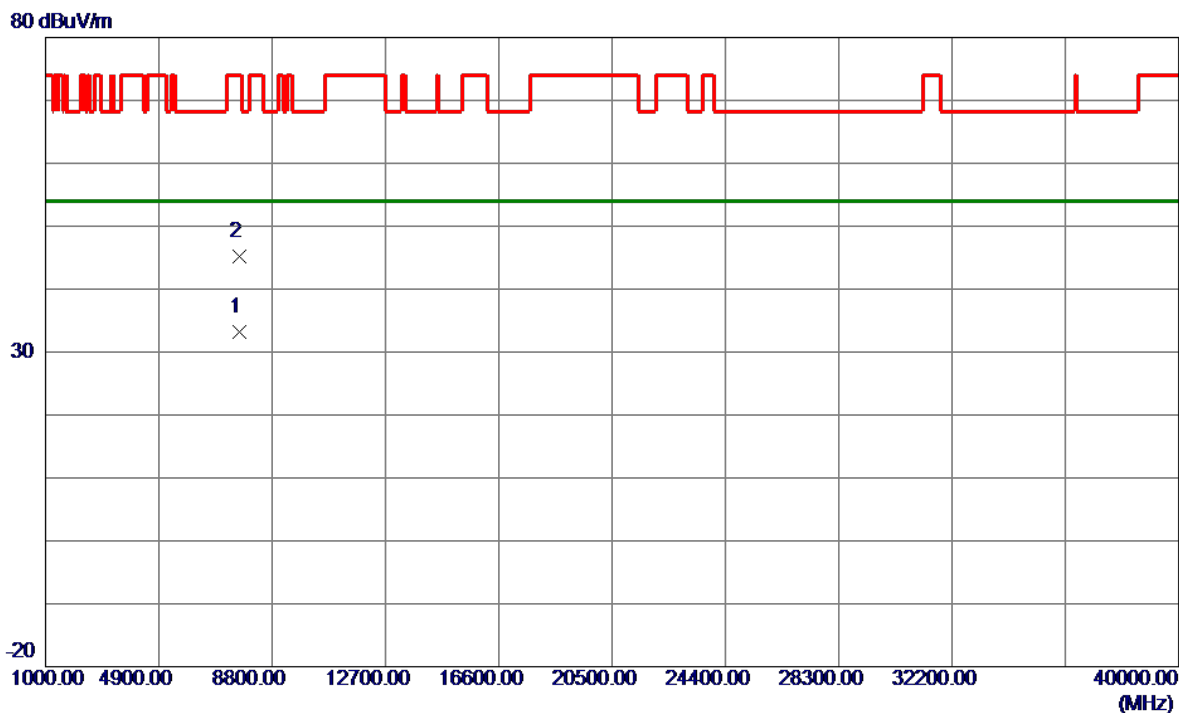


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7673.3300	25.42	7.86	33.28	54.00	-20.72	AVG	
2	7673.3780	37.35	7.86	45.21	74.00	-28.79	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

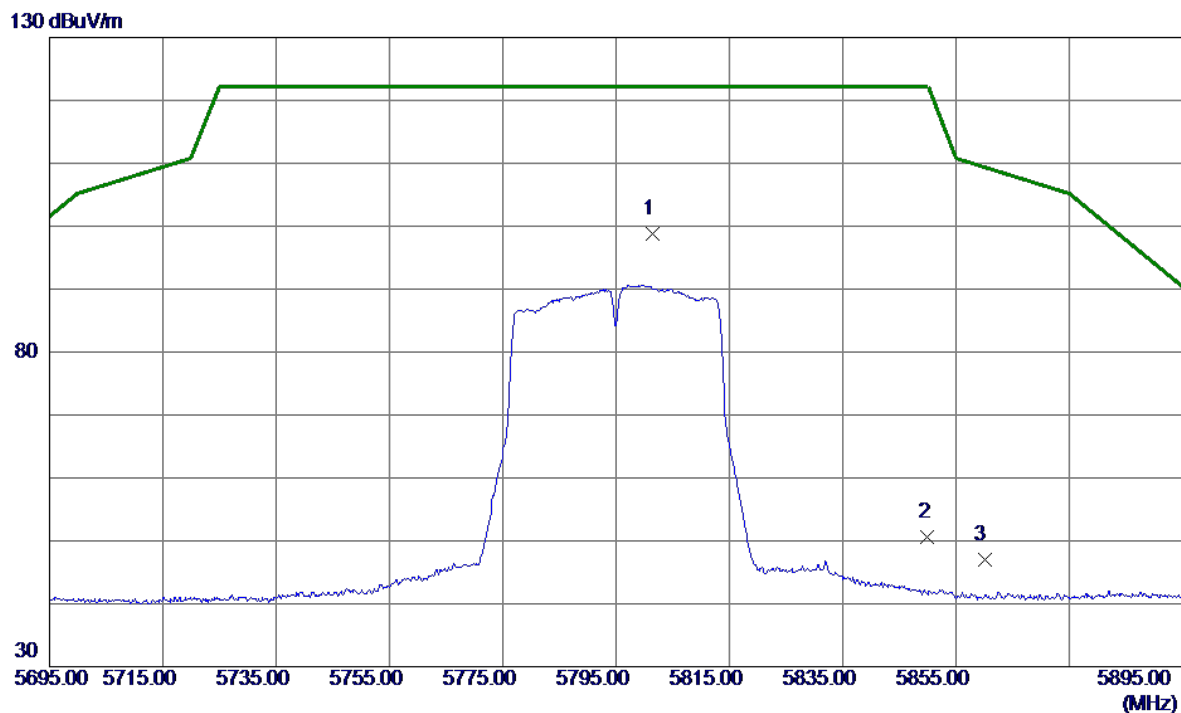


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5801.5000	84.84	13.94	98.78	122.20	-23.42	Peak	No Limit
2	5850.0000	36.55	14.10	50.65	122.20	-71.55	Peak	
3	5860.0000	32.95	14.14	47.09	109.40	-62.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

80 dBuV/m

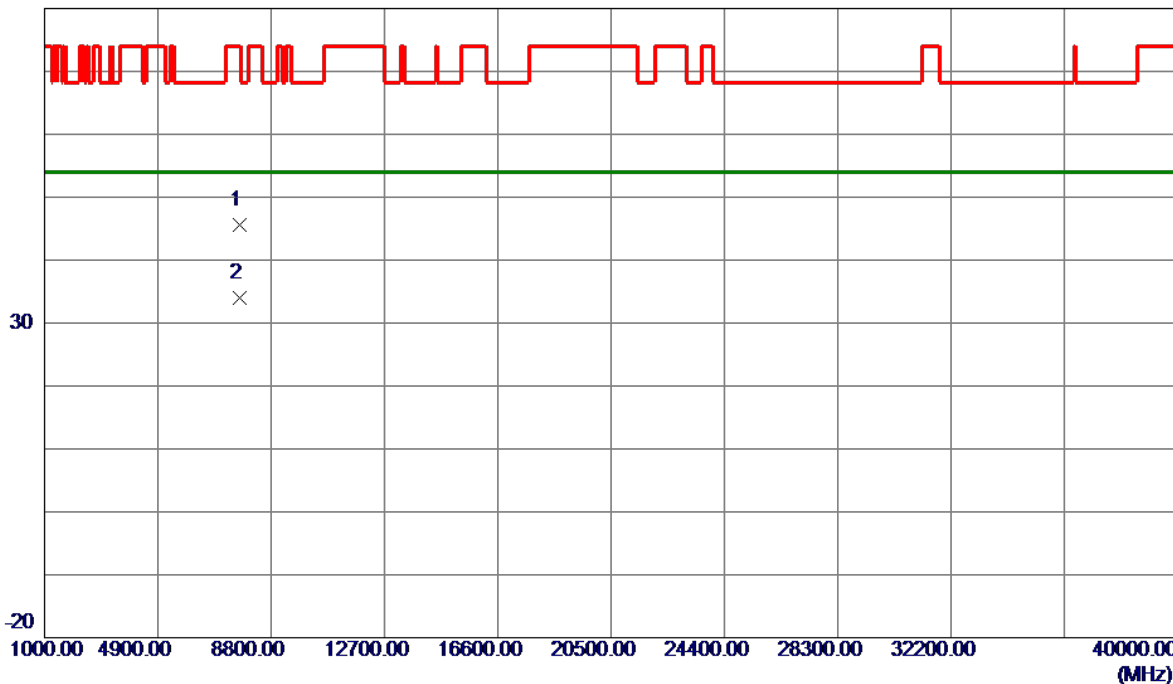


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7726.4380	37.75	7.84	45.59	74.00	-28.41	Peak	
2 *	7726.7860	26.24	7.84	34.08	54.00	-19.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

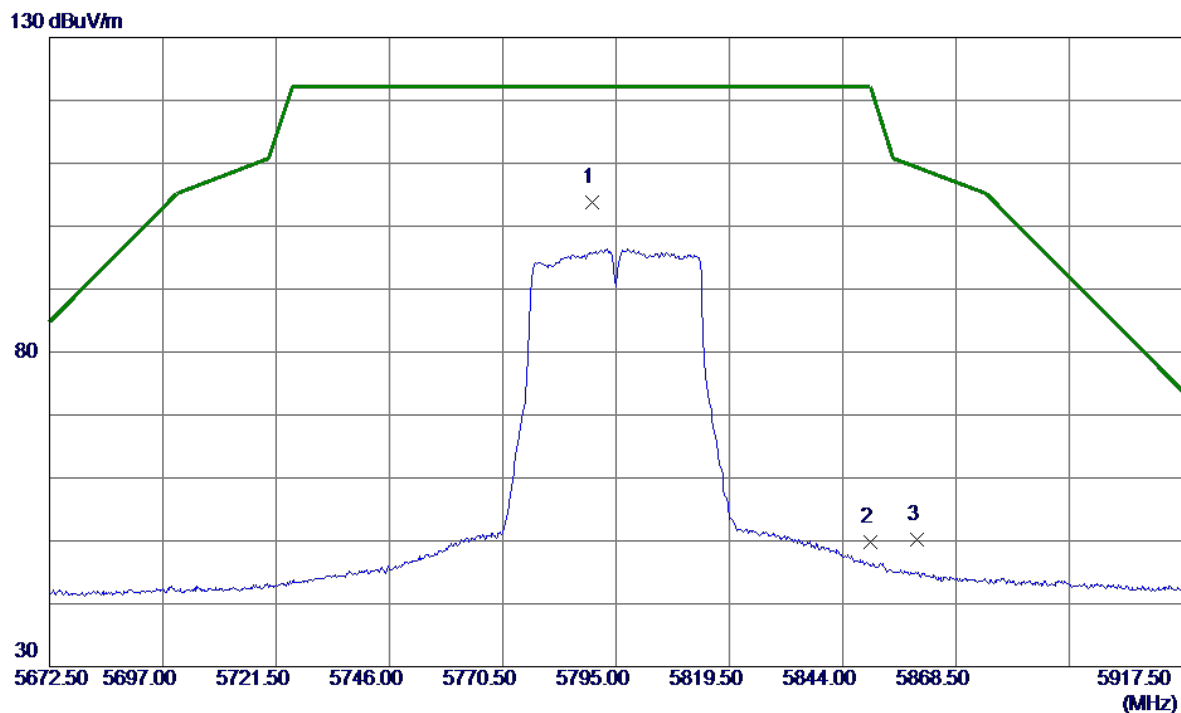


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5789.8550	89.93	13.90	103.83	122.20	-18.37	Peak	No Limit
2	5850.0000	35.63	14.10	49.73	122.20	-72.47	Peak	
3	5860.0000	36.06	14.14	50.20	109.40	-59.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

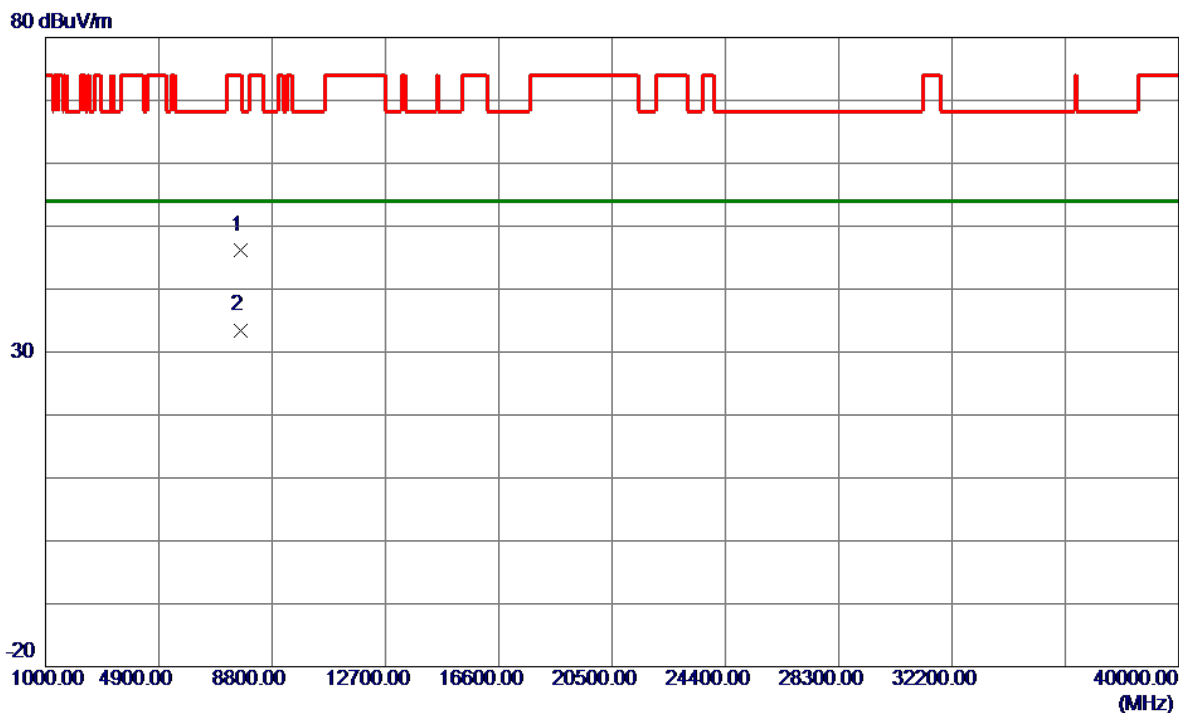


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7726.8760	38.27	7.84	46.11	74.00	-27.89	Peak	
2 *	7729.7860	25.66	7.84	33.50	54.00	-20.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

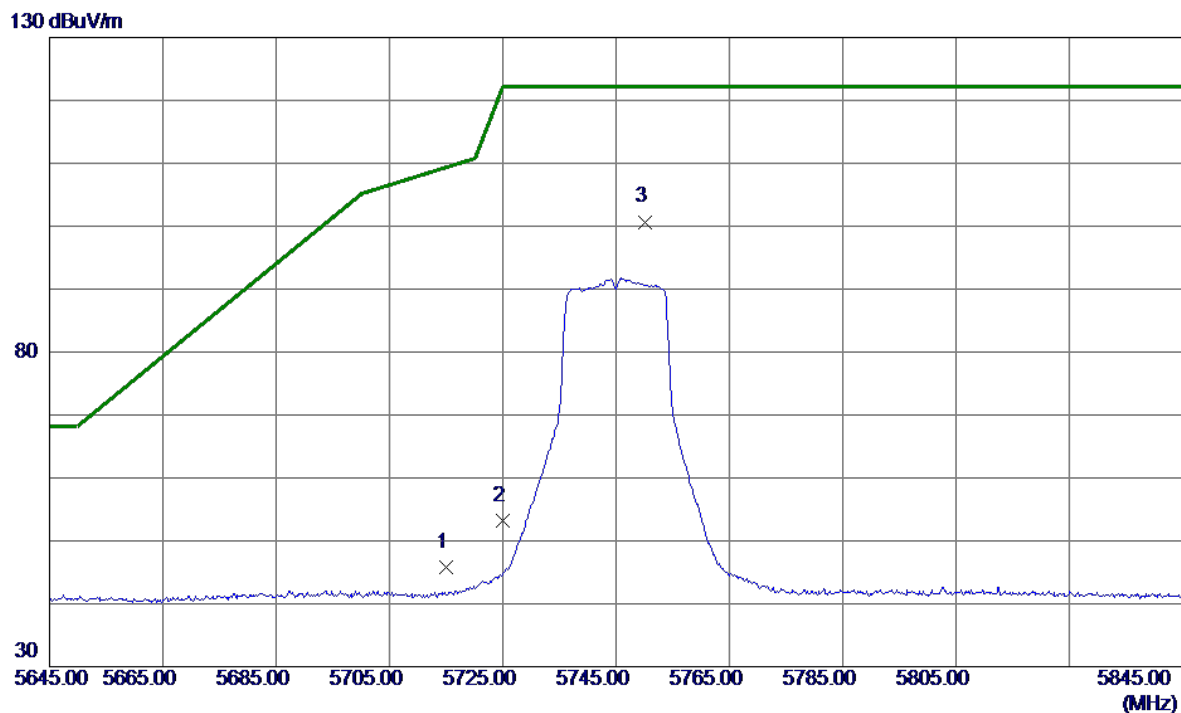


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	32.19	13.64	45.83	109.40	-63.57	Peak	
2	5725.0000	39.53	13.68	53.21	122.20	-68.99	Peak	
3 *	5750.1000	86.94	13.76	100.70	122.20	-21.50	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

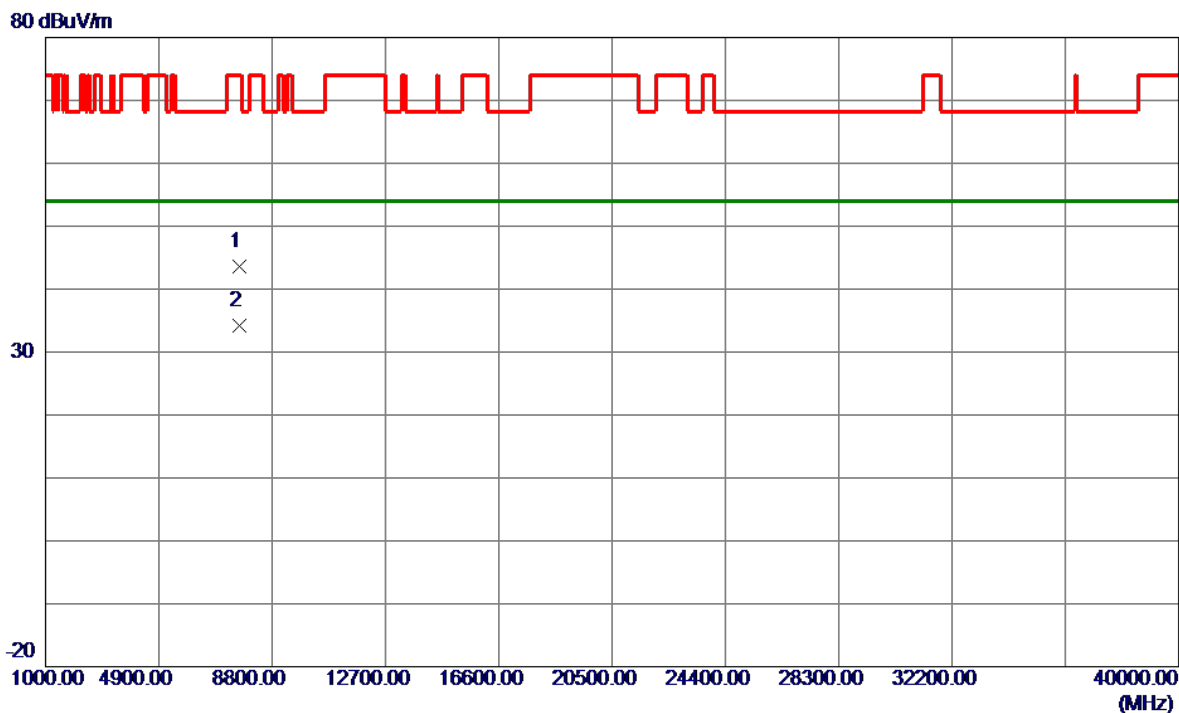


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7656.2500	35.70	7.87	43.57	74.00	-30.43	Peak	
2 *	7660.1250	26.36	7.87	34.23	54.00	-19.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

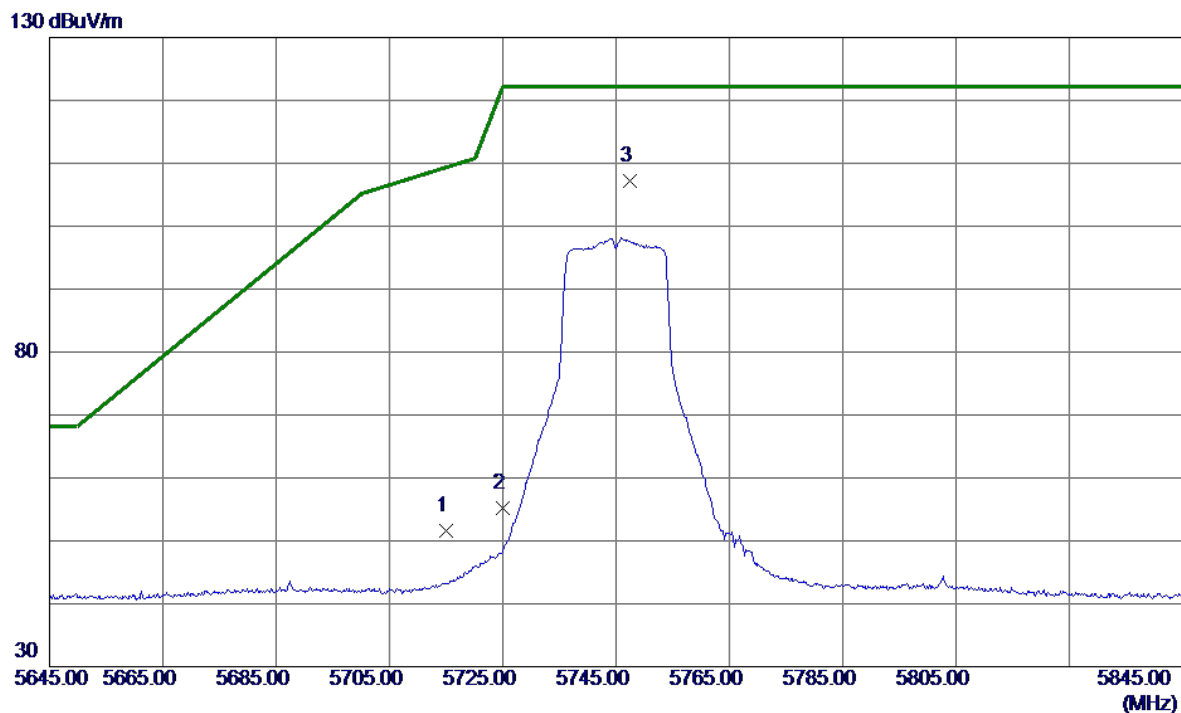


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	37.89	13.64	51.53	109.40	-57.87	Peak	
2	5725.0000	41.52	13.68	55.20	122.20	-67.00	Peak	
3 *	5747.4000	93.51	13.75	107.26	122.20	-14.94	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

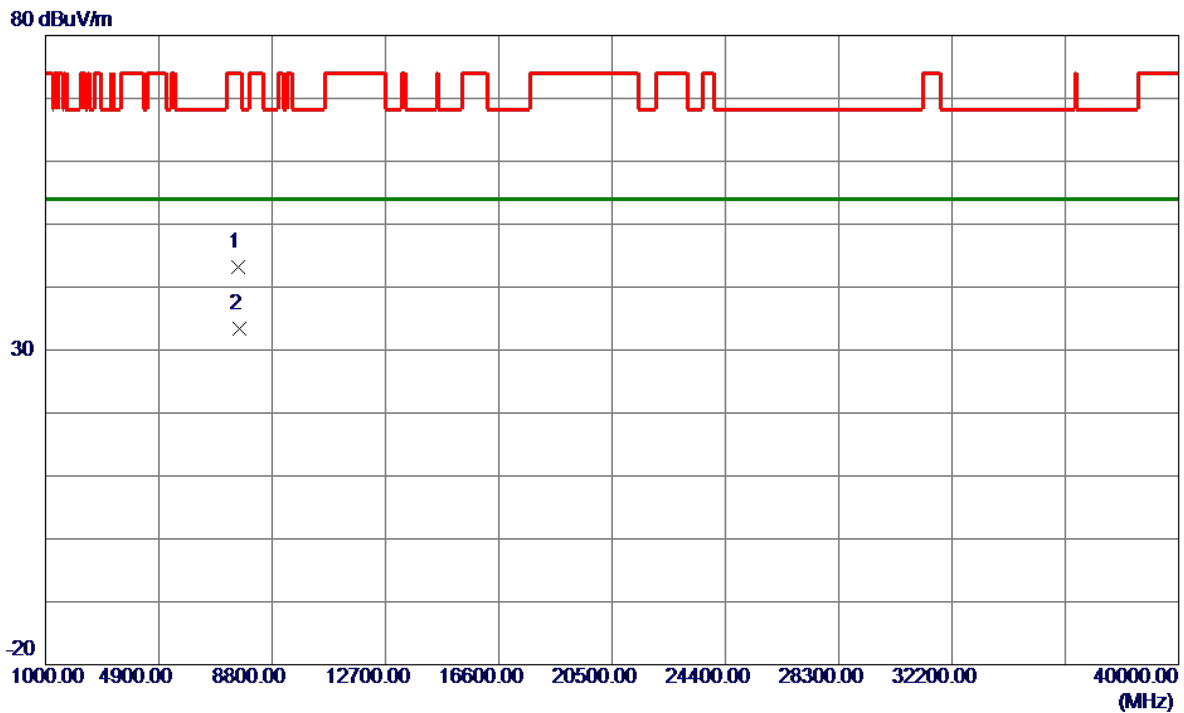


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7640.0750	35.24	7.87	43.11	74.00	-30.89	Peak	
2 *	7659.8500	25.44	7.87	33.31	54.00	-20.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

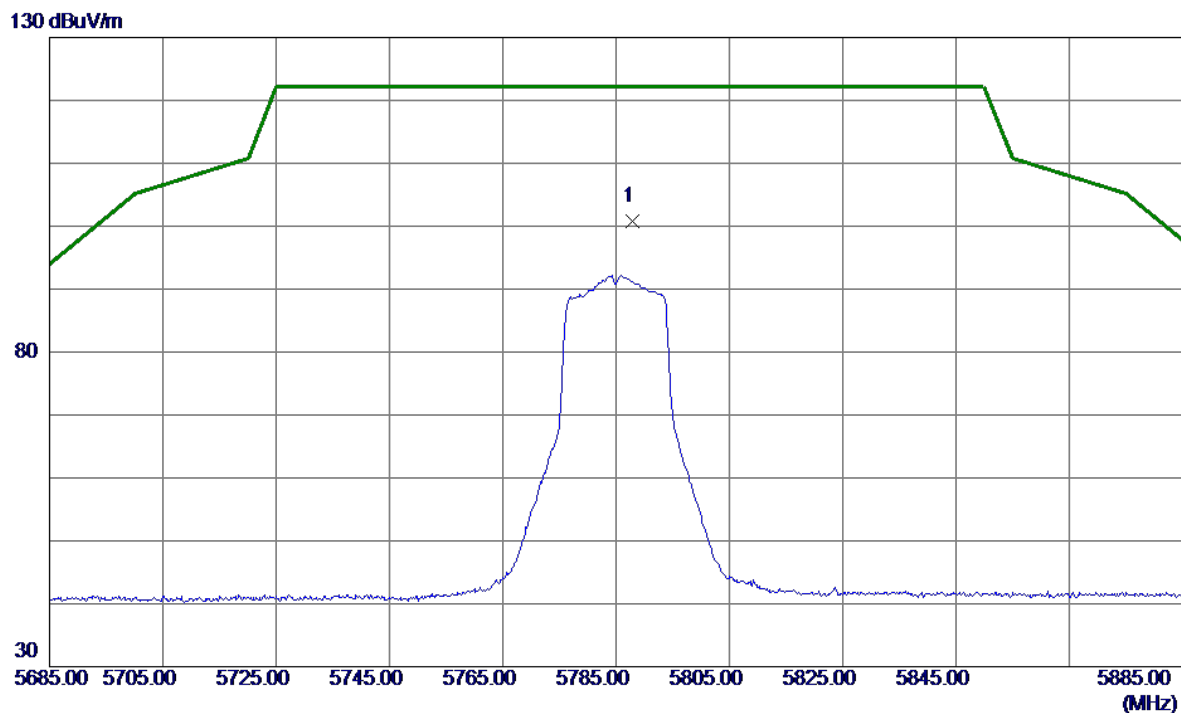


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.9000	86.89	13.89	100.78	122.20	-21.42	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

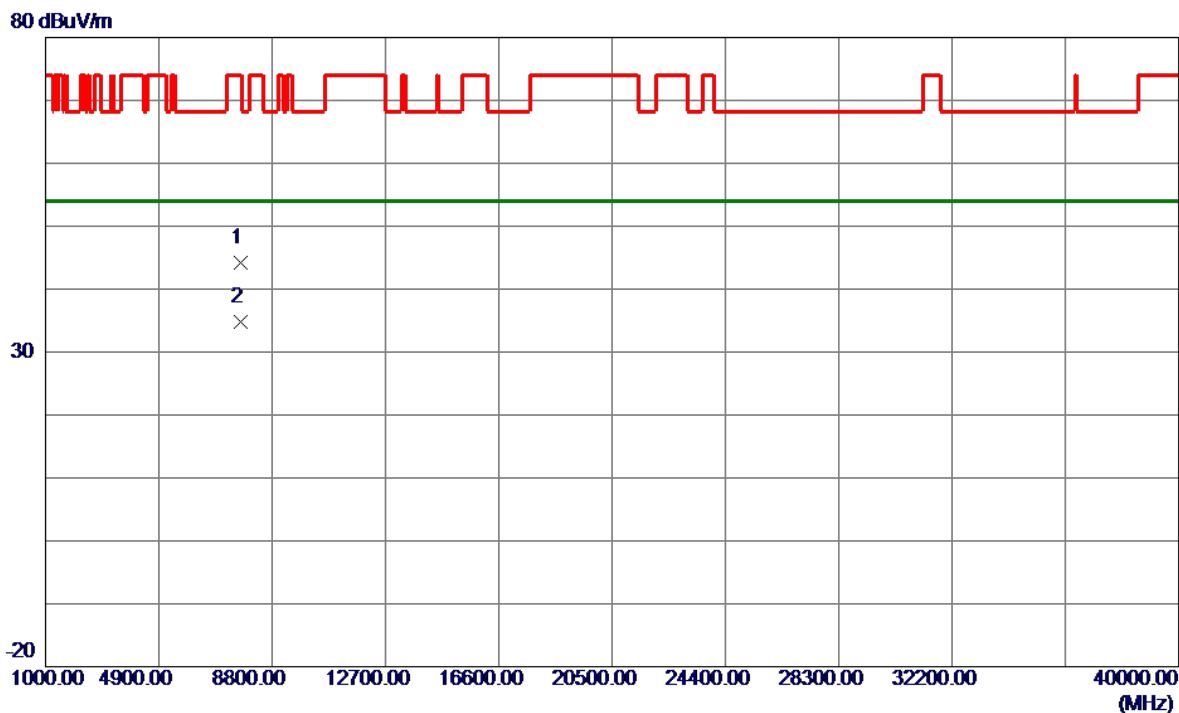


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7696.0300	36.40	7.85	44.25	74.00	-29.75	Peak	
2 *	7713.4050	26.91	7.84	34.75	54.00	-19.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

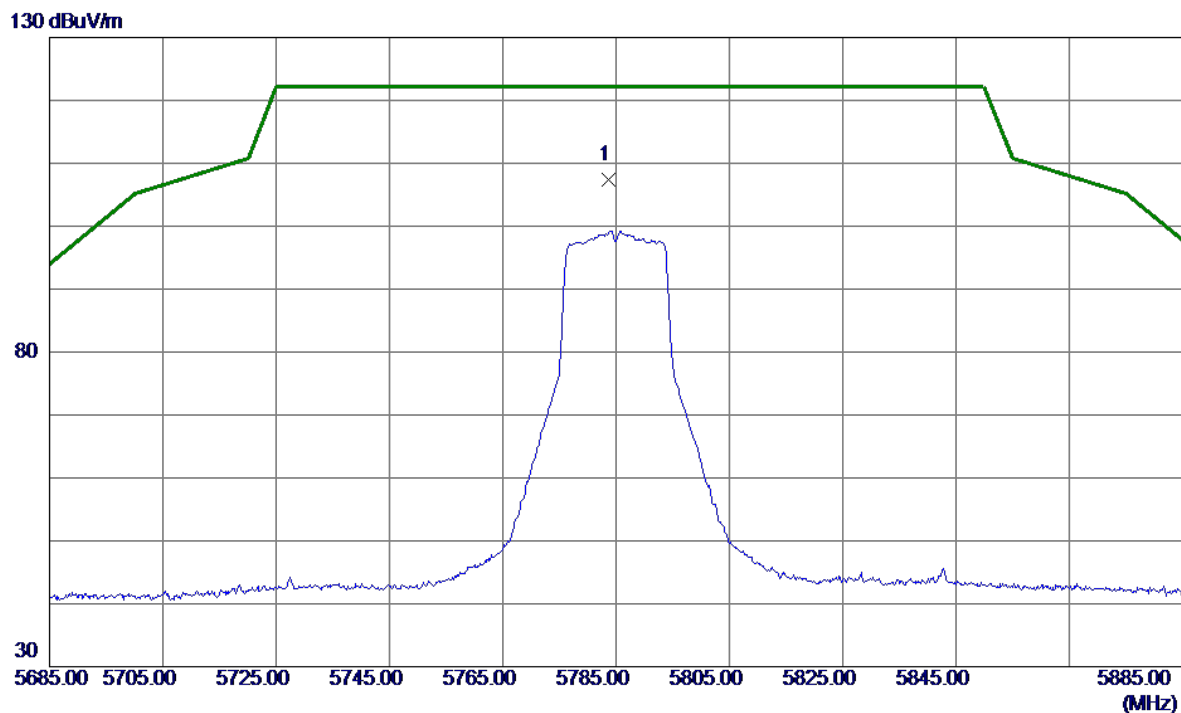


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5783.7000	93.58	13.88	107.46	122.20	-14.74	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

80 dBuV/m

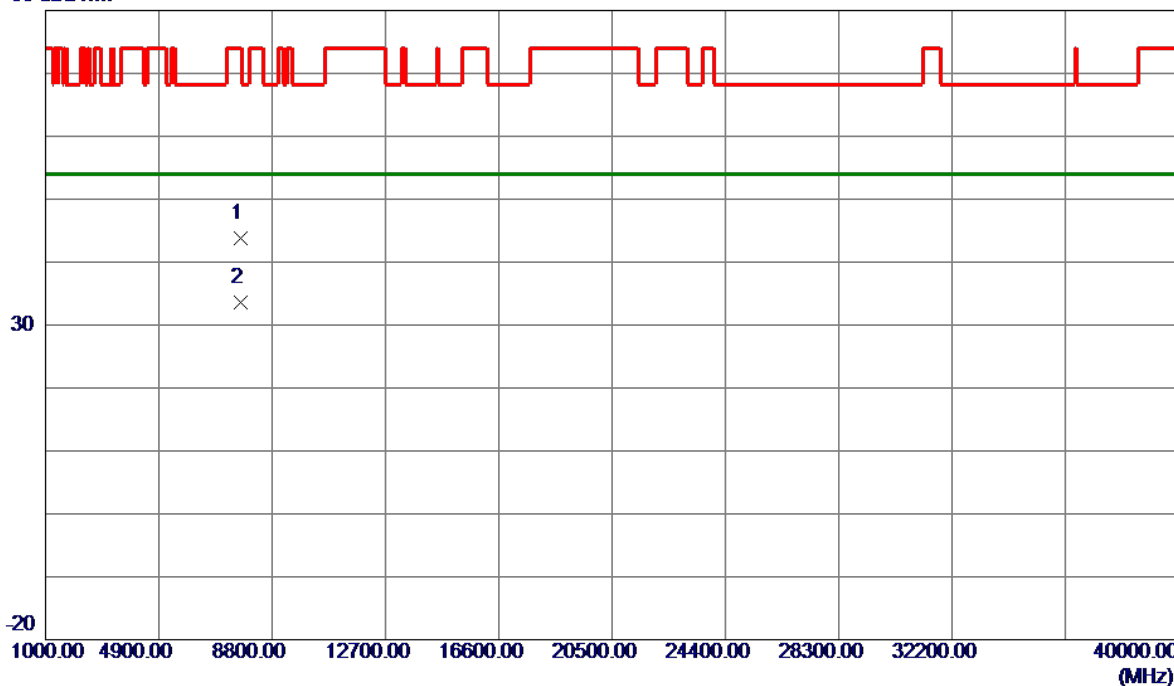


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7706.8800	35.88	7.85	43.73	74.00	-30.27	Peak	
2 *	7713.4300	25.70	7.84	33.54	54.00	-20.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

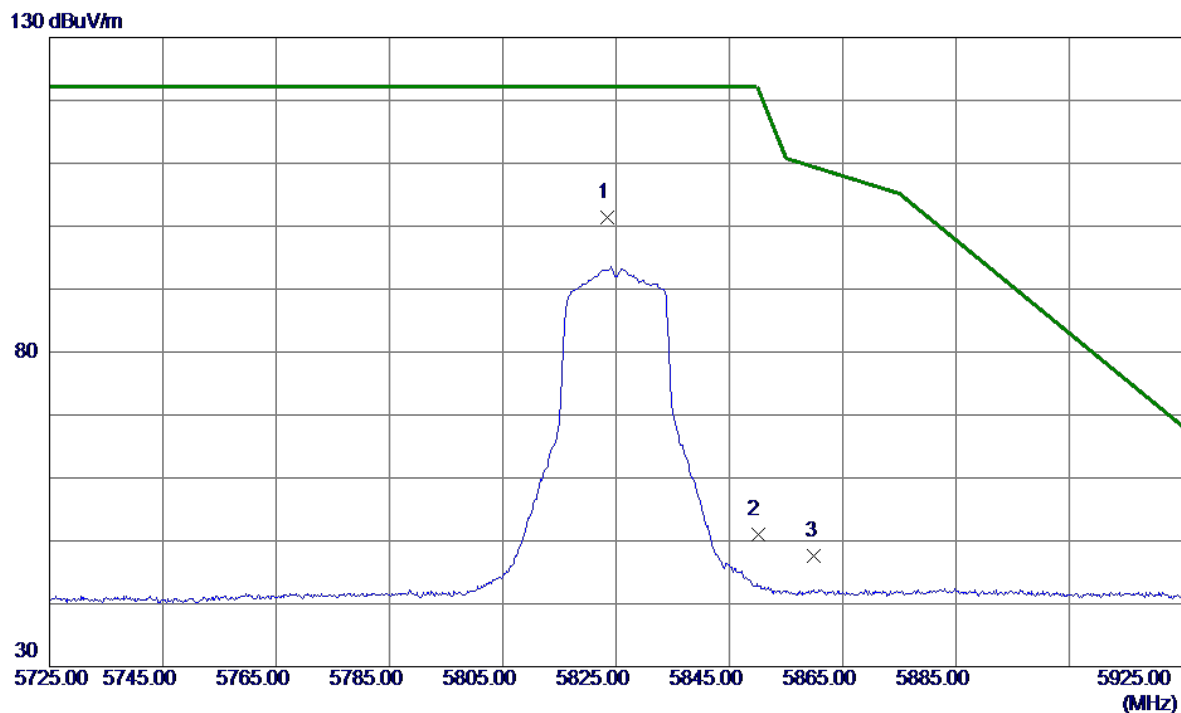


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5823.5000	87.42	14.01	101.43	122.20	-20.77	Peak	No Limit
2	5850.0000	36.95	14.10	51.05	122.20	-71.15	Peak	
3	5860.0000	33.44	14.14	47.58	109.40	-61.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

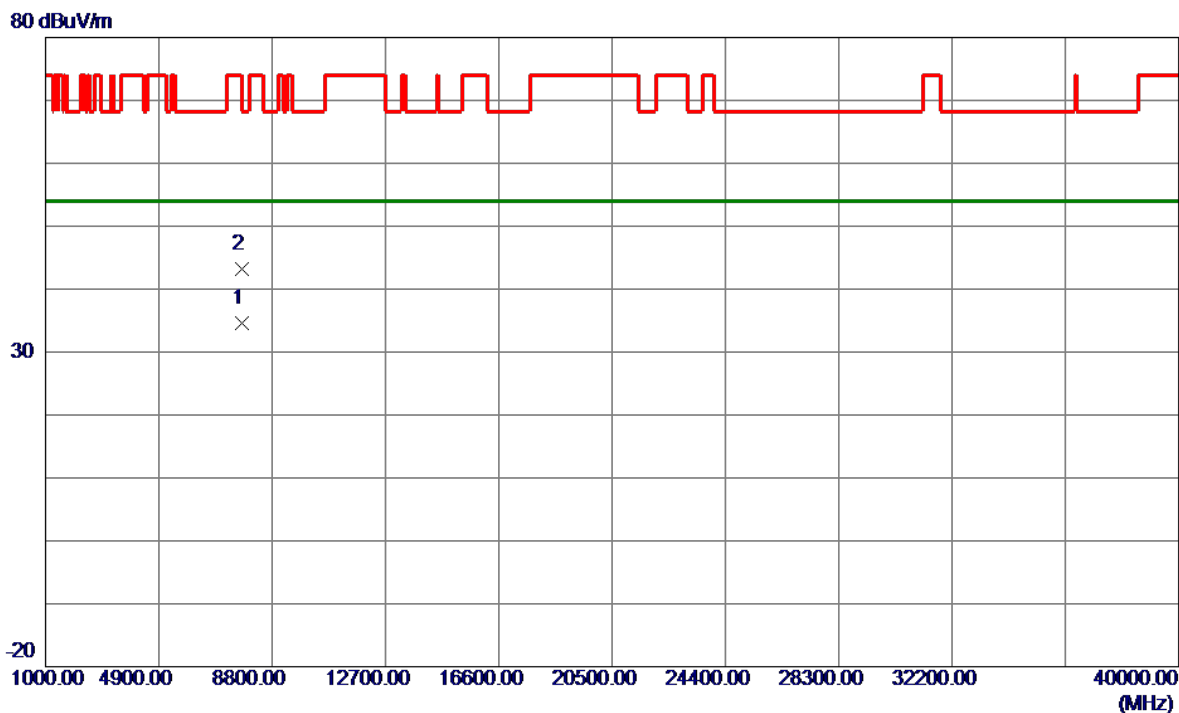


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7766.7700	26.81	7.82	34.63	54.00	-19.37	AVG	
2	7766.9450	35.37	7.82	43.19	68.30	-25.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

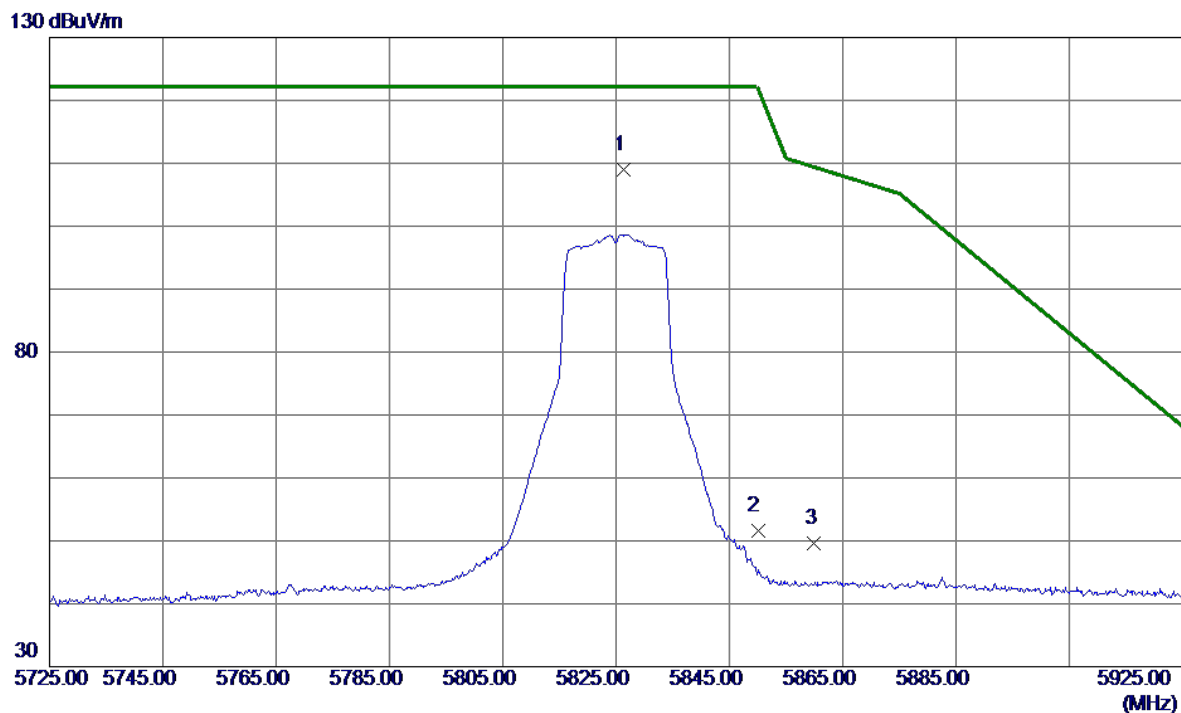


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.3000	94.97	14.02	108.99	122.20	-13.21	Peak	No Limit
2	5850.0000	37.55	14.10	51.65	122.20	-70.55	Peak	
3	5860.0000	35.53	14.14	49.67	109.40	-59.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

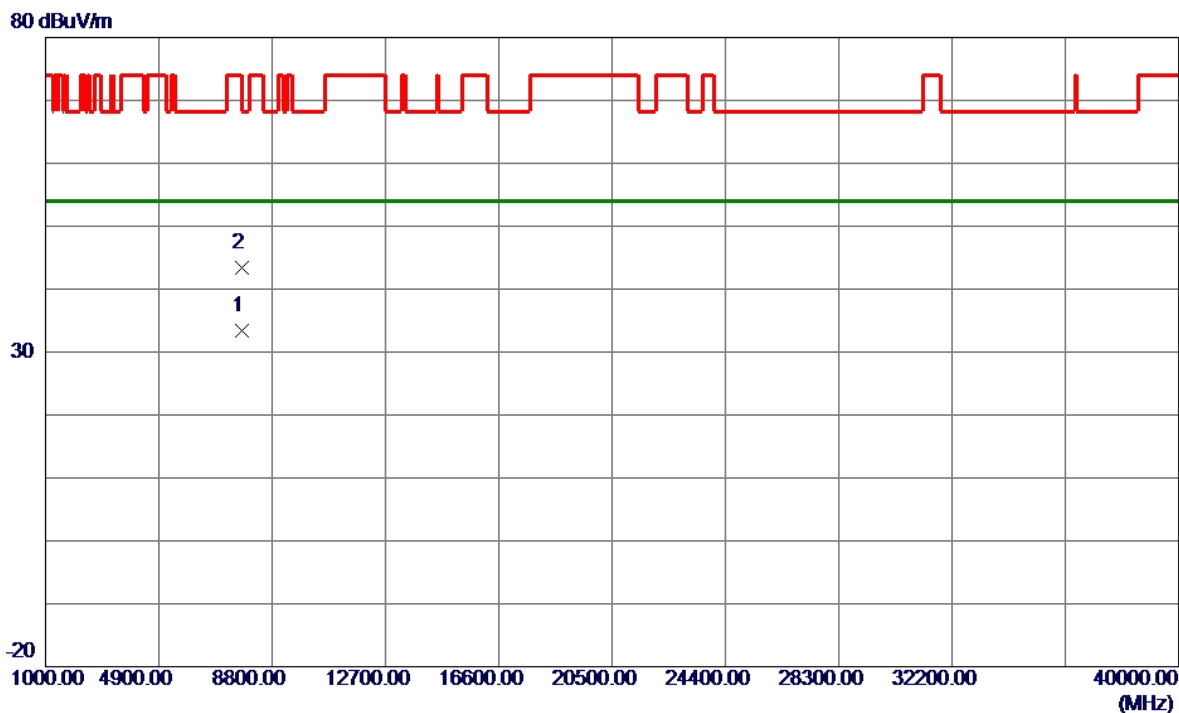


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7752.9950	25.59	7.83	33.42	54.00	-20.58	AVG	
2	7766.3700	35.59	7.82	43.41	68.30	-24.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

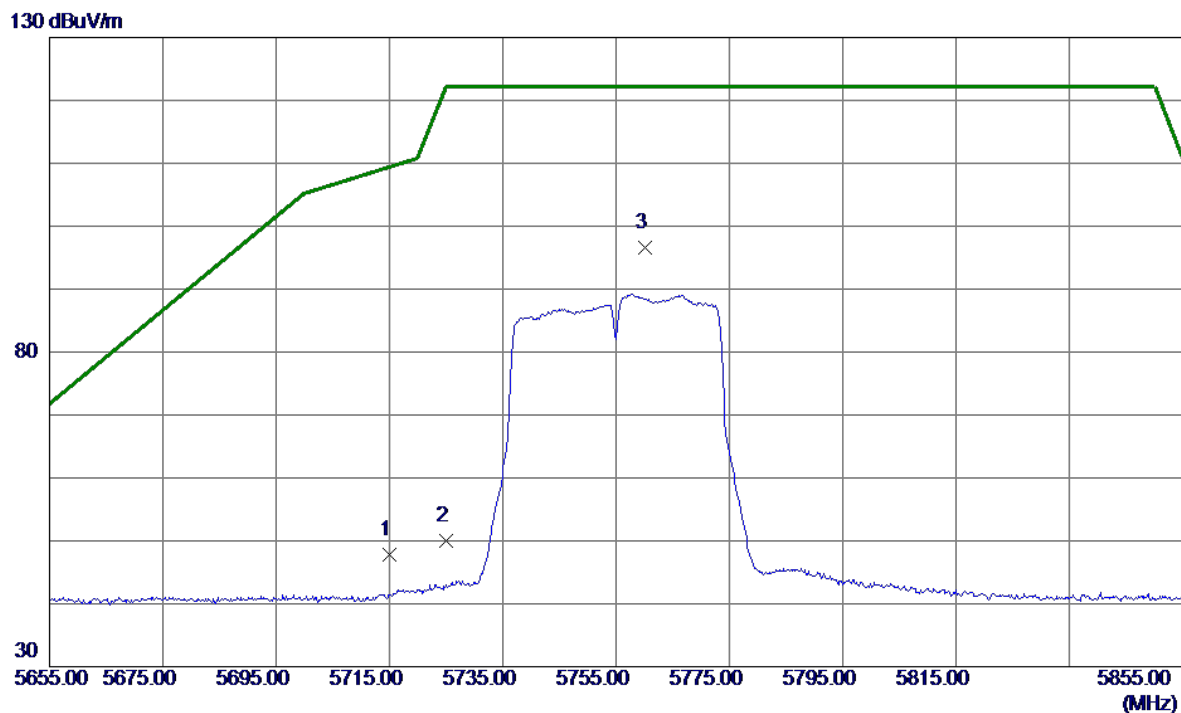


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	34.08	13.64	47.72	109.40	-61.68	Peak	
2	5725.0000	36.23	13.68	49.91	122.20	-72.29	Peak	
3 *	5760.2000	82.86	13.80	96.66	122.20	-25.54	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

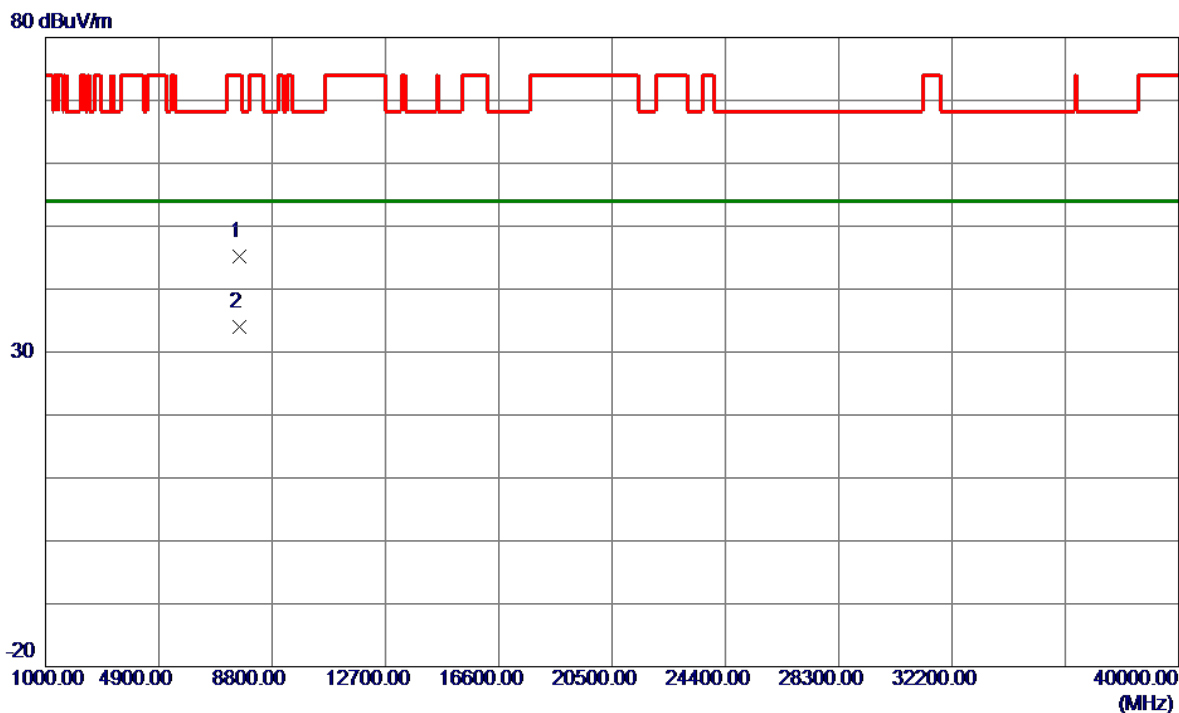


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7672.9700	37.38	7.86	45.24	74.00	-28.76	Peak	
2 *	7673.5400	26.09	7.86	33.95	54.00	-20.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

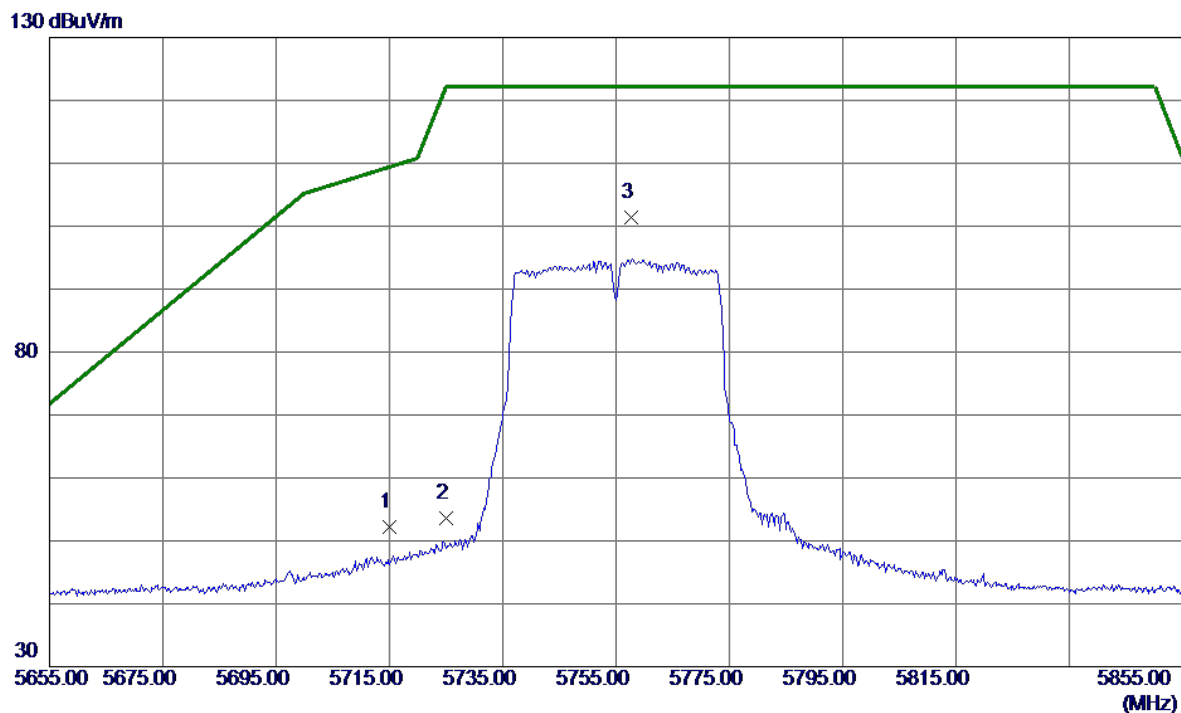


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	38.48	13.64	52.12	109.40	-57.28	Peak	
2	5725.0000	39.83	13.68	53.51	122.20	-68.69	Peak	
3 *	5757.6000	87.67	13.79	101.46	122.20	-20.74	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

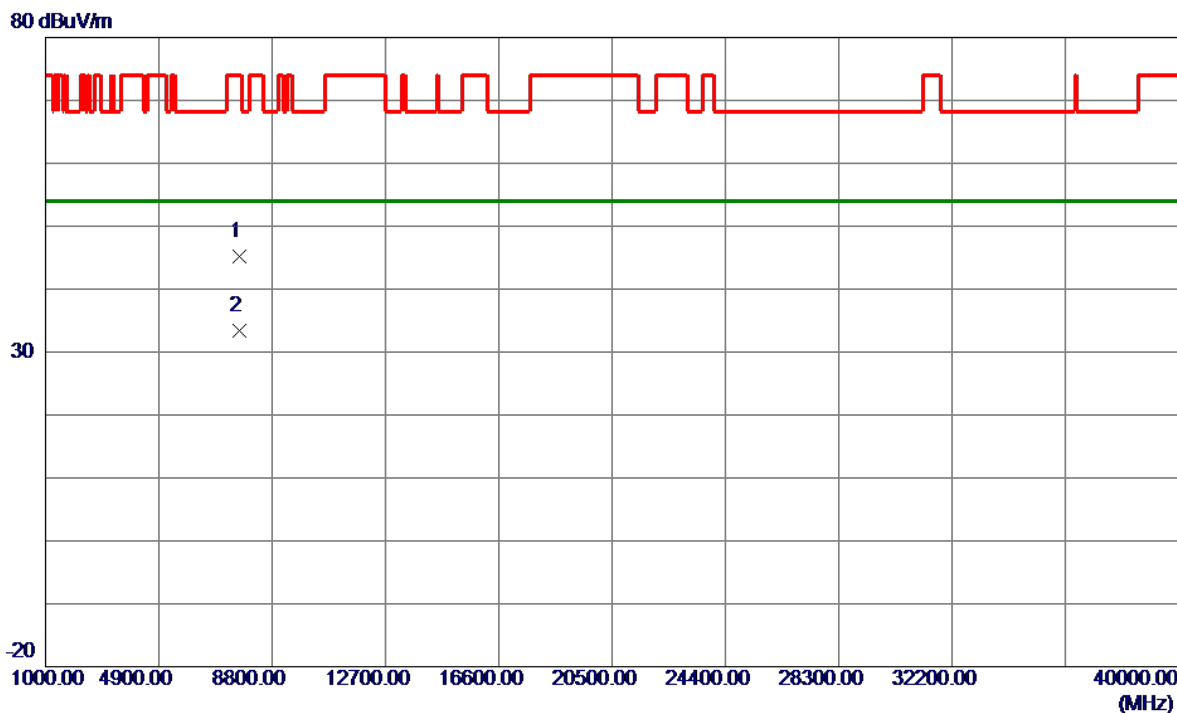


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7673.3260	37.43	7.86	45.29	74.00	-28.71	Peak	
2 *	7673.3700	25.46	7.86	33.32	54.00	-20.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

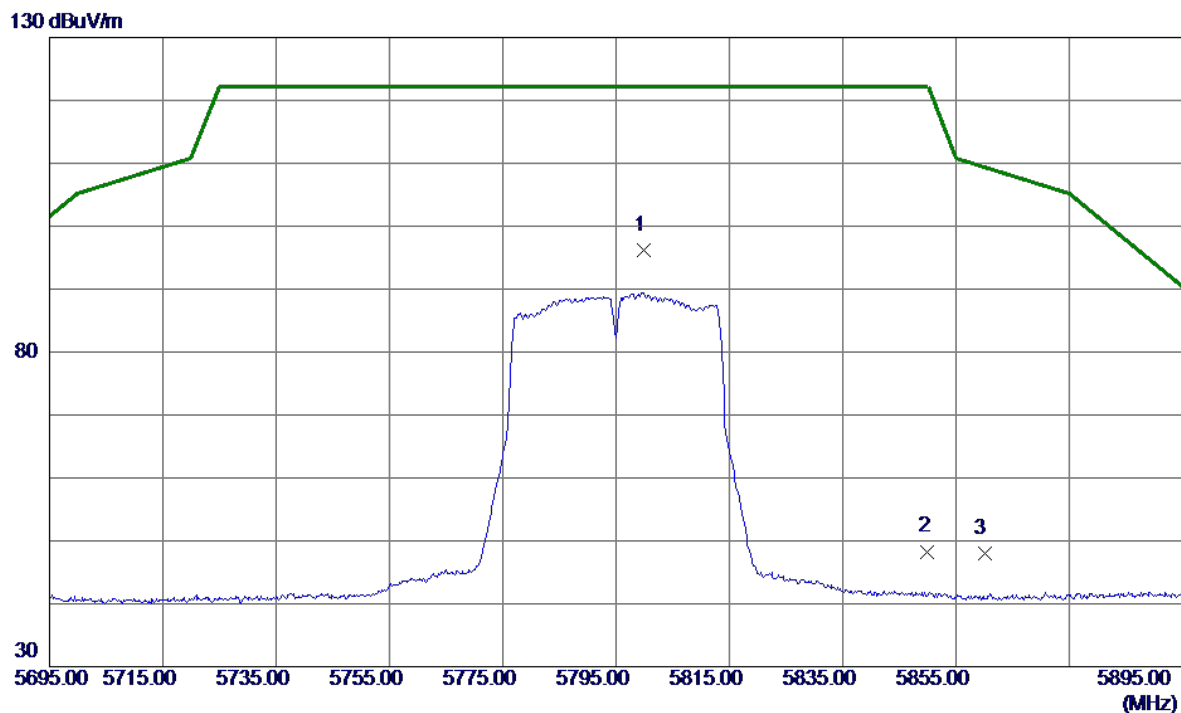


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5799.8000	82.31	13.93	96.24	122.20	-25.96	Peak	No Limit
2	5850.0000	34.20	14.10	48.30	122.20	-73.90	Peak	
3	5860.0000	33.82	14.14	47.96	109.40	-61.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

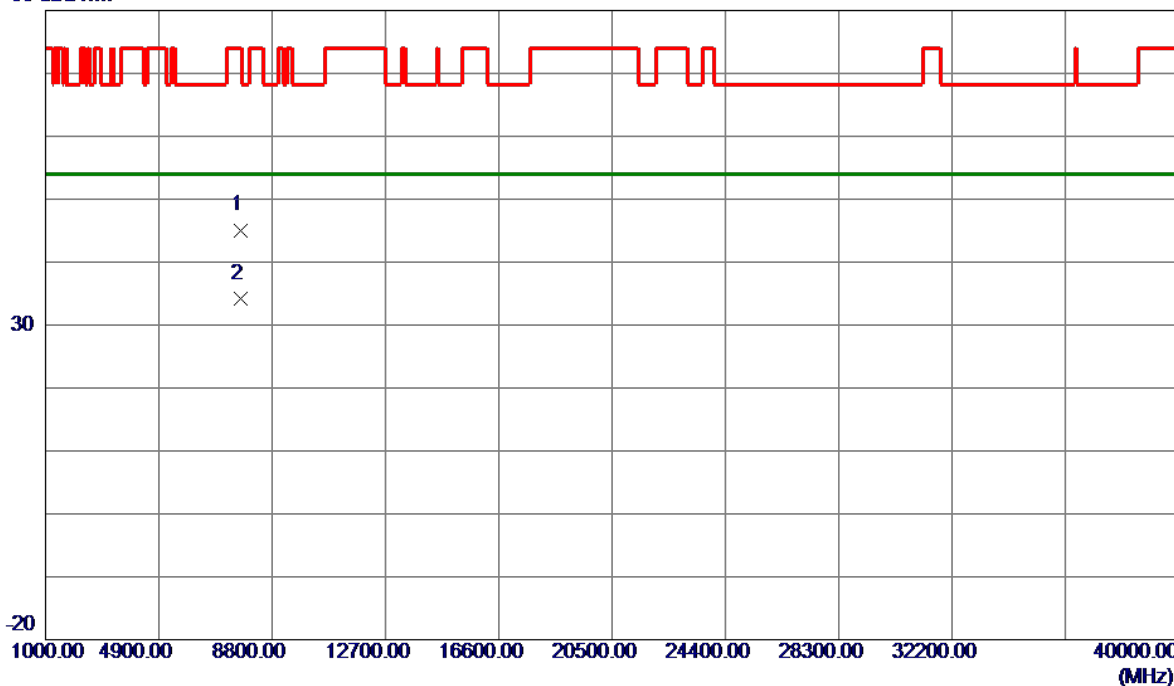


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7726.4530	37.26	7.84	45.10	74.00	-28.90	Peak	
2 *	7726.7760	26.32	7.84	34.16	54.00	-19.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

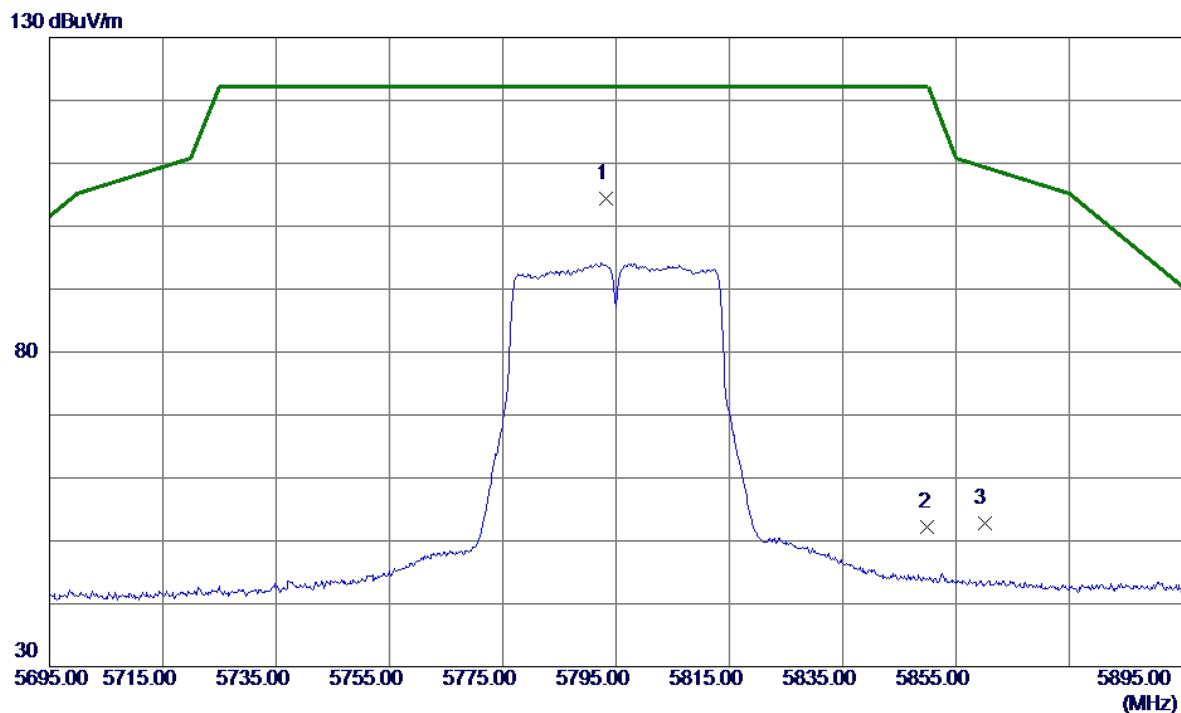


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5793.3000	90.46	13.91	104.37	122.20	-17.83	Peak	No Limit
2	5850.0000	38.04	14.10	52.14	122.20	-70.06	Peak	
3	5860.0000	38.57	14.14	52.71	109.40	-56.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

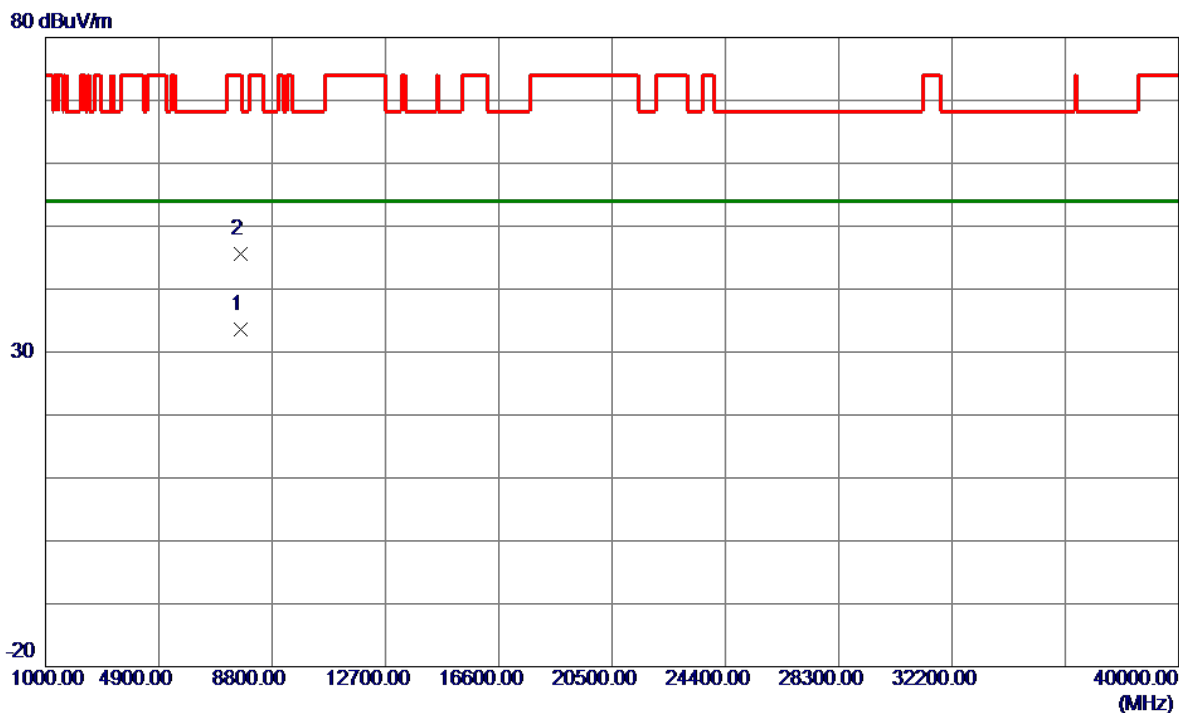


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7726.3680	25.72	7.84	33.56	54.00	-20.44	AVG	
2	7726.7300	37.83	7.84	45.67	74.00	-28.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

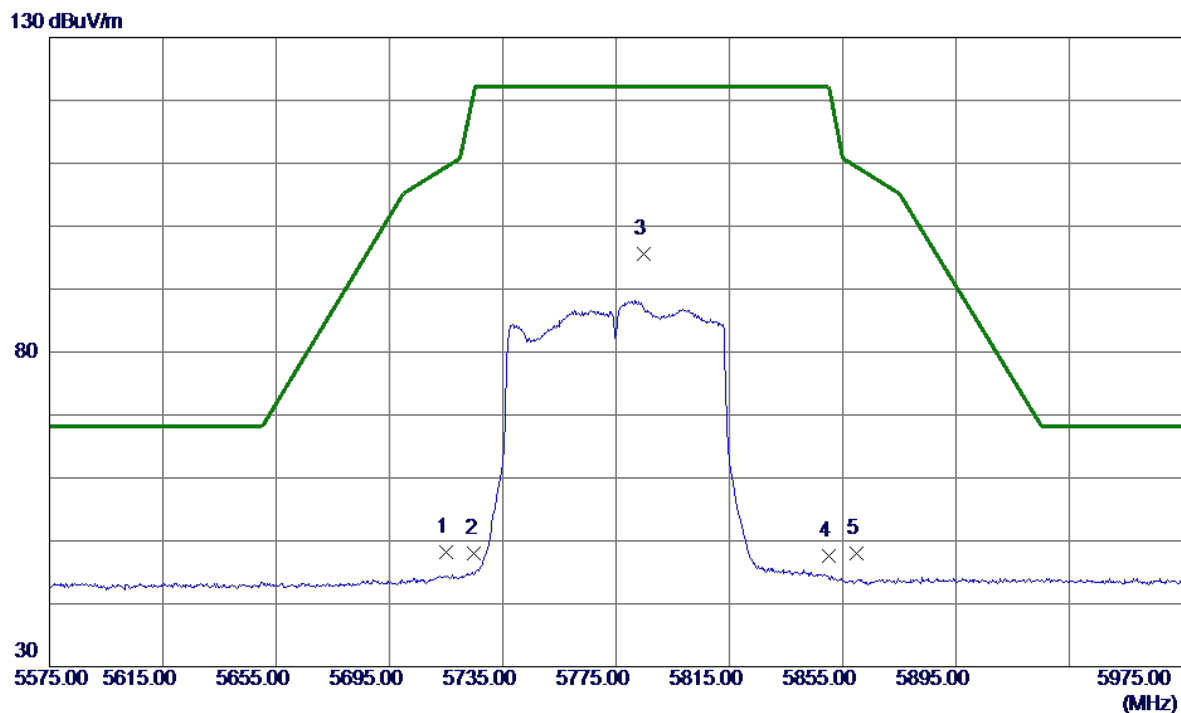


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	34.54	13.64	48.18	109.40	-61.22	Peak	
2	5725.0000	34.37	13.68	48.05	122.20	-74.15	Peak	
3 *	5784.6000	81.66	13.88	95.54	122.20	-26.66	Peak	No Limit
4	5850.0000	33.50	14.10	47.60	122.20	-74.60	Peak	
5	5860.0000	33.80	14.14	47.94	109.40	-61.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

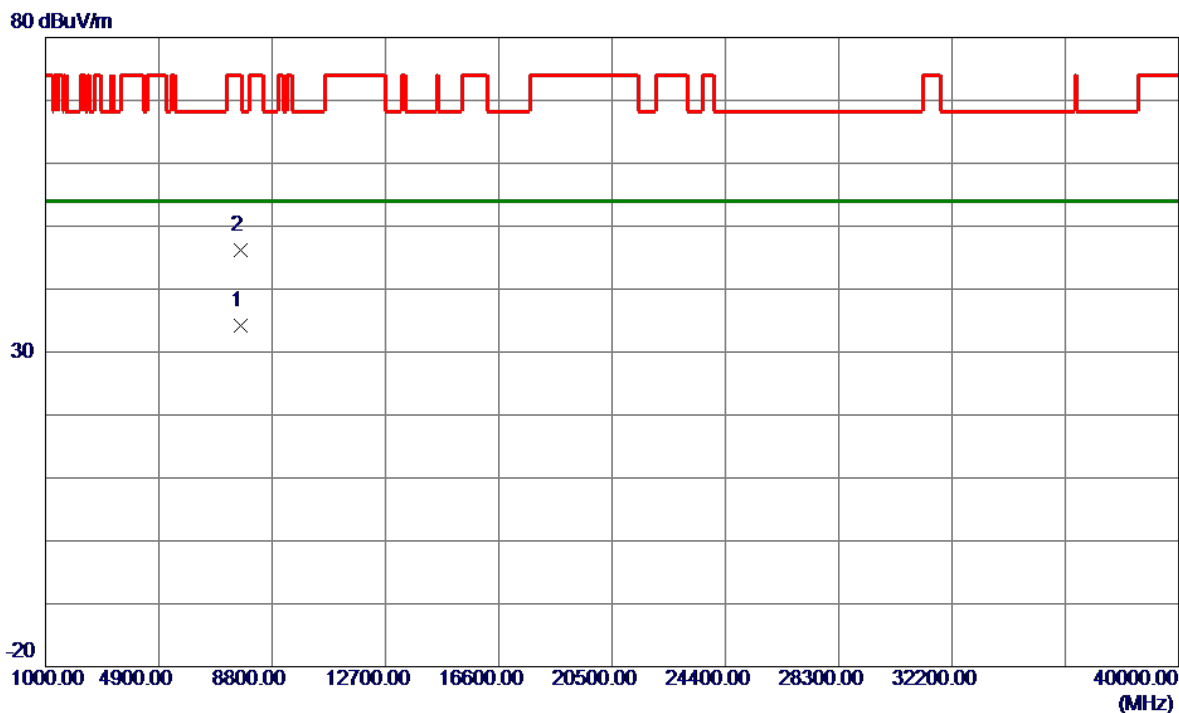


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7700.7890	26.30	7.85	34.15	54.00	-19.85	AVG	
2	7701.6390	38.33	7.85	46.18	74.00	-27.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

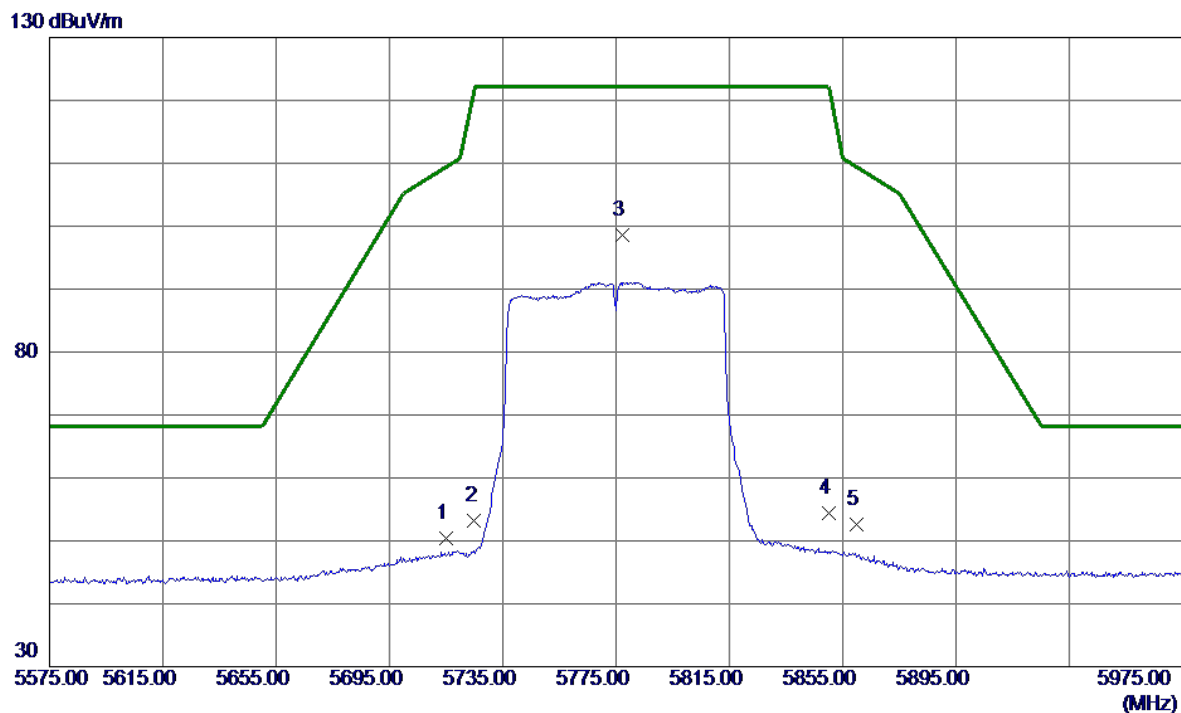


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	36.85	13.64	50.49	109.40	-58.91	Peak	
2	5725.0000	39.46	13.68	53.14	122.20	-69.06	Peak	
3 *	5777.2000	84.74	13.85	98.59	122.20	-23.61	Peak	No Limit
4	5850.0000	40.39	14.10	54.49	122.20	-67.71	Peak	
5	5860.0000	38.52	14.14	52.66	109.40	-56.74	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

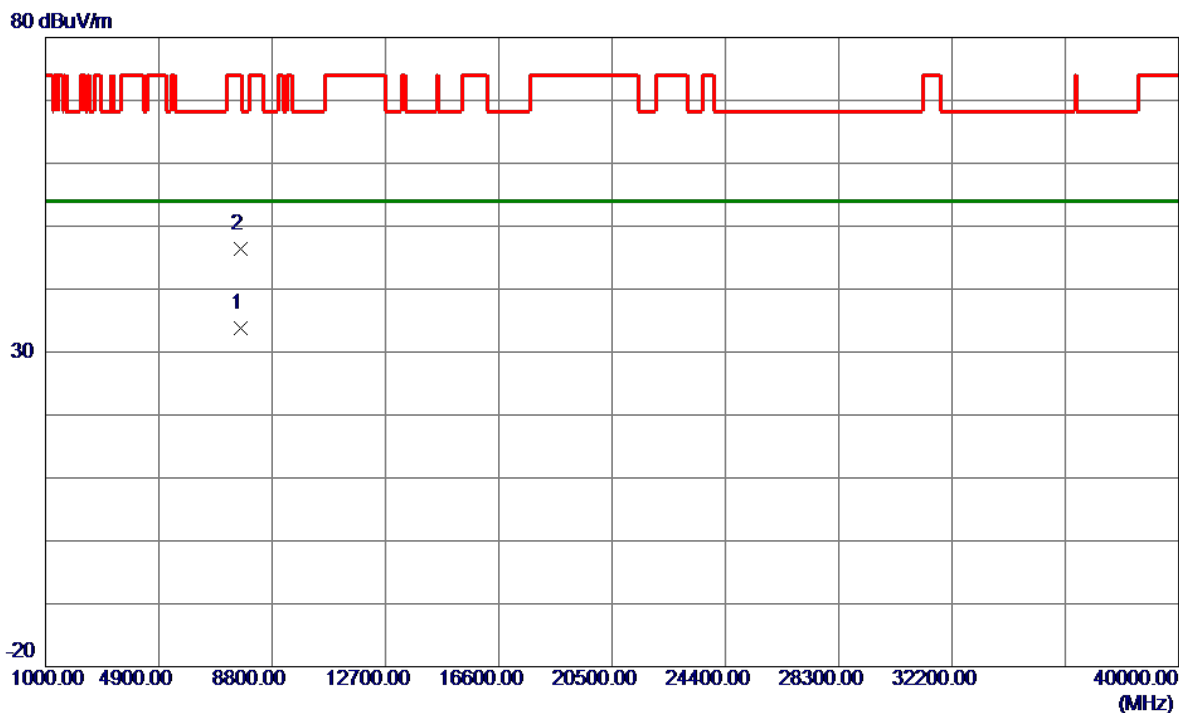

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7700.2790	25.88	7.85	33.73	54.00	-20.27	AVG	
2	7700.7300	38.62	7.85	46.47	74.00	-27.53	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	25.750	17.000
40	5200	24.189	17.000
48	5240	24.450	16.900

CH36

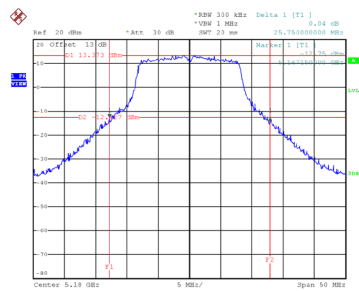


Date: 25.NOV.2021 19:01:53

CH40
26 dB Bandwidth

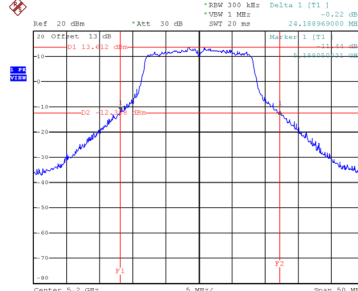


Date: 25.NOV.2021 19:02:58

CH48

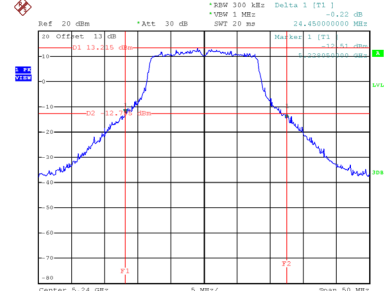


Date: 25.NOV.2021 19:03:48


99 % Occupied Bandwidth

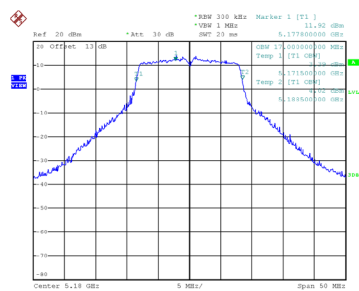

Date: 25.NOV.2021 19:01:34

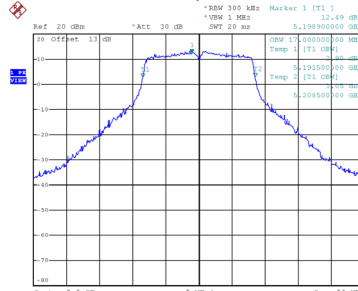

Date: 25.NOV.2021 19:02:33

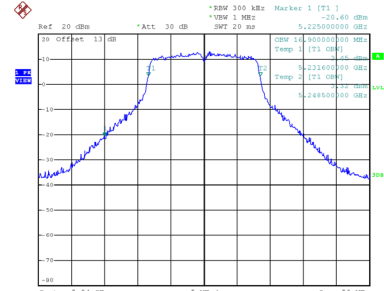


Date: 25.NOV.2021 19:03:26

Test Mode	UNII-1_TX N(HT20) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	24.589	18.000
40	5200	24.690	18.100
48	5240	24.699	18.100

CH36

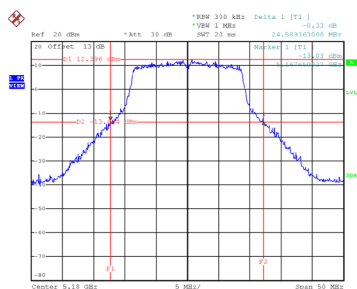


Date: 25.NOV.2021 19:13:32

CH40
26 dB Bandwidth

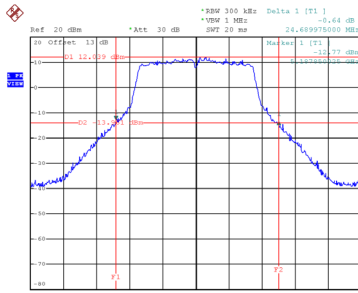


Date: 25.NOV.2021 19:14:21

CH48

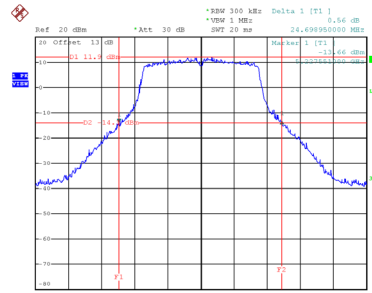


Date: 25.NOV.2021 19:15:08


99 % Occupied Bandwidth

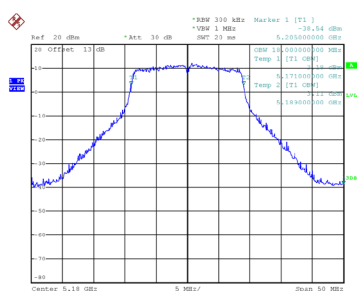

Date: 25.NOV.2021 19:13:11

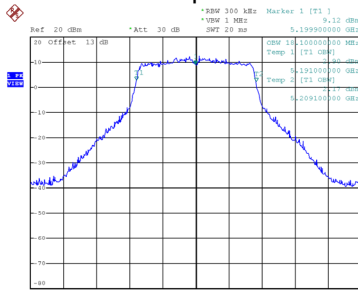

Date: 25.NOV.2021 19:13:57

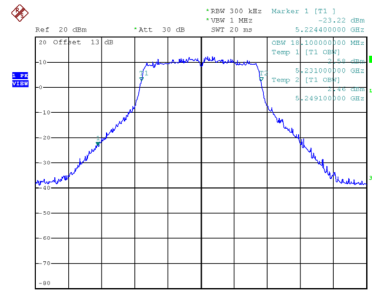


Date: 25.NOV.2021 19:14:46


Test Mode	UNII-1_TX N(HT40) Mode
-----------	------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	41.398	36.800
46	5230	41.590	36.800



CH38

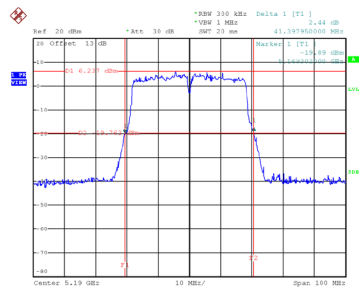

CH46 26 dB Bandwidth

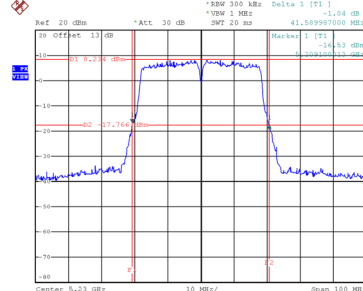


99 % Occupied Bandwidth

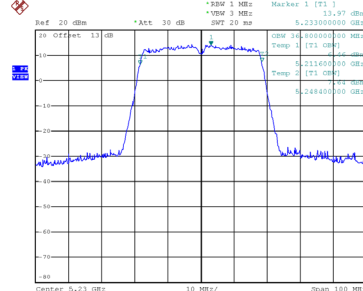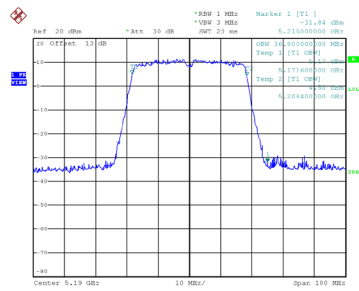

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	24.890	18.100
40	5200	24.650	18.100
48	5240	24.250	18.100

CH36

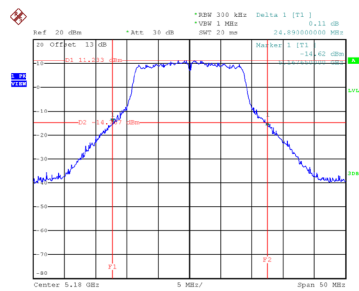


Date: 25.NOV.2021 19:36:10

CH40
26 dB Bandwidth

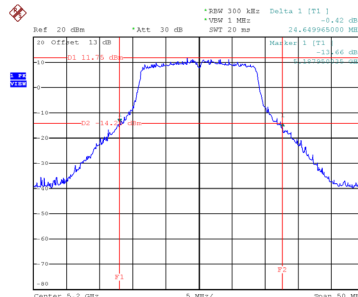


Date: 25.NOV.2021 19:36:16

CH48

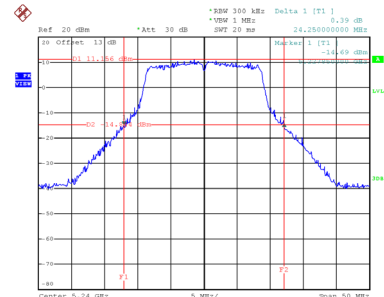


Date: 25.NOV.2021 19:37:41


99 % Occupied Bandwidth

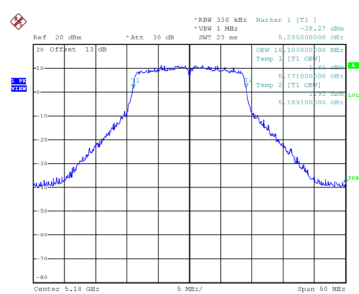

Date: 25.NOV.2021 19:35:49

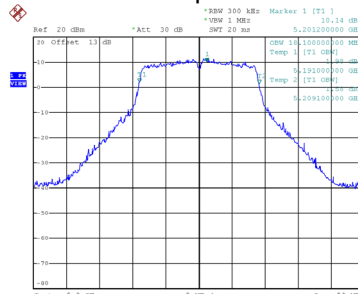

Date: 25.NOV.2021 19:36:14

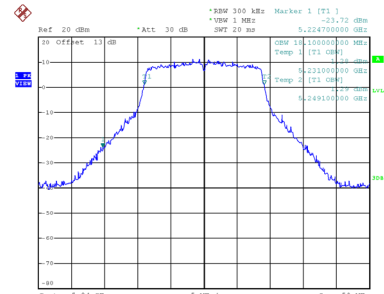

Date: 25.NOV.2021 19:37:19

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	41.100	36.800
46	5230	41.500	36.800

CH46

Ref 20 dBm *Att 30 dB *BW 300 kHz Delta 1 [F1]
 *VM 1 MHz SWR 20 dB Markers 1 [F1]
 0.45 dB 41,5000000000 MHz

30 Offset 13 dB
 F1 7.100 MHz
 -10 dBm
 -25 dBm
 -90 dBm


Date: 25-NOV-2021 19:47:23

Date: 25-NOV-2021 19:46:59

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	24.849	16.900
60	5300	24.550	17.000
64	5320	25.350	17.000

CH52

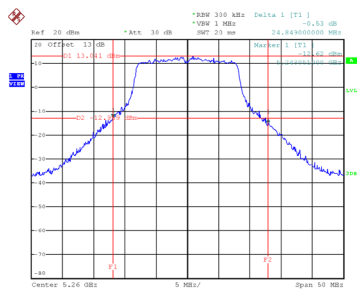


Date: 25.NOV.2021 19:04:34

CH60
26 dB Bandwidth

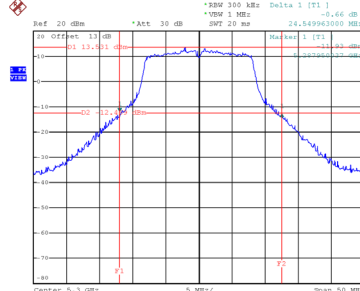


Date: 25.NOV.2021 19:05:23

CH64

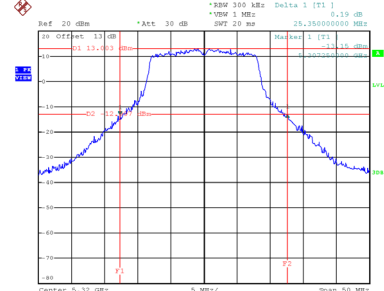


Date: 25.NOV.2021 19:06:08


99 % Occupied Bandwidth

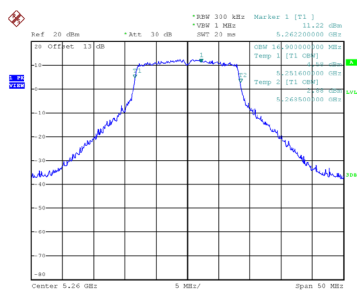

Date: 25.NOV.2021 19:04:13

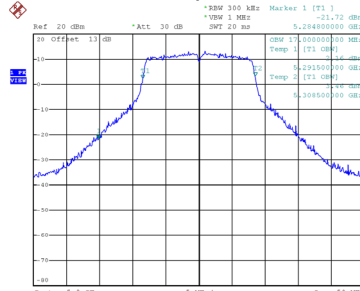

Date: 25.NOV.2021 19:05:02

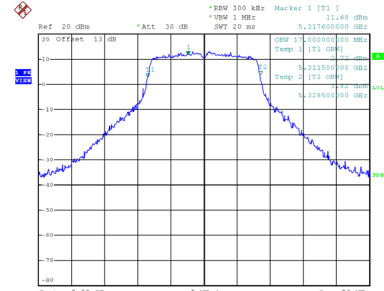


Date: 25.NOV.2021 19:05:48

Test Mode	UNII-2A_TX N(HT20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	24.590	18.100
60	5300	25.100	18.100
64	5320	24.890	18.100

CH52

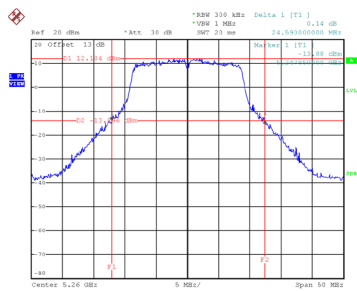


Date: 25.NOV.2021 19:15:55

CH60
26 dB Bandwidth

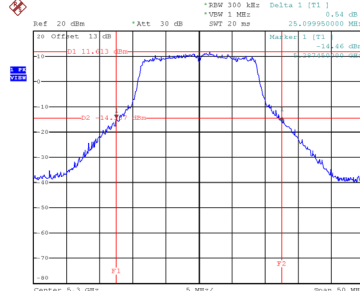


Date: 25.NOV.2021 19:16:40

CH64

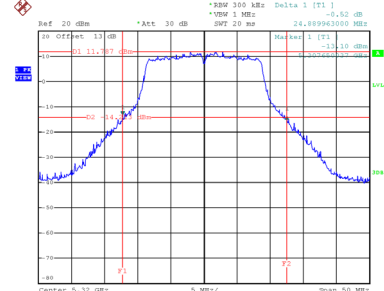


Date: 25.NOV.2021 19:17:25


99 % Occupied Bandwidth

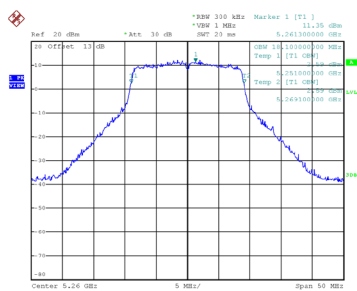

Date: 25.NOV.2021 19:15:33

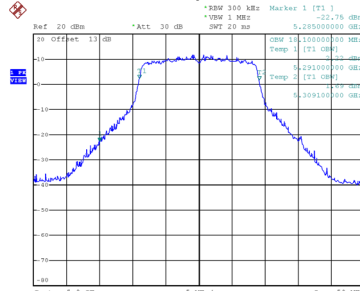

Date: 25.NOV.2021 19:16:19

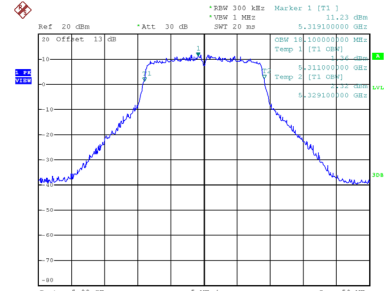


Date: 25.NOV.2021 19:17:03

Test Mode	UNII-2A_TX N(HT40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	41.390	36.800
62	5310	41.390	37.000

CH54

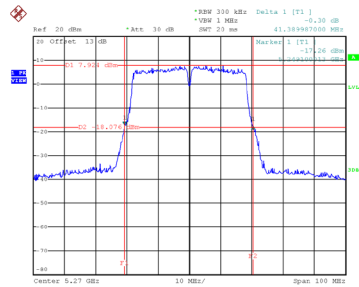


Date: 25.NOV.2021 19:26:21

CH62 26 dB Bandwidth

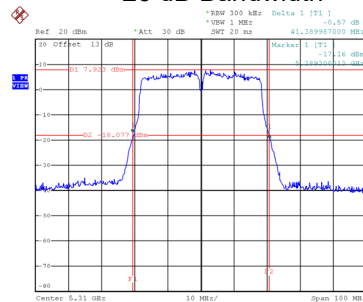


Date: 25.NOV.2021 19:28:03

99 % Occupied Bandwidth

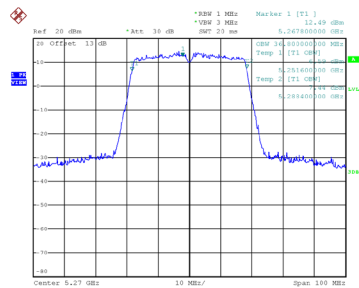

Date: 25.NOV.2021 19:25:49

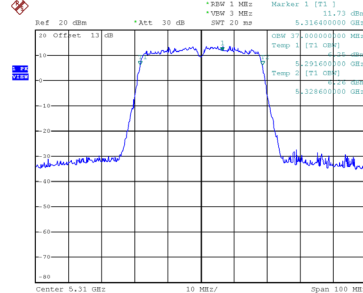


Date: 25.NOV.2021 19:27:31

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.697	18.100
60	5300	24.650	18.100
64	5320	25.050	18.100

CH52

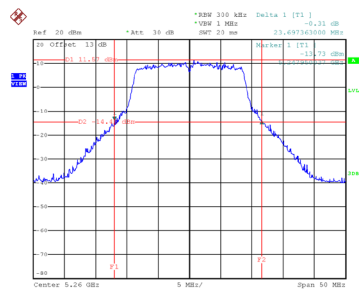


Date: 25.NOV.2021 19:38:27

CH60
26 dB Bandwidth

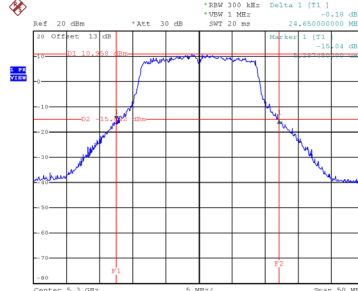


Date: 25.NOV.2021 19:39:13

CH64

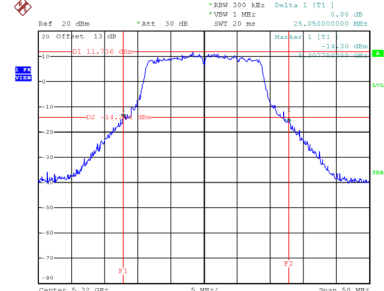


Date: 25.NOV.2021 19:39:56


99 % Occupied Bandwidth

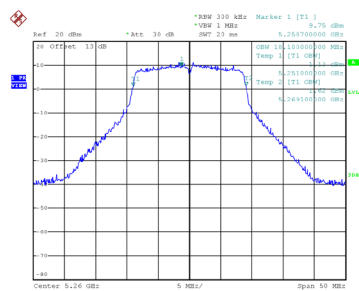

Date: 25.NOV.2021 19:38:04

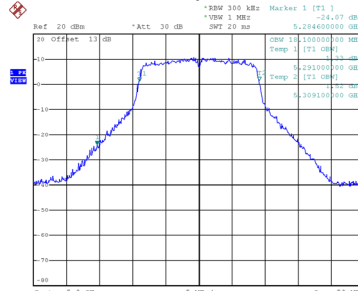

Date: 25.NOV.2021 19:38:52

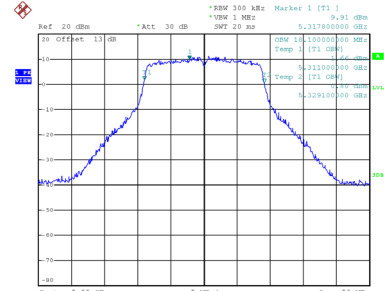


Date: 25.NOV.2021 19:39:36

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	41.300	36.800
62	5310	41.208	36.800

CH54

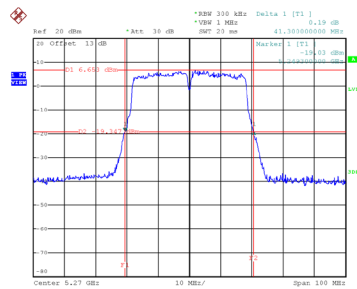


Date: 25.NOV.2021 19:48:24

CH62 26 dB Bandwidth

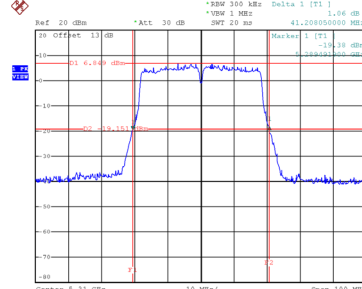


Date: 25.NOV.2021 19:49:24

99 % Occupied Bandwidth

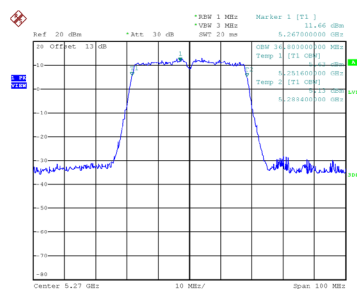

Date: 25.NOV.2021 19:47:53

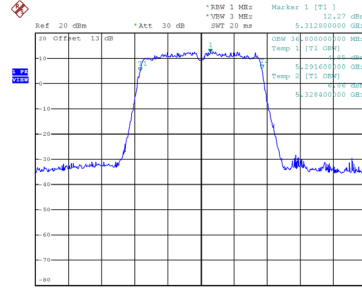


Date: 25.NOV.2021 19:48:53

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	83.998	76.000

CH58 26 dB Bandwidth

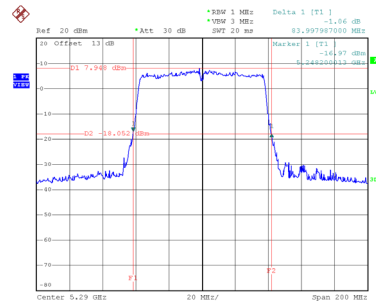

Date: 26.NOV.2021 17:25:19

99 % Occupied Bandwidth

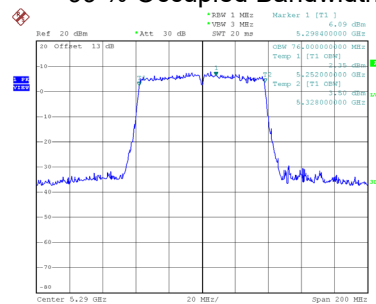

Date: 26.NOV.2021 17:24:23