

Equipment

: Lytro Digital Camera

Brand Name

: Lytro

Model No.

: B5

FCC ID

: ZMQBZ

Standard

: 47 CFR FCC Part 15.407

Applicant

: Lytro, Inc.

1300 Terra Bella Avenue, Mountain View,

CA 94043 USA

Manufacturer

: Qisda Corporation

157 Shan-Ying Road, Gueishan Taoyuan 333,

Taiwan

Operate Mode : Client without radar detection

The product sample received on May 19, 2014 and completely tested on Jul. 2, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in FCC 06-96 Appendix and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Wayne Hsu / Assistant Manager

Testing Laborator 1190

: 1 of 21

Report Version

Page No.

: Rev. 01

Report No.: FZ452053

TEL: 886-3-3273456 FAX: 886-3-3270973

SPORTON INTERNATIONAL INC.



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	Support Equipment	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information	6
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	DFS and TPC Information	8
2.2	The Worst Case Measurement Configuration	8
3	DYNAMIC FREQUENCY SELECTION (DFS) TEST RESULT	9
3.1	General DFS Information	9
3.2	Radar Test Waveform Calibration	11
3.3	In-service Monitoring	17
4	TEST EQUIPMENT AND CALIBRATION DATA	21

APPENDIX A. TEST PHOTOS

Report No. : FZ452053

Summary of Test Result

	Conformance Test Specifications (FCC 06-96 Appendix)						
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result		
-	7.8.1	DFS: UNII Detection Bandwidth Measurement	N/A (Client w/o test)	80% of the 99% BW	N/A		
-	7.8.2.1	DFS: Initial Channel Availability Check Time	N/A (Client w/o test)	CAC ≥ 60 sec	N/A		
-	7.8.2.2	DFS: Radar Burst at the Beginning of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A		
-	7.8.2.3	DFS: Radar Burst at the End of the Channel Availability Check Time	N/A (Client w/o test)	Detection Threshold: -64 dBm	N/A		
3.3	7.8.3	DFS: In-Service Monitoring for Channel Move Time (CMT)	CMT < 10sec	CMT ≤ 10sec	Complied		
3.3	7.8.3	DFS: In-Service Monitoring for Channel Closing Transmission Time (CCTT)	CCTT < 60 ms	CCTT ≤ 60 ms starting at CMT 200ms	Complied		
3.3	7.8.3	DFS: In-Service Monitoring for Non-Occupancy Period (NOP)	NOP > 30 min	NOP ≥ 30 min	Complied		
-	7.8.4	DFS: Statistical Performance Check	N/A (Client w/o test)	Table 5 - 7 (KDB 905462)	N/A		
-	5.8.1	DFS: Uniform Spreading	N/A (Client w/o this function)	Uniform Spreading for DFS Band	N/A		
3.1.4	8.1	User Access Restrictions	Manufacturer attestation NOT accessible to user	DFS controls	Complied		

Report No. : FZ452053

SPORTON INTERNATIONAL INC. Page No. : 3 of 21
TEL: 886-3-3273456 Report Version : Rev. 01



Revision History

Report No. : FZ452053

Version	Description	Issued Date
Rev. 01	Initial issue of report	Jul. 7, 2014

SPORTON INTERNATIONAL INC. Page No. : 4 of 21
TEL: 886-3-3273456 Report Version : Rev. 01

1 General Description

1.1 Information

1.1.1 RF General Information

IEEE Std. 802.11	Channel Bandwidth (MHz)	
a / n (HT20) / ac (VHT20)	20	
n (HT40) / ac (VHT40)	40	
ac (VHT80)	80	
802 11a/n uses a combination of OEDM-RPSK OPSK	C 160AM 640AM modulation	

Report No.: FZ452053

802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation. 802.11ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.

1.1.2 Antenna Information

	Antenna Category						
\boxtimes	Integral antenna (antenna permanently attached)						
		Temporary RF connector provided					
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.					

	Antenna General Information					
No.	Ant. Cat.	Ant. Type	Gain (dBi)			
1	Integral	Chip	1.00			
	For radiated tests, the DFS test should be performed with lowest antenna gain (regardless of antenna type).					

SPORTON INTERNATIONAL INC. Page No. : 5 of 21
TEL: 886-3-3273456 Report Version : Rev. 01

1.2 Support Equipment

	Support Equipment						
No.	Equipment	Brand Name	Model Name	FCC ID			
1	AP (Master)	NETGEAR	R6100	PY312400225			
2	NoteBook PC	Dell	Latitude E5510	DoC			
3	NoteBook PC	Dell	Latitude E5530	DoC			

Report No.: FZ452053

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 06-96 Appendix
- FCC KDB 905462 5 GHz UNII DFS Compliance Procedures
- FCC KDB 443999 Approval of DFS UNII Devices
- KDB443999 D01
- KDB905462 D05

1.4 Testing Location Information

	Testing Location						
	HWA YA	ADD	:	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C .			
		TEL	:	886-3-327-3456 FA	886-3-327-3456 FAX : 886-3-327-0973		
	Test Condition			Test Site No.	Test Engineer	Test Environment	
DFS Site		DF01-HY	Ben Tseng	26°C / 60%			

SPORTON INTERNATIONAL INC. Page No. : 6 of 21
TEL: 886-3-3273456 Report Version : Rev. 01

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FZ452053

Measurement Uncertainty		
Test Item	Uncertainty	
Radio frequency	± 8.7 X 10 ⁻⁷	
RF output power, conducted	±0.6 dB	
All emissions, conducted	±0.8 dB	
All emissions, radiated	±2.9 dB	
Temperature	±0.8 °C	
Humidity	±3 %	
DC and low frequency voltages	±3 %	
Time	±1.4 %	

SPORTON INTERNATIONAL INC. Page No. : 7 of 21
TEL: 886-3-3273456 Report Version : Rev. 01

2 Test Configuration of EUT

2.1 DFS and TPC Information

Т	The DFS Related Operating Mode(s) of the Equipment				
☐ Master					
☐ Slave with radar detec	ction				
	etection				
Software / Firmware Vers	Software / Firmware Version Msm8974-eng 4.2.2 JDQ39 23 test-keys				
Communication Mode			☐ Frame Based		
IEEE Std. 802.11 Frequency Range (MHz)		TPC (Transmit Power Control)	Passive Scan		
a / n (HT20) / ac (VHT20) 🛛 5250-5350		Yes	Yes		
n (HT40) / ac (VHT40)	⊠ 5470-5725	Yes	Yes		
ac (VHT80)	⊠ 5600-5650	Yes	Yes		

Report No.: FZ452053

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item Dynamic Frequency Selection (DFS)			
Test Condition Radiated measurement (Vertical Polarization)			
	Modulation Mode		
HT20 / HT40			

SPORTON INTERNATIONAL INC. Page No. : 8 of 21
TEL: 886-3-3273456 Report Version : Rev. 01



3 Dynamic Frequency Selection (DFS) Test Result

3.1 General DFS Information

3.1.1 DFS Parameters

Table D.1: DFS requirement values			
Parameter	Value		
Non-occupancy period	Minimum 30 minutes		
Channel Availability Check Time	60 seconds		
Channel Move Time	10 seconds See Note 1.		
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2.		
U-NII Detection Bandwidth	Minimum 80% of the 99% power bandwidth See Note 3.		

Report No.: FZ452053

- Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:
 - For the Short pulse radar Test Signals this instant is the end of the Burst.
 - For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
 - For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.
- Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
- Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic

Table D.2: Interference threshold values					
Maximum Transmit Power Value (see note)					
≥ 200 milliwatt	-64 dBm				
< 200 milliwatt	-62 dBm				

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

SPORTON INTERNATIONAL INC. : 9 of 21
TEL: 886-3-3273456 : Report Version : Rev. 01

3.1.2 Applicability of DFS Requirements Prior to Use of a Channel

	DFS Operational mode					
Requirement	Master	Client without radar detection	Client with radar detection			
Non-Occupancy Period	Yes	Not required	Yes			
DFS Detection Threshold	Yes	Not required	Yes			
Channel Availability Check Time	Yes	Not required	Not required			
Uniform Spreading	Yes	Not required	Not required			
U-NII Detection Bandwidth	Yes	Not required	Yes			

Report No.: FZ452053

3.1.3 Applicability of DFS Requirements during Normal Operation

	DFS Operational mode					
Requirement	Master	Client without radar detection	Client with radar detection			
DFS Detection Threshold	Yes	Not required	Yes			
Channel Closing Transmission Time	Yes	Yes	Yes			
Channel Move Time	Yes	Yes	Yes			
U-NII Detection Bandwidth	Yes	Not required	Yes			

3.1.4 User Access Restrictions

User Access Restrictions DFS controls (hardware or software) related to radar detection are NOT accessible to the user. Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3.1.5 Channel Loading/Data Streaming

\boxtimes	IP Based (Load Based) - stream the test file from the Master to the Client.						
	Performed NTIA approved WAV file. (EUT w/o video function application)						
	Performed NTIA approved MPEG2 file. (EUT with video function application)						
	Alternative streaming e.g., FTP with about 17 to 20% loading and submit proposal to FCC.						
	Frame Based - stream the test file from the Master to the Client.						
	fixed talk/listen ratio, set the ratio to 45%/55%						
NTL	NTIA test file refer as: http://ntiacsd.ntia.doc.gov/dfs/						

SPORTON INTERNATIONAL INC. Page No. : 10 of 21 TEL: 886-3-3273456 Report Version : Rev. 01

3.2 Radar Test Waveform Calibration

3.2.1 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4 11-20 200-500		12-16	60%	30	
Aggrega	te (Radar Types 1-4	.)		80%	120

Report No.: FZ452053

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

3.2.2 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per <i>Burst</i>	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Each waveform is defined as follows:

- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst Count.
- Each Burst consists of 1 to $\overline{3}$ pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length (12,000,000 / Burst_Count) microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and [(12,000,000 / Burst_Count) (Total Burst Length) + (One Random PRI Interval)] microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

SPORTON INTERNATIONAL INC. Page No. : 11 of 21 TEL: 886-3-3273456 Report Version : Rev. 01

3.2.3 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30


Report No.: FZ452053

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.


3.2.4 Master DFS Threshold Level

Master DFS Threshold Level						
DFS Threshold level:	-63	dBm	at the antenna connector (-61 dBm conducted)			
			in front of the antenna (-63 dBm e.i.r.p.)			
The Interference Radar Detection Threshold Level is (-64dBm) + (1 [dBi]) = -63 dBm. That had beer taken into account the master output power range and antenna gain.						

3.2.5 Calibration Setup

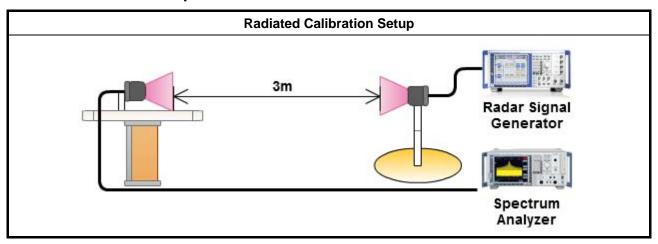

SPORTON INTERNATIONAL INC. Page No. : 12 of 21
TEL: 886-3-3273456 Report Version : Rev. 01

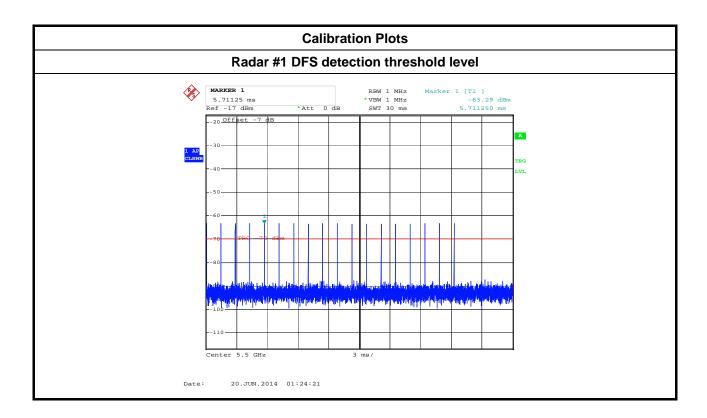

Report No.: FZ452053


SPORTON INTERNATIONAL INC. Page No. : 13 of 21 TEL: 886-3-3273456 Report Version : Rev. 01




3.2.6 Test Setup

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

Report No.: FZ452053

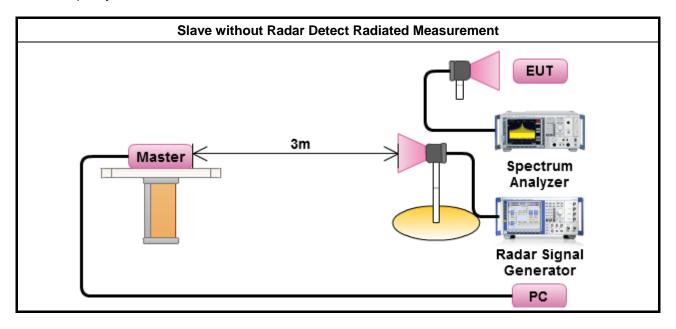


SPORTON INTERNATIONAL INC. Page No. : 14 of 21 TEL: 886-3-3273456 Report Version : Rev. 01

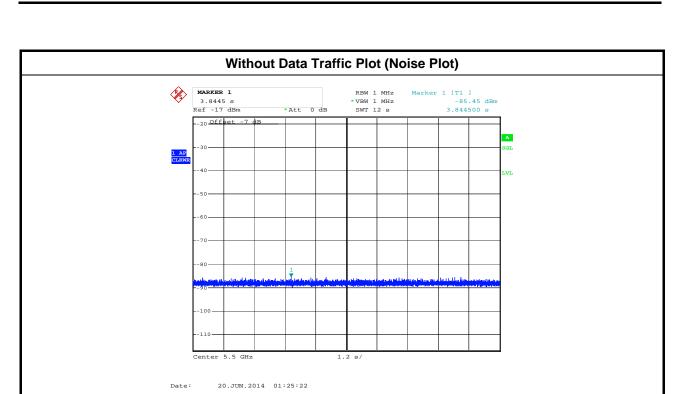


Report No.: FZ452053



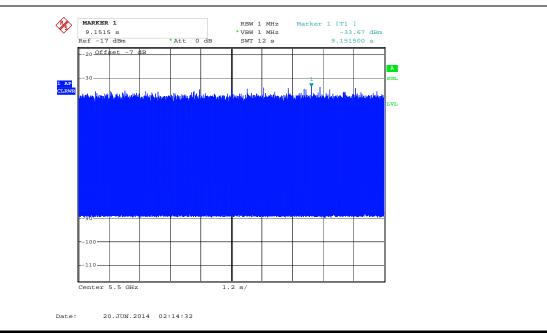

SPORTON INTERNATIONAL INC. Page No. : 15 of 21 TEL: 886-3-3273456 Report Version : Rev. 01

Report No. : FZ452053

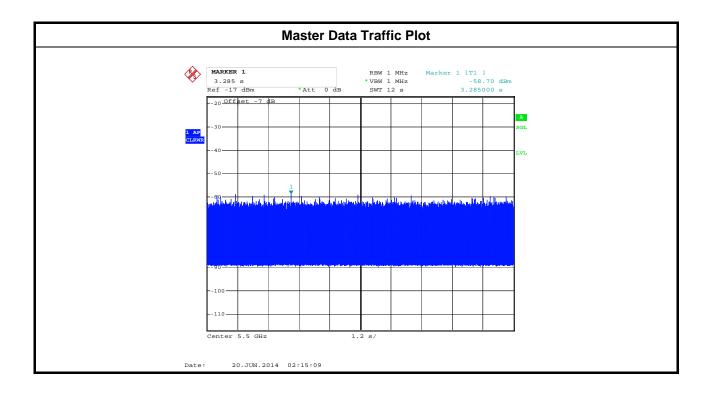

SPORTON INTERNATIONAL INC. Page No. : 16 of 21 TEL: 886-3-3273456 Report Version : Rev. 01

3.3 In-service Monitoring

3.3.1 In-service Monitoring Limit

In-service Monitoring Limit					
Channel Move Time	10 sec				
Channel Closing Transmission Time	200 ms + an aggregate of 60 ms over remaining 10 sec periods.				
Non-occupancy period	Minimum 30 minutes				

Report No.: FZ452053

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method

- Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time limits.
- Refer as FCC 06-96 Appendix, clause 8.3 verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time. One 10 sec plot needs to be reported for the Short Pulse Radar Types 1-4 and one for the Long Pulse Radar Type in a 22 sec plot. And zoom-in a 600 ms plot verified channel closing time for the aggregate transmission time starting from 200ms after the end of the radar signal to the completion of the channel move.
- Refer as FCC 06-96 Appendix, clause 7.8.3 verified during In-Service Monitoring; Non-Occupancy Period. Client Device will associate with the EUT. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Non-Occupancy Period). Compare the Non-Occupancy Period limits.

SPORTON INTERNATIONAL INC. Page No. : 17 of 21 TEL: 886-3-3273456 Report Version : Rev. 01




3.3.4 Test Result of In-service Monitoring

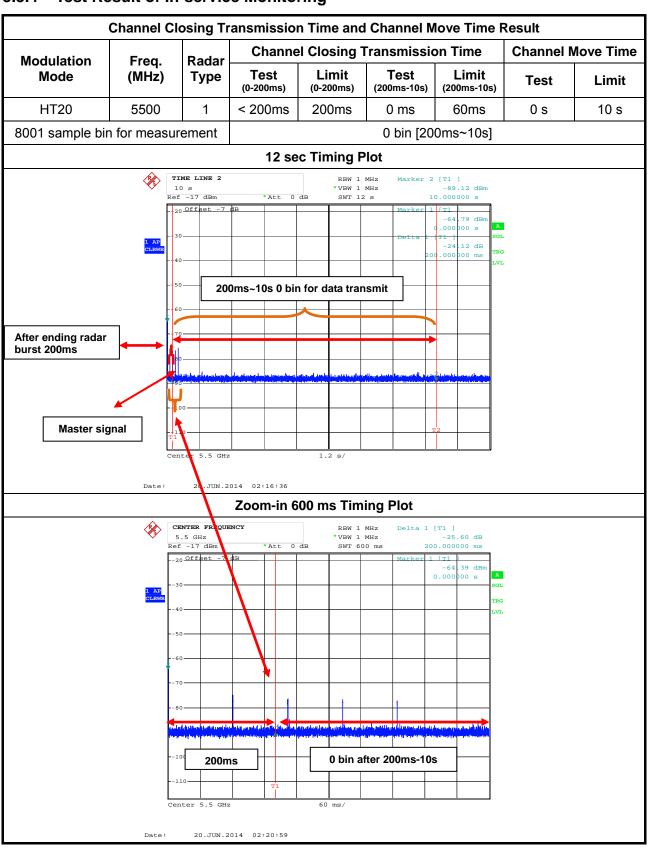

Report No.: FZ452053

SPORTON INTERNATIONAL INC. Page No. : 18 of 21 TEL: 886-3-3273456 Report Version : Rev. 01



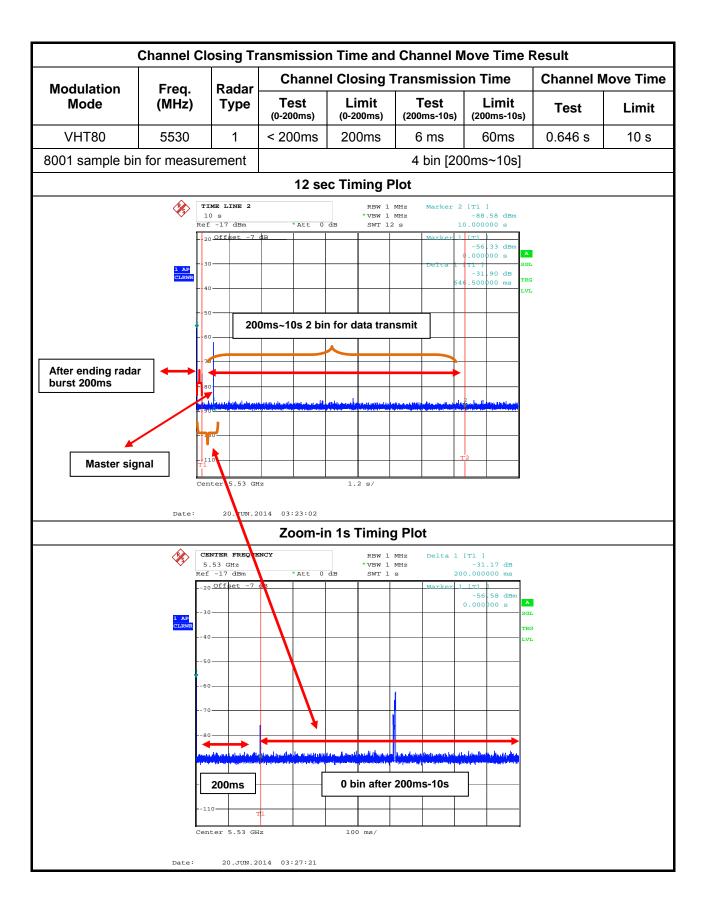

Report No.: FZ452053

SPORTON INTERNATIONAL INC. Page No. : 19 of 21 TEL: 886-3-3273456 Report Version : Rev. 01



Non-Occupancy Period Result Non-Occupancy Period Modulation Freq. (MHz) Mode Measured Limit Result HT20 5500 >30min 30min Complied 2000 sec Timing Plot TIME LINE 2 1824 s Ref -17 dBm VBW 1 MHz SWT 2000 s -86.57 dBm 1.824000 ks *Att 0 dB -₂₀ Offset -7 1 [T1] 59 dBm -50 10.000 87 dB Center 5.5 GHz 20.JUN.2014 03:00:29

Report No.: FZ452053

SPORTON INTERNATIONAL INC. Page No. : 20 of 21 TEL: 886-3-3273456 Report Version : Rev. 01



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 7	100645	9kHz ~ 7GHz	Apr. 17, 2014	DFS
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 12, 2013	DFS
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	302338	1GHz ~ 26.5GHz	Oct. 15, 2013	DFS
RF Cable-8m	HUBER+SUHNER	SUCOFLEX_104	MY17172/4	0.05 ~ 26.5GHz	Oct. 15, 2013	DFS
Horn Antenna	COM-POWER	AH-118	10094	1GHz ~ 18GHz	Apr. 21, 2014	DFS
Horn Antenna	COM-POWER	AH-118	711064	1GHz ~ 18GHz	Sep. 17, 2013	DFS

Report No.: FZ452053

Note: Calibration Interval of instruments listed above is one year.

SPORTON INTERNATIONAL INC. Page No. : 21 of 21 TEL: 886-3-3273456 Report Version : Rev. 01