



Test Mode: Chain 2 & 802.11g & 6Mbps & 2412MHz


Reference

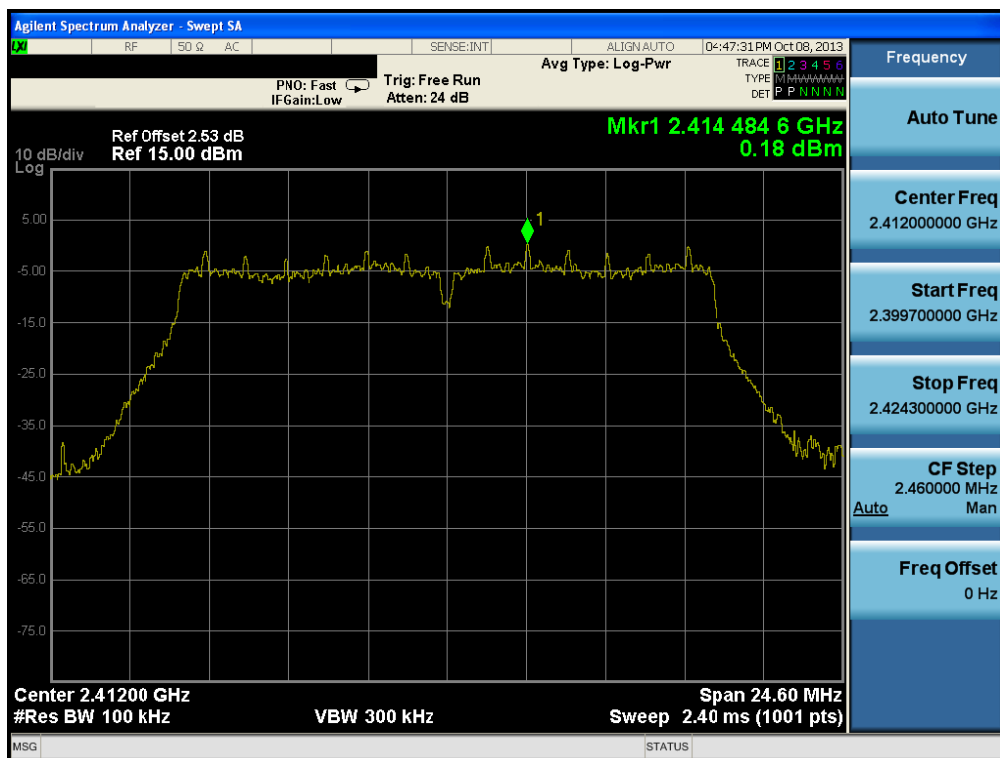

Low Band-edge

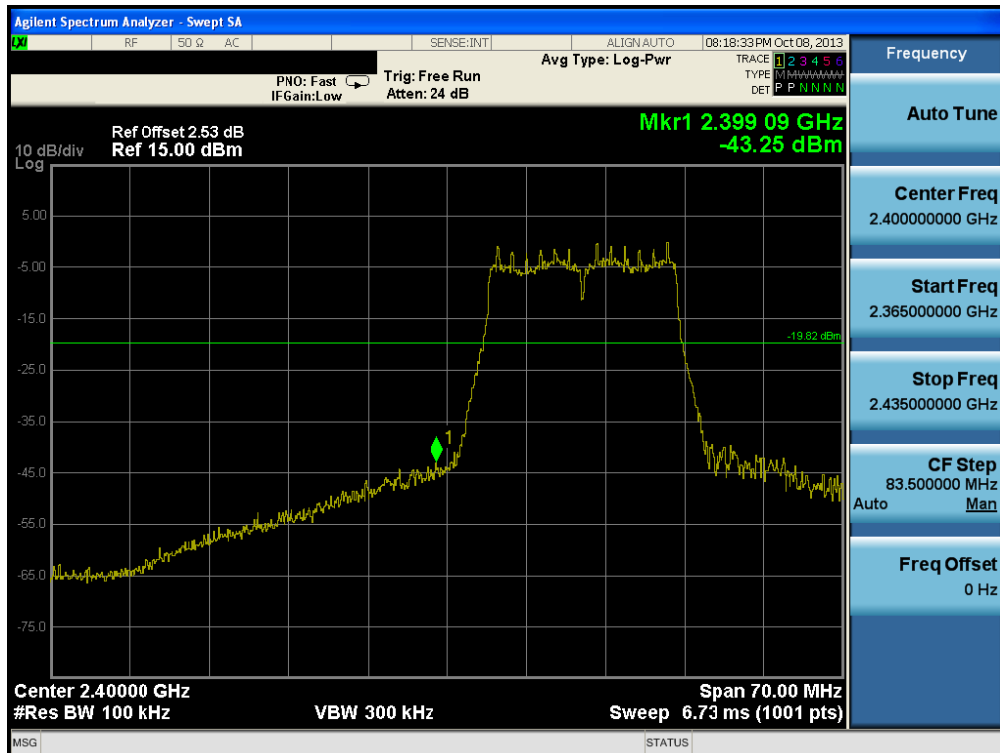


Conducted Spurious Emissions

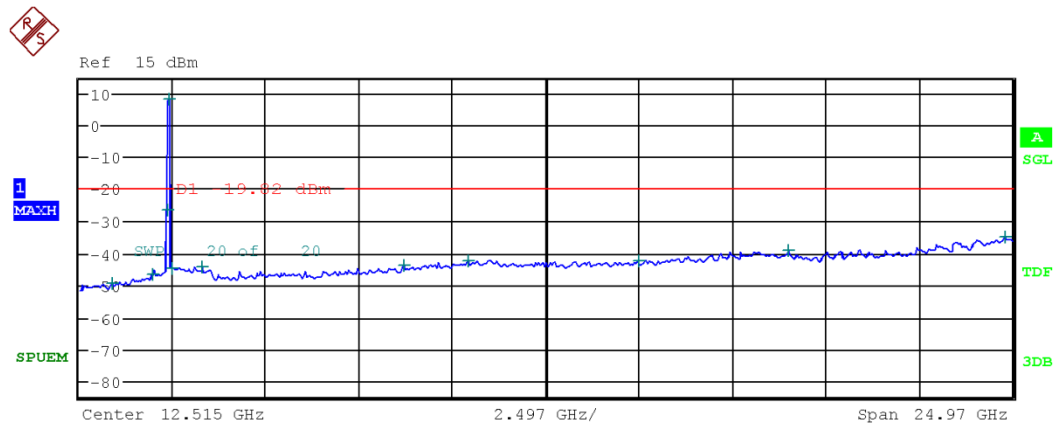


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	929.190000 M	-49.46
1.000 G	2.000 G	1.00 M	1.991000 G	-46.76
2.000 G	2.400 G	1.00 M	2.399800 G	-26.68
2.400 G	2.483 G	1.00 M	2.414546 G	8.27
2.483 G	3.000 G	1.00 M	2.519500 G	-44.71
3.000 G	6.000 G	1.00 M	3.325333 G	-44.23
6.000 G	9.000 G	1.00 M	8.729333 G	-44.13
9.000 G	12.000 G	1.00 M	10.415000 G	-42.50
12.000 G	15.000 G	1.00 M	14.978333 G	-42.41
15.000 G	20.000 G	1.00 M	19.005500 G	-39.44
20.000 G	25.000 G	1.00 M	24.780500 G	-35.17

Test Mode: Chain 2 & 802.11g & 6Mbps & 2437MHz

Reference

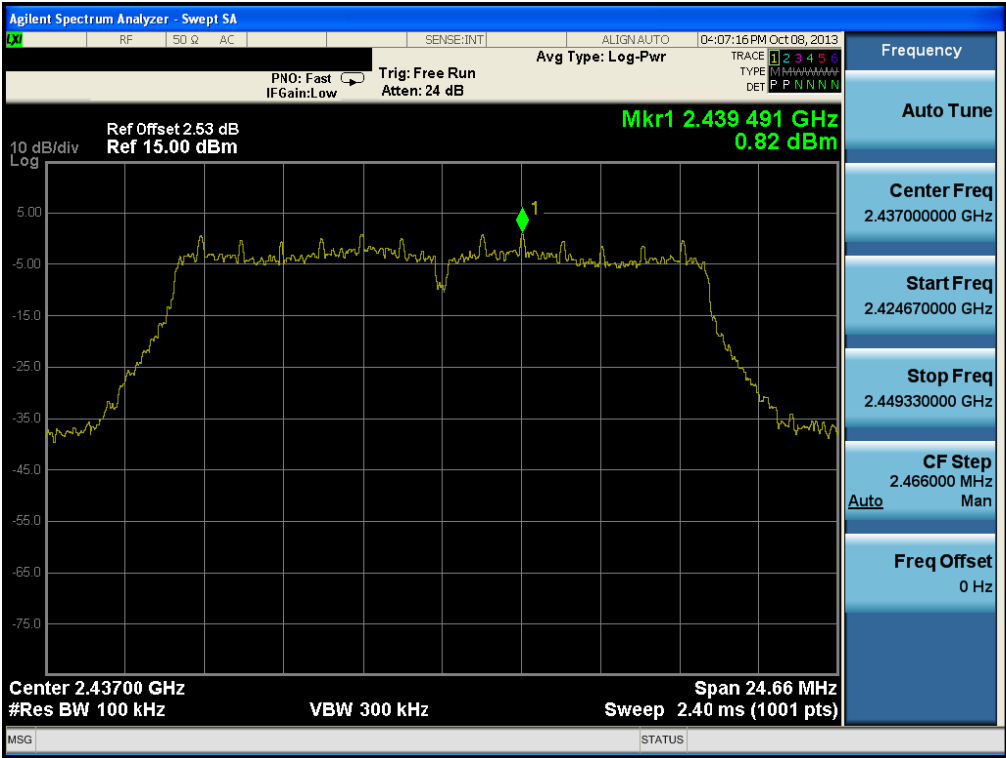


Conducted Spurious Emissions

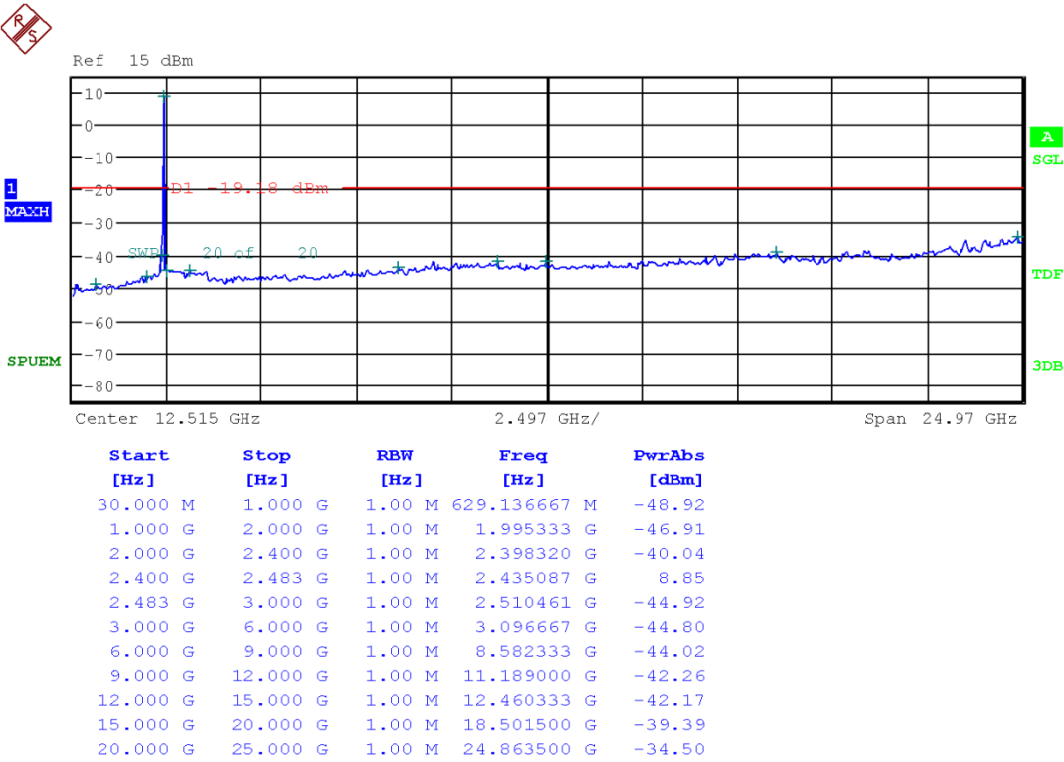



Test Mode: Chain 2 & 802.11g & 6Mbps & 2462MHz

Reference

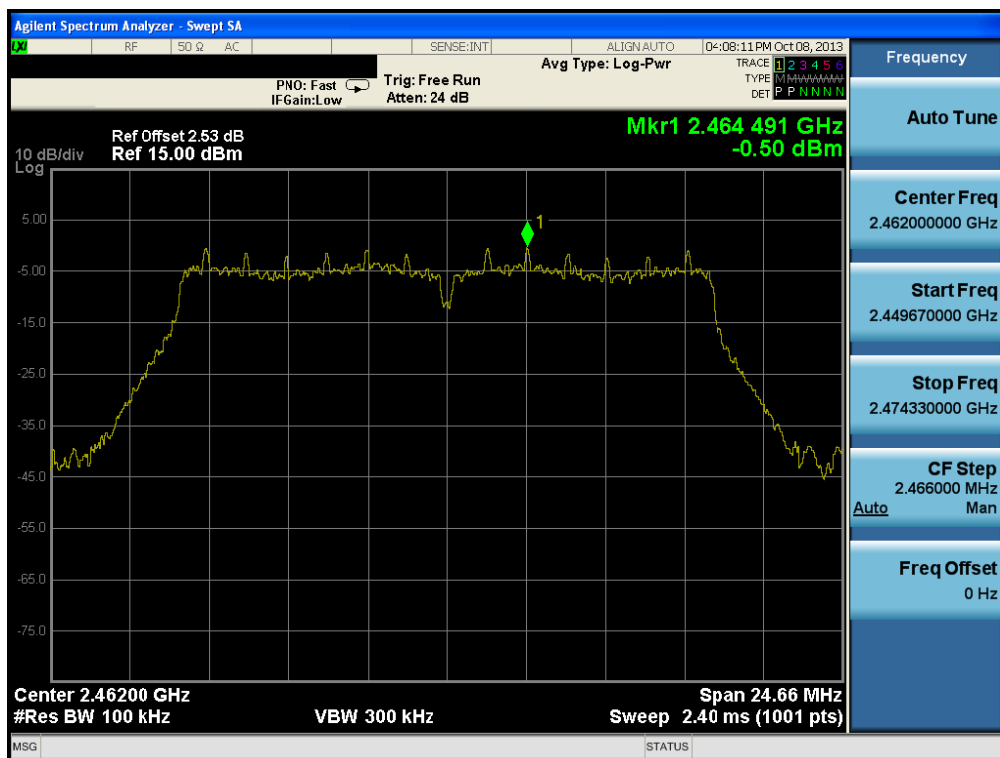

High Band-edge

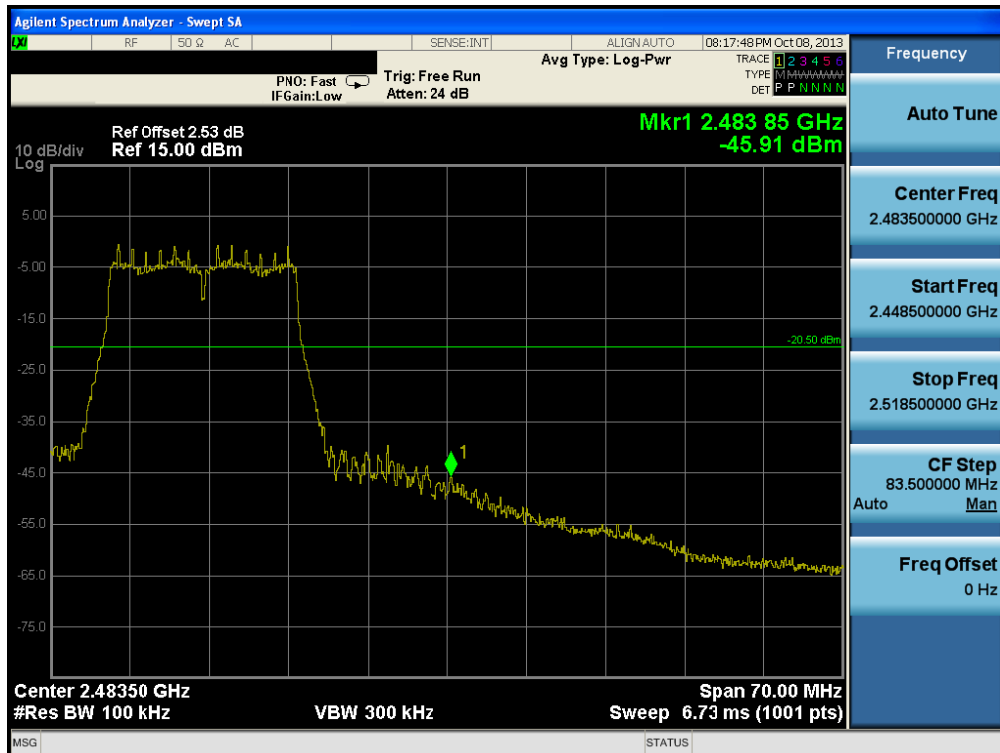


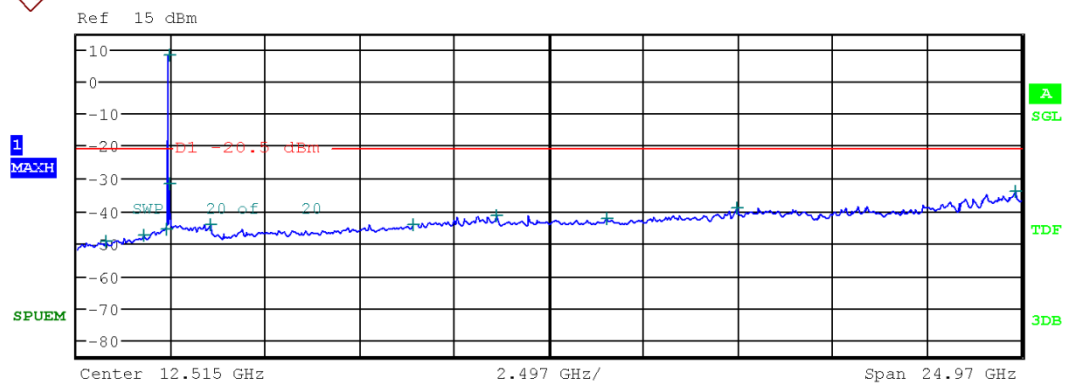


Start	Stop	RBW	Freq	PwrAbs
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]
30.000 M	1.000 G	1.00 M	774.960000 M	-49.79
1.000 G	2.000 G	1.00 M	1.790667 G	-47.84
2.000 G	2.400 G	1.00 M	2.383960 G	-45.66
2.400 G	2.483 G	1.00 M	2.464721 G	8.02
2.483 G	3.000 G	1.00 M	2.484636 G	-31.89
3.000 G	6.000 G	1.00 M	3.545333 G	-44.60
6.000 G	9.000 G	1.00 M	8.911000 G	-44.50
9.000 G	12.000 G	1.00 M	11.129000 G	-41.41
12.000 G	15.000 G	1.00 M	14.053000 G	-42.68
15.000 G	20.000 G	1.00 M	17.458000 G	-39.28
20.000 G	25.000 G	1.00 M	24.859000 G	-34.22


Test Mode: Chain 1 & 802.11n(HT20) & MCS 8 & 2412MHz

Reference

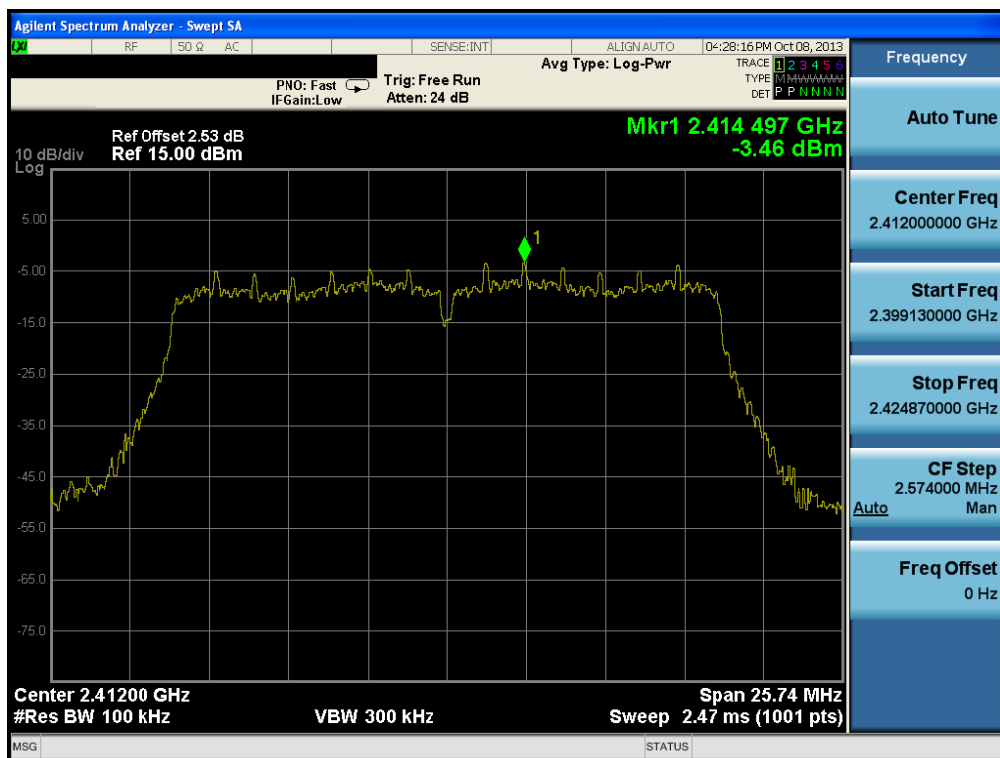


Low Band-edge

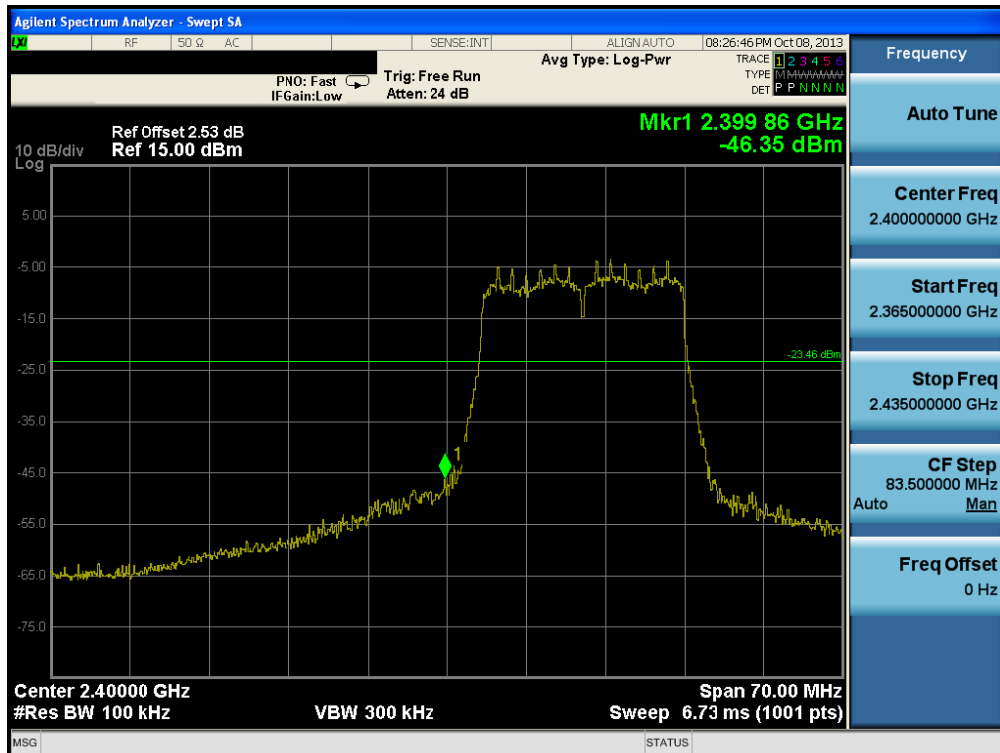

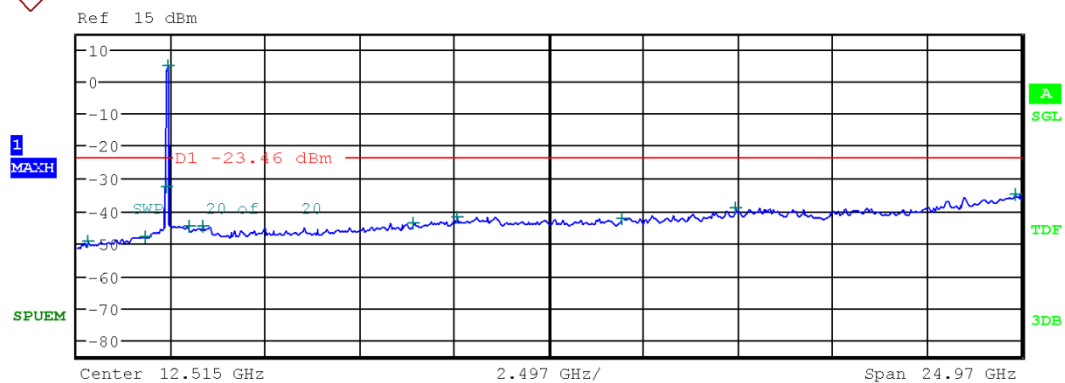


Start	Stop	RBW	Freq	PwrAbs
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]
30.000 M	1.000 G	1.00 M	309.036667 M	-49.78
1.000 G	2.000 G	1.00 M	1.837000 G	-48.00
2.000 G	2.400 G	1.00 M	2.399360 G	-32.68
2.400 G	2.483 G	1.00 M	2.413752 G	4.87
2.483 G	3.000 G	1.00 M	2.994938 G	-44.79
3.000 G	6.000 G	1.00 M	3.351667 G	-44.65
6.000 G	9.000 G	1.00 M	8.933333 G	-43.73
9.000 G	12.000 G	1.00 M	10.080000 G	-42.04
12.000 G	15.000 G	1.00 M	14.430333 G	-42.30
15.000 G	20.000 G	1.00 M	17.436500 G	-39.25
20.000 G	25.000 G	1.00 M	24.827000 G	-34.87

Reference

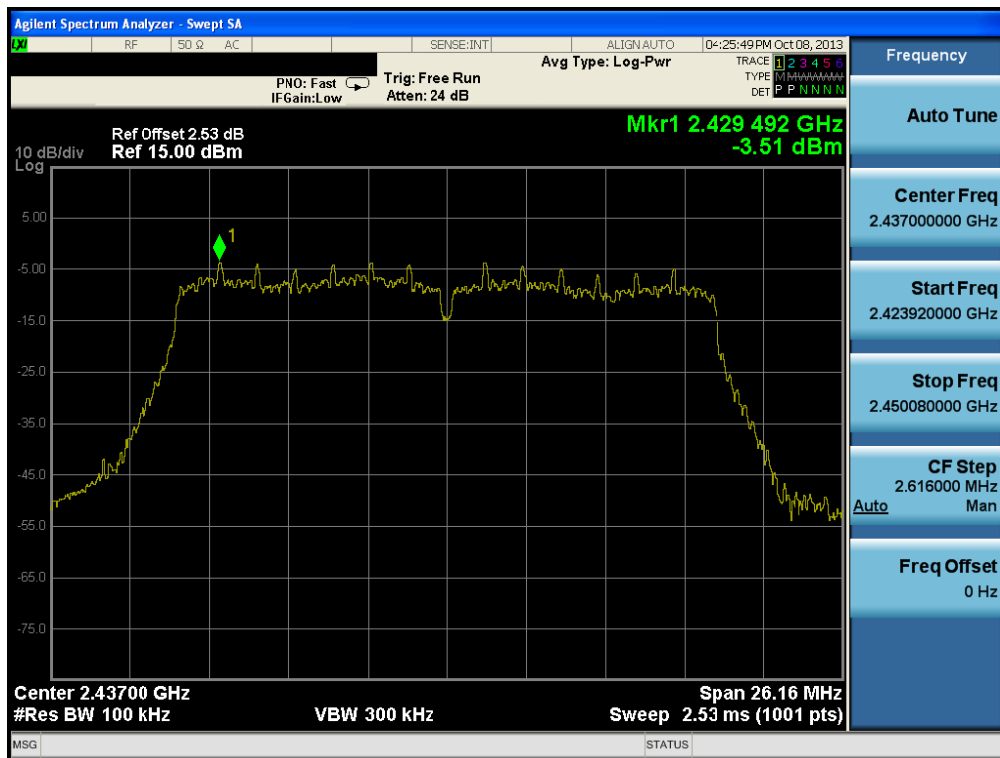


Conducted Spurious Emissions

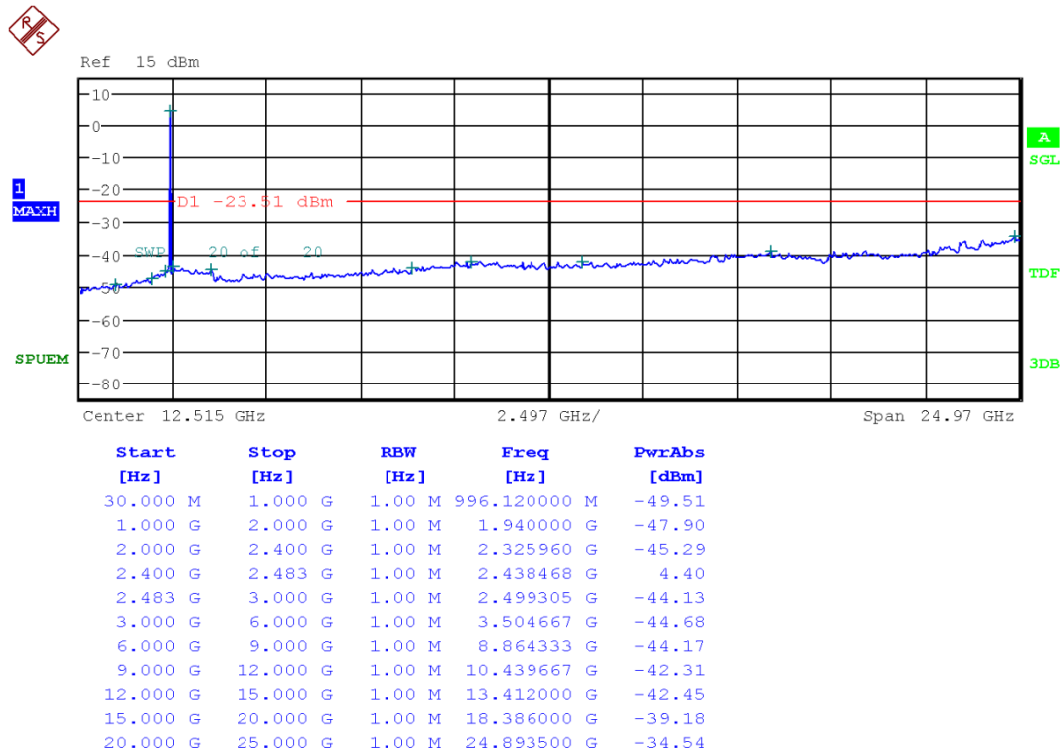


Test Mode: Chain 1 & 802.11n(HT20) & MCS 8 & 2462MHz

Reference

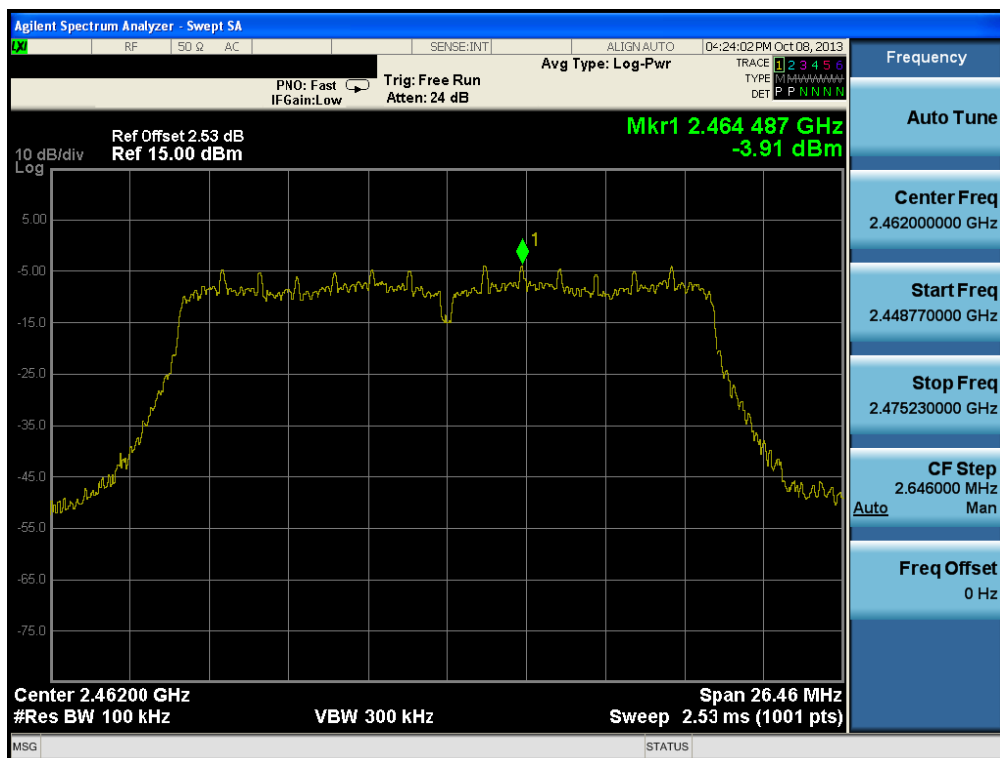

High Band-edge

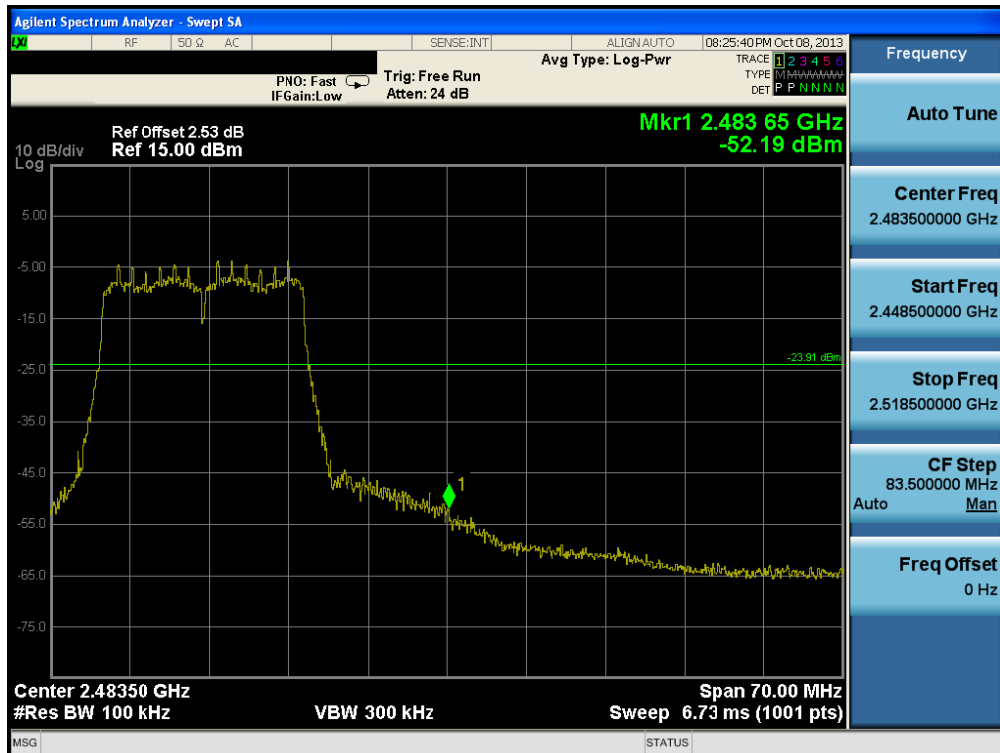





Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	736.160000 M	-49.02
1.000 G	2.000 G	1.00 M	1.905667 G	-47.54
2.000 G	2.400 G	1.00 M	2.355120 G	-45.79
2.400 G	2.483 G	1.00 M	2.463761 G	4.94
2.483 G	3.000 G	1.00 M	2.484223 G	-40.58
3.000 G	6.000 G	1.00 M	3.113000 G	-44.35
6.000 G	9.000 G	1.00 M	8.980333 G	-44.13
9.000 G	12.000 G	1.00 M	11.859667 G	-42.17
12.000 G	15.000 G	1.00 M	14.091667 G	-41.97
15.000 G	20.000 G	1.00 M	18.980000 G	-38.11
20.000 G	25.000 G	1.00 M	24.814500 G	-34.43

Test Mode: Chain 2 & 802.11n(HT20) & MCS 8 & 2412MHz


Reference

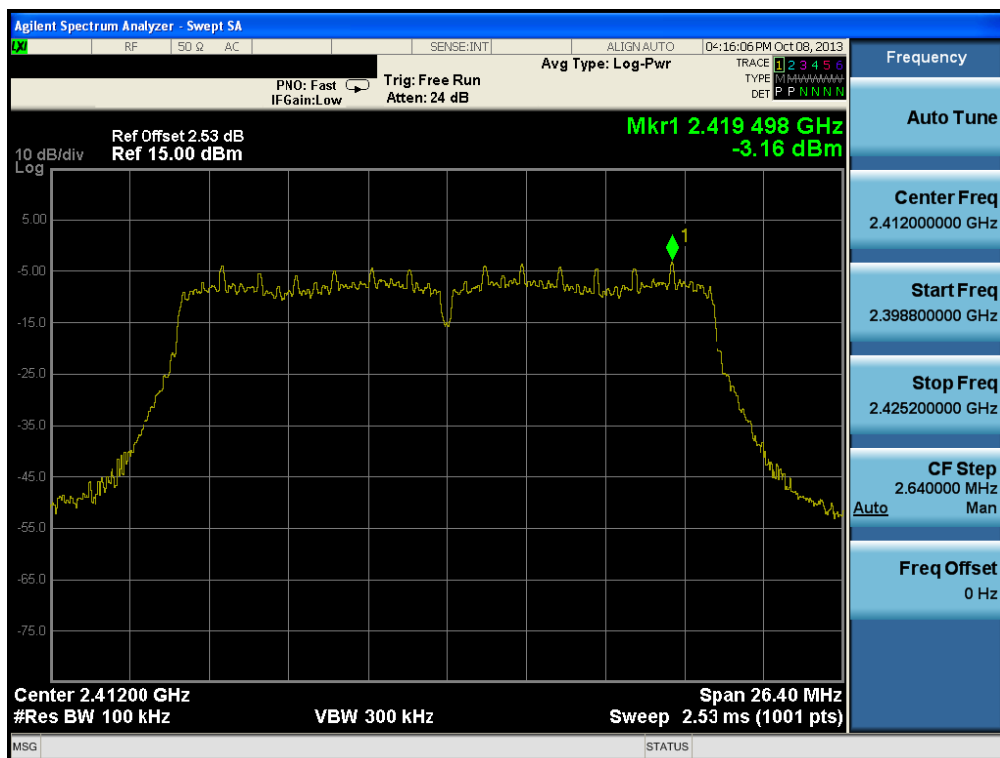

Low Band-edge

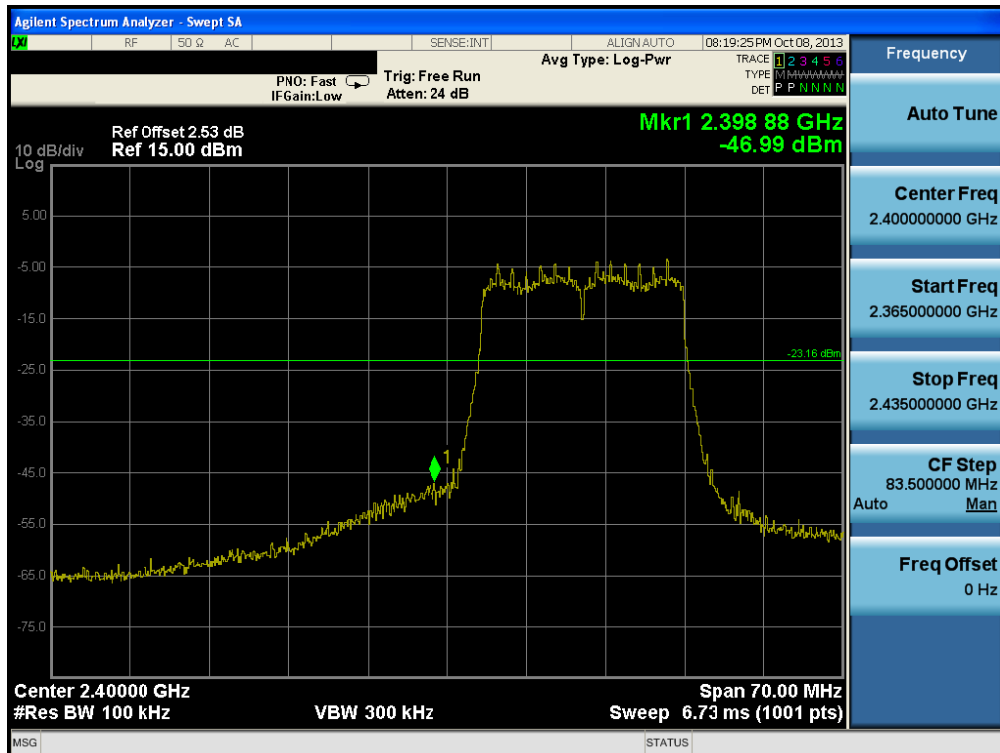


Conducted Spurious Emissions

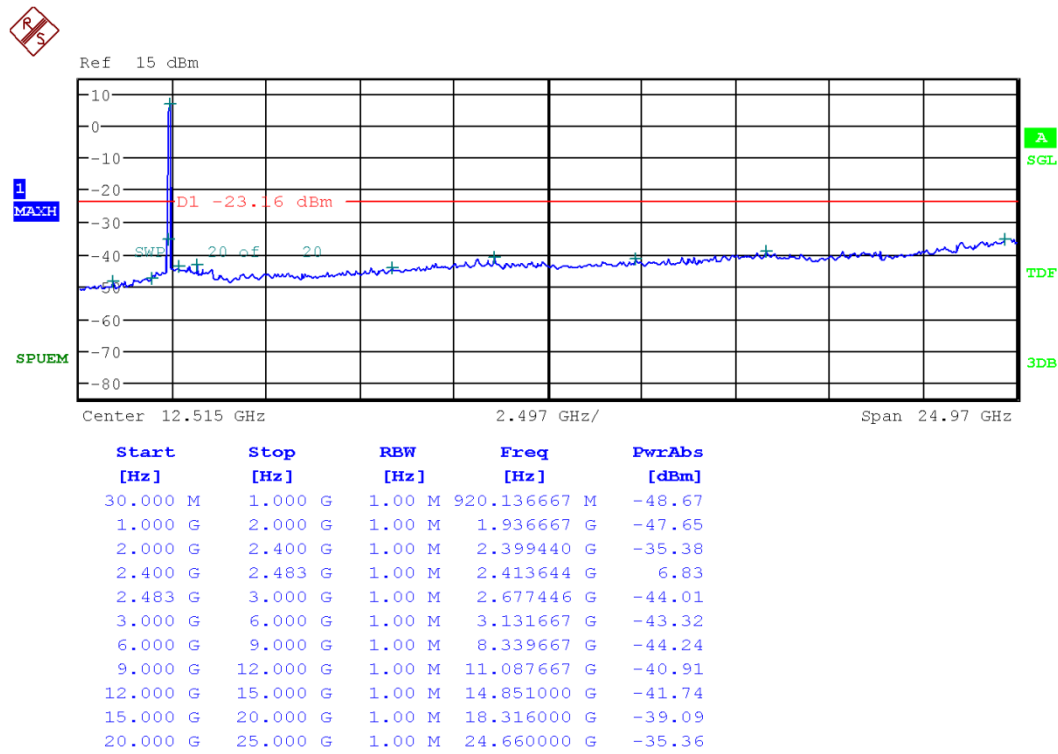


Test Mode: Chain 2 & 802.11n(HT20) & MCS 8 & 2437MHz

Reference

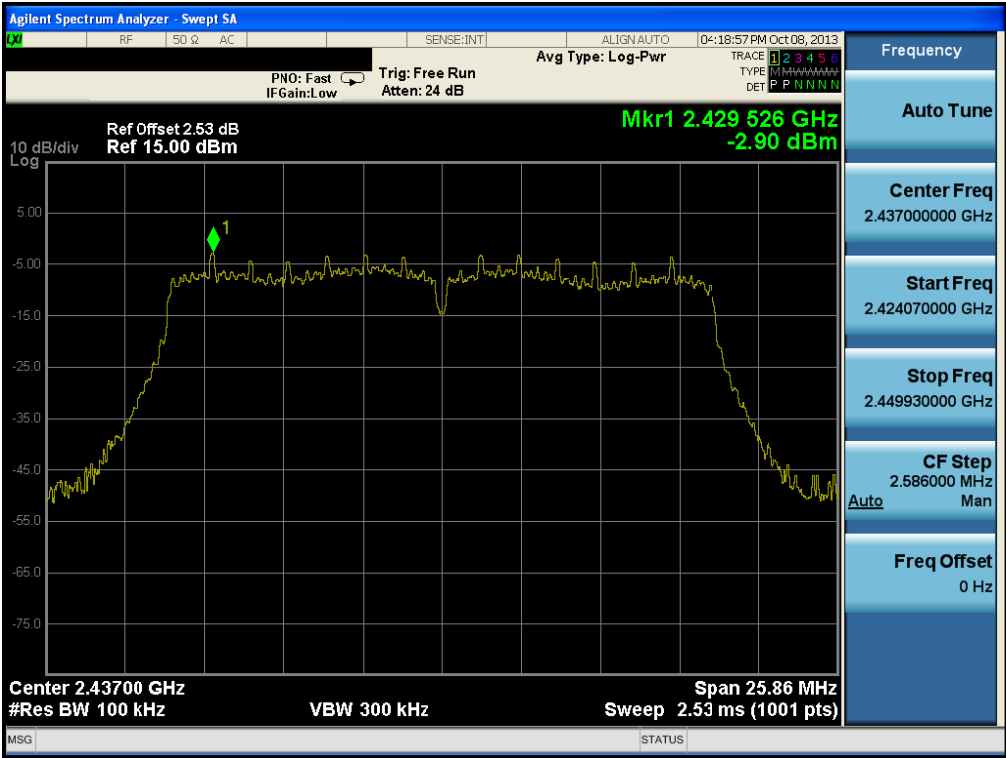


Conducted Spurious Emissions

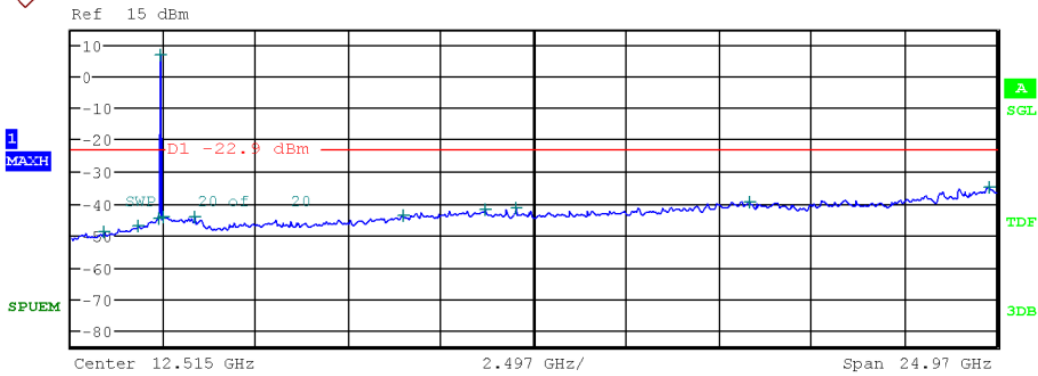

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	919.490000 M	-49.03
1.000 G	2.000 G	1.00 M	1.837667 G	-47.11
2.000 G	2.400 G	1.00 M	2.399960 G	-44.97
2.400 G	2.483 G	1.00 M	2.438727 G	6.82
2.483 G	3.000 G	1.00 M	2.497342 G	-44.29
3.000 G	6.000 G	1.00 M	3.351333 G	-44.28
6.000 G	9.000 G	1.00 M	8.985000 G	-43.69
9.000 G	12.000 G	1.00 M	11.183000 G	-42.16
12.000 G	15.000 G	1.00 M	12.043333 G	-41.79
15.000 G	20.000 G	1.00 M	18.314000 G	-39.47
20.000 G	25.000 G	1.00 M	24.813500 G	-35.00

Reference

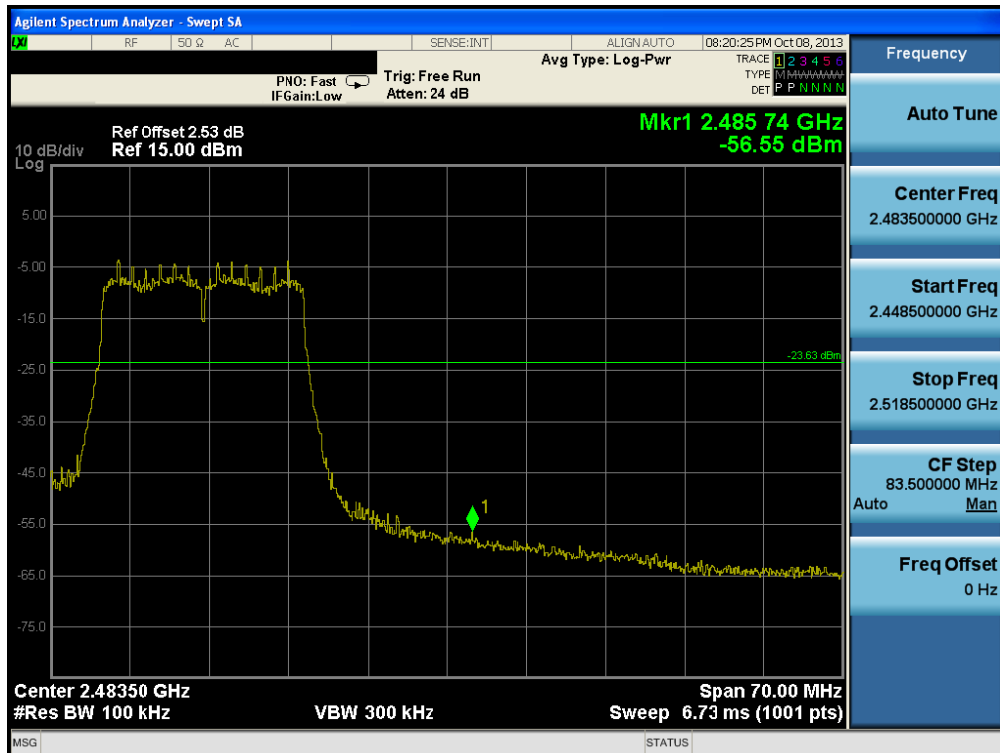





Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	630.430000 M	-49.65
1.000 G	2.000 G	1.00 M	1.975667 G	-46.98
2.000 G	2.400 G	1.00 M	2.389880 G	-46.00
2.400 G	2.483 G	1.00 M	2.463711 G	6.42
2.483 G	3.000 G	1.00 M	2.484430 G	-36.65
3.000 G	6.000 G	1.00 M	3.525333 G	-44.15
6.000 G	9.000 G	1.00 M	8.152333 G	-43.63
9.000 G	12.000 G	1.00 M	11.163667 G	-42.11
12.000 G	15.000 G	1.00 M	14.065000 G	-41.54
15.000 G	20.000 G	1.00 M	18.342000 G	-38.76
20.000 G	25.000 G	1.00 M	24.868000 G	-34.39

Test Mode: Chain 1 & 802.11n(HT40) & MCS 8 & 2422MHz


Reference

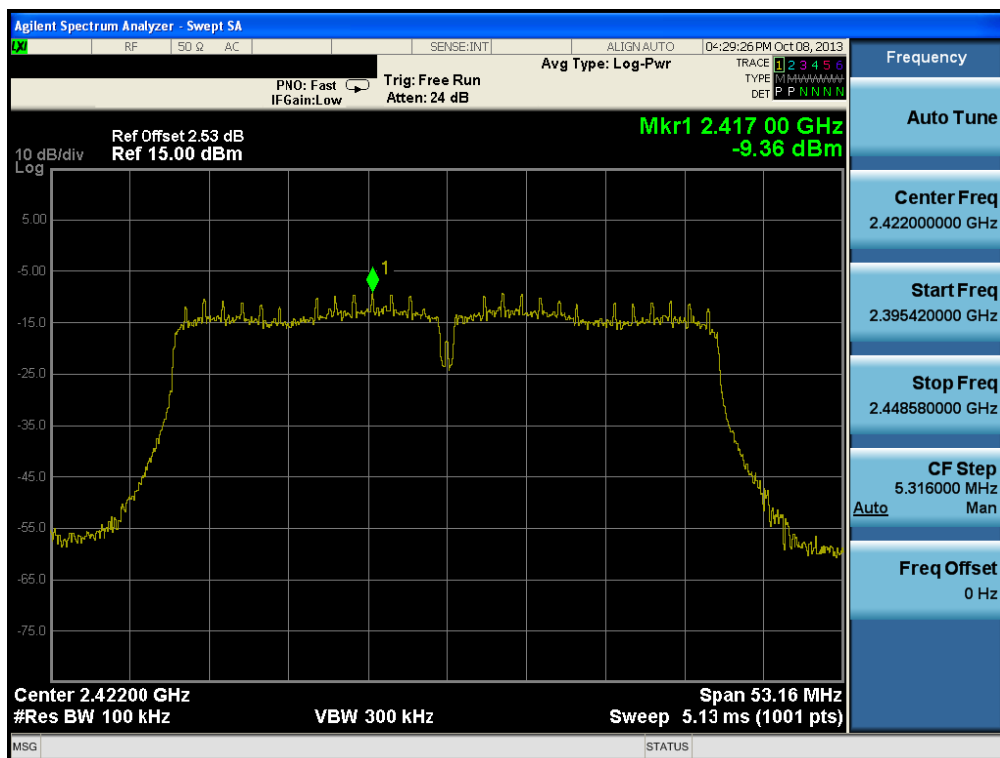

Low Band-edge

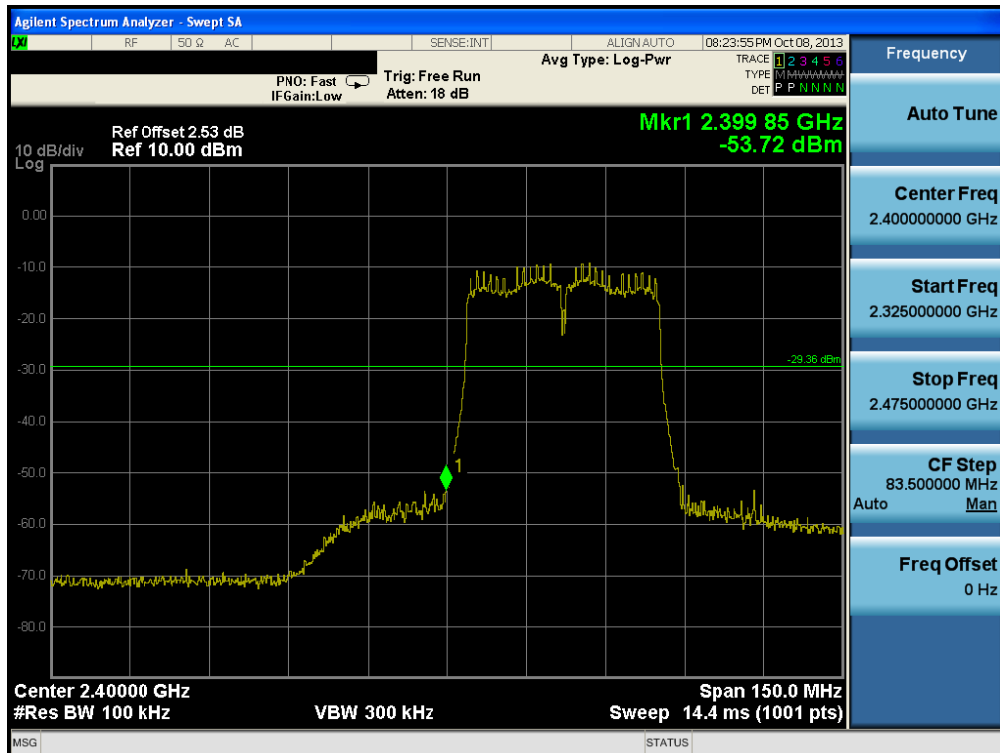


Conducted Spurious Emissions

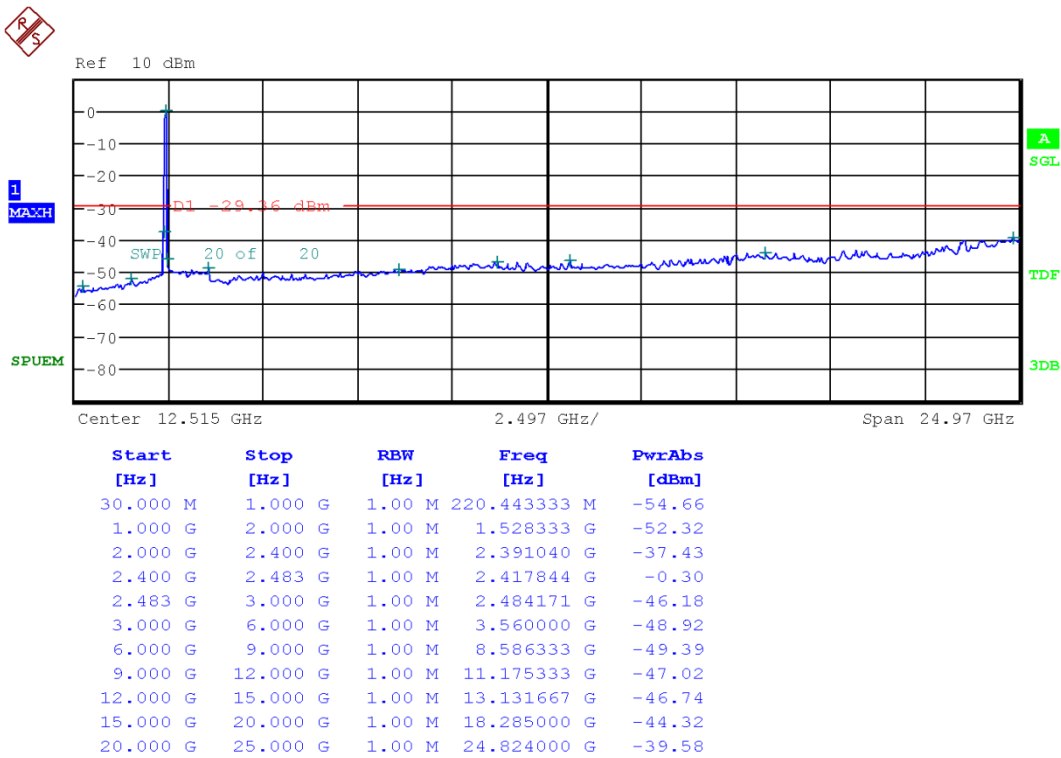


Test Mode: Chain 1 & 802.11n(HT40) & MCS 8 & 2437MHz

Reference

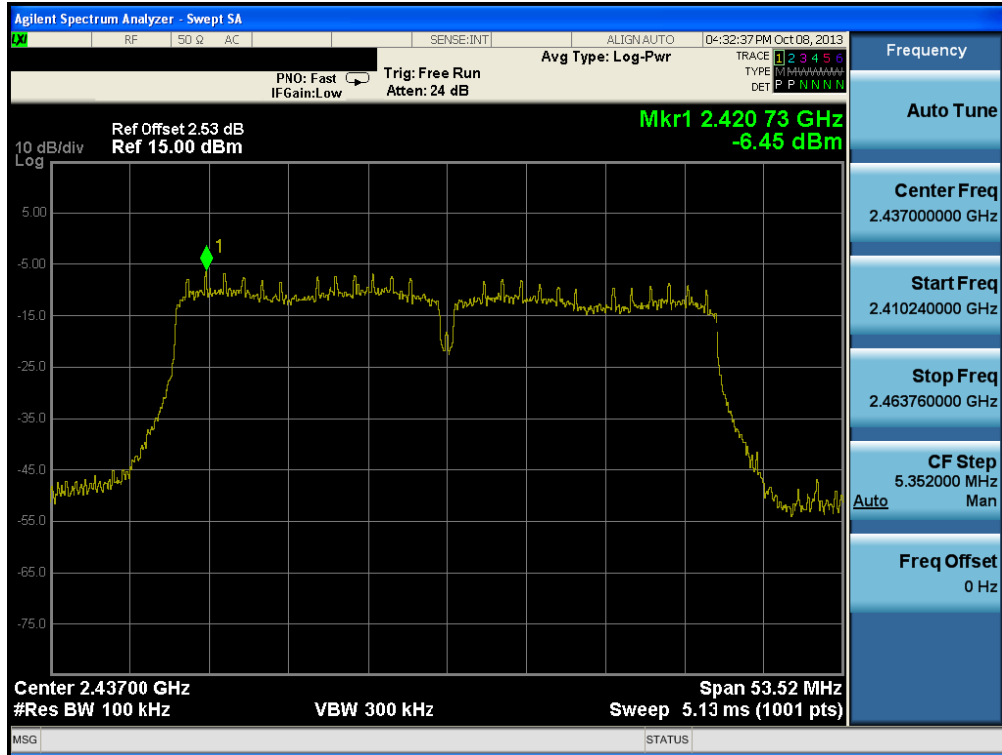


Conducted Spurious Emissions

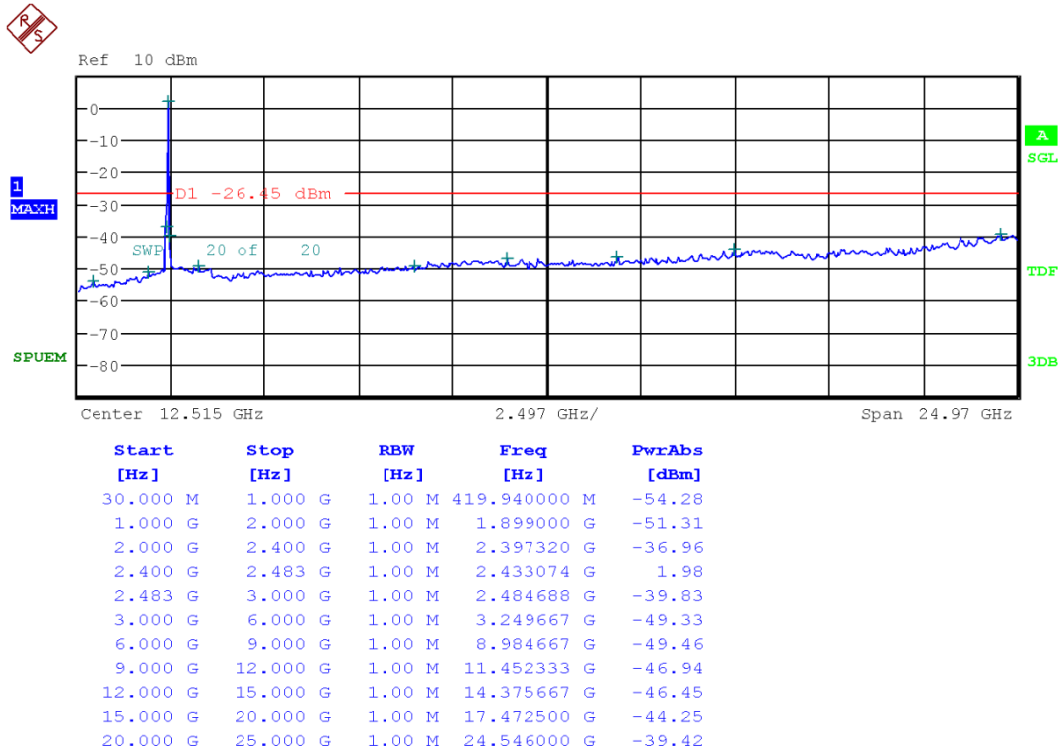


Test Mode: Chain 1 & 802.11n(HT40) & MCS 8 & 2452MHz


Reference

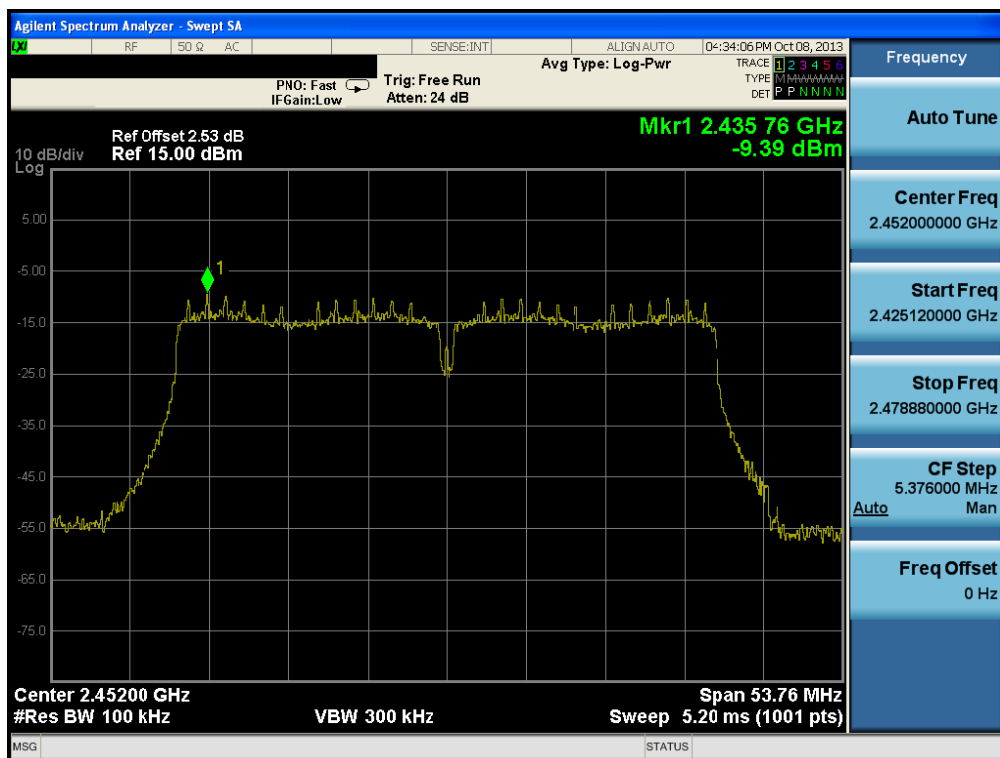

High Band-edge

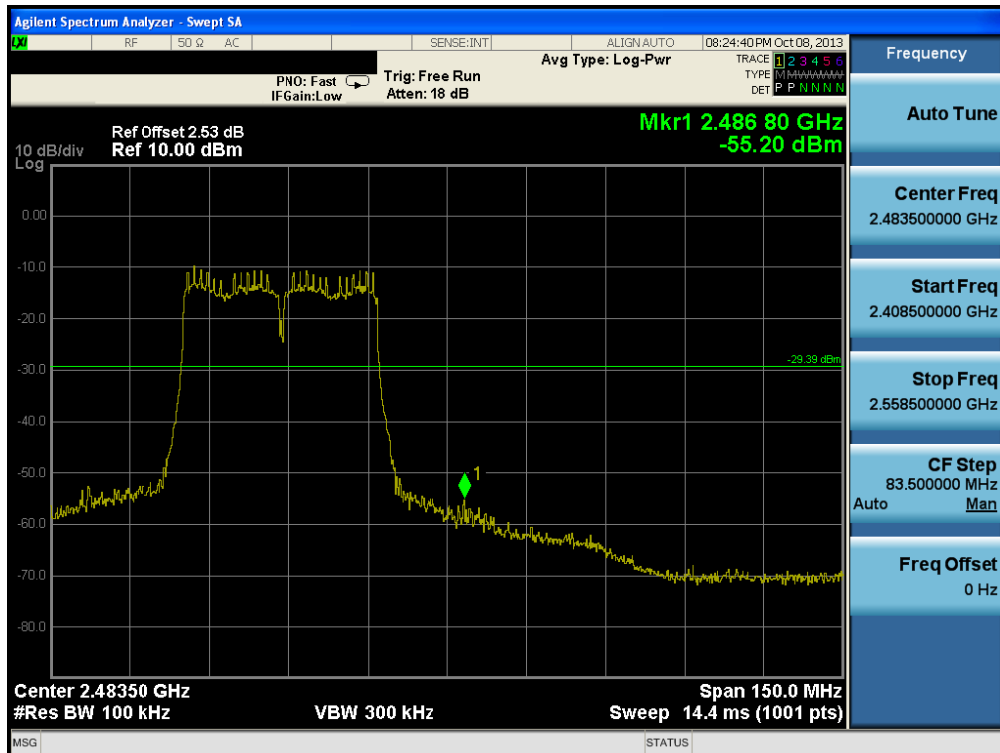


Conducted Spurious Emissions

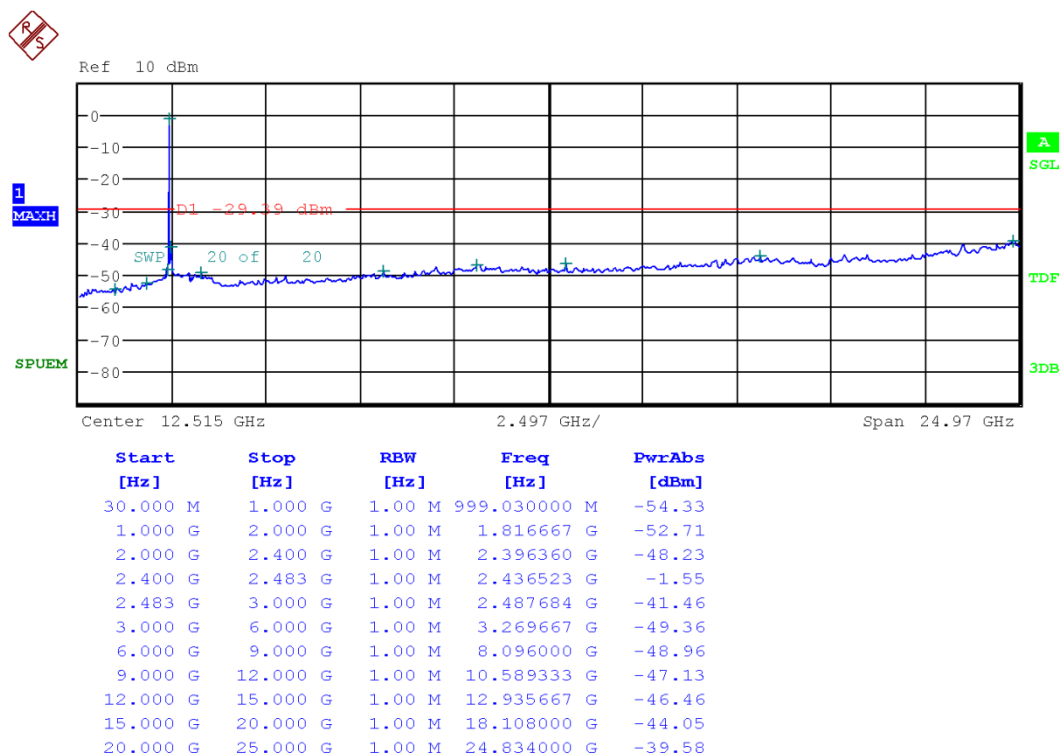


Test Mode: Chain 2 & 802.11n(HT40) & MCS 8 & 2422MHz


Reference

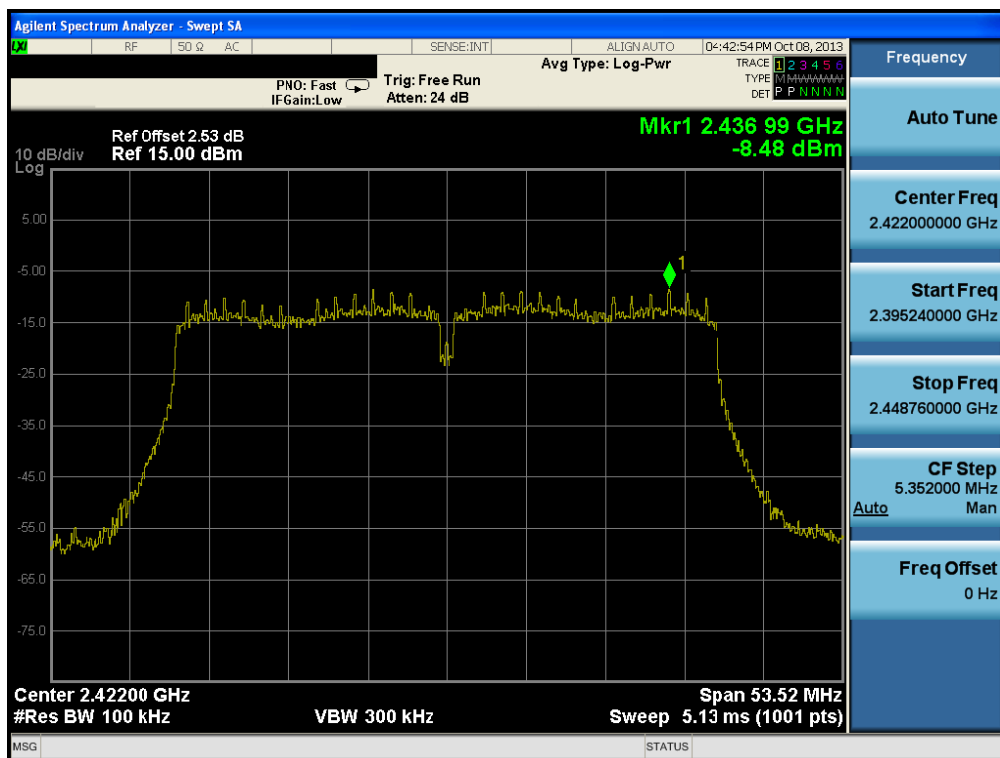

Low Band-edge

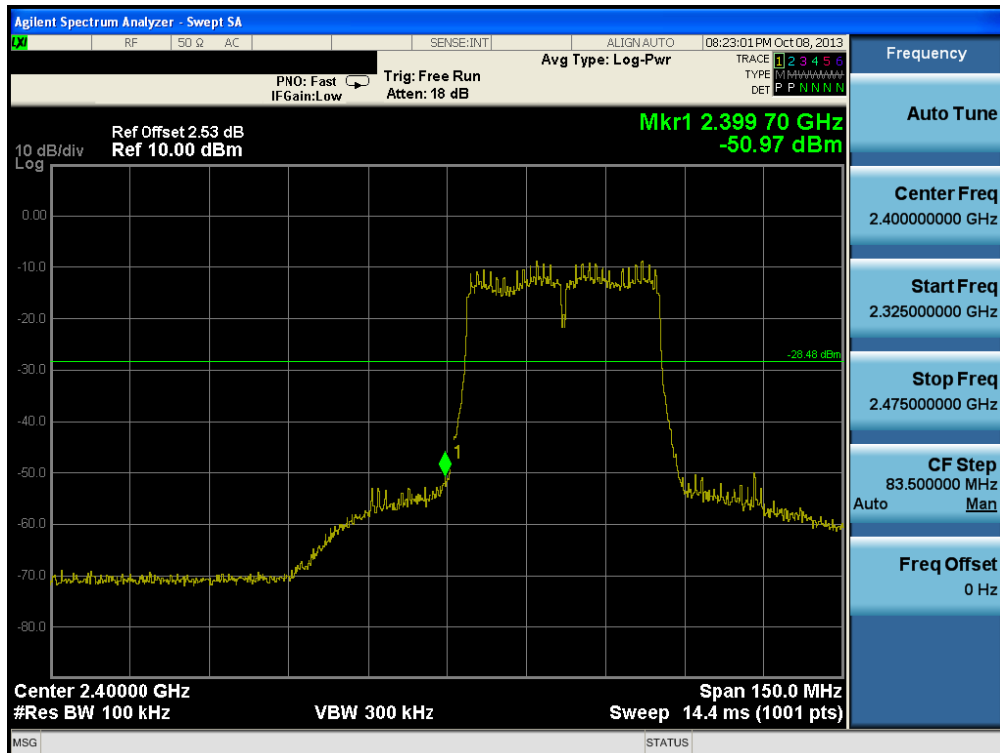


Conducted Spurious Emissions

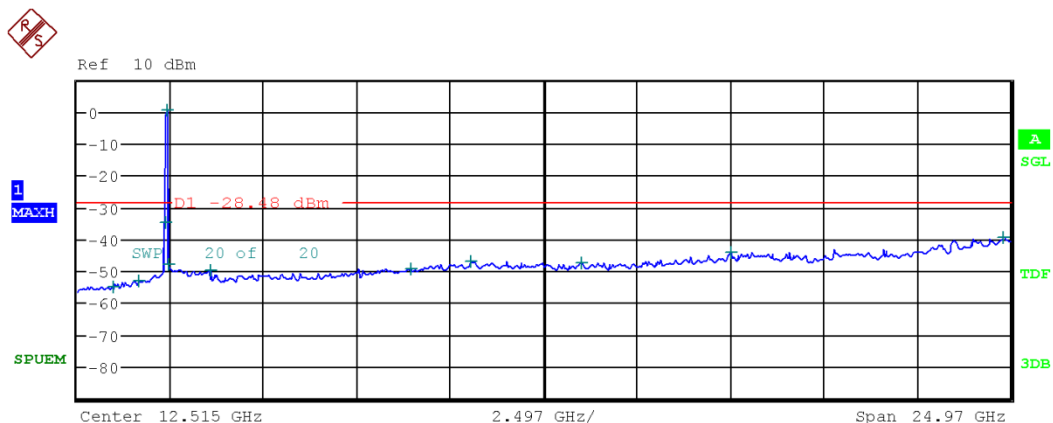


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]
30.000 M	1.000 G	1.00 M	999.676667 M	-54.86
1.000 G	2.000 G	1.00 M	1.666000 G	-52.92
2.000 G	2.400 G	1.00 M	2.399400 G	-35.02
2.400 G	2.483 G	1.00 M	2.425843 G	0.50
2.483 G	3.000 G	1.00 M	2.490369 G	-47.82
3.000 G	6.000 G	1.00 M	3.581000 G	-50.09
6.000 G	9.000 G	1.00 M	8.947667 G	-49.26
9.000 G	12.000 G	1.00 M	10.552667 G	-46.85
12.000 G	15.000 G	1.00 M	13.512333 G	-47.37
15.000 G	20.000 G	1.00 M	17.501500 G	-44.09
20.000 G	25.000 G	1.00 M	24.791000 G	-39.34

Test Mode: Chain 2 & 802.11n(HT40) & MCS 8 & 2437MHz

Reference

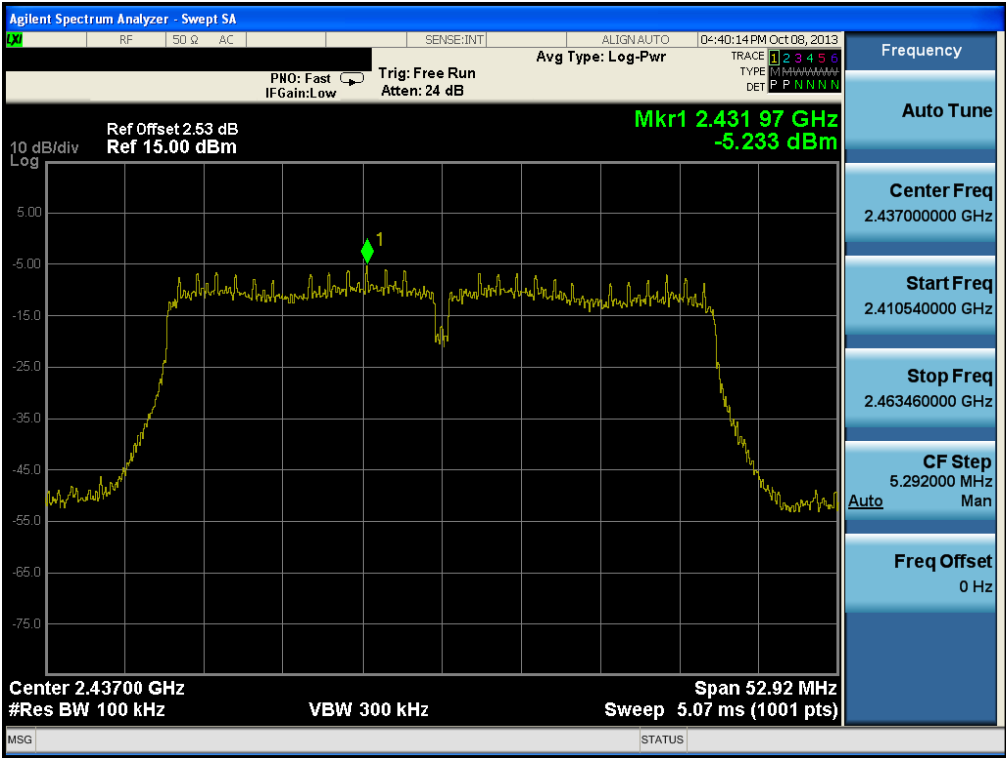


Conducted Spurious Emissions

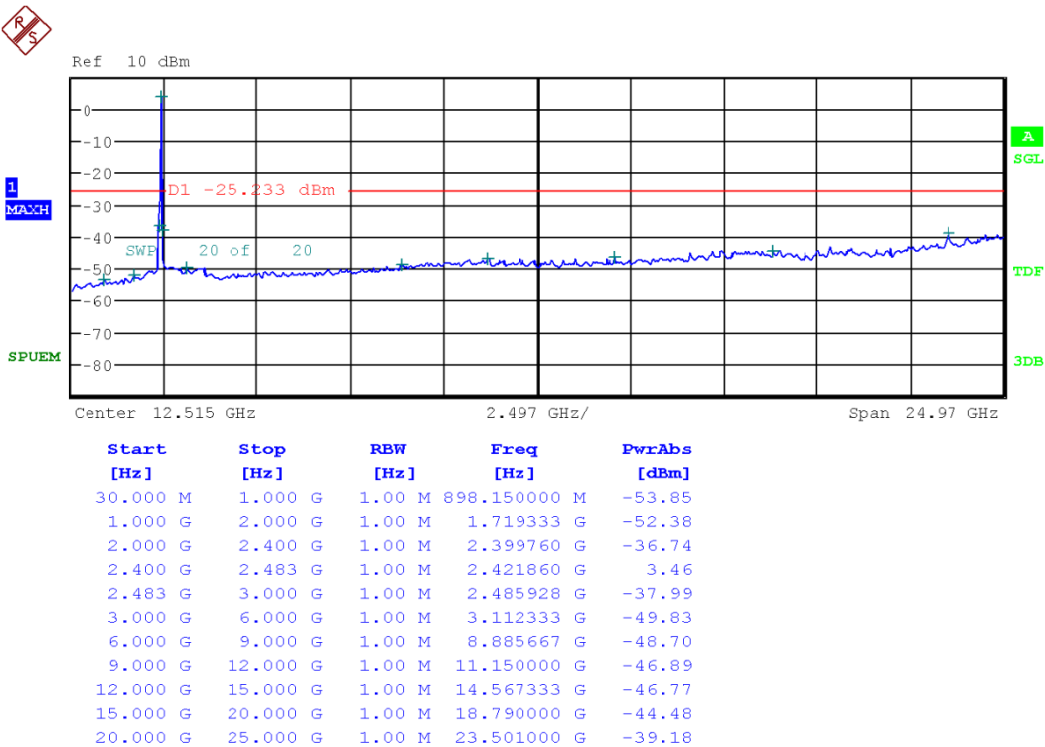


Test Mode: Chain 2 & 802.11n(HT40) & MCS 8 & 2452MHz


Reference

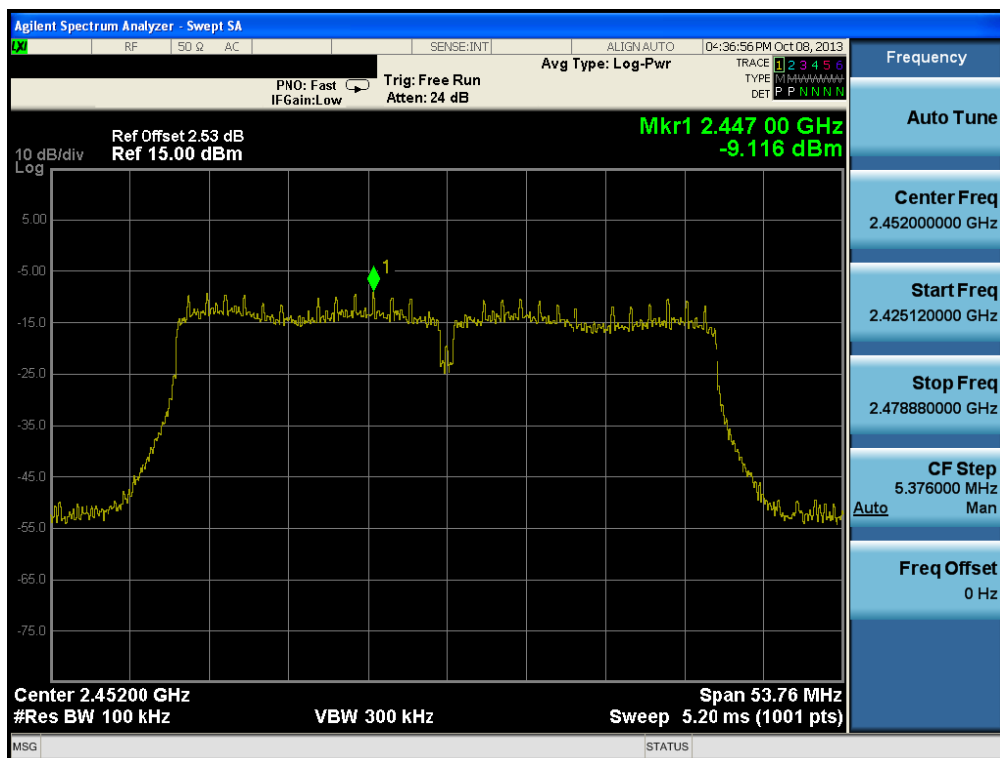

High Band-edge

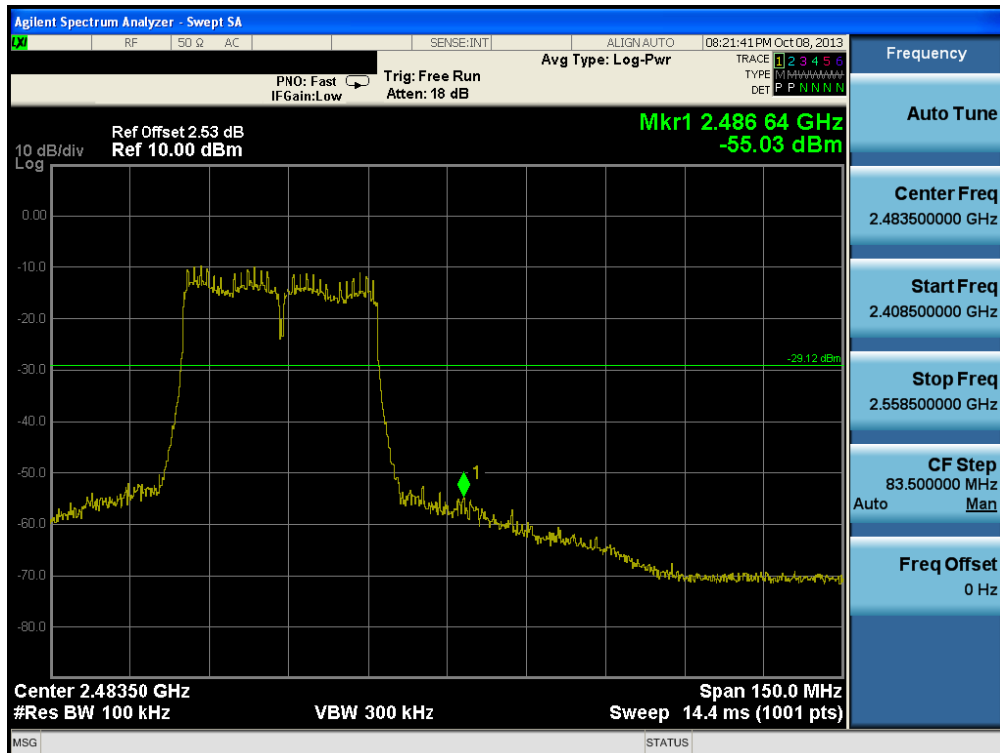

Conducted Spurious Emissions

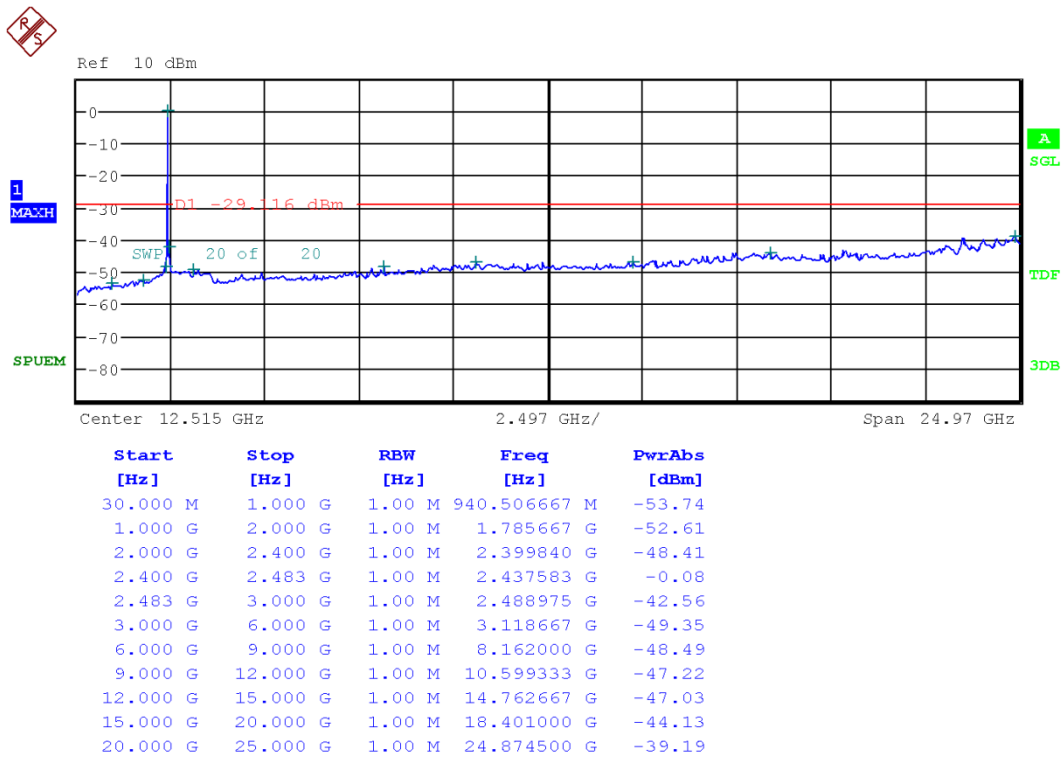

8.5 Radiated Spurious Emissions

Test Requirements and limit, §15.247(d), §15.205, §15.209& RSS-210 [A8.5], RSS-Gen [7.2.2]

In any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240			
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

Test Configuration

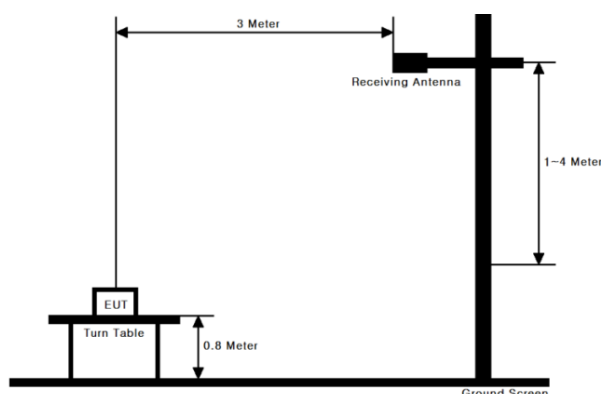

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Measurement Instrument Setting for Radiated Emission Measurements.

Peak Measurement : 12.2.4 of KDB 558074 v03r1

RBW = As specified in below table , VBW $\geq 3 \times$ RBW, Sweep = Auto, Detector = Peak, Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

Average Measurement : 12.2.5 of KDB 558074 v03r1

1. RBW = 1 MHz (unless otherwise specified).
2. VBW $\geq 3 \times$ RBW.
3. Detector = RMS (Number of points $\geq 2 \times$ Span / RBW)
4. Averaging type = power (i.e., RMS).
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.
7. A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

Mode	Rate	Duty Cycle (%)	T _{on} (ms)	T _{on} + T _{off} (ms)	DCF = 10log(1/Duty) (dB)
802.11b	1Mbps	99.04	12.420	12.540	-
802.11g	6Mbps	95.38	2.065	2.165	0.21
802.11n(HT20)	MCS0	95.06	1.925	2.025	0.22
802.11n(HT20)	MCS8	90.56	0.978	1.080	0.43
802.11n(HT40)	MCS0	90.29	0.948	1.050	0.44
802.11n(HT40)	MCS8	82.61	0.494	0.598	0.83

9KHz ~ 25GHz Data(802.11b & Chain 1 & 1Mbps)**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2386.72	H	Y	PK	50.40	- 3.38	-	-	47.02	74.00	26.98
2386.12	H	Y	AV	40.52	- 3.38	-	-	37.14	54.00	16.86
4823.56	V	Y	PK	45.52	5.43	-	-	50.95	74.00	23.05
4823.97	V	Y	AV	37.92	5.43	-	-	43.35	54.00	10.65
-	-	-	-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4873.99	V	Y	PK	47.19	5.64	-	-	52.83	74.00	21.17
4873.95	V	Y	AV	40.61	5.64	-	-	46.25	54.00	7.75
-	-	-	-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.68	H	Y	PK	55.41	- 2.79	-	-	52.62	74.00	21.38
2483.50	H	Y	AV	47.49	- 2.79	-	-	44.70	54.00	9.30
4924.09	V	Y	PK	46.33	5.99	-	-	52.32	74.00	21.68
4924.01	V	Y	AV	40.34	5.99	-	-	46.33	54.00	7.67
-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz, Measurement Distance = 1 m for above 10 GHz.
So Distance Correction Factor :- $9.54\text{dB} = 20 \times \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCF + Distance Factor / T.F = AF + CL – AG
Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11b & Chain 2 & 1Mbps)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2387.20	H	Y	PK	50.24	- 3.38	-	-	46.86	74.00	27.14
2386.52	H	Y	AV	40.06	- 3.38	-	-	36.68	54.00	17.32
4824.02	V	Y	PK	45.03	5.43	-	-	50.46	74.00	23.54
4823.95	V	Y	AV	36.85	5.43	-	-	42.28	54.00	11.72
-	-	-	-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.12	V	Y	PK	45.97	5.64	-	-	51.61	74.00	22.39
4874.05	V	Y	AV	38.42	5.64	-	-	44.06	54.00	9.94
-	-	-	-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.51	H	Y	PK	54.50	-2.79	-	-	51.71	74.00	22.29
2483.51	H	Y	AV	45.88	-2.79	-	-	43.09	54.00	10.91
4924.11	V	Y	PK	47.26	5.99	-	-	53.25	74.00	20.75
4923.96	V	Y	AV	41.04	5.99	-	-	47.03	54.00	6.97
-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz , Measurement Distance = 1 m for above 10 GHz.
So Distance Correction Factor :- $9.54\text{dB} = 20 \cdot \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCF} + \text{Distance Factor} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11g & Chain 1 & 6Mbps)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2389.92	H	Y	PK	65.15	-3.38	-	-	61.77	74.00	12.23
2390.00	H	Y	AV	50.35	-3.38	0.21	-	47.18	54.00	6.82
4824.34	V	Y	PK	44.25	5.43	-	-	49.68	74.00	24.32
4823.05	V	Y	AV	33.06	5.43	0.21	-	38.70	54.00	15.30
-	-	-	-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4873.54	V	Y	PK	43.71	5.64	-	-	49.35	74.00	24.65
4874.07	V	Y	AV	33.29	5.64	0.21	-	39.14	54.00	14.86
-	-	-	-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.30	H	Y	PK	69.44	-2.79	-	-	66.65	74.00	7.35
2483.63	H	Y	AV	52.65	-2.79	0.21	-	50.07	54.00	3.93
4924.30	V	Y	PK	43.11	5.99	-	-	49.10	74.00	24.90
4921.52	V	Y	AV	32.80	5.99	0.21	-	39.00	54.00	15.00
-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz , Measurement Distance = 1 m for above 10 GHz.
So Distance Correction Factor :- $9.54\text{dB} = 20 \cdot \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCF + Distance Factor / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11g & Chain 2 & 6Mbps)

▪ Lowest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2388.60	V	Z	PK	68.51	-3.38	-	-	65.13	74.00	8.87
2389.52	V	Z	AV	51.59	-3.38	0.21	-	48.42	54.00	5.58
4823.85	V	Y	PK	43.93	5.43	-	-	49.36	74.00	24.64
4822.93	V	Y	AV	33.11	5.43	0.21	-	38.75	54.00	15.25
-	-	-	-	-	-	-	-	-	-	-

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874.18	V	Y	PK	44.13	5.64	-	-	49.77	74.00	24.23
4873.08	V	Y	AV	33.02	5.64	0.21	-	38.87	54.00	15.13
-	-	-	-	-	-	-	-	-	-	-

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.53	H	Y	PK	71.41	-2.79	-	-	68.62	74.00	5.38
2484.02	H	Y	AV	53.80	-2.79	0.21	-	51.22	54.00	2.78
4922.55	V	Y	PK	43.40	5.99	-	-	49.39	74.00	24.61
4922.41	V	Y	AV	33.03	5.99	0.21	-	39.23	54.00	14.77
-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz , Measurement Distance = 1 m for above 10 GHz.
So Distance Correction Factor :- $9.54\text{dB} = 20 \cdot \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCF} + \text{Distance Factor} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11n HT20 & 1TX (Chain 1 or 2) & MCS 0 , 2TX & MCS8)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	TX Chain
2390.00	V	Z	PK	65.14	-3.38	-	-	61.76	74.00	12.24	2
2389.96	V	Z	AV	48.75	-3.38	0.22	-	45.59	54.00	8.41	2
4826.49	V	Y	PK	43.14	5.43	-	-	48.57	74.00	25.43	2TX
4826.24	V	Y	AV	33.38	5.43	0.43	-	39.24	54.00	14.76	2TX
-	-	-	-	-	-	-	-	-	-	-	-

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	TX Chain
4872.03	V	Y	PK	44.45	5.64	-	-	50.09	74.00	23.91	2TX
4871.22	V	Y	AV	32.43	5.64	0.43	-	38.50	54.00	15.50	2TX
-	-	-	-	-	-	-	-	-	-	-	-

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	TX Chain
2483.53	H	Y	PK	69.54	-2.79	-	-	66.75	74.00	7.25	1
2483.56	H	Y	AV	50.58	-2.79	0.22	-	48.01	54.00	5.99	1
4925.55	V	Y	PK	43.84	5.99	-	-	49.83	74.00	24.17	1
4924.87	V	Y	AV	32.95	5.99	0.22	-	39.16	54.00	14.84	1
-	-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz , Measurement Distance = 1 m for above 10 GHz.
So Distance Correction Factor :- $9.54\text{dB} = 20 \times \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCF} + \text{Distance Factor} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

9KHz ~ 25GHz Data(802.11n HT40 & 1TX (Chain 1 or 2) & MCS 0 , 2TX & MCS8)▪ **Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	TX Chain
2387.68	H	Y	PK	66.18	-3.38	-	-	62.80	74.00	11.20	2TX
2388.84	H	Y	AV	49.01	-3.38	0.83	-	46.46	54.00	7.54	2TX
4841.61	V	Y	PK	43.90	5.45	-	-	49.35	74.00	24.65	2TX
4842.05	V	Y	AV	32.04	5.45	0.83	-	38.32	54.00	15.68	2TX
-	-	-	-	-	-	-	-	-	-	-	-

▪ **Middle Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	TX Chain
2487.04	H	Y	PK	62.16	-3.38	-	-	58.78	74.00	15.22	2
2389.24	H	Y	AV	47.42	-3.38	0.44	-	44.48	54.00	9.52	2
2483.99	H	Y	PK	61.99	-2.79	-	-	59.20	74.00	14.80	2TX
2484.45	H	Y	AV	46.67	-2.79	0.83	-	44.71	54.00	9.29	2TX
4877.22	V	Y	PK	44.34	5.64	-	-	49.98	74.00	24.02	2TX
4875.12	V	Y	AV	31.89	5.64	0.83	-	38.36	54.00	15.64	2TX
-	-	-	-	-	-	-	-	-	-	-	-

▪ **Highest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Distance Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	TX Chain
2487.08	H	Y	PK	65.18	-2.79	-	-	62.39	74.00	11.61	2TX
2484.58	H	Y	AV	49.66	-2.79	0.83	-	47.70	54.00	6.30	2TX
4902.59	V	Y	PK	43.88	5.92	-	-	49.80	74.00	24.20	2TX
4903.30	V	Y	AV	32.28	5.92	0.83	-	39.03	54.00	14.97	2TX
-	-	-	-	-	-	-	-	-	-	-	-

Note.

1. Measurement Distance = 3 m for below 10 GHz , Measurement Distance = 1 m for above 10 GHz.
So Distance Correction Factor :- $9.54\text{dB} = 20 \cdot \log(1\text{m}/3\text{m})$
2. No other spurious and harmonic emissions were found greater than listed emissions on above table.
3. Above listed point data is the worst case data.
4. Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F+ DCF + Distance Factor / T.F = AF + CL – AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCF = Duty Cycle Correction Factor.

8.6 Power-line Conducted Emissions

Test Requirements and limit, §15.207& RSS-Gen [7.2.2]

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs for the actual connections between EUT and support equipment.

Test Mode

The all modes of EUT operation were investigated and the worst case mode was reported.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ RESULT PLOTS

AC Line Conducted Emissions (Graph)

Test Mode: 802.11b (2.4GHz Band)





Results of Conducted Emission

Digital EMC
Date : 2013-10-02

Model No. : L02F
Type :
Serial No. : Identical prototype
Test Condition : 802.11b

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 24 °C 40 % R.H.
Operator : J.J.LEE

Memo : Chain 1

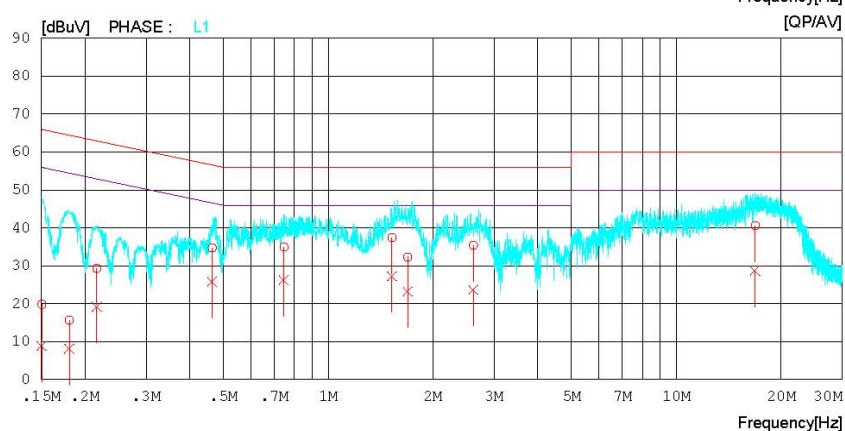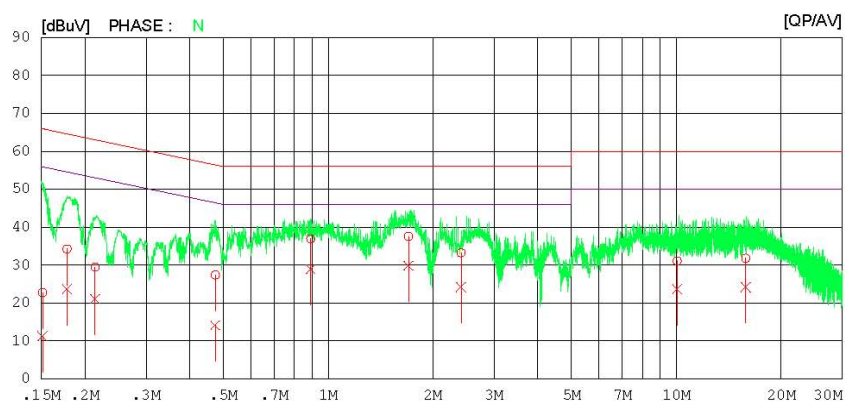LIMIT : FCC P15.207 QP
FCC P15.207 AV

AC Line Conducted Emissions (List)

Test Mode: 802.11b (2.4GHz Band)

Results of Conducted EmissionDigital EMC
Date : 2013-10-02

Model No.	: L02F	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	: Identical prototype	Temp/Humi.	: 24 °C 40 % R.H.
Test Condition	: 802.11b	Operator	: J.J.LEE
Memo	: Chain 1		

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15125	22.7	11.2	0.1	22.8	11.3	65.9	55.9	43.1	44.6	N
2	0.17794	34.2	23.6	0.1	34.3	23.7	64.6	54.6	30.3	30.9	N
3	0.21402	29.4	21.0	0.1	29.5	21.1	63.0	53.0	33.5	31.9	N
4	0.47440	27.3	14.0	0.1	27.4	14.1	56.4	46.4	29.0	32.3	N
5	0.89090	36.7	28.7	0.2	36.9	28.9	56.0	46.0	19.1	17.1	N
6	1.70260	37.3	29.5	0.3	37.6	29.8	56.0	46.0	18.4	16.2	N
7	2.41000	32.9	23.9	0.3	33.2	24.2	56.0	46.0	22.8	21.8	N
8	10.06180	30.6	23.2	0.5	31.1	23.7	60.0	50.0	28.9	26.3	N
9	15.82500	31.2	23.6	0.6	31.8	24.2	60.0	50.0	28.2	25.8	N
10	0.15050	19.7	8.7	0.1	19.8	8.8	66.0	56.0	46.2	47.2	L1
11	0.18057	15.6	8.0	0.1	15.7	8.1	64.5	54.5	48.8	46.4	L1
12	0.21650	29.2	19.2	0.1	29.3	19.3	63.0	53.0	33.7	33.7	L1
13	0.46456	34.6	25.7	0.1	34.7	25.8	56.6	46.6	21.9	20.8	L1
14	0.74672	34.8	26.0	0.2	35.0	26.2	56.0	46.0	21.0	19.8	L1
15	1.52580	37.2	27.0	0.3	37.5	27.3	56.0	46.0	18.5	18.7	L1
16	1.69360	32.0	22.9	0.3	32.3	23.2	56.0	46.0	23.7	22.8	L1
17	2.61440	35.1	23.4	0.3	35.4	23.7	56.0	46.0	20.6	22.3	L1
18	16.85060	40.0	28.1	0.6	40.6	28.7	60.0	50.0	19.4	21.3	L1

8.7 Occupied Bandwidth

Test Requirements, RSS-Gen [4.6.1]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

■ TEST CONFIGURATION

Refer to the APPENDIX I.


■ TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

■ TEST RESULTS: -

9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	E4440A	13/01/08	14/01/08	MY44033778
Spectrum Analyzer	Agilent	N9020A	13/09/16	14/09/16	MY50410163
Signal Analyzer	Rohde Schwarz	FSQ26	13/02/14	14/02/14	200445
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A/ MA2411B	13/09/16	14/09/16	1111002 / 011290
DC Power Supply	SM techno	SDP30-5D	13/05/27	14/05/27	305DKA013
Multimeter	HP	34401A	13/02/27	14/02/27	3146A13475
Vector Signal Generator	Rohde Schwarz	SMBV100A	13/01/08	14/01/08	255571
Signal Generator	Rohde Schwarz	SMF100A	13/07/22	14/07/22	102341
Thermohygrometer	BODYCOM	BJ5478	13/06/01	14/06/01	120612-2
High-pass Filter	Wainwright Instruments	WHKX3.0	13/09/12	14/09/12	9
Loop Antenna	Schwarzbeck	FMZB1513	12/09/24	14/09/24	1513-128
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
Horn Antenna	ETS	3115	13/02/28	15/02/28	00021097
Horn Antenna	A.H.Systems Inc.	SAS-574	13/03/20	15/03/20	154
Amplifier (22dB)	HP	8447E	13/01/08	14/01/08	2945A02865
Amplifier (30dB)	Agilent	8449B	13/02/27	14/02/27	3008A00370
EMI TEST RECEIVER	R&S	ESU	13/01/08	14/01/08	100014
EMI TEST RECEIVER	R&S	ESCI	13/02/27	14/02/27	100364
CVCF	NF	4420	13/09/12	14/09/12	3049354420023
LISN	R&S	ESH2-Z5	13/09/12	14/09/12	828739/006

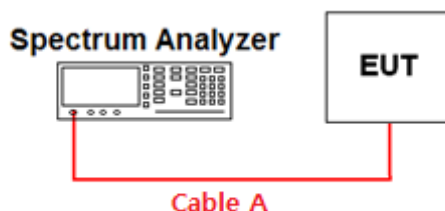APPENDIX I**Conducted Test set up Diagram & Path loss Information****Conducted Measurement(30MHz ~ 25GHz)****Path loss information**

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	0.96	15	6.08
1	1.56	20	6.93
2412 & 2437 & 2462	2.53	25	7.61
5	3.37	-	-
10	4.70	-	-

Note. 1: The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (=S/A's offset value) = Cable A

Note. 2: For conducted spurious emissions, the path loss values were saved as the transducer factor on the spurious measurement function of the spectrum analyzer and the transducer factor of tested frequency is calculated and corrected automatically by the spectrum analyzer's measurement function.