



**FCC CFR47 PART 20.19**

**ANSI C63.19-2007**

**HAC RF EMISSIONS TEST REPORT**

*For*

**Cellular/PCS BC 10 CDMA and LTE Phone with Bluetooth and WLAN**

**MODEL: LS840, LGLS840 and LG-LS840**

**FCC ID: ZNFLS840**

**REPORT NUMBER: 11U14124-12**

**ISSUE DATE: November 29, 2011**

*Prepared for*

**LG ELECTRONICS MOBILECOMM U.S.A., INC.**

**10101 OLD GROVE ROAD**

**SAN DIEGO, CA 92131**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (UL CCS)**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 771-1000**

**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	November 29,2011	Initial Issue	--

## Tablet of Contents

<b>1. Attestation of Test Results .....</b>	<b>4</b>
<b>2. Test Methodology .....</b>	<b>5</b>
<b>3. Facilities and Accreditation .....</b>	<b>5</b>
<b>4. Calibration and Uncertainty .....</b>	<b>6</b>
4.1. <i>Measuring Instrument Calibration.....</i>	<i>6</i>
4.2. <i>Measurement Uncertainty.....</i>	<i>7</i>
<b>5. Equipment Under Test .....</b>	<b>8</b>
5.1. <i>List of Air Interfaces/Bands &amp; Operating Modes.....</i>	<i>8</i>
<b>6. System Specifications.....</b>	<b>9</b>
<b>7. System Validation .....</b>	<b>10</b>
7.1. <i>System Validation Results.....</i>	<i>11</i>
<b>8. Probe Modulation Factor (PMF).....</b>	<b>12</b>
8.1. <i>PMF Measurement Results .....</i>	<i>14</i>
<b>9. HAC RF Emissions Test Procedure .....</b>	<b>15</b>
<b>10. RF Emissions Measurement Criteria.....</b>	<b>17</b>
<b>11. HAC (RF Emissions) Test Results .....</b>	<b>18</b>
11.1. <i>E-Field Emissions .....</i>	<i>18</i>
11.2. <i>H- Field Emissions .....</i>	<i>18</i>
<b>12. Test Plots .....</b>	<b>19</b>
<b>13. Appendixes.....</b>	<b>25</b>
13.1. <i>Appendix A: System Validation Plots.....</i>	<i>25</i>
13.2. <i>Appendix B: E-field emissions test plots .....</i>	<i>25</i>
13.3. <i>Appendix C: H-field emissions test plots.....</i>	<i>25</i>
13.4. <i>Appendix D: Calibration Certificate - E-Field Probe ER3DV6 - SN 2509.....</i>	<i>25</i>
13.5. <i>Appendix E: Calibration Certificate - H-Field Probe H3DV6 - SN 6324 .....</i>	<i>25</i>
13.6. <i>Appendix F: Calibration Certificate for Dipole CD835V3 - SN 1175 .....</i>	<i>25</i>
13.7. <i>Appendix G: Calibration Certificate for Dipole CD1880V3 - SN 1159.....</i>	<i>25</i>
<b>14. Setup Photo .....</b>	<b>26</b>

### 1. Attestation of Test Results

Applicant name:	LG ELECTRONICS MOBILECOMM U.S.A., INC.		
EUT description:	Cellular/PCS BC10 CDMA and LTE Band 25 Phone with Bluetooth and WLAN		
Model name:	LS840, LGLS840 and LG-LS840 IMEI: 99000074000554		
Device category:	Portable		
Exposure category:	General Population/Uncontrolled Exposure		
Date of tested:	November 7, 2011		
<b>Maximum E/H-Filed Emissions</b>			
Max. E-Field emissions:	Part 22 - CDMA BC0:	62.886 V/m (M4)	
	Part 24 - CDMA BC1:	35.417 V/m (M4)	
	Part 90 - CDMA BC10:	70.515 V/m (M4)	
Max. H-Field emissions:	Part 22 - CDMA BC0:	0.123 A/m (M4)	
	Part 24 - CDMA BC1:	0.099 A/m (M4)	
	Part 90 - CDMA BC10:	0.114 A/m (M4)	
<b>Hearing Aid Near-Field Category: M4</b>			
Applicable Standards			Test Results
ANSI C63.19-2007			Pass
<p>Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>			
Approved & Released For UL CCS By:		Tested By:	
			
Sunny Shih Engineering Team Leader Compliance Certification Services (UL CCS)		Devin Chang EMC Engineer Compliance Certification Services (UL CCS)	

## 2. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2007 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC KDB 285076 D01 HAC Guidance v02r01

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. Calibration and Uncertainty

### 4.1. Measuring Instrument Calibration

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

<u>Name of Equipment</u>	<u>Manufacturer</u>	<u>Type/Model</u>	<u>Serial Number</u>	<u>Cal. Due date</u>
Robot - Six Axes	Stäubli	TX90 XL	N/A	N/A
DASY5 Measurement Server	SPEAG	SEUMS001BA	1041	N/A
Data Acquisition Electronics	SPEAG	DAE4	1257	10/25/12
E-Field Probe	SPEAG	ER3DV6	2509	4/8/12
H-Field Probe	SPEAG	H3DV6	6324	4/11/12
Calibration Dipole	SPEAG	CD835V3	1175	5/3/12
Calibration Dipole	SPEAG	CD1880V3	1159	5/3/12
Power Meter	Giga-Tronics	8651A	8651404	5/13/12
Power Sensor	Giga-Tronics	80701A	1834588	5/13/12
Amplifier	Mini-Circuits	ZHL-42W	D072701-5	N/A
Signal Generator	HP	8665B	3744A01084	N/A
Radio Communication Tester	R &S	CMU 200	54-1008661	2/16/2012

## 4.2. Measurement Uncertainty

### HAC Uncertainty Budget According to ANSI PC63.19

Error Description	Uncertainty value ( $\pm\%$ )	Probe Dist.	Div.	(Ci) E	(Ci) H	Std. Unc.( $\pm\%$ )	
						E	H
<b>Measurement System</b>							
Probe Calibration	5.10	N	1	1	1	5.1	5.1
Axial Isotropy	4.70	R	1.732	1	1	2.7	2.7
Sensor Displacement	16.50	R	1.732	1	0.145	9.5	1.4
Boundary Effects	2.40	R	1.732	1	1	1.4	1.4
Linearity	4.70	R	1.732	1	1	2.7	2.7
Scaling to Peak Envelope Power	2.00	R	1.732	1	1	1.2	1.2
System Detection Limit	1.00	R	1.732	1	1	0.6	0.6
Readout Electronics	0.30	N	1	1	1	0.3	0.3
Response Time	0.80	R	1.732	1	1	0.5	0.5
Integration Time	2.60	R	1.732	1	1	1.5	1.5
RF Ambient Conditions	3.00	R	1.732	1	1	1.7	1.7
RF Reflections	12.00	R	1.732	1	1	6.9	6.9
Probe Positioner	1.20	R	1.732	1	0.67	0.7	0.5
Probe Positioning	4.70	R	1.732	1	0.67	2.7	1.8
Extrapolation and Interpolation	1.00	R	1.732	1	1	0.6	0.6
<b>Test sample Related</b>							
Test Positioning Vertical	4.70	R	1.732	1	0.67	2.7	1.8
Test Positioning Lateral	1.00	R	1.732	1	1	0.6	0.6
Device Holder and Phantom	2.40	R	1.732	1	1	1.4	1.4
Power Drift	5.00	R	1.732	1	1	2.9	2.9
<b>Phantom and Setup Related</b>							
Phantom Thickness	2.40	R	1.732	1	0.67	1.4	0.9
Combined Std. Uncertainty						14.7	10.9
<b>Expanded Std. Uncertainty on Power</b>						<b>29.4</b>	<b>21.8</b>
<b>Expanded Std. Uncertainty on Field</b>						<b>14.7</b>	<b>10.9</b>
Notes for table							
1. N - Nomal							
2. R - Rectangular							
3. Div. - Divisor used to obtain standard uncertainty							
4. Ci - is te sensitivity coefficient							

## 5. Equipment Under Test

Cellular/PCS BC10 CDMA and LTE Band 25 Phone with Bluetooth and WLAN

MODEL: LS840, LGLS840 and LG-LS840

### 5.1. List of Air Interfaces/Bands & Operating Modes

Air-Interface	Bands (MHz)	Type	C63.19/ Tested	Simultaneous Transmissions Note: Not to be tested	Concurrent single transmission	Reduced power 20.19 (c) (1)	Voice Over Digital Transport (Data)
CDMA	800 (BC0/BC10)	VO	Yes	Yes LTE, EV-DO, WiFi and Bluetooth	Yes: EV-DO, LTE, WiFi and Bluetooth	N/A	N/A
	1900		Yes				
	EV-DO	DT	N/A	N/A	Yes: * see note	Yes: **SVDO mode only	Yes
LTE	Band 25	DT	N/A	Yes EV-DO, WiFi and Bluetooth	Yes: * see note	Yes: **SVLTE mode only	Yes
WiFi	2450	DT	N/A	Yes CDMA,GSM,UMTE, LTE, EV-DO and Bluetooth	N/A	N/A	Yes
Bluetooth	2400	DT	N/A	Yes CDMA,GSM,UMTE, LTE, EV-DO and WiFi	N/A	N/A	N/A
VO Voice CMRS/PTSN Service Only V/D Voice CMRS/PSTN and Data Service DT Digital Transport				Note(s): * HAC Rating was not base on concurrent voice and data modes, Noncurrent mode was found to represent worst case rating. For M rating ** SVDO: CDMA voice and EVDO Simultaneously transmission SVLTE: CDMA voice and LTE Simultaneously transmission			

## 6. System Specifications

E-field and H-field measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland.

The DASY5 HAC Extension consists of the following parts:

### Test Arch Phantom

The specially designed Test Arch allows high precision positioning of both the device and any of the validation dipoles.

### ER3DV6 Isotropic E-Field Probe

Construction:	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration:	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )
Frequency:	100 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB (100 MHz to 3 GHz)
Directivity:	$\pm 0.2$ dB in air (rotation around probe axis) $\pm 0.4$ dB in air (rotation normal to probe axis)
Dynamic Range:	2 V/m to > 1000 V/m; Linearity: $\pm 0.2$ dB
Dimensions:	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm The closest part of the sensor element is 1.1 mm closer to the tip
Application:	General near-field measurements up to 6 GHz Field component measurements

### H3DV6 3-Dimensional H-Field Probe

Construction:	Three concentric loop sensors with 3.8 mm loop diameters resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Frequency:	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ ); Output linearized
Directivity:	$\pm 0.25$ dB (spherical isotropy error)
Dynamic Range:	10 mA/m to 2 A/m at 1 GHz
E-Field Interference:	< 10% at 3 GHz (for plane wave)
Dimensions:	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm The closest part of the sensor element is 1.9 mm closer to the tip
Application:	General magnetic near-field measurements up to 3 GHz Field component measurements Surface current measurements Measurements in air or liquids Low interaction with the measured field

## 7. System Validation

The test setup was validated when first configured and verified periodically thereafter to ensure proper function. The procedure provided in this section is a validation procedure using dipole antennas for which the field levels were computed by numeric modeling.

### Procedure


Place a dipole antenna meeting the requirements given in ANSI-PC63.19 2007 in the normally occupied by the WD.

The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field and H-field probes so that:

- The probes and their cables are parallel to the coaxial feed of the dipole antenna
- The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions; and
- The center point of the probe element(s) are 10 mm from the closest surface of the dipole elements.

Scan the length of the dipole with both E-field and H-field probes and record the maximum values for each. Compare the readings to expected values.

### Setup diagram

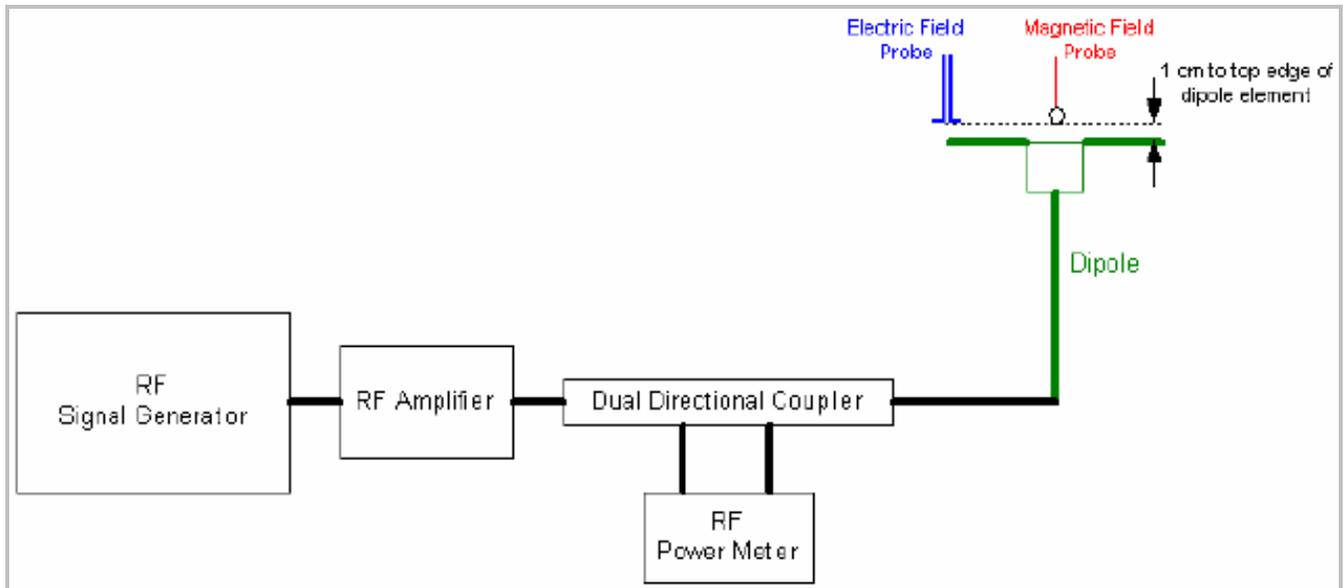

## 7.1. System Validation Results

### E-field

Calibration Dipole	f (MHz)	Input Power (mW)	Max. measured from		Average max. above arm (V/m)	E-field Target Values (V/m) (From SPEAG)	Deviation <sup>1)</sup> (%)
			above high end (V/m)	above low end (V/m)			
CD835V3 SN 1175	835	100	166.5	167.8	167.15	171.0	-2.25
CD1880V3 SN 1159	1880	100	136.1	138.1	137.10	140.3	-2.28

### H-field

Calibration Dipole	f (MHz)	Input Power (mW)	Measured H-field (A/m)	H-field Target Values (A/m) (From SPEAG)	Deviation <sup>1)</sup> (%)
CD835V3 SN 1175	835	100	0.437	0.475	-8.00
CD1880V3 SN 1159	1880	100	0.443	0.464	-4.53

### Notes:

- 1) Delta (Deviation) % = 100 \* (Measured value minus Target value) divided by the Target value. Deltas within ±25% are acceptable, of which 12% is deviation and 13% is measurement uncertainty.
- 2) The maximum E-field or H-field were evaluated and compared to the target values provided by SPEAG in the calibration certificate of specific dipoles.
- 3) Please refer to the attachment for detailed measurement data and plots.

## 8. Probe Modulation Factor (PMF)

### Purpose

The HAC Standard requires measurement of the peak envelope E- and H-fields of the wireless device (WD). Para. 4.2.2.1, and C.3.1 of the standard describes the Probe Modulation Response Factor that shall be applied to convert the probe reading to Peak Envelope Field.

### Definitions


The Probe Modulation Factor (PMF) is defined as the ratio of the field readings for a CW and a modulated signal with the equivalent Field Envelope Peak as defined in the Standard (Chapter C.3.1).

### Evaluation Procedure for Unknown PMF (DASY4 Application note, Section 28.8)

The proposed measurement setup corresponds to the procedure as required in the Standard, Chapter C.3.1.

1. Install a calibration dipole for the appropriate frequency band under the Test Arch Phantom and select the proper phantom section according to the probe type installed (E- or H-field). Move the probe to the field reference point. (Do not move the probe between the subsequent CW and modulated measurements.)
2. Install the field probe in the setup.
3. The modulated signal to the dipole must be monitored to record peak amplitude and compared to a CW signal with the same peak envelope level (e.g., with a directional coupler and a spectrum analyzer in zero span mode set to the operating frequency). To determine the peak envelope level of the modulated signal properly, the settings of a spectrum analyzer shall be as follows:
  - Resolution bandwidth  $\geq$  emission bandwidth (4 MHz for UMTS bands, 300 kHz)
  - Video bandwidth  $\geq$  20 kHz
  - Span: zero
  - Center Frequency: nominal center frequency of channel
  - Detection: RMS detection with averaging turned on
  - Trigger: Video or IF trigger, adjusted to give a stable display of the transmission
  - Sweep rate: Sufficiently rapid to permit the transmit pulse to be resolved accurately. The sweep shall be long enough to show a complete transmission. The sweep time may be set to allow a full transmission cycle, displaying the on and off time.
4. Define a DASY4 document and set the procedure properties (frequency, modulation frequency and crest factor) according to the measured signal. Define a multimeter job for the field reading.
5. Define a second procedure for the evaluation of the CW signal (frequency set as above, modulation frequency = 0, crest factor = 1) and a multimeter job.

**PMF Measurement Setup Diagram**

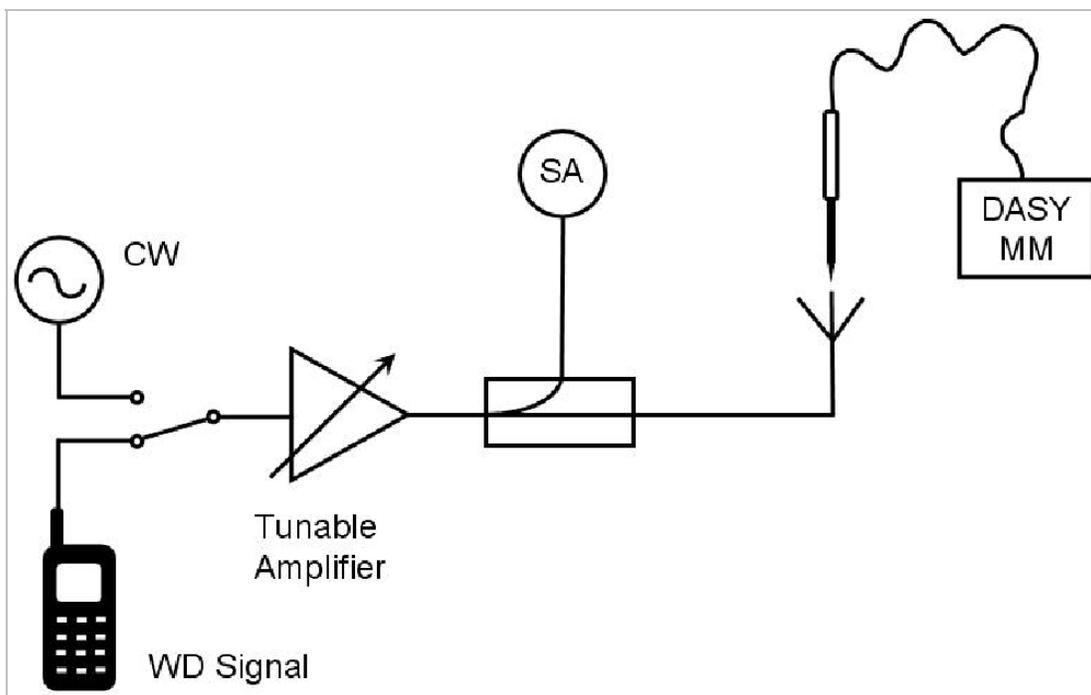

**The HAC measurement procedure is as follows:**

- a) Modulated signals (WD and 80% AM) measurement:
  - 1) Connect the modulated signal using the appropriate frequency via the cable to the dipole.
  - 2) The signal to the dipole must be monitored to record peak amplitude with a directional coupler and a spectrum analyzer.
  - 3) Run the multimeter job in the procedure with the corresponding modulation setting in continuous mode.
  - 4) Read the envelope peak on the monitor in order to adjust the CW signal later to the same level.
- b) CW signal measurement:
  - 1) Change the signal to CW at the same center frequency, without touching or moving the dipole and probe in the setup.
  - 2) Adjust the CW signal amplitude to the same peak level on the spectrum analyzer (keep the same bandwidth and attenuation for CW and modulated signals).
  - 3) Run the multimeter job in the CW procedure in continuous mode.
  - 4) Read the multimeter total field display and note it together with modulation type and frequency.
  - 5) Calculate the Probe Modulation Factor as the ratio between the CW multimeter field reading and the reading for the applicable modulation. I.e.,  $PMF = \frac{E_{cw}}{E_{mod}}$  and similar for H.

### 8.1. PMF Measurement Results

CDMA2000


Probe	Frequency (MHz)	Type of signal	E-field V/m	PMF
E-Field Probe	835	CDMA (RC3/SO55)	64.6	0.95
		CW	61.4	
	1880	CDMA (RC3/SO55)	44.7	0.95
		CW	42.6	
Probe	Frequency (MHz)	Type of signal	H-field A/m	PMF
H-Field Probe	835	CDMA (RC3/SO55)	0.260	0.96
		CW	0.249	
	1880	CDMA (RC3/SO55)	0.190	0.98
		CW	0.187	

## 9. HAC RF Emissions Test Procedure

The following are step-by-step test procedures.

1. Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
2. Position the WD in its intended test position.
3. Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters, (e.g. test mode) as intended for the test.
4. The center sub-grid shall be centered on the center of the WD output (acoustic or T-coil output), as appropriate. Locate the field probe at the initial test position in the 5 x 5 cm grid, which is contained in the measurement plane, see illustrated in Figure 5.
5. Record the reading.
6. Scan the entire 5 x 5 cm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the peak reading.
7. Identify the five contiguous sub-grids around the center sub-grid with the lowest maximum strength readings. Thus the 6 areas to be used to determine the WD's peak emissions are identified and outlined for the final manual scan. Please note that a maximum of five blocks can be excluded for both E- and H-field measurements for the WD output being measured. State another way, the center sub-grid and 3 other must be common to both the E- and H-field measurements.
8. Identify the highest field reading within the non-excluded sub-grids identified in step 7.
9. Convert the highest field reading within identified in step 8 to peak V/m or A/m, as appropriate.
10. Repeat steps 1-10 for both the E- and H-field measurements.
11. Compare this reading to the categories in ANSI-PC63.19 and record the resulting category. The lowest category number listed in ANSI-PC63.19 obtained in step 10 for either E or H field determines the M category for the audio coupling mode assessment. Record the WD category rating.

**Test flowchart Per ANSI-PC63.19 2007**

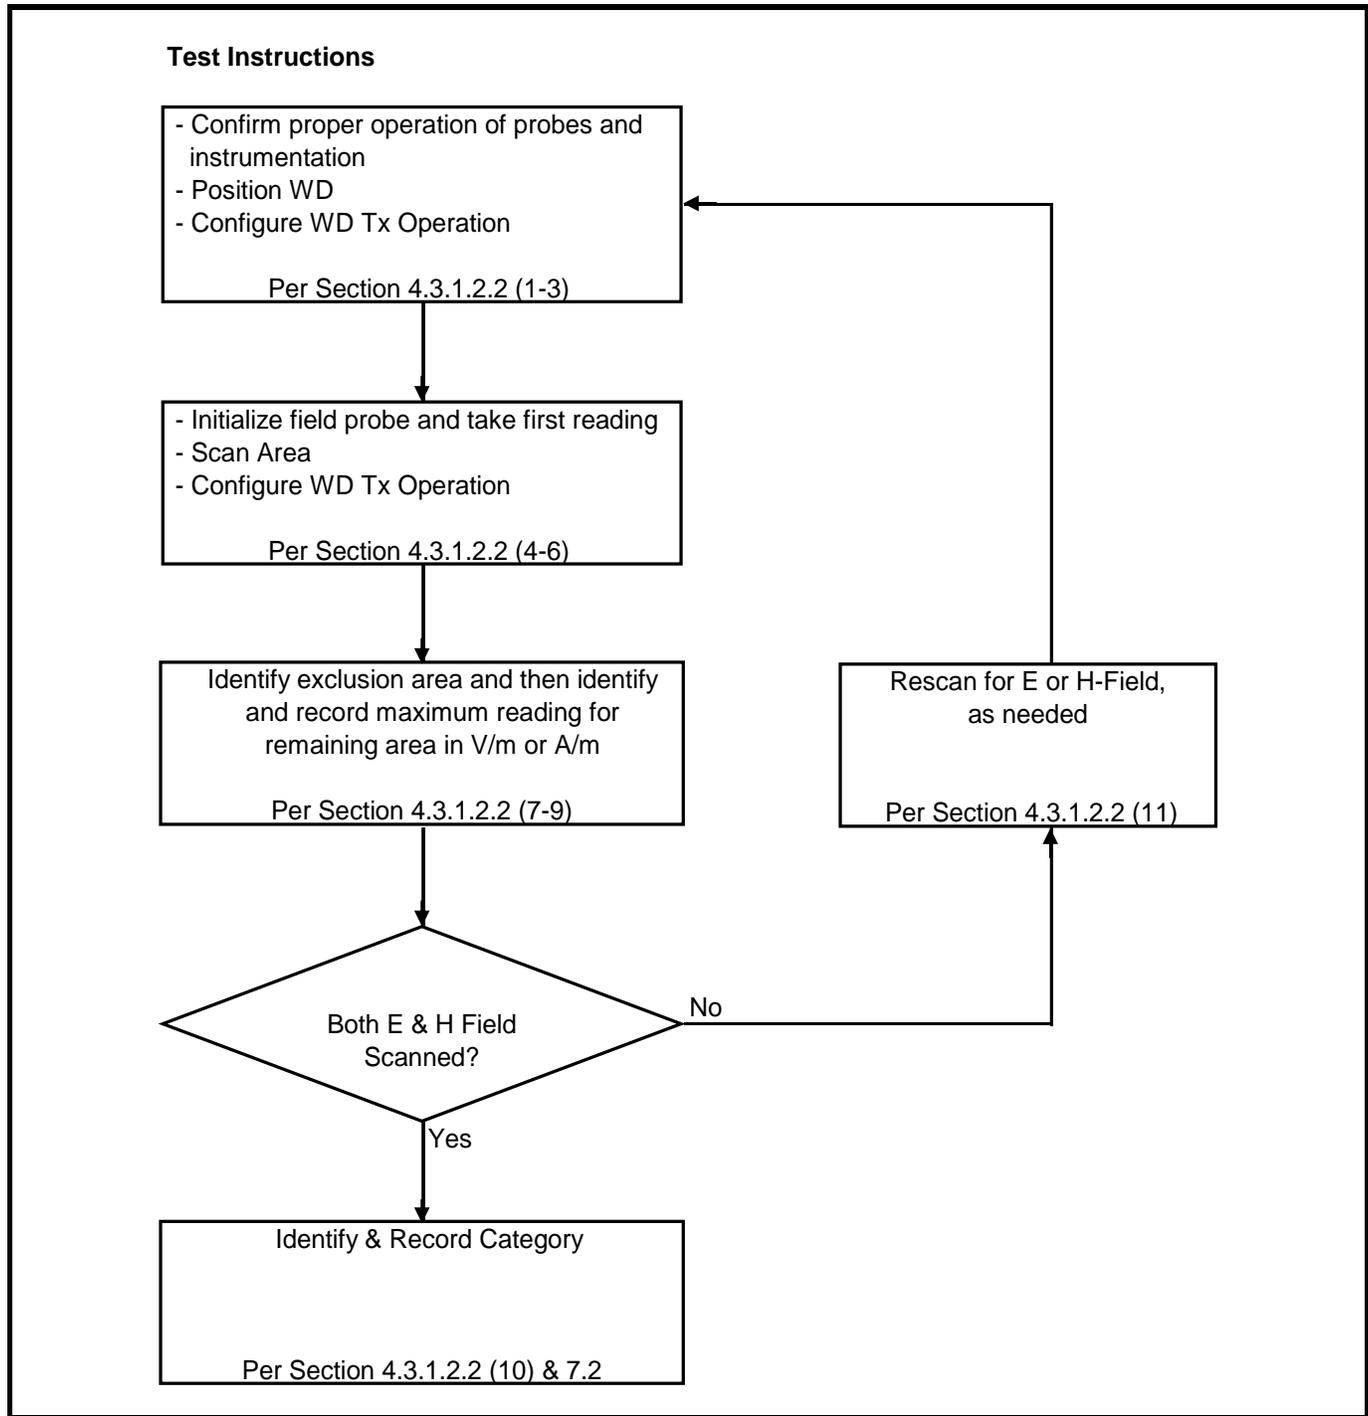

## 10. RF Emissions Measurement Criteria

Telephone near-field Categories in linear units

		Telephone RF Parameters			
		< 960 MHz		> 960 MHz	
Category	AWF	E-Field Emissions (V/m)	H-Field Emissions (A/m)	E-Field Emissions (V/m)	H-Field Emissions (A/m)
M3	0	199.5 to 354.8	0.60 to 1.07	63.1 to 112.2	0.19 to 0.34
	-5	149.6 to 266.1	0.45 to 0.80	47.3 to 84.1	0.14 to 0.25
M4	0	< 199.5	< 0.60	< 63.1	< 0.19
	-5	< 149.6	< 0.45	< 47.3	< 0.14

## 11. HAC (RF Emissions) Test Results

### 11.1. E-Field Emissions

Operating Mode	Ch. No.	f (MHz)	PMF	Peak E-Field (V/m)	M-Rating
CDMA BC0 1xRTT (RC3, SO55)	1013	824.70	0.95	<b>62.886</b>	M4
	384	836.52		56.838	M4
	777	848.31		50.403	M4
CDMA BC1 1xRTT (RC3, SO55)	25	1851.25	0.95	<b>35.417</b>	M4
	600	1880.00		35.099	M4
	1175	1908.75		31.858	M4
CDMA BC10 1xRTT (RC3, SO55)	476	817.90	0.95	<b>70.515</b>	M4
	580	820.50		69.313	M4
	684	823.10		66.368	M4

### 11.2. H-Field Emissions

Operating Mode	Ch. No.	f (MHz)	PMF	Peak H-Field (A/m)	M-Rating
CDMA BC0 1xRTT (RC3, SO55)	1013	824.70	0.96	0.111	M4
	384	836.52		<b>0.123</b>	M4
	777	848.31		0.076	M4
CDMA BC1 1xRTT (RC3, SO55)	25	1851.25	0.98	0.098	M4
	600	1880.00		<b>0.099</b>	M4
	1175	1908.75		0.093	M4
CDMA BC10 1xRTT (RC3, SO55)	476	817.90	0.96	0.112	M4
	580	820.50		<b>0.114</b>	M4
	684	823.10		0.112	M4

## 12. Test Plots

### E-field worst case test plot for Part 22

Date: 11/7/2011

Test Laboratory: UL CCS SAR Lab C

### CDMA2000\_BC0

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 4/8/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**E-Field, 1x RTT (RC3, SO55)/L ch/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 62.886 V/m

Probe Modulation Factor = 0.950


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 85.081 V/m; Power Drift = 0.03 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>54.679 M4</b>	Grid 2 <b>57.005 M4</b>	Grid 3 <b>54.054 M4</b>
Grid 4 <b>59.901 M4</b>	Grid 5 <b>62.886 M4</b>	Grid 6 <b>60.277 M4</b>
Grid 7 <b>61.846 M4</b>	Grid 8 <b>64.576 M4</b>	Grid 9 <b>61.104 M4</b>

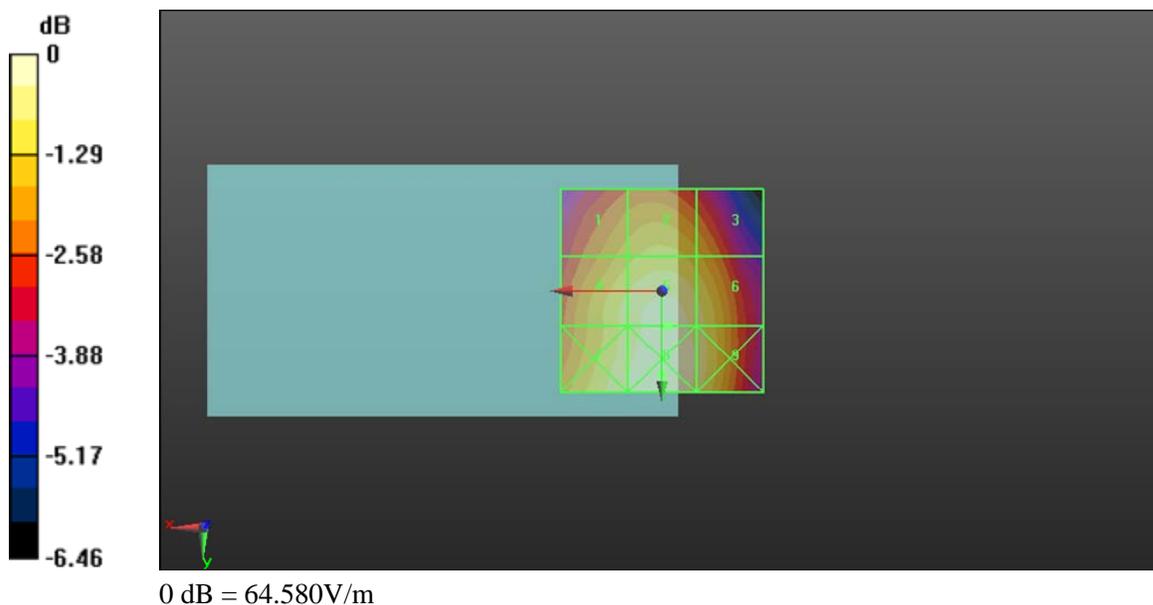

E-field worst case test plot for Part 24

Date: 11/7/2011

Test Laboratory: UL CCS SAR Lab C

**CDMA2000\_BC1**

Communication System: CDMA2000; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 4/8/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

**E-Field, 1x RTT (RC3, SO55)/L ch/Hearing Aid Compatibility Test (101x101x1):** Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 35.417 V/m

Probe Modulation Factor = 0.950


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 39.323 V/m; Power Drift = -0.0027 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>30.944 M4</b>	Grid 2 <b>26.241 M4</b>	Grid 3 <b>24.622 M4</b>
Grid 4 <b>30.226 M4</b>	Grid 5 <b>35.417 M4</b>	Grid 6 <b>34.288 M4</b>
Grid 7 <b>41.531 M4</b>	Grid 8 <b>43.022 M4</b>	Grid 9 <b>38.730 M4</b>

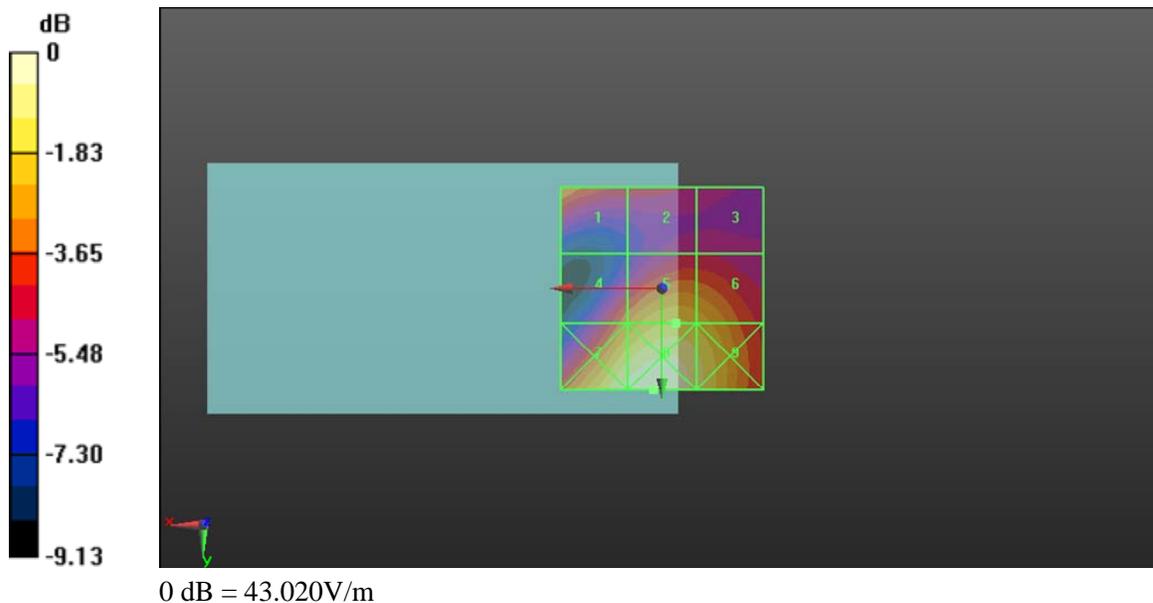

E-field worst case test plot for Part 90

Date: 11/22/2011

Test Laboratory: UL CCS SAR Lab C

**CDMA2000\_BC10**

Communication System: CDMA2000; Frequency: 817.9 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2509; ConvF(1, 1, 1); Calibrated: 4/8/2011
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1257; Calibrated: 10/25/2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**E-Field, 1x RTT (RC3, SO55)/L ch/Hearing Aid Compatibility Test (101x101x1):** Measurement

grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 70.515 V/m

Probe Modulation Factor = 0.950


Device Reference Point: 0, 0, -6.3 mm

Reference Value = 94.937 V/m; Power Drift = 0.19 dB

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak E-field in V/m

Grid 1 <b>62.201 M4</b>	Grid 2 <b>64.676 M4</b>	Grid 3 <b>60.471 M4</b>
Grid 4 <b>67.723 M4</b>	Grid 5 <b>70.515 M4</b>	Grid 6 <b>66.617 M4</b>
Grid 7 <b>69.316 M4</b>	Grid 8 <b>71.806 M4</b>	Grid 9 <b>67.234 M4</b>

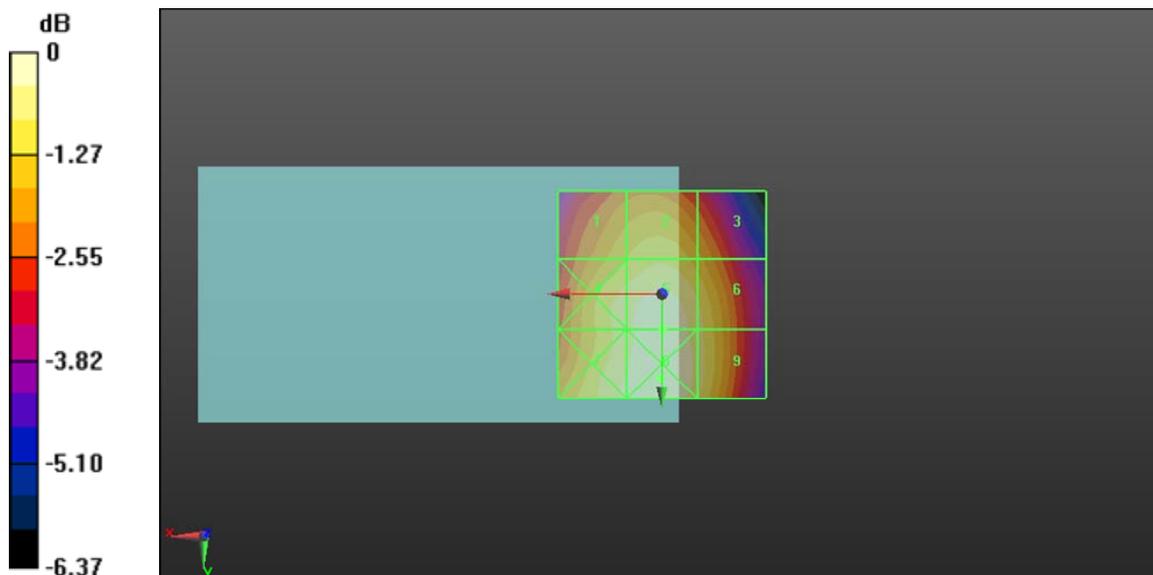

0 dB = 71.810V/m

H-field worst case test plot for Part 22

Date: 11/7/2011

Test Laboratory: UL CCS SAR Lab C

**CDMA2000\_BC0**


Communication System: CDMA2000; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Phantom section: RF Section  
 DASy4 Configuration:  
 - Probe: H3DV6 - SN6324; ; Calibrated: 4/11/2011  
 - Sensor-Surface: (Fix Surface)  
 - Electronics: DAE4 Sn1257; Calibrated: 10/25/2011  
 - Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB  
 - Measurement SW: DASy52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

**H-Field, 1x RTT (RC3, SO55)/M ch/Hearing Aid Compatibility Test (101x101x1):**

Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 0.123 A/m  
 Probe Modulation Factor = 0.960  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 0.109 A/m; Power Drift = -0.35 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.138 M4</b>	Grid 2 <b>0.102 M4</b>	Grid 3 <b>0.068 M4</b>
Grid 4 <b>0.142 M4</b>	Grid 5 <b>0.120 M4</b>	Grid 6 <b>0.074 M4</b>
Grid 7 <b>0.155 M4</b>	Grid 8 <b>0.123 M4</b>	Grid 9 <b>0.074 M4</b>

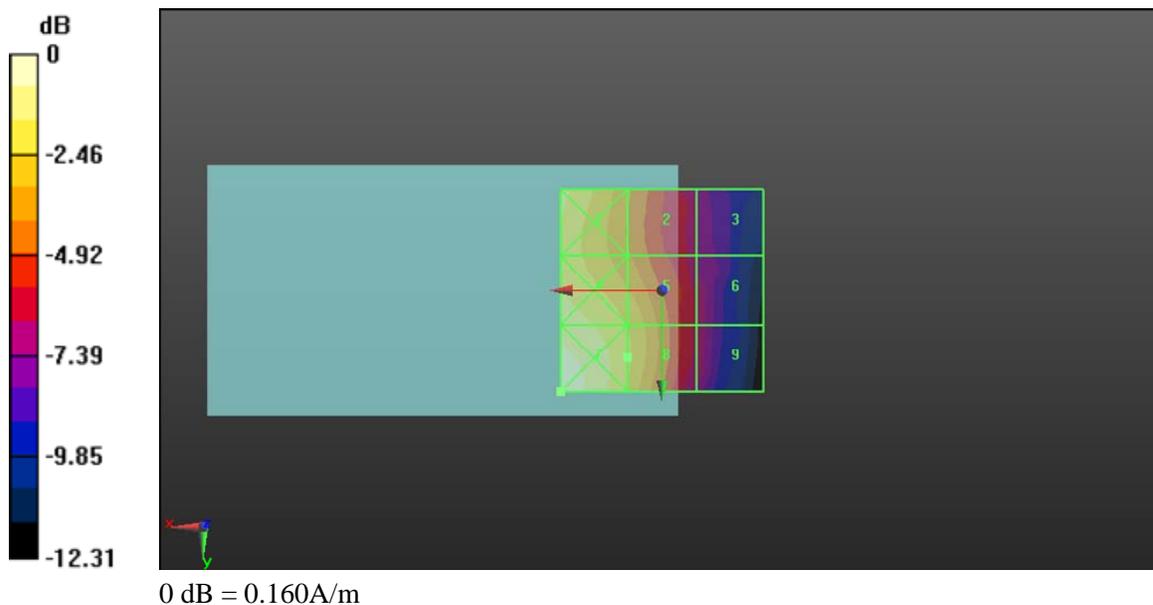

H-field worst case test plot for Part 24

Date: 11/7/2011

Test Laboratory: UL CCS SAR Lab C

**CDMA2000\_BC1**


Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Phantom section: RF Section  
 DASy4 Configuration:  
 - Probe: H3DV6 - SN6324; ; Calibrated: 4/11/2011  
 - Sensor-Surface: (Fix Surface)  
 - Electronics: DAE4 Sn1257; Calibrated: 10/25/2011  
 - Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB  
 - Measurement SW: DASy52, Version 52.6 (2);SEMCAD X Version 14.4.5 (3634)

**H-Field, 1x RTT (RC3, SO55)/M ch/Hearing Aid Compatibility Test (101x101x1):**

Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 0.099 A/m  
 Probe Modulation Factor = 0.980  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 0.101 A/m; Power Drift = 0.07 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.101 M4</b>	Grid 2 <b>0.099 M4</b>	Grid 3 <b>0.088 M4</b>
Grid 4 <b>0.093 M4</b>	Grid 5 <b>0.095 M4</b>	Grid 6 <b>0.087 M4</b>
Grid 7 <b>0.104 M4</b>	Grid 8 <b>0.083 M4</b>	Grid 9 <b>0.068 M4</b>

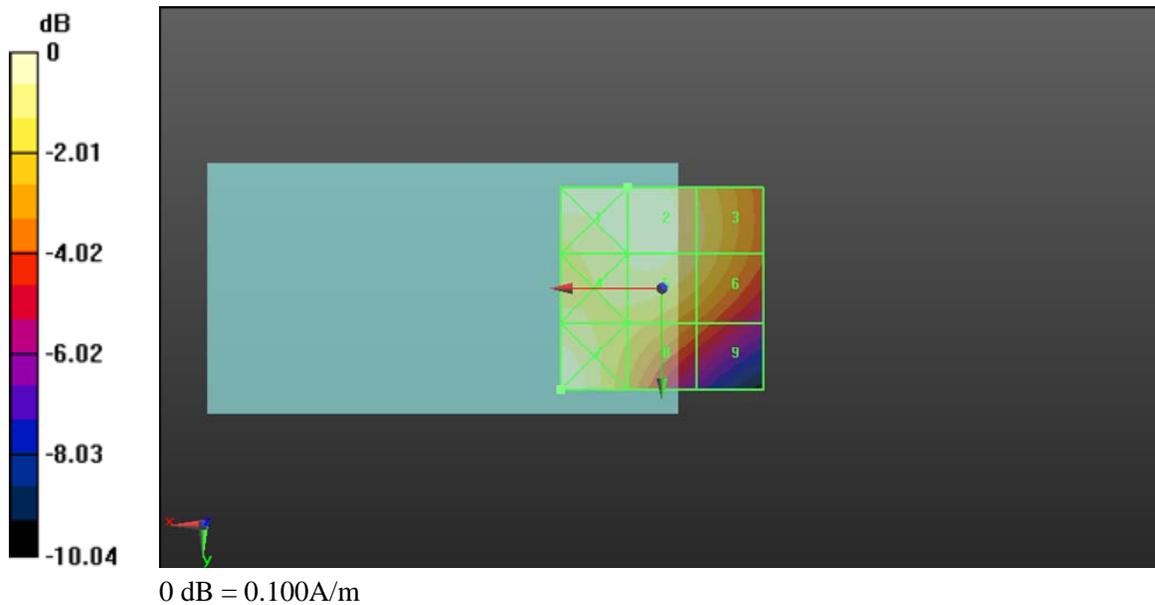

H-field worst case test plot for Part 90

Date: 11/22/2011

Test Laboratory: UL CCS SAR Lab C

**CDMA2000\_BC10**


Communication System: CDMA2000; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Phantom section: RF Section  
 DASy4 Configuration:  
 - Probe: H3DV6 - SN6324; ; Calibrated: 4/11/2011  
 - Sensor-Surface: (Fix Surface)  
 - Electronics: DAE4 Sn1257; Calibrated: 10/25/2011  
 - Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB  
 - Measurement SW: DASy52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

**H-Field, 1x RTT (RC3, SO55)/M ch/Hearing Aid Compatibility Test (101x101x1):**

Measurement grid: dx=5mm, dy=5mm  
 Maximum value of peak Total field = 0.114 A/m  
 Probe Modulation Factor = 0.960  
 Device Reference Point: 0, 0, -6.3 mm  
 Reference Value = 0.096 A/m; Power Drift = 0.0019 dB  
**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

Peak H-field in A/m

Grid 1 <b>0.144 M4</b>	Grid 2 <b>0.105 M4</b>	Grid 3 <b>0.066 M4</b>
Grid 4 <b>0.139 M4</b>	Grid 5 <b>0.110 M4</b>	Grid 6 <b>0.063 M4</b>
Grid 7 <b>0.158 M4</b>	Grid 8 <b>0.114 M4</b>	Grid 9 <b>0.062 M4</b>

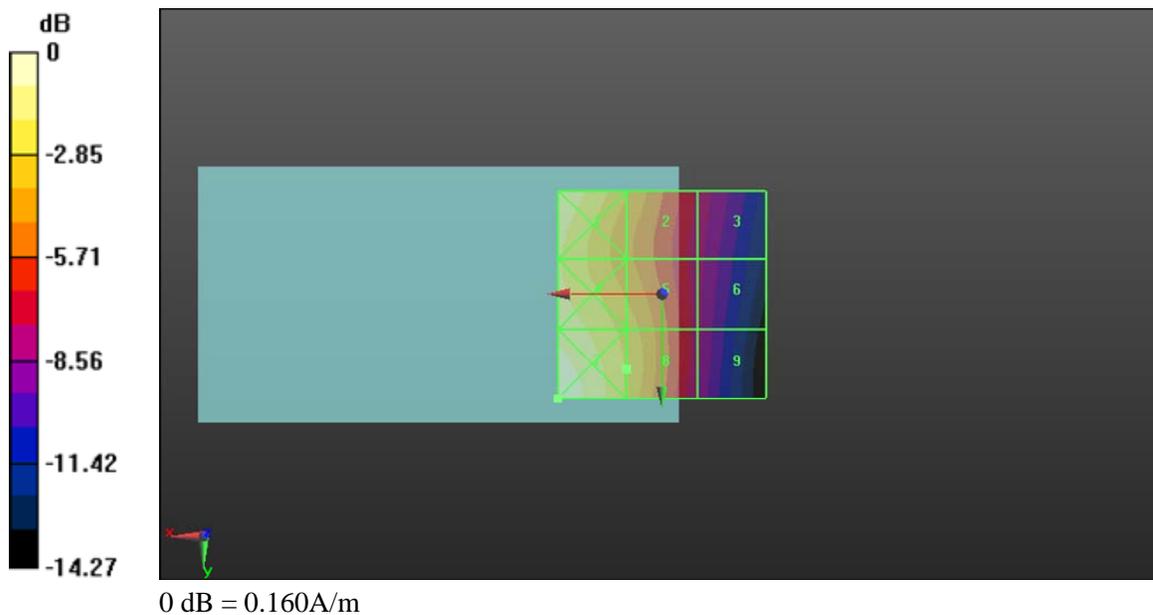

## **13. Appendixes**

### **Refer to separated files for the following appendixes**

- 13.1. Appendix A: System Validation Plots**
- 13.2. Appendix B: E-field emissions test plots**
- 13.3. Appendix C: H-field emissions test plots**
- 13.4. Appendix D: Calibration Certificate - E-Field Probe ER3DV6 - SN 2509**
- 13.5. Appendix E: Calibration Certificate - H-Field Probe H3DV6 - SN 6324**
- 13.6. Appendix F: Calibration Certificate for Dipole CD835V3 - SN 1175**
- 13.7. Appendix G: Calibration Certificate for Dipole CD1880V3 - SN 1159**