



## Test Data

### Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-5.877	30	Pass
NVNT	BLE	2442	Ant1	-4.039	30	Pass
NVNT	BLE	2480	Ant1	-4.76	30	Pass

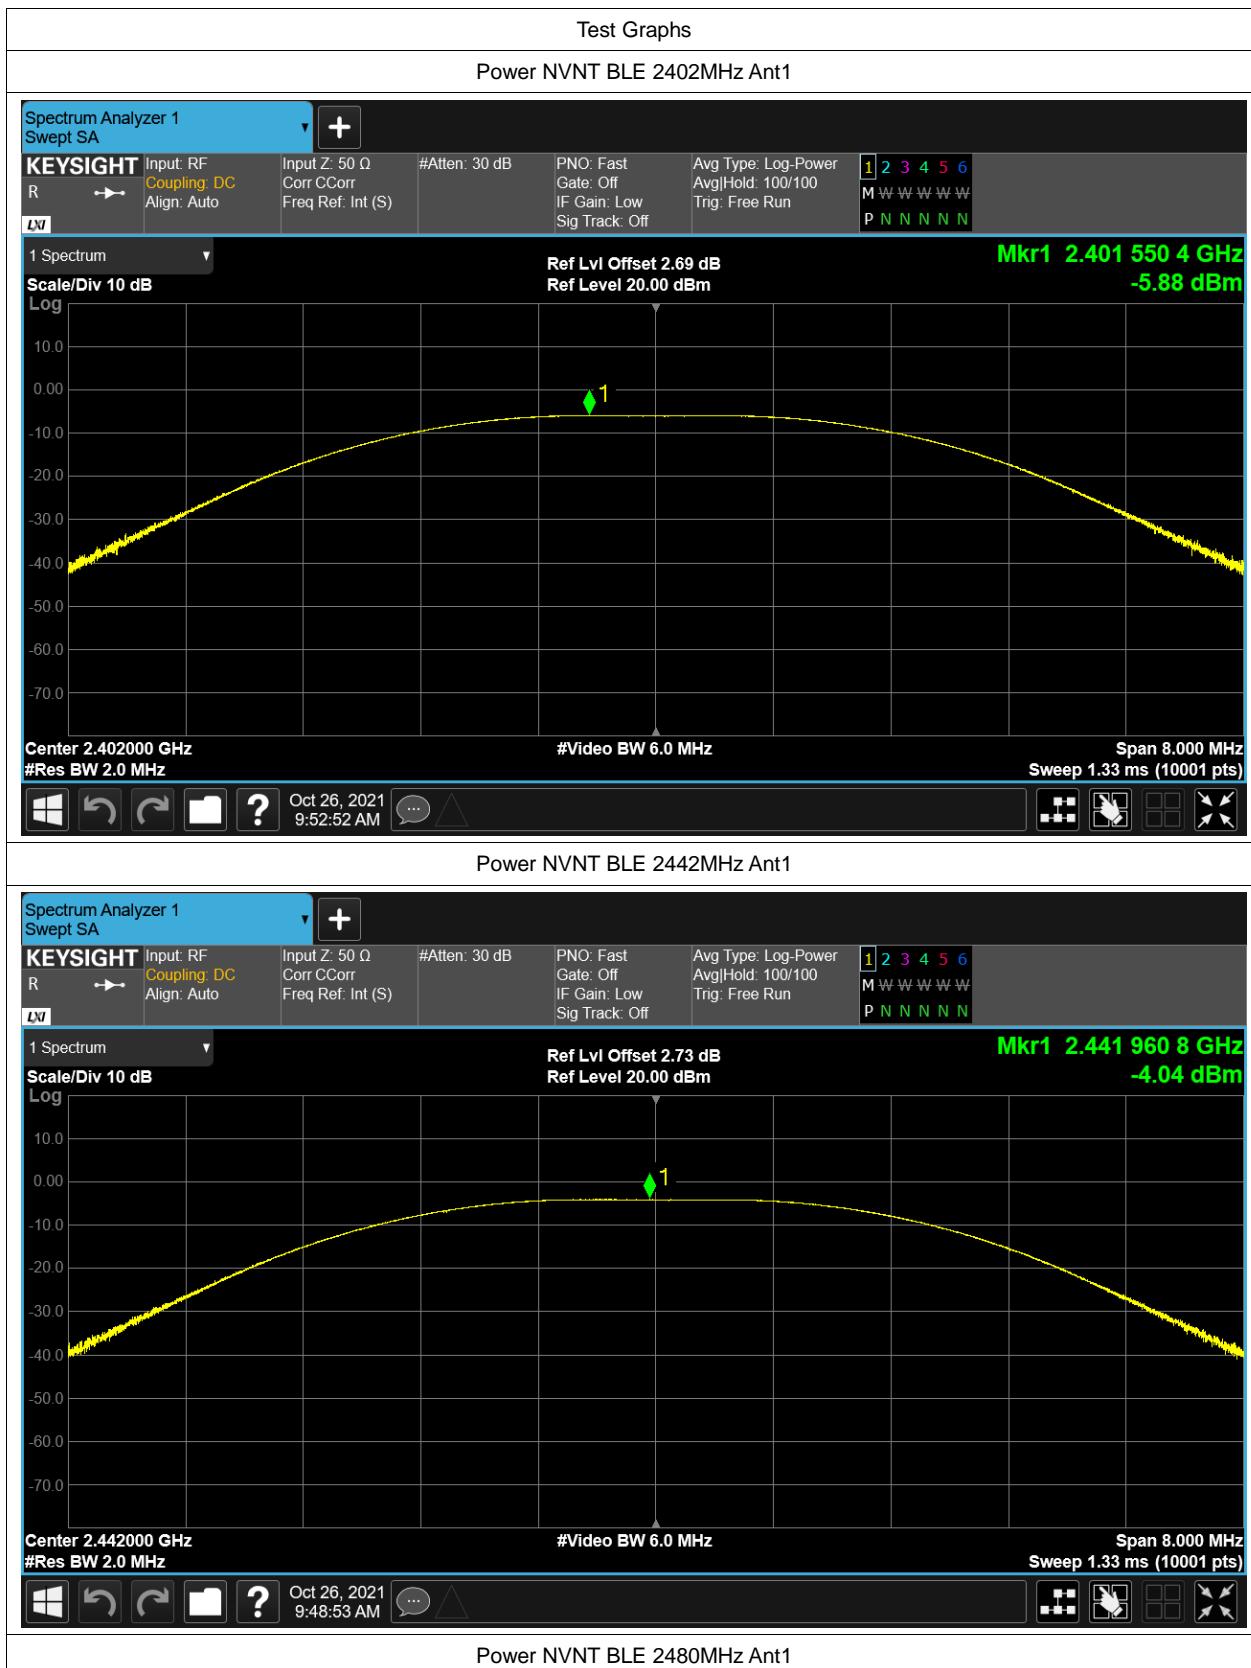

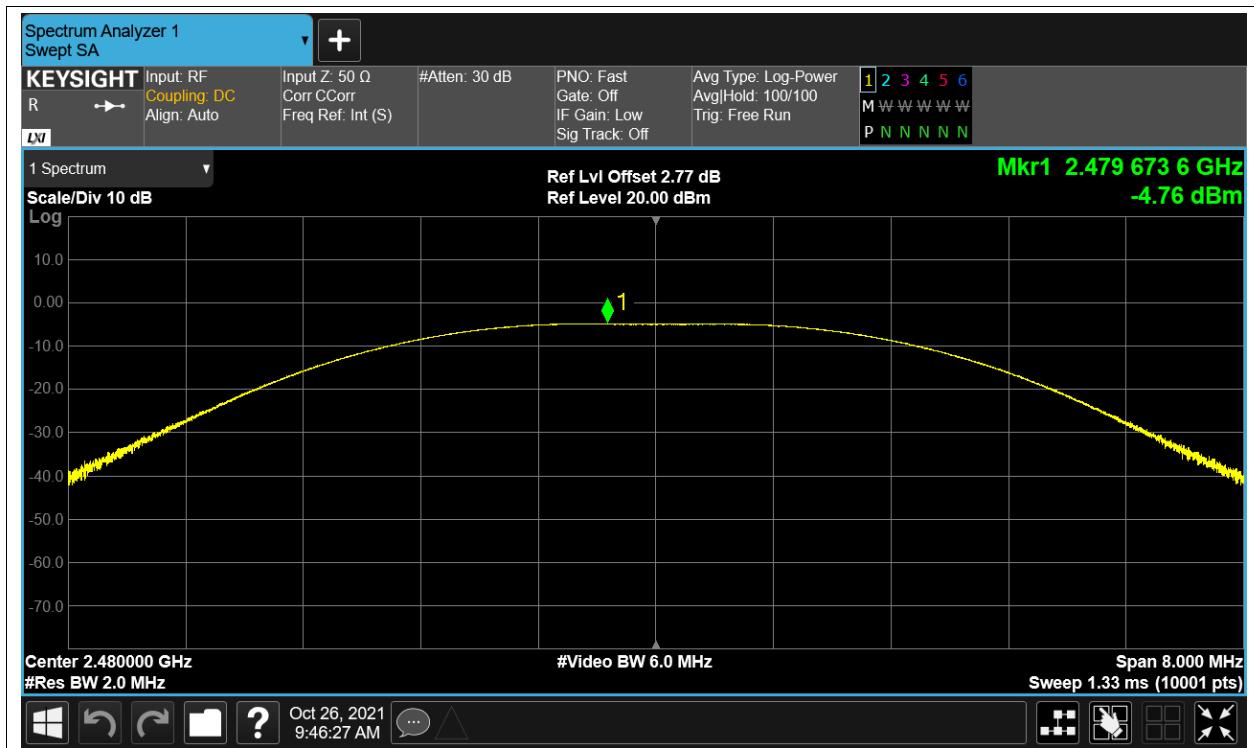

**-6dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	1.174	0.5	Pass
NVNT	BLE	2442	Ant1	1.165	0.5	Pass
NVNT	BLE	2480	Ant1	1.167	0.5	Pass






## Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	2.079851597
NVNT	BLE	2442	Ant1	2.078745967
NVNT	BLE	2480	Ant1	2.080689423

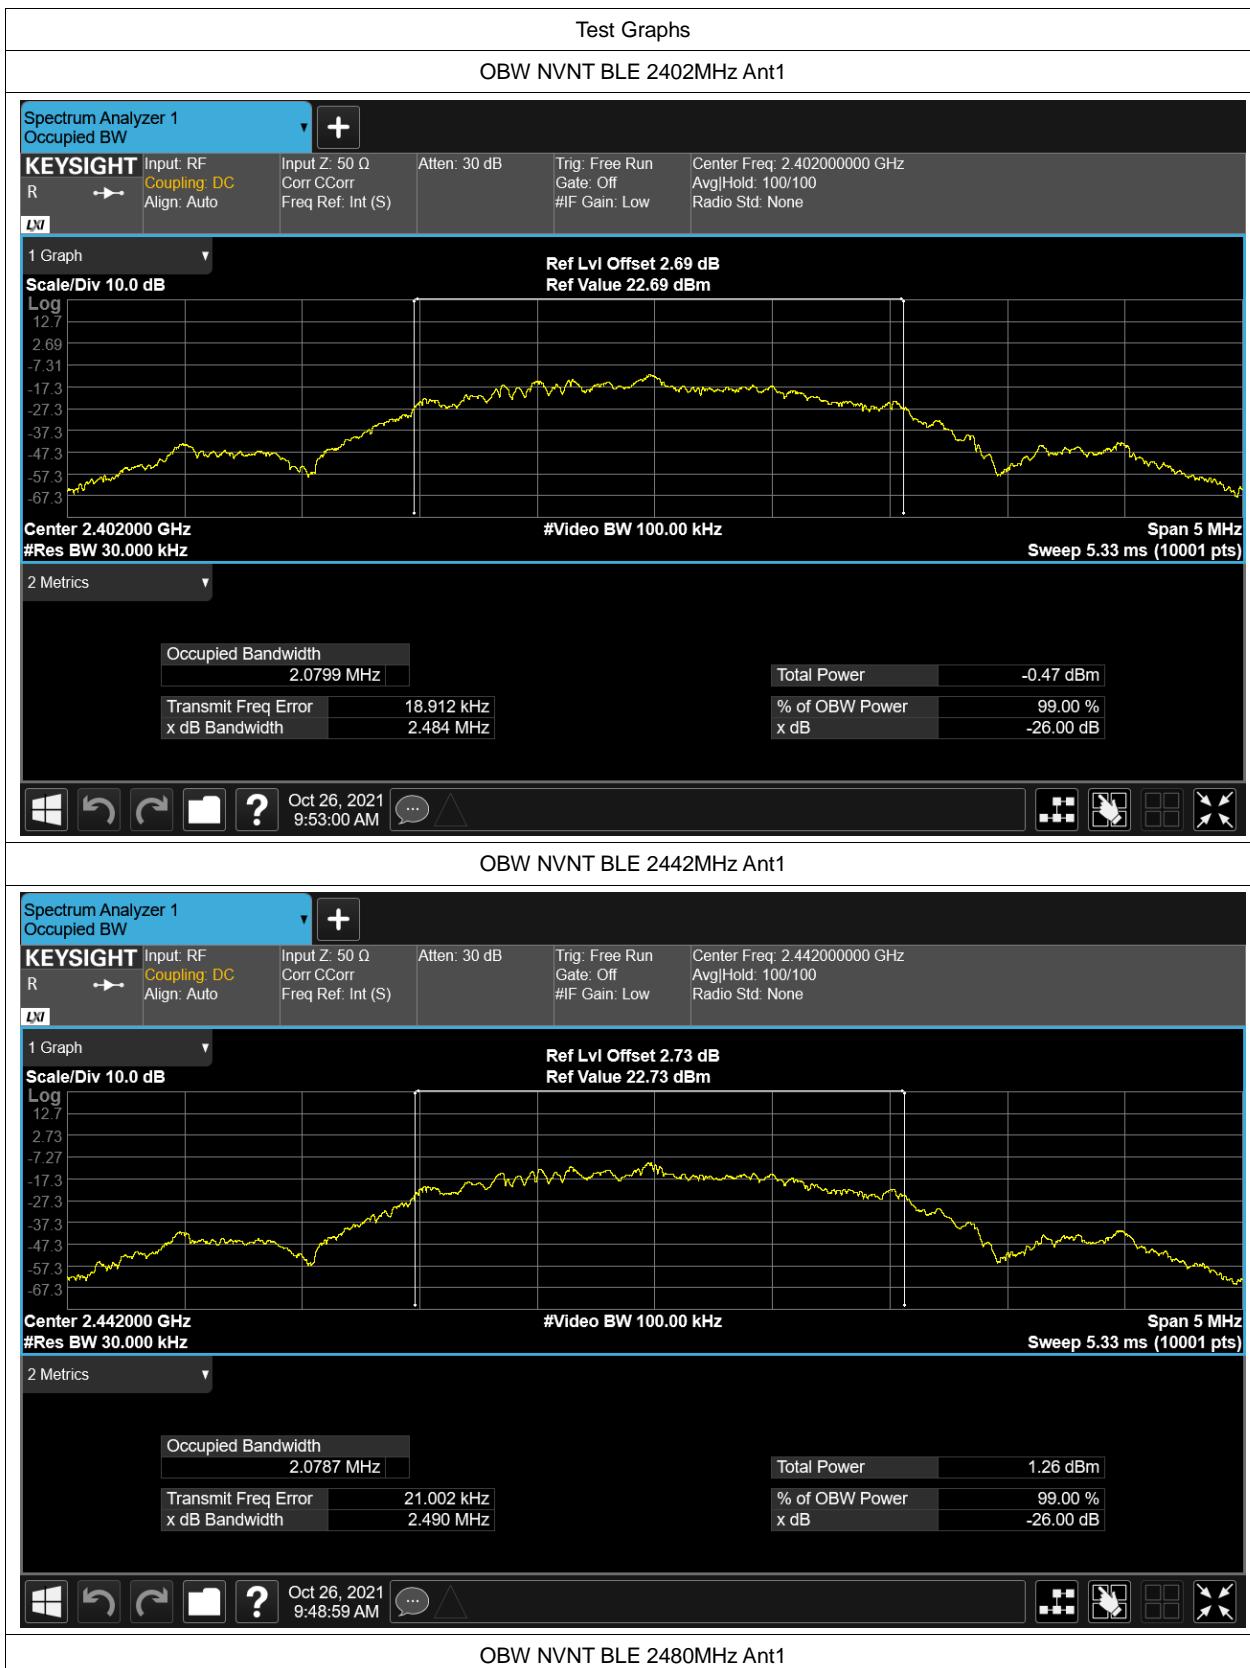


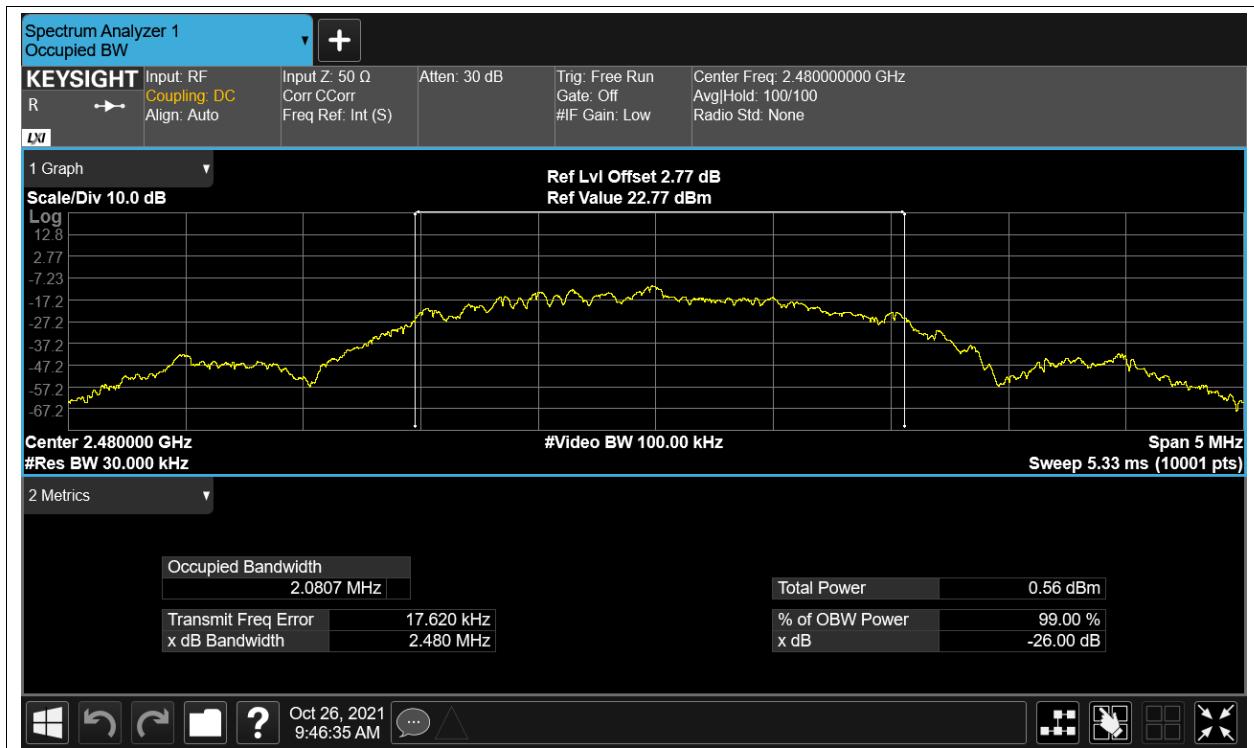

**Maximum Power Spectral Density Level**

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-23.306	8	Pass
NVNT	BLE	2442	Ant1	-21.437	8	Pass
NVNT	BLE	2480	Ant1	-22.2	8	Pass

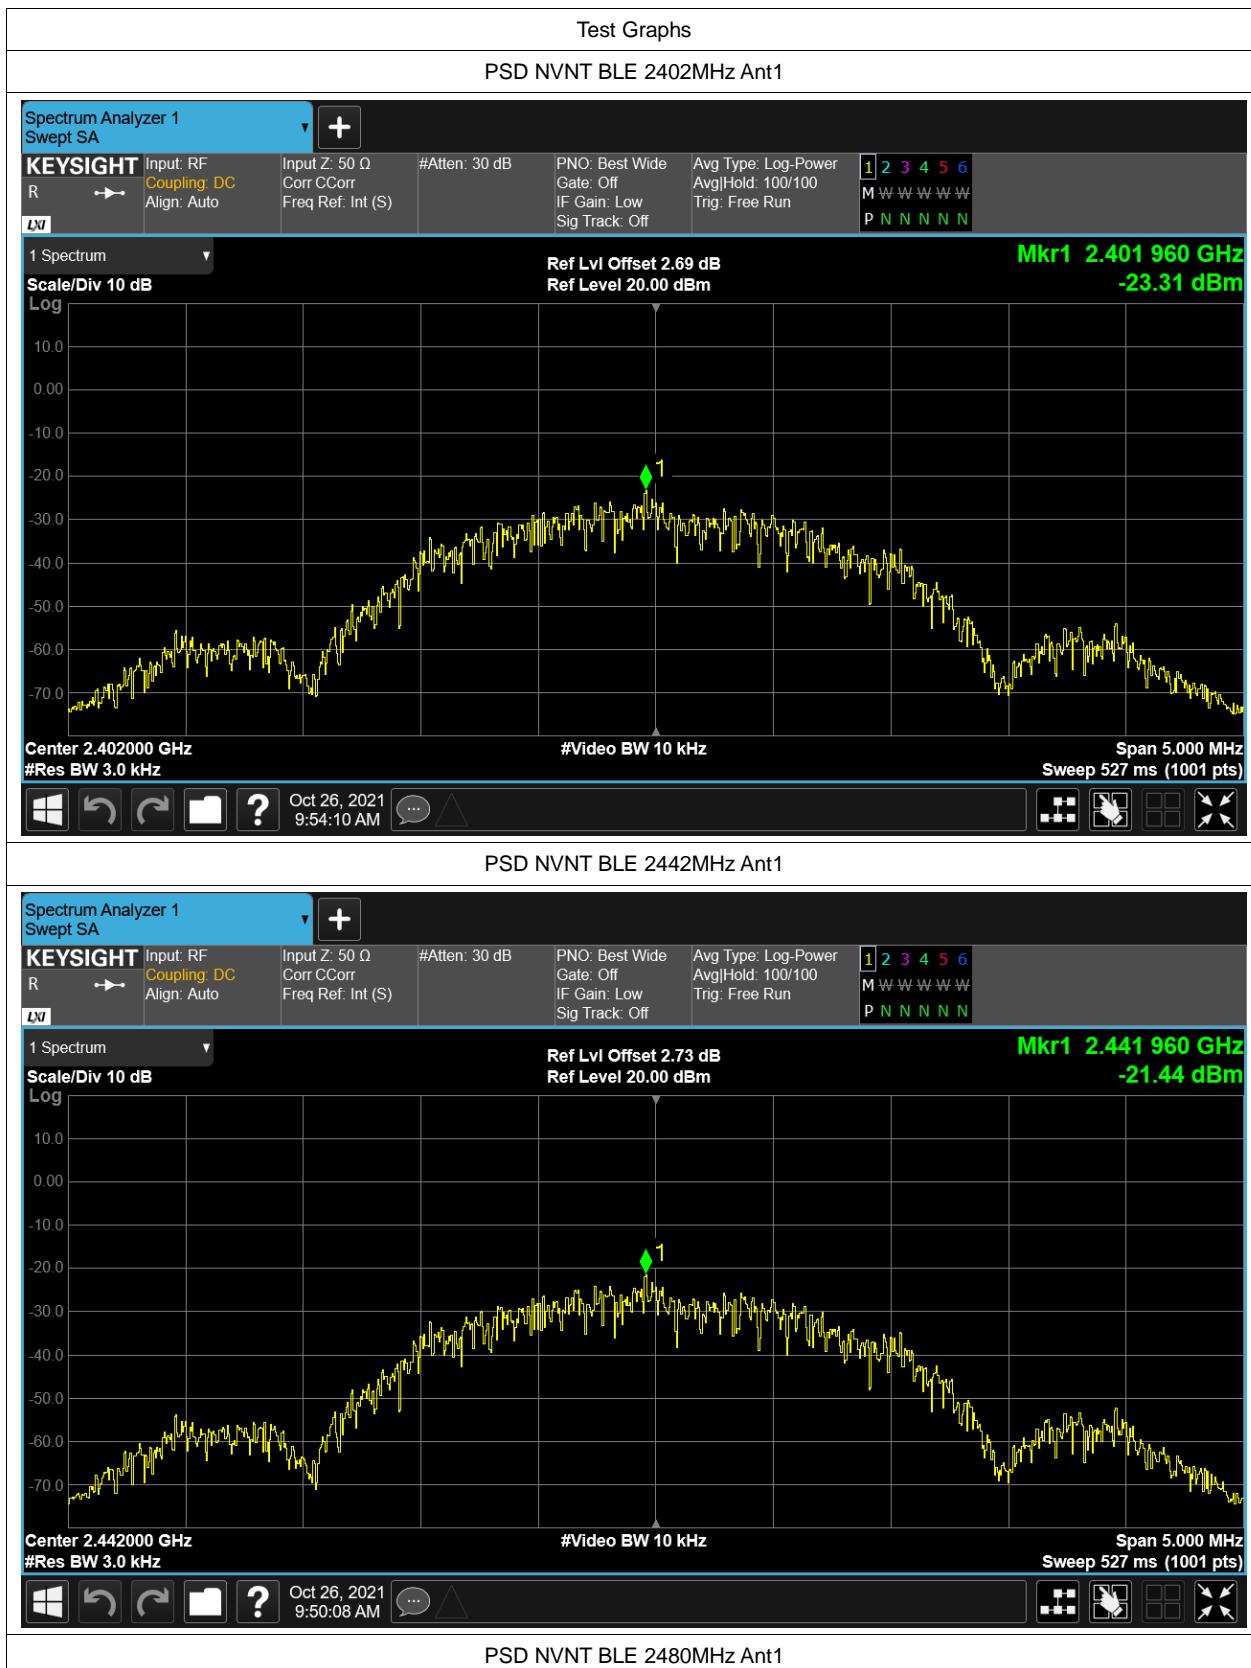


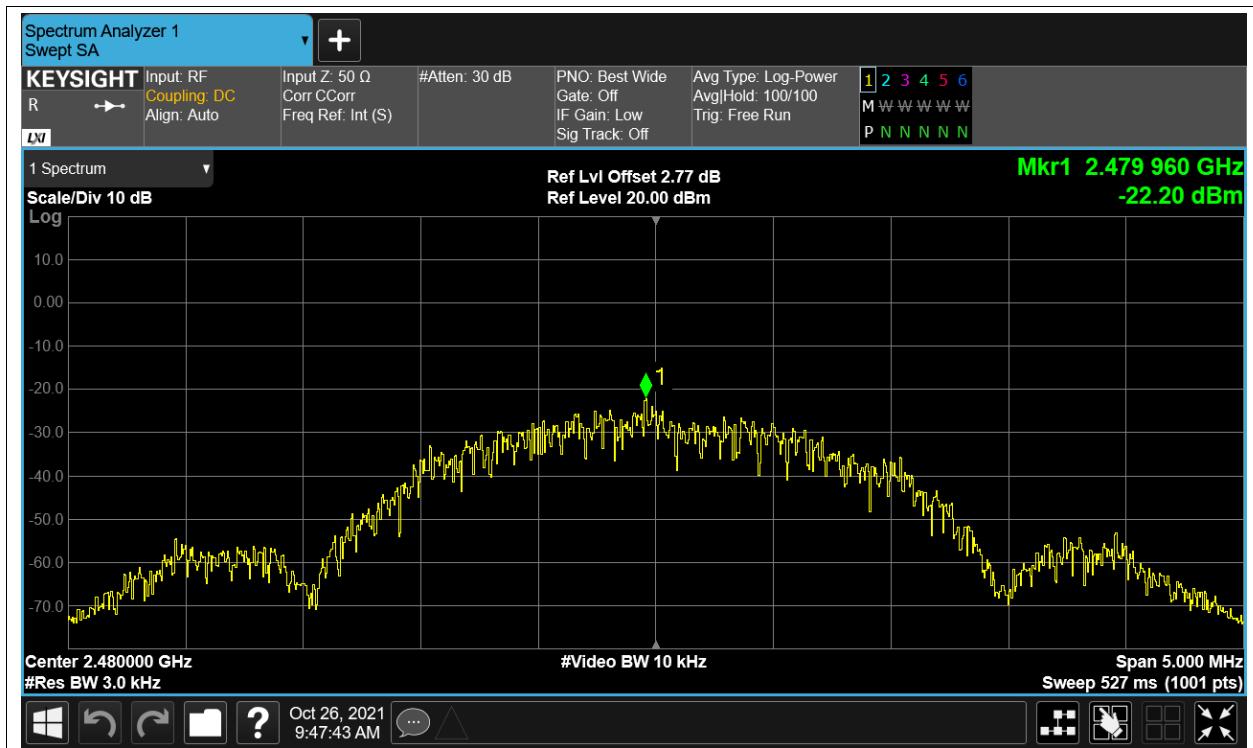

**Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-50.48	-20	Pass
NVNT	BLE	2480	Ant1	-51.41	-20	Pass



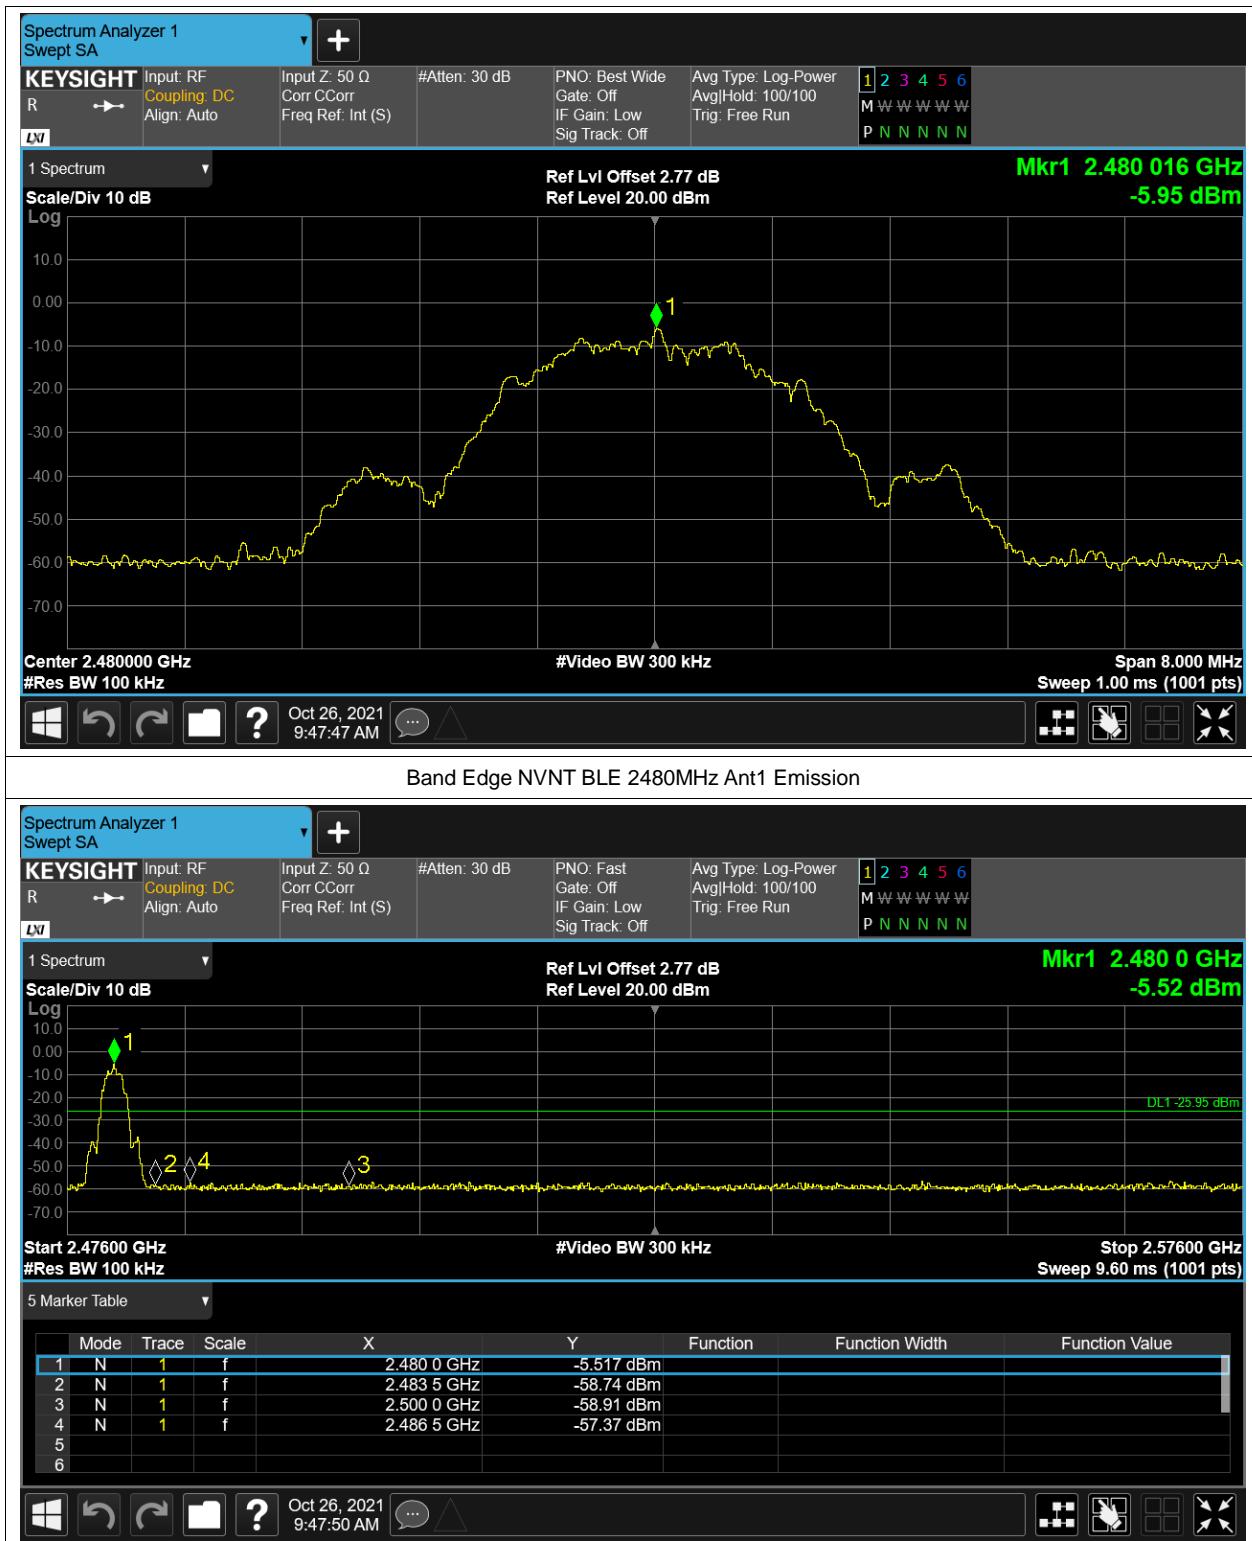


## Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-42.14	-20	Pass
NVNT	BLE	2442	Ant1	-44.54	-20	Pass
NVNT	BLE	2480	Ant1	-42.46	-20	Pass





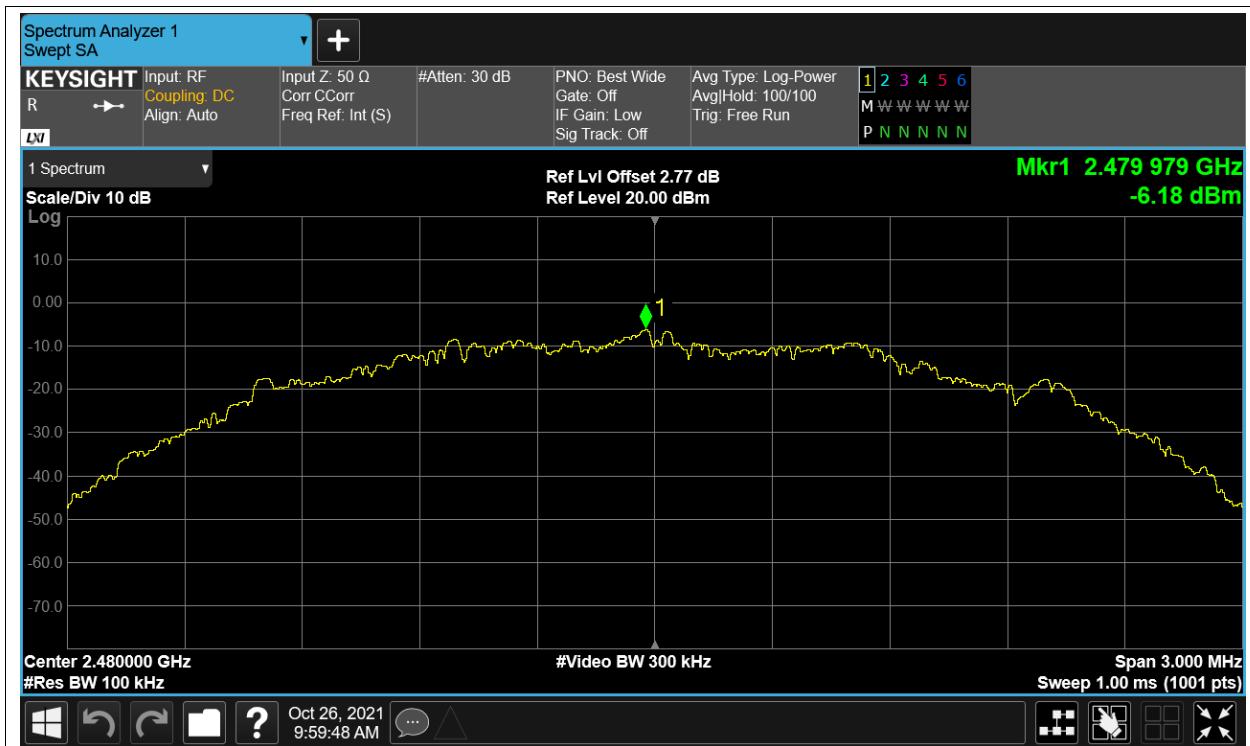

## Tx. Spurious NVNT BLE 2480MHz Ant1 Emission

