

User Manual

Thank you for your purchase of Kiano 4. For best use and understanding of the features and functions of the product, please read this manual carefully and keep for future reference.

You can also find other relevant information about the product on our website: www.inature.hk/kiano4

NOTE:

The USB jack is only used for charging.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

The antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operated in conjunction with any other antenna or transmitter.

1. Introduction of product


1.1 Front image

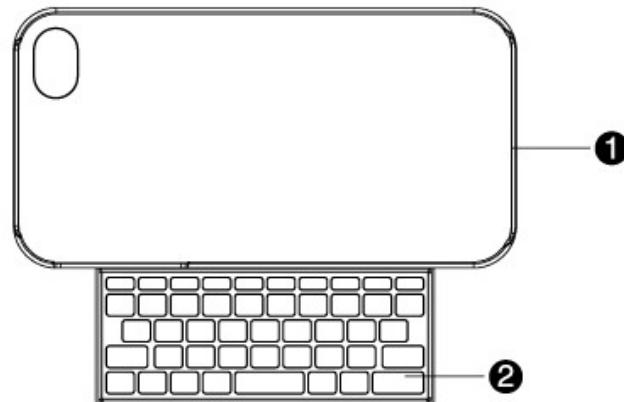

1. Case Cover

2. Keyboard

1.2 Back image

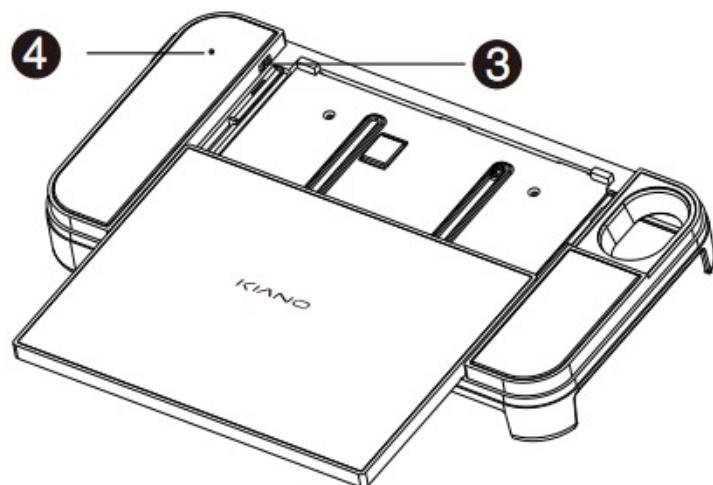

3. Kiano 4 power key

4. LED light indicator: (see the light indication table as below)

Charging	Red light on
Low power	Blue light flickering 3 times intermittently
Charging finished	Red light off
Bluetooth paring	Blue light flickering
Bluetooth toggle switch on	Blue light will be off after 5 seconds

1.3 Specification

Model: Kiano 4

Design color: Black, White

Weight: 78g

Keyboard thickness: 3.5mm

Dimension: 117.3mmx 60.7mmx15.3mm


Compatibility: iOS 4.1 or above

2 Bluetooth pairing


2.1 Bluetooth pairing instruction

Kiano 4 is Bluetooth V2.0 compliant. For your first usage, please follow the instruction shown as below:

(1) Before Bluetooth pairing, please charge your Kiano 4 with the provided USB cable. And the red LED, located at the back of the device, will be turned on:

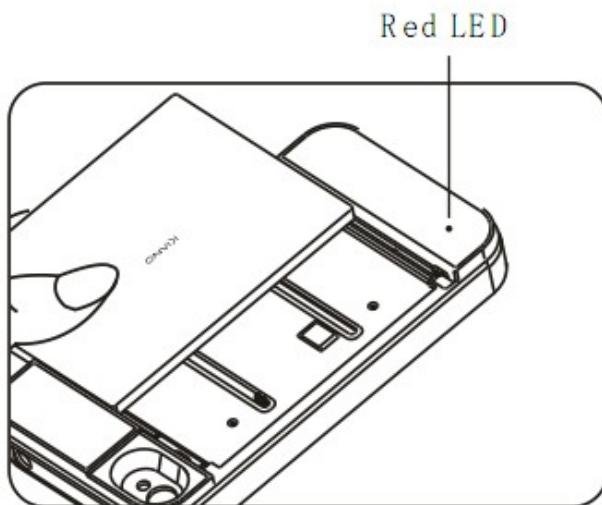

(2) Slide out Kiano 4 keyboard and turn on the power key near the sliding trail. And the blue LED, will be flickering for 5 seconds.

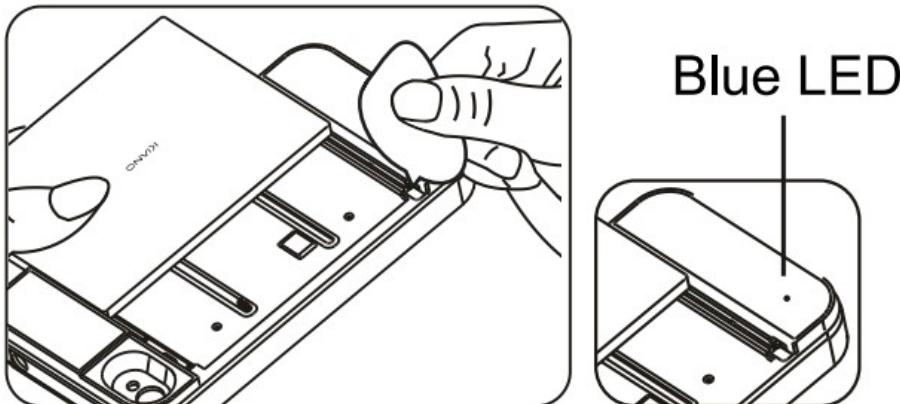

(3) Press the Bluetooth pairing keys Fn+X on the keyboard of Kiano 4, as shown in the picture. And the blue LED will be flickering continuously.



(4) After that, please get access to the “Settings” page of your iPhone 4



(5) Click “General” setting.



(6) Select “Bluetooth” on the page of “General” setting.



(7) Bluetooth connection is displayed to be “OFF” for now, which is shown as below:



(8) Click the Bluetooth setting icon on this page to turn on Bluetooth for iPhone 4. And then your iPhone 4 operation system will search Bluetooth devices automatically.



(9) Select “Kiano 4” in the list of searching results as below:



(10) An input instruction will pop out on iPhone 4 screen, as shown in the picture. Please enter the corresponding code with Kiano 4 keyboard, followed by the “return” key.



(11) On the top information bar of screen, iPhone 4 Bluetooth status has turned to be “ON”. And Kiano 4 Bluetooth connection is shown as “Connected”. Here you would have completed the Bluetooth pairing of Kiano 4 with your iPhone 4. (please notice the arrows)



Note: 1. No need to turn off the power key after first usage since the device will be turned on automatically thereafter once you slide out the keyboard.

2. If you could not get access to Bluetooth pairing, please make sure all the following settings are right: a. Kiano 4 power key is turned on; b. your iPhone Bluetooth is switched on; c. your Kiano 4 has sufficient power.

2.2 Bluetooth disconnection

Auto-off time for Bluetooth connection is 10 minutes after no usage of the keyboard. Just one slightly press of any key, Bluetooth can be automatically reconnected after auto-off. And besides, by sliding in the keyboard, the Bluetooth connection can also be cut off.

3 Key functionality

3.1 Keyboard image



Note: This is the image of Kiano 4 black keyboard unit, and the white color one is also available for you to choose.

3.2 Shortcut keys

Shortcut keys can help users get access to certain functions quite easily, for instance:

Q: “Fn+Q” for iPhone 4 screen lock/unlock

W: “Fn+W” for arrow up

A: “Fn+A” for arrow left

S: “Fn+S” for arrow down

D: “Fn+D” for arrow right

Z: “Fn+Z” for search, you can search your entry with this.

X: “Fn+X” for Bluetooth connection



: Backlit on/off (Backlit auto-off time is ten minutes after no usage of the keyboard. And it can be turned on again by pressing any keys after auto-off)



: Input language switch



: Switch between kiano 4 and on-screen keyboard



: Caps Lock

4 Battery charging

When the power of Kiano 4 is too low, an alert will show up with the blue LED light keeping flickering. Kiano 4 provides you with a custom Y-Shaped adapter for battery charging. With two independent USB ports on the one side, this adapter can help you simultaneously charge your iPhone 4 and Kiano 4.

The total charging time of Kiano 4 is around 2 hours. It supports up to 30 hours of standby time and 4 to 5 hours of continuous using time. To meet the need of convenient usage, battery charging everyday is highly suggested.

5 Customer service

Website: www.inature.hk/kiano4

Customer Careline: +852 3692 4059

Produced by: inature in Hong Kong

Address: Unit D, 26/F., Dragon Centre, 79 Wing Hong Street, Lai Chi Kok, Kowloon, Hong Kong