

Tablet PC INSTRUCTIONS

User manual



Dear users, thank you for purchasing our products, our company strive to excellence, from brief and beautiful human operation to fashionable and elegant appearance .All of these bring you the new operation experience, I sincerely hope that you use it comfortable. The manual will introduce each function of product, let you fully understand each function how to use, please read this manual before using the machine, to extent that quickly mastery of various functions and matters, then you felt the pleasures that machine gives your when surfing

Contents

A Announcements.....	3
B Main performance.....	4
C External View and Important Keys.....	5
D Basic Operation.....	6
E Introduction on the home screen.....	7
F Main Function.....	11
Internet.....	11
System Settings.....	12
Video.....	16
Audio.....	18
Pictures.....	19
E-book.....	20
Recording.....	21
Resource Manager.....	22
Addinatioal Function.....	23
H Common Problem.....	24
I Technical specification.....	25

Notes

This manual contains important security measures and how to correct use of products, please use the product before reading in carefully.

- a** The machine adopts highlight capacitive touch LCD screen, through the finger skin directly touch operation, using your fingertips click operation sharp objects such as invalid.
- b** Please do not at extremely cold, hot, dusty and humid environment using the machine.
- c** Please avoid dropped or violent collisions this product, avoid TFT LCD screen by violent collisions may cause damage or display is not normal, dropped or collision, the consequence by the user account.
- d** The battery life may with use the different environmental conditions and use changed.
- e** This machine is in the format or upload and download please don't suddenly disconnect network connection, otherwise may cause the system faults.
- f** Don't use of alcohol, thinner or other chemical preparation scrubbing product surface, in order to avoid product surface corrosion damage.
- g** This machine during charging, the cabinet slightly warming (micro hot) is a normal phenomenon, but will not affect users.
- h** For damage to the product, service or other causes to memory data loss, erased losses caused by, this company shall not be responsible for the user, please observe the manual operation, and promptly backup important data.
- i** Because different ways, the machine capacity calculation and flash memory storage system firmware division will occupy certain FAT, the machine is recognition of memory space after PC connection capacity and display of memory capacity will have certain discrepancy, concrete depends on the product adopts firmware version and flash category and decide.
- j** The current computer virus is more, because the virus caused products and systems, documentation and firmware application etc were damaged, please strengthen virus protection. As has been infected by a virus, make the product cannot normal use, the user can determine the virus free upgrade firmware on a computer, then formatting solve.
- k** Use process if you have any questions, please contact with dealers, do not disassemble the product, otherwise you will lose the company promised any warranty, the result by all the problem can only be the sole responsibility of the user.

Attention : Different hardware and software version of the product function and function may have certain differences, so the change will happen without notice, the company reserves the right to improve product.



Main Performance

- a** 7 inch TFT capacitive touch LCD 800 * 600 resolution.
- b** Android2.3 operating system, support wireless Internet, support online download all kinds of information material.
- c** Support the APK applications application and installation.
- d** Supports MP3, WMA, FLAC, AAC, OGG, WAV, broadcast, support lyrics APE in format displayed
- e** Support 1080P video (played the AVI, 3GP, MP4, RM, RMVB, MOV, MKV) and 480p the video (FLV).
- f** Support MIC function, can undertake instant communications and online chat (for example: Skype)
- g** Support outside ring function
- h** Expand TF card function.
- i** Support automatic browsing JPG, BMP, JPGE, GIF format images.
- j** Energy saving Settings, brightness can be adjusted freely, can set up automatic closed display , automatic sleep.
- k** Recording function, the recording format for 3gp
- l** Support simplified Chinese, English, traditional Chinese, Multi Languages etc.
- m** Support Win2000, Win XP, Vista computer system..
- n G-sensor** Rotating function.
- o** High speed USB2.0 transmission.
- p** Support e-book reading function.
- q** Support multitasking function (for example: background music)
- r** Support the firmware update, functional updates.
- S Support Wi-Fi, Bluetooth,**

External View and Important Keys

The machine's main keys and interface distribution is as follows:



- 1, Volume +/- key button
- 2, Power / reset key
- 3, Back key
- 4, Speaker key
- 5, Speaker key
- 6, Microphone
- 7, TF-CARD slot
- 8, USB
- 9, OTG
- 10, earphone jack
- 11, Home key
- 12, Adapter jack
- 13, HDMI

Basic operation

Keys function describe

Volume + key/ Volume - key : Short press adjustable high/to reduce the volume

Back key : Short press can get back last menu

Home key : Short press can return main interface.

Menu key : Short press can be used to extract the menu

Power key : Long press can open/shut down, short press turn off the display standby, short press again is turn on the display.

reset: 5 seconds long press Power Key

Turns on/off the machine

Shut down state, long press the power button 3 seconds later, the machine in the display boot screen junior enters the interface (boot time longer, please wait patiently).

Boot condition , long press the power button 3 seconds later, In pop-up screen, clicking on the right return key  will not shut down, choose shut down is closed

Power monitoring

You can through the screen power  icon monitor battery and electrical quantity state, along with the machines use the increase, battery icon  corresponding decrease, when power  fast burned out, machines automatic shut down. Battery use time and broadcast file types, the screen displays a status, operating frequency and volume relevant. You can enter the system Settings squadron set items "brightness" and "screen on the standby" LCD backlight brightness and automatic turn off the display time for reasonable Settings to save power savings.

i Charging

When the screen prompt power battery with low, please promptly charging ,Please use the company with the machine configuration of the special power adapter to charge the battery, charging process, charging completes display pulse  ,charging compete ,the battery gauge to display full frame  . Charging at turn off the display state, the machine will automatically turn on, the charging process need around 4 hours.

i Reset/restart function

If your tablet PC appears CRASH and loading SLOW normal phenomenon in process , you can long press the power button 5 seconds to reset/restart.

i G-sensor induction function

This machine built-in G-sensor  induction function . in the setting of open “menu>setting>voice and display>direction” Users will be machine after 90 degrees counter-clockwise, Screen will automatically switch.

Screen lock

Backlighting closed after the system automatically lock screen, short press power key will lock screen if you click this icon  upward dragged

Use process, fingers on touch screen glass tipped the menu button  can popping operate the menus, all tipped  back to superior directory, tipped  back to the interface

Connect computers and transferring files

i

This machine is of high speed USB2.0 interface, after connect with computer  short press "turn on USB storage", mobile disk can be realized functions, to file etc data download transmission.

The interface touch-key instructions

-  The interface key : click this key can return to home screen.
-  Menu key : click this key can pop up the operation menu in current interface
-  Volume + /-key : Click this key can adjustable higher/lower system volume
-  backspace key : Click this key can return to backspace menu
-  Function menu key :Click the button enter into function in this list interface, user may view, choose to use the machine of any one of the function, such as long press this button will pop-up 5 main interface shortcuts for users to quickly choice.



-  Window switch key : This machine built-in 5 function management window. Users can through touch this key and drag touch screen around between multiple Windows



WIFI signal observation icon


 **System notice** : Drag down this icon to view TF card state, download documents, the USB connection status and so on.



Search function : Clicking main interface display “Google search” can pop-up the search content input keyboard , the completes after click  can enter into relevant web page

Introduction of main interface specific operation

In the main interface click menu button  or short press menu of machine all can show interface operation menu as follows



Add : Click the button, pop-up “add to the main interface” (also in the main interface long press after have corresponding setting)can choice add to shortcut, widget(such as simulation clock and so on)folder and wallpaper, users can setting in the main interface according to own habits and hobbies ,this machine support delete added pictures from main interface . Method: long press any icon in main interface , the right screen display delete icon  after delete drag to delete icon .


Wallpaper: click the button can setting Interface wallpaper.

Search: click the button can enter input states of search content

Notifications: Click the button can check system notice, for example: the states of documents download, TF card remove, USB remove notice and so on, click and check every notice after the top of main interface display some system notice icon is no shows.

Settings: click the button can enter into system setting menu.

Function menu button: Click  button can pop-up full function menu as follows.

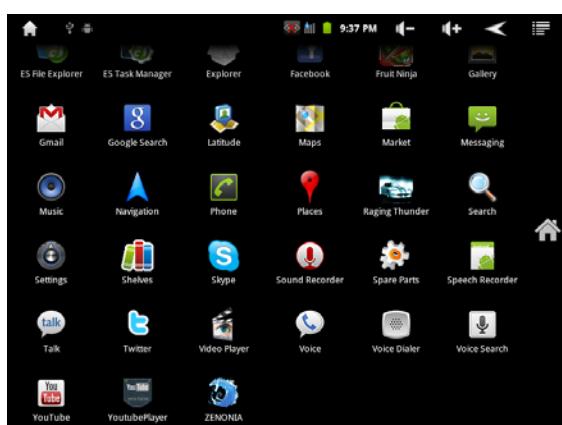


Main interface button

This window display all of function icon this machine, click any icon can enter relevant function interface, click main interface button can return main interface.

 **APK Installer** : At the right picture,

The machine support APK program install and management, click this icon can enter relevant interface

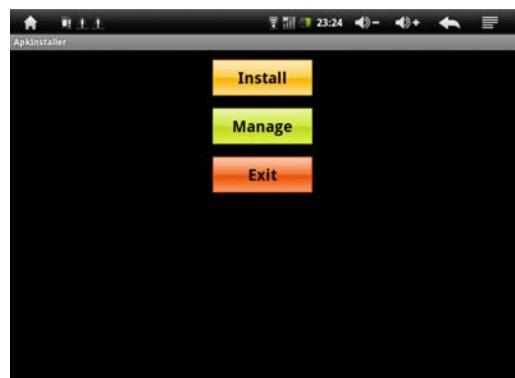

① Notice : this products adopts Andriod2.3 operation system, support application program suffix is .APK”

 After users download need APK install program in this machine, click this option can enter APK program install interface, find the needs of APK program, clicking installation.

 Click the option to view all of the third of users install APK program inside the machine. Long press the any of program can pop-up the operation interface. This interface support starting the program, export, unloading, search and other operation.


 Click the interface to exit.

 E-market : APK application E-market of Internet. the users enter into E-market at the first time ,please according to page tips apply for, register, create user name and password success ,you can online download ,install e-market provide all kinds of application program, games and other APK application program.

① Notice: In the E-market application program have paid and free program, please users have choice to download.

 Resource manager : After click it can enter TF card, Flash etc storages media interface, it useful manager application program, documents and all kinds of data.

 Web browser : In machine network connection condition, click and enter into the Internet interface may convenience to the users Internet search for web

 G-mail and E-mail is free internet mail service, it used for Receiving and sending e-mail .but it used by register and registered users.

 Online chat tool

 Click can view Google map of the world

 Click enter can view YouTube videos

 Online chat tool

 Click enter to Twitter

 Click enter to Face book

 Click enter can view calendar and set memorandum, etc



Click can open calculator function



Click can setting alarm clock function (boot state is effective)



Click and enter system functions of setting surface.



Click enter can make voice recording



Video player: Detailed operation turn to page 16



Audio player: Detailed operation turn to page 18



Picture browser: Detailed operation turn to page 19



E-book reader: Detailed operation turn to page 21



Game



Game




Game

Note: use your finger slipping in function window, you can browser all classification function in the machine.

Main function

Internet function

In all the functional menu click on icon can enter Internet interface, the default page for Google search page, clicking a website input bar/content search all can pop-up web input the keyboard, blow image :

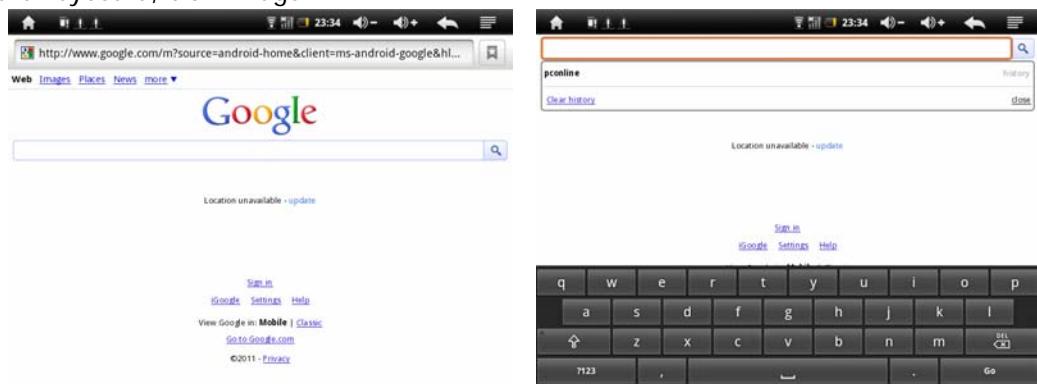

After click website search or content search column, in the input keyboard click relevant character input website, content, clicking Enter button can connection relevant page

Note: the keyboard have some switch functions, such as Chinese and English

switched, digital and image switching. Related keyboard setting is decide by what program

This machine at most support four web windows, Use your browser to web browsing process  Pop-up menu as follows:



 Click open in new window, if click the new window in opened page, the new opened window will be in front of open web page display.

 Click this choice can enter websites memory and website visit the most website and history record interface (click the menu button  in the bookmarks interface, it can pop-up “Bookmarks last viewed page” and “Thumbnail view” when you browser history record, click  menu button pop-up “delete history record” delete prompting)

Click this choice

 Click the choice can pop-up manager windows of opened webpage, the most of four windows

  Click “refresh” can refresh current webpage, in page loading click “stop” can stopped to loading current webpage

 On the contrary of return key function

 Click this choice can “Add bookmark” “searching in page” “Select text” “webpage information” “share webpage” “Downloads” “Setting” and other function task’s setting

On the Internet, use finger on the screen up and down sliding can up and down browser webpage, when drag webpage it up and down, pop-up webpage enlarge/narrowing button, click it can enlarge/narrowing webpage.

 Internet use the finger

 Note: This machine use operation system doesn’t support webpage flash broadcast

System setting

In the all function menu interface, click setting  icon, enter setting surface, at the right picture shows



1. Wireless and network

Clicking this option may view are using WiFi network and WiFi Settings. By clicking the "WiFi Settings", the system in automatic scanning after showed all the WiFi to receive the network, in receives the WiFi network list, by clicking the "add WiFi network," shows interface as picture:



Users setting website SSID and security in the surface after add a target network to WIFI network list

In the WIFI network list click any network, thought security inspection (users name/password) after Connect the network can be set to the current Internet network. the

top of the WIFI after connection notice list will appear WIFI network  icon, Users can observation network signal intensity

Setting this network as current network, connection WIFI

 Note: if have most of WIFI network through inspection, it all be used as the default Internet network, next time automatic connection, no longer need to enter security verification (machine factory Settings to recover after a reset associated Settings).


WIFI scanning:

In WIFI setting interface click menu key  after pop-up menu click "scanning", can receive WIFI network if you scan and refresh

WIFI advanced settings in the WIFI setting interface, clicking  menu button after pop-up menu click "advanced" can enter WIFI advanced setting interface , users can static state IP address and other operation according to need

3. Bluetooth Setting

In Wireless & Networks settings, As following pictures,

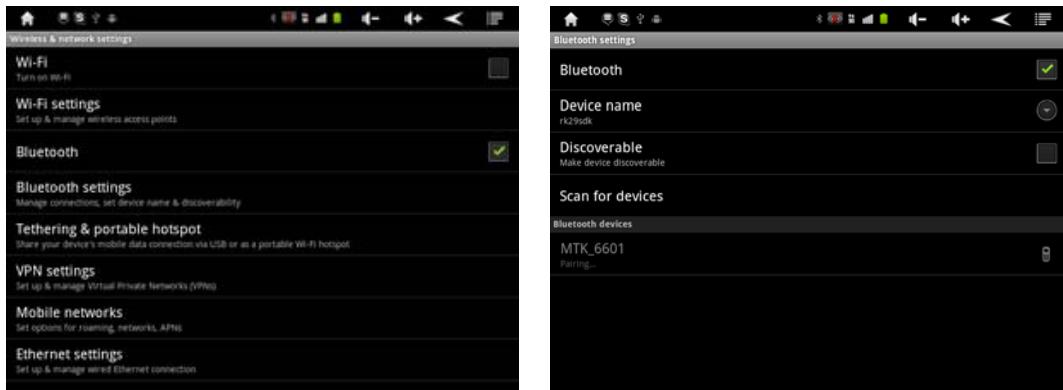

After it scan Bluetooth phone devices , users can pair with the phone,
After it paired, then it works.

4, Sound setting

Sound setting: including media volume, inform bells, select operator sound, TF card notice, USB notice.

5, Display settings: including Brightness, Auto-rotate

screen(G-sensor), animation, screen timeout,

Screen timeout :15 second, 30 second, 1 minute, 2 minute, 10 minute, 30 minute for select setting, If the setting about 30 seconds, the screen in idle 30 seconds after self-closing and padlock, short power can open the clock, please upward the closed button

 Note : if you want open G-sensor function, please select “Auto-rotate screen” on the contrary , please closed this option .G-sensor function opened after, users counterclockwise 90 degree in machine, screen will revolve.

6, Location and security: it is used setting “My Location” “screen unlock” “Passwords” ” Device administration” “Credential storage”

7, Application settings: manager application program

Unknown source : Users can be open or close unknown source application program installation function.

Manager application program: Users can be manager and delete install application program.

Running service: it is used view and control current service

Development: Users can setting application program choice, checked this choice, with some application realize interaction.

Storage use: users can view storage used by applications

Battery use: users can view what has been using the battery

8, privacy : “personal setting” click “factory data reset” can erases all data on device

Note: Factory data reset, users all data and personal information material and install third-party applications will no longer retained, need to reset and installation.

9, Accounts & sync:

General sync settings: 1,Background data 2,Auto-sync

Manage accounts: users can add accounts

10, Storage: TF card and Nand flash : clicking on entering user can view, TF card capacity TF card unload, TF card format, built-in storage CARDS available space, equipment of memory available space check relevant operation.

11, Language and keyboard: sets the system language and input methods related information.

12, Date and time :It is can setting is open from network to get automatic the date and time of the functions and set the date/time zone /time/format.

13, About device : View the machine using state, power usage, legal information, hardware model, The operating system firmware version model, The inner core CPU type and version information

* Video player

In all the functional menu interface click 【video player】 icon ,it enters video resource list interface and long press video files can be pop-up video delete menu, click into any video files can enter video playback interface, such as right:

Players have a row of keys icon below, each key icon function as follows:



 Click the button icon adjustable high/turn it down

 Video bookmarks: Click the button icon memory current time points after

the next play this video when choose whether since then time point start playing.



Brilliance : Click the button ICONS can reset the screen brightness values



The last one : Click the button icons can play last video, long press this button icons can retreat quickly video (drag progress bar also can retreat quickly video)



Click the button ICONS can pause/continue to play the current film



The next one : click the button icons can be playing next video, long press this button icons can quick in current video(drag progress bar also can quickly video)



Display mode : Click the button icons can choice 16:9、4:3、
Full screen, video mode playback of its original size



Return : Click the button icons can return the superior menu.



Click the button icons can make following operations

- i* Delete bookmarks and playing from started.
- i* Obliterate bookmarks
- i* Play mode : Including single broadcast, single cycle, all video cycle playing and returns
- i* Help : Users can enter this option view the function of each key-press
- i* Return

When full of screen play, click screen can play toolbar, click screen or wait a moment can restore full screen broadcasting. When video full screen play, the keys function of airframe is as follows:

- i* Home key : Short press can return main interface.
- i* Volume + / Volume - : Short press can turn up/down volume
- i* Return: short press can return last level menu.
- i* Menu: short press can conceal toolbar
- i* Power button: long press can turn up/down machine, short press turn off display , short press again is open the display

Video documents delete: video file list, long press any video file pop-up file delete menu after, click "delete", confirm delete on whether the dialog click "ok" can delete selected video files

i

This machine doesn't support broadcast than 2G single video files

* Music

In all the functional menu interface, click **【 music player 】** into music resource list, such as right:

Music player relevant key icon function like this:



【 】 Click the button icon can display all music files within the machine.

【 】 Click the button icon can search for internet and download music

【 】 Click the button can according all music classify all song names

【 】 Click the button can according special name classify all of the songs.

【 】 Click the button can according species classification all of the songs

【 】 Click the button can display music files contents this machine.

【 】 Click the button can create and delete playlist

【 】 Click the button can play the music chosen and keep playing being played songs

【 】 Click the button icon returns the last level menu

In the music files list, click music name can enter music playback interface, as right follows:



【 】 Click the button can be played last music, Long press this button ICONS can retreat / quickly current music (drag progress bar also can fast retreat music).

【 】/【 】 Click the button ICONS can pause/comtinue current music playback.

【 】 Click the button can be played next music, long press this button ICONS can speed current music (drag progress bar also can quick enter music)

【 EQ 】 Click the button icons can switch audio normal, rock, pop, classical, heavy bass, jazz and my sound

【 A-B 】 Click the button ICONS can setting read starting point A, click again setting reread end B

after, from A to B the music will repeat play, the third time click this button can resume normal play.

- ➡ Click the button icons can switch Music playback modes for single time, single cycle, all time, all the circulation, try to listen
- ➡ Click the button ICONS can add current music to player list
- ➡ Click the button ICONS can show or hide music information
- ➡ Click the button can turn down media volume
- ➡ Click the button can turn up media volume
- ➡ Click the button can return superior menu

When the music /songs are playing, this machine key functions as follows:

- Home key : Short press can return main surface
- Volume + / Volume - :short can adjustment higher/lower media volume.
- Return :short press can return higher lever menu
- Menu key: short press can display my sound button, click this button can enter my sound setting surface.
- Power key : Long press can turn on/off machine; short press can closed display, short press again open the display


Note: users can download LRC England lyrics with corresponding to music/songs at websites such as www.51lrc.com, or through the lyrics show software making itself with corresponding music /songs of the same name (LRC)stored under the root directory of the player in your LRC paper file after, then come ture play the music/songs realized on the screen displayed the lyrics.

Note: some coding have very special mp3 / wma audio files,maybe in this machine can't normally broadcast, please use audio format conversion tool ,documents conversion after coping in the machine broadcast.

* Picture:

In all the functional menu interface click [photo browser】 icon enters next menu after click any picture filer entering photo browser interface ,as picture shows:

As above Pictured shows, the bottom of the screen key icon function below

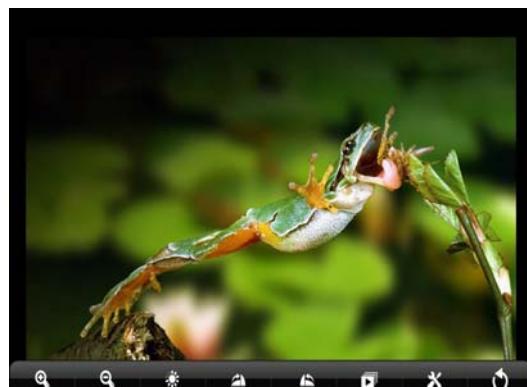

-  Click the button icons can magnify current picture
-  Click the button icons can lessen current picture
-  Click the button icons can adjustment screen brightness
-  Click the button icons can right-rotation current picture
-  Click the button icons can left-rotation current picture
-  Click the button can be automatically play all pictures (slide show mode).
-  Click the button icons can enter picture setting surface, the surface settings not only pictures of the broadcast order and pictures of the automatic playback interval time, the effect of switch, but also to view the firmware version information and to set the current pictures for desktop background and other operation.

-  Click the button icons can return last level menu

Picture in the full screen play browsing mode, click on the screen can show the sidebar, click again or wait a moment can restore full screen broadcasting.

There are a few used to Apple computer system the JPEG image files, may cannot view in the machine, please use Windows system drawing tools or users to download the pictures in the network converting and copying in this machine to browse.

* E-book

In all the functional menu interface, click **【 e-book 】** icon enters next menu can be directly display SD card or within the memory Flash the text files bookshelf, click text files (.TXT) can enter ebook reading interface, such as right:



When browse the ebook, hauls around ebook page can drag text, clicking menu button or light on the menu button can fuselage show/hide operation menu functions as follows:



Jump page: click this button ICONS can choose to skip position.



Bookmarks: click this button ICONS can enter bookmarks Settings, add, delete interface.



Books information: click the button icon to view books title and the author information.



Auto flip: click this button icons can install manual, 15 seconds, 30 seconds, 60 seconds browse mode

E-book application support format for TXT, EPUB, PDF, RTF, FB2, PDB. Users can search download ebook source on the Internet.

Every exit text breakpoint will be automatically records, the next play the same text, the screen display reading from the last time you quit .

* Recording

In full function interface click **【recording】** icon enter recording interface at the right picture.



i click key, start recording,

After the completion of the recording, click this button, screen pop-up menu asking if save this recording, click the middle of button can play current recording. in poped-up menu choice "use this recording" or "abandon" can affirm save or cancel this recording.

i


All the recording with the recording time sequence named and stored in root directory folder "RECORD", users can click on music playlist options "my recording" view, played or delete all the recording documents, recording file format default for (. 3gp).

i

* Resource manager

In all the function interface click **【 resource manager 】** icon enters file management interface, in this interface can view the memory Flash and SD card all the folders and files in the machine, the sound, video , ebook, pictures, etc can be directly select open or play. Users can also be conducted in this mode of a folder or file copy, move, delete, paste and rename operation. Specific operation method is: long press folder or file, pop-up operate interface is as follows:



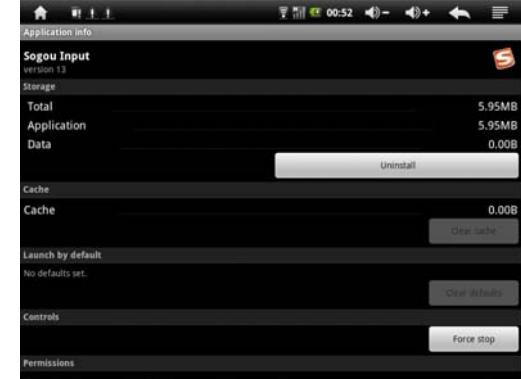

Copy : Long press copying files or folders

pop-up menu, click the "copy", then selected target folder on the top of the "edit" button, in the pop-up menu click paste can copy the file or folder to target folder

i Delete : Long press delete files or folders pop-up menu, click the "delete", then can delete selected files or folders.

Remove : After long press remove files or folders pop-up menu, click "remove", then selected target folder on the top of the "edit" button, in the pop-up menu click paste can copy the file or folder to target folder


Rename : After long press remove files or folders pop-up menu, click "rename", then in the pop-up tip box click text input box can pop-up text input keyboard, after input the completion, click return key or determine key which can save the file or folder names

In resource manager interface  next clicking on menu button enter application management interface, to check and clicking unloading applications will see the program storage file formats and size, free memory, and whether the default powered up, control information and unload and other information. As below:

click to check and unloading tipped the application will see the program storage formats and size, free memory, and whether the default powered up, control information and unload and other information. As below:

* Additional Function

Look at the right picture, our machine built-in many interesting and useful widget.

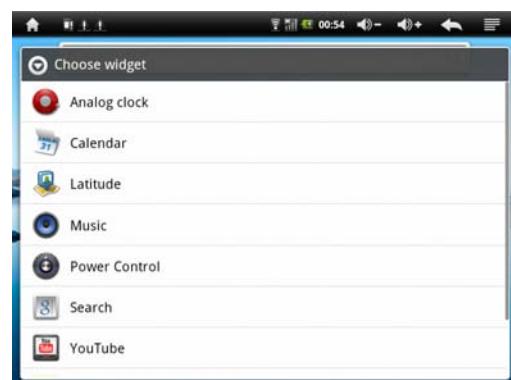

Users click on the small parts to add to the main window, the main window displays related small parts, such as the fast key way as simulation clock added to the main window, the main window display the simulation clock at the right

*** Deal with the common problem**

i Cannot turn on the computer

Check the battery is no electricity

Check it again if connection battery

Touch the tapering items reset/restart key

After above questions cannot solve if charging, please contact with sellers.

i The earphone is not voice

Please check whether the volume set to “0”

Please check the earphone is connection well

i Serious noise

Please check whether earphone is clean, dirt may lead to the noise.

Please check whether earphone plug into place

Please check the music if the file is damaged, the damaged music files may lead to noise

You can play other music to judgment and decide.

i Screen display messy code

Please check whether has set the right language options

i Cannot download files

Please conform whether between PC and tablet pc proper connected

Please confirm whether memory storage space already full

Please confirm whether damage USB cable

Please confirm whether to change associated Settings

Why broadcast music without lyrics display

Please confirm the lyrics file formats is LRC, documents name is same of the music played by filename file name

The USB connection is invalid, the screen has connections, but PC can't find DATA content related

Please check the USB cable intact without damage

Please check the PC associated Settings, such as: safety antivirus software stop connection

Please inserted USB cable connection again.

Do not have access to the Internet or online play audio and video

Please confirm Wi-Fi send equipment and mobile 3G network receiving modules in open and connection status

Display	7inch HDV LCD display, 800×600 Pixels
Connect PC	High SpeedUSB2.0
RAM	512MB
battery	4250MAH capacity polymer battery
Play Back Time (Audio)	Video playing about 7hours (turn off Wi-Fi) earphone output

Please confirm Wi-Fi signal is good

Headset matters need attention

When you use headphones have to get this machine to plug in the volume of the headset connections, then slowly volume adjustable high, so we can prevent headset overload burned-out caused by voice coil hissing sound. burned-out caused by voice coil hissing sound.

	Audio playing about 30hours(turn of Wi-Fi), earphone output	
Version	Andriod2. 3	
WiFi	Support IEEE802. 11b/g、n	
G-sensor	Gravity sensor detection	
Audio	Headphone out power	(L) 7mW+ (R) 7mW (32ohm)
	MP3 bit rate	8kbps-320kbps
	WMA	48kbps-320kbps
	Frequency	20Hz-20KHz + / - 3dB
	noisy	≥85dB
		Less 0. 6%
Video	AVI	1280 × 720
	RMVB	1280 × 720
	MP4	1280 × 720
Using temperature	From - 10 °C to 45 °C	
System languages	English, Simplified Chinese , Traditional Chinese , Multi Language、	
Operating System	Windows 2000/XP/Vista	

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference.
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.