

433mHZ Antenna report


Manufacturer: Wenzhou Chedunwang Electronic Technology CO.,LTD

M/N:433MHZ

Freq(MHZ) 430MHZ-438MHZ

PCB Antenna

mm

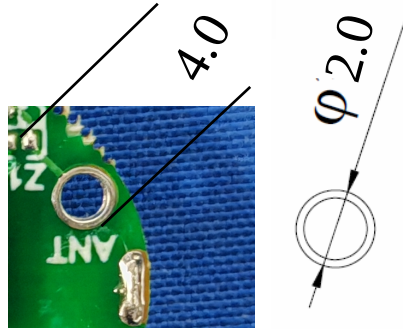

1. Gain and Efficiency

Freq(MHZ)	Efficiency(%)	Gain(dBi)
430	30.5	0.44
431	31.4	1.00
432	32.5	0.74
433	33.6	0.46
434	34.5	0.22
435	31.6	0.23
436	32.5	0.25
437	30.5	0.14
438	29.5	0.18