



TEST REPORT

No. AR22-0077688-02

performed in accordance with

FCC Rules: Code of Federal Regulations (CFR) no. 47
Part 15 Subpart C Section 15.247

INDUSTRY CANADA

Spectrum Management and Telecommunications Radio Standards Specification

RSS-247:2017

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and
Licence-Exempt Local Area Network (LE-LAN) Devices

PRODUCT	Dual-mode Basic Rate (BR), Enhanced Data Rate (EDR) and Low Energy (LE) Bluetooth® radio module
MODEL(s) TESTED	05010BTH
FCC ID	2A6P2-117569
IC ID	29967-117569
TRADE MARK(s)	CEIA

APPLICANT	COSTRUZIONI ELETTRONICHE INDUSTRIALI AUTOMATISMI CEIA S.p.A. Zona industriale, 54 – IT-52041 Arezzo
-----------	--

Tested by	Robertino Torri <i>[Laboratory Technician]</i>	
Approved by	Roberto Colombo <i>[Laboratory manager]</i>	

Revision Sheet

Release No.	Date	Revision Description
Rev. 0	2023-04-03	First edition Digital signed - AR22-0077688-02_TR_FCC 15.247_IC RSS-247 - CEIA - BLE radio module 05010BTH.doc

The results of tests and checks reported in this Test Report refer exclusively to the samples tested and described in the Report itself.

This Report shall not be reproduced partially the written approval of IMQ S.p.A..

The authenticity of this Test Report and its contents can be verified by contacting IMQ S.p.A., responsible for this Test Report.

1. GENERAL DATA

SAMPLE				
Samples received on	2022-09-19	(Item(s) sampled and sent by applicant)		
IMQ reference samples	BEM	110224		
Samples tested No.	1			
Object under analysis recognition	Not carried out	Except where stated, characteristics of products were taken from client description and were not verified by the laboratory		
Date of acceptance of test item	2022-09-19			
TEST LOCATION				
Testing dates	2022-10-21 ÷ 2022-11-21			
Testing laboratory	IMQ S.p.A. - Via Quintiliano, 43 – I-20138 Milano			
Testing site	Via Lombardia, 20B – IT-20021 Bollate			
ISED Canada test site registration number	8839A			
ENVIRONMENTAL CONDITIONING				
Parameter	Measured			
Ambient Temperature	20.0 ÷ 23.0 °C			
Relative Humidity	47 ÷ 55 %			
Atmospheric Pressure	989 ÷ 997 mbar			
The laboratory is monitored by a continuous environmental conditions measurements system. Temperature, humidity and pressure data are recorded on a weekly basis and stored in local archive.				
REMARKS				
<p>Throughout this report a point (comma) is used as the decimal separator.</p> <p>The ability or reliability of this product to perform its intended function in a particular application has not been investigated.</p> <p>Unless otherwise specified, warnings, installation instruction and/or user manual provided with the sample have been checked in Italian or English version only.</p> <p>The test results apply to the sample as received.</p> <p>All information relating to the details of the equipment under test at the § 3 of this document was provided by the applicant.</p> <p>IMQ declines any responsibility derived from missing or wrong information provided aside by the applicant.</p>				

2. REFERENCE DOCUMENT

DOCUMENT		DATE	TITLE
<input checked="" type="checkbox"/>	47 CFR Part 15	2015	Radio Frequency Device
<input checked="" type="checkbox"/>	ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<input checked="" type="checkbox"/>	ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<input checked="" type="checkbox"/>	RSS-GEN	2018 ls. 5	General Requirements for Compliance of Radio Apparatus
<input checked="" type="checkbox"/>	RSS-247	2017 ls. 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3. EQUIPMENT UNDER TEST (EUT) DETAILS


GENERAL DATA (According to manufacturer declaration)

MODEL (basic)	Description
05010BTH	Dual-mode Basic Rate (BR), Enhanced Data Rate (EDR) and Low Energy (LE) Bluetooth® radio module mounted on dedicated evaluation board.
VARIANTS (derived)	Description
/	/

FCC ID	2A6P2-117569
IC ID	29967-117569

Manufacturer	COSTRUZIONI ELETTRONICHE INDUSTRIALI AUTOMATISMI CEIA S.p.A. Zona industriale, 54 – IT-52041 Arezzo
--------------	--

Type of equipment	DTS - Digital transmission equipment
Operating frequency	2400-2483.5MHz
Max RF conducted power	DTS : 9.62 dBm
Modulation	BLE : <input checked="" type="checkbox"/> GFSK 1Mbps, <input type="checkbox"/> GFSK 2Mbps
Number of channels	DTS : 40
Antenna	CHIP antenna, gain 1.6 dBi max
Remarks	None

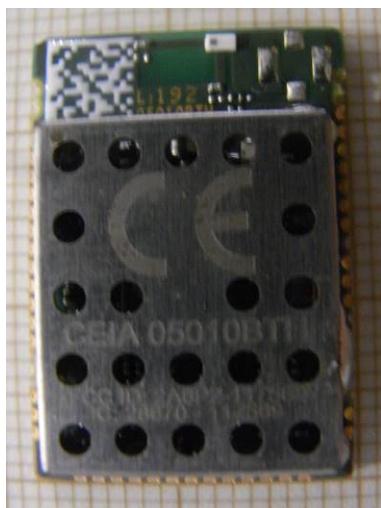

4. STATE OF THE EUT DURING TESTS

Channel Number	Frequency
0	2402 MHz
1	2404 MHz
:	:
18	2438 MHz
19	2440 MHz
20	2442 MHz
:	:
38	2478 MHz
39	2480 MHz

Mode	Description
See below test mode description	<p>The EUT is mounted on evaluation board and supply by USB-TTL cable.</p> <p>Engineering program for management of RF parameters was used during testing to control the transmitter for staying in continuous transmission at the max RF output power.</p> <p>The single TX channel was fixed which was for the purpose of the measurements and included the lower, middle, and higher frequency to perform the test.</p> <p>3axis were chosen for radiated emission testing for each applicable mode.</p> <p>The choice of axis and transmission was made based on preliminary analysis measurements in order to maximize the emission characteristics of measurement performed.</p> <p>Only the worst result was recorded in the report, unless otherwise stated.</p> <p>A temporary antenna connector is provided by the manufacturer for conducted test.</p>


NO.	MODULATION	EUT OPERATING CONDITION		
		PAYLOAD	LENGTH	Power level
1	Lower channel GFSK (BLE)	PRBS9	37	1 (max)
2	Middle channel GFSK (BLE)	PRBS9	37	1 (max)
3	Higher channel GFSK (BLE)	PRBS9	37	1 (max)

SUPPORT EQUIPMENT

Defined as equipment needed for correct operation or loading of the EUT, but not considered as tested

Equipment	Manufacturer	Model
SW for radio parameter management	Texas Instruments	HCITester Tool
Radio parameter commands	Texas Instruments	CC256x VS HCI commands
Radio parameter testing guide	Texas Instruments	CC256x Testing Guide
Evaluation board	CEIA	05010DEM10 - L:192
AC/DC adapter for conducted emission on AC mains	Alpha elettronica	BD212 – 230VAC -12VDC

RF Management SW

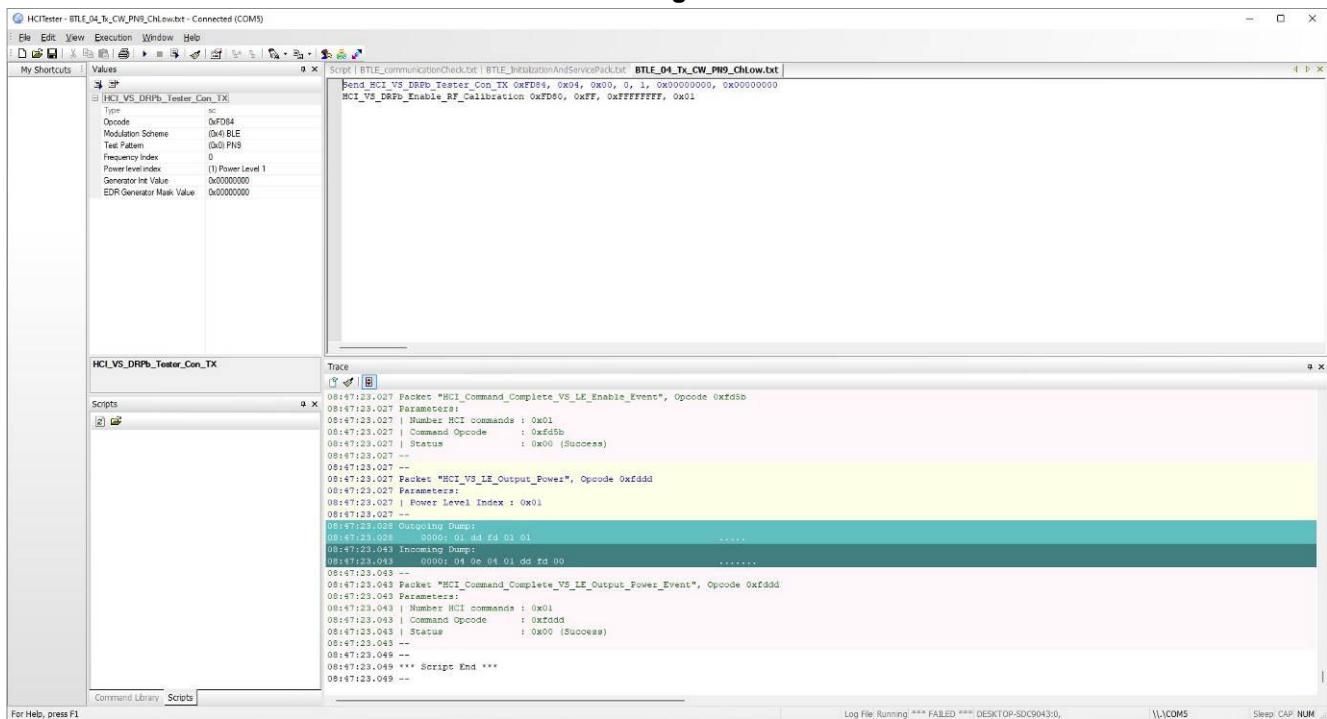

```

HCITester - BTLE_04_Tx_CW_PN9_Chlow.txt - Connected (COM5)
File Edit View Execution Window Help
File Edit View Execution Window Help
My Shortcuts Values Scripts
HCi_VS_DRPB_Tester_Con_TX
  Type: sc
  Opcode: 0x0f04
  Modulation Scheme: (0x4) BLE
  Tx Power: (0x0) PN9
  Frequency Index: 0
  Power Level Index: (1) Power Level 1
  Generator Init Value: 0x00000000
  EDR Generator Mask Value: 0x00000000


HCi_VS_DRPB_Tester_Con_TX
  Trace
  08:47:23.027 Packet "HCI_Command_Complete_VS_LF_Enable_Event", Opcode 0xf0f0
  08:47:23.027 Parameters:
  08:47:23.027 | Number HCI commands : 0x01
  08:47:23.027 | Command Opcode : 0x0f04
  08:47:23.027 | Status : 0x00 (Success)
  08:47:23.027 --
  08:47:23.027
  08:47:23.027 Packet "HCI_VS_LF_Output_Power", Opcode 0xf0fdd
  08:47:23.027 Parameters:
  08:47:23.027 | Power Level Index : 0x01
  08:47:23.027 --
  08:47:23.028 Outgoing Dump:
  08:47:23.028 0000 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
  08:47:23.049 Incoming Dump:
  08:47:23.049 0000 04 06 04 01 dd fd 00 00 00 00 00 00 00 00 00 00
  08:47:23.049 --
  08:47:23.049 Packet "HCI_Command_Complete_VS_LF_Output_Power_Event", Opcode 0xf0fdd
  08:47:23.049 Parameters:
  08:47:23.049 | Number HCI commands : 0x01
  08:47:23.049 | Command Opcode : 0xf0fdd
  08:47:23.049 | Status : 0x00 (Success)
  08:47:23.049 --
  08:47:23.049 --
  08:47:23.049 *** Script End ***
  08:47:23.049 --

```

For Help, press F1

Log File Running *** FAILED *** DESKTOP-SDC9043;0, \\COM5, Sleep Cap NUM

Evaluation board

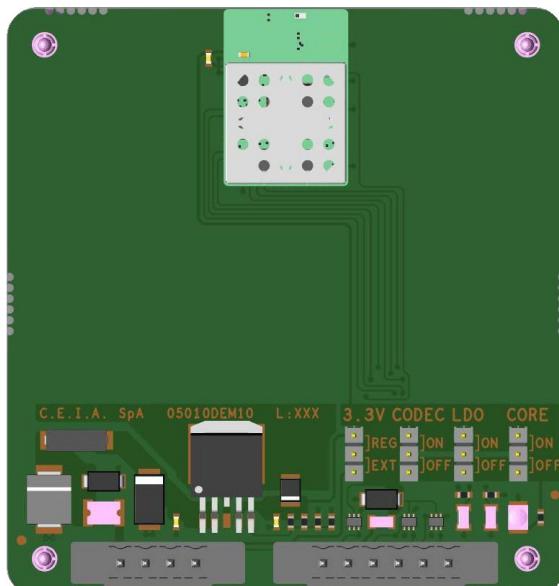



ELECTROMAGNETICALLY RELEVANT COMPONENTS

Component	No.	Manufacturer	Model
BT radio module	1	CEIA	05010BTH
Evaluation board	1	CEIA	05010DEM10 - L:192

RFI SUPPRESSION DEVICES

Component	No.	Manufacturer	Model
/	/	/	/

EMI PROTECTION DEVICES

Component	No.	Manufacturer	Model
/	/	/	/

EUT TECHNICAL DOCUMENTATION

Document	Reference
/	/

5. METHODS OF MEASUREMENT

All compliance measurements have been carried out using the procedures described in the standard ANSI C63.4-2014, ANSI C63.10-2013, Section 15.31 of 47CFR Part 15 – Subpart A (General), RSS-GEN and RSS-247.

Additional test requirements have been adopted according to the reference Section indicated in the § 6 of this test report.

FREQUENCY RANGE INVESTIGATED

Radiated emission tests: from 9 kHz to tenth harmonic of fundamental.

6. SUMMARY OF TEST RESULTS

POSSIBLE TEST CASE VERDICT	
Test object meets the requirement	PASS
Test object does not meet the requirement	FAIL
Test case does not apply to the test object	N.A.
Test not performed	N.P.

47CFR Part 15C	RSS	TITLE	RESULT
15.203	RSS -Gen § 6.8	Antenna Requirements	PASS
15.207 (a)	RSS-Gen § 8.8	Conducted Emission	PASS
15.209 (a)(f)	RSS-Gen §§ 7.3/8.9	Radiated Emission	PASS
15.247 (a)	RSS -247 § 5.1	Frequency Hopping Spread Spectrum Specifications	
15.247 (a)	RSS-247 § 5.1 (a)	20 dB Bandwidth	N.A.
15.247 (a)(1)	RSS -247 § 5.1 (b)	Carrier frequency (Hopping Channel) Separation	N.A.
15.247(a)(1)(iii)	RSS -247 § 5.1 (c)	Number of Hopping Channels Used	N.A.
15.247(a)(1)(iii)	RSS -247 § 5.1 (d)	Channel occupancy time	N.A.
15.247 (a)(2)	RSS -247 § 5.2 (a)	6dB Minimum Bandwidth	PASS
	RSS -Gen § 6.7	99% emission bandwidth	PASS
15.247 (b)	RSS -247 § 5.4	Maximum Peak Output Power	
15.247 (b)(1)	RSS -247 § 5.4 (b)	Peak Output Power	N.A.
15.247 (b)(3)	RSS -247 § 5.4 (a)	Maximum conducted output power	PASS
15.247 (b)(4)	RSS -247 § 5.4 (d)	Antenna gain	N.A.
15.247 (c)	RSS -247 § 5.4 (e)	Operation with directional antenna gains greater than 6dBi	N.A.
15.247 (d)	RSS -247 § 5.5	100 kHz Bandwidth emissions outside frequency Band	PASS
15.247 (e)	RSS -247 § 5.2 (b)	Power Spectral Density	PASS
15.247 (f)	RSS -247 § 5.3	Hybrid systems	N.A.
15.247 (g)	RSS -247 § 5.1	FHSS Transmission characteristics	N.A.
15.247 (h)	RSS -247 § 5.1	Recognition of occupied channel & multiple transmission	N.A.
15.247 (i)	RSS -102	RF humane exposure § 47CFR 1.1307 (b)(1)	N.P.

7. TEST RESULTS

7.1 ANTENNA REQUIREMENTS

TEST REQUIREMENT

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Testing dates	2022-11-22
---------------	------------

Antenna specifications

N° of authorized antenna types	/
Antenna type	CHIP antenna on PCB
Maximum total gain	1.6 dBi
External power amplifiers	Not present

TEST RESULT

The EUT meets the requirements of section 15.203 and RSS -Gen § 6.8


7.2 AC MAINS POWER SUPPLY CONDUCTED EMISSION

TEST REQUIREMENT	
Test setup	ANSI C63.4
Test facility	Shielded chamber
Frequency range	150 kHz – 30 MHz
IF bandwidth	9 kHz
EMC class	B
EUT operating condition	1 to 3 (Only worst case was reported)
Testing dates	2022-11-15

LIMITS		
Band of operations	Quasi-Peak (dB μ V)	Average Limit (dB μ V)
0.15 ÷ 0.5	66 ÷ 56	56 ÷ 46
0.5 ÷ 5	56	46
5 ÷ 30	60	50

TEST RESULT
The EUT meets the requirements of sections 15.207 (a) and RSS-Gen § 8.8

TEST PROCEDURE
<ol style="list-style-type: none"> 1) The EUT was placed on a wooden table of size, 80 cm by 80 cm, raised 80 cm. 2) The EUT received DC 12V from AC/DC power adapter which is connected to 50Ω/50μH LISN to the input power source. 3) Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement. 4) The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz. 5) The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 9 kHz during the measurements. 6) The measurements with Quasi-Peak detector are performed only for frequencies for which the Peak values are \geq (Q.P. limit - 6 dB).

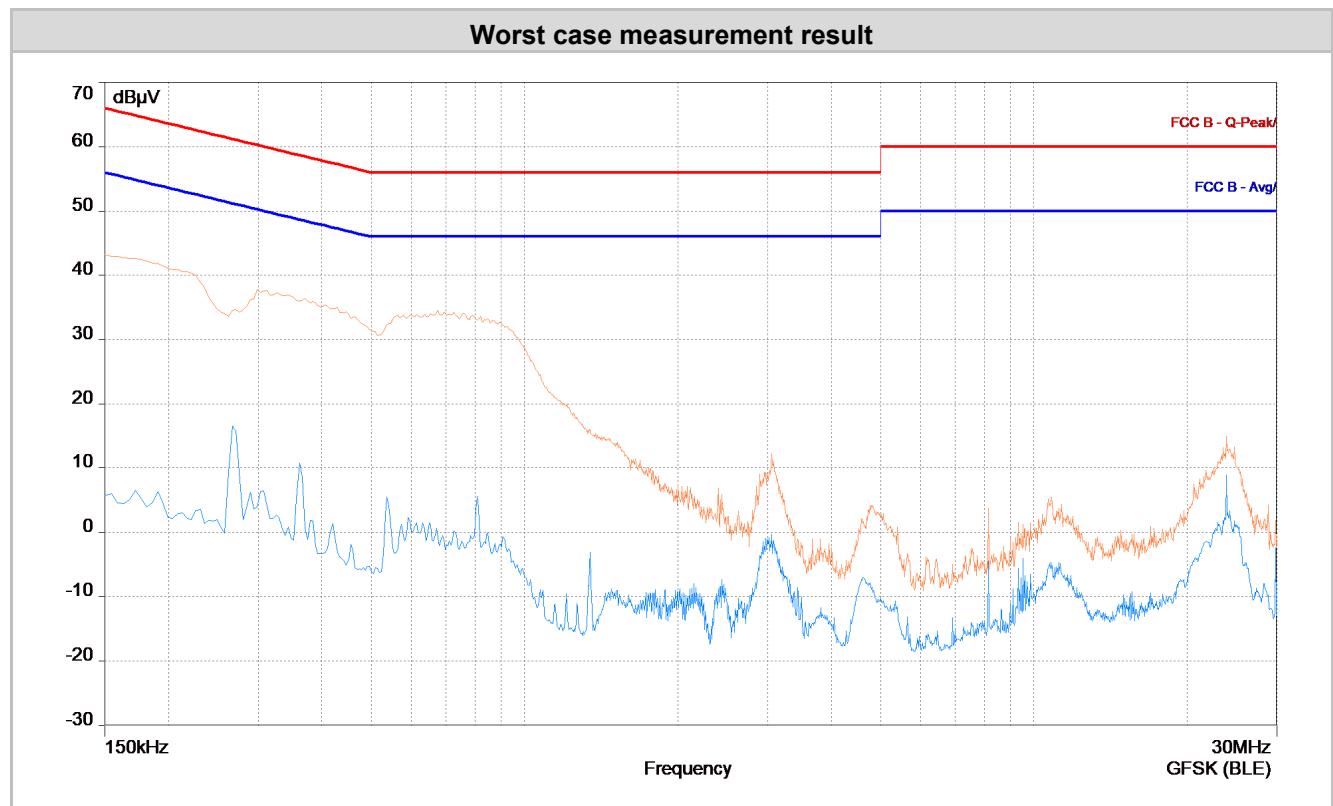

7.3 RADIATED DISTURBANCES

TEST REQUIREMENT	
Test setup	ANSI C63.4
Test facility	Semi-anechoic chamber
Test distance	3 meters
Frequency range	9 kHz to tenth harmonic of fundamental
IF bandwidth (below 30 MHz)	9 kHz
IF bandwidth (below 1,000 MHz)	120 kHz
IF bandwidth (above 1,000 MHz)	1 MHz
EMC class	B
EUT operating condition	1 to 3

Remark:

In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance.

The applied formula for limits at 3 meter is:

Extrapolation (dB) = $40\log(300\text{meter} / 3\text{meter}) = +80\text{db}$


Extrapolation (dB) = $40\log(30\text{meter} / 3\text{meter}) = +40\text{db}$


Testing dates	2022-10-25 ÷ 2022-10-27
---------------	-------------------------


LIMITS		
Band of operations	Peak (dB μ V/m)	Average Limit (dB μ V/m)
Restricted bands	74	54
Other bands	According to emissions limits or Fundamental -20dB (which is greater)	According to emissions limits or Fundamental -20dB (which is greater)


TEST PROCEDURE	
1)	The EUT was placed on turntable which is 0.8 m above the ground plane
2)	The turntable shall rotate from 0° to 360° degrees to determine the position of maximum emission level.
3)	The EUT is positioned 3 m away from the receiving antenna, which varied from 1 to 4 m to find the highest emission.
4)	The measurements were made with the detector set to PEAK and AVERAGE amplitude within a bandwidth of 100 kHz below 1000 MHz and 1 MHz above 1000 MHz.
5)	The receiving antenna was positioned in both horizontal and vertical polarization.
6)	The measurements with Quasi-Peak detector, below 1000 MHz are performed only for frequencies for which the Peak values are \geq (Q.P. limit - 6 dB).

TEST RESULT	
The EUT has been tested in 3 orthogonal axes at the frequencies lowest, middle and highest for each modulation.	
The results reported are worst case.	
The measurement of spurious emission of EUT in receiver mode is deemed to be fulfilled as no limits are exceeded in transmitter mode (condition considered more burdensome).	
The EUT meets the requirements of sections 15.205, 15.209, 15.247 and RSS-Gen §§ 7.3/8.9/8.10	

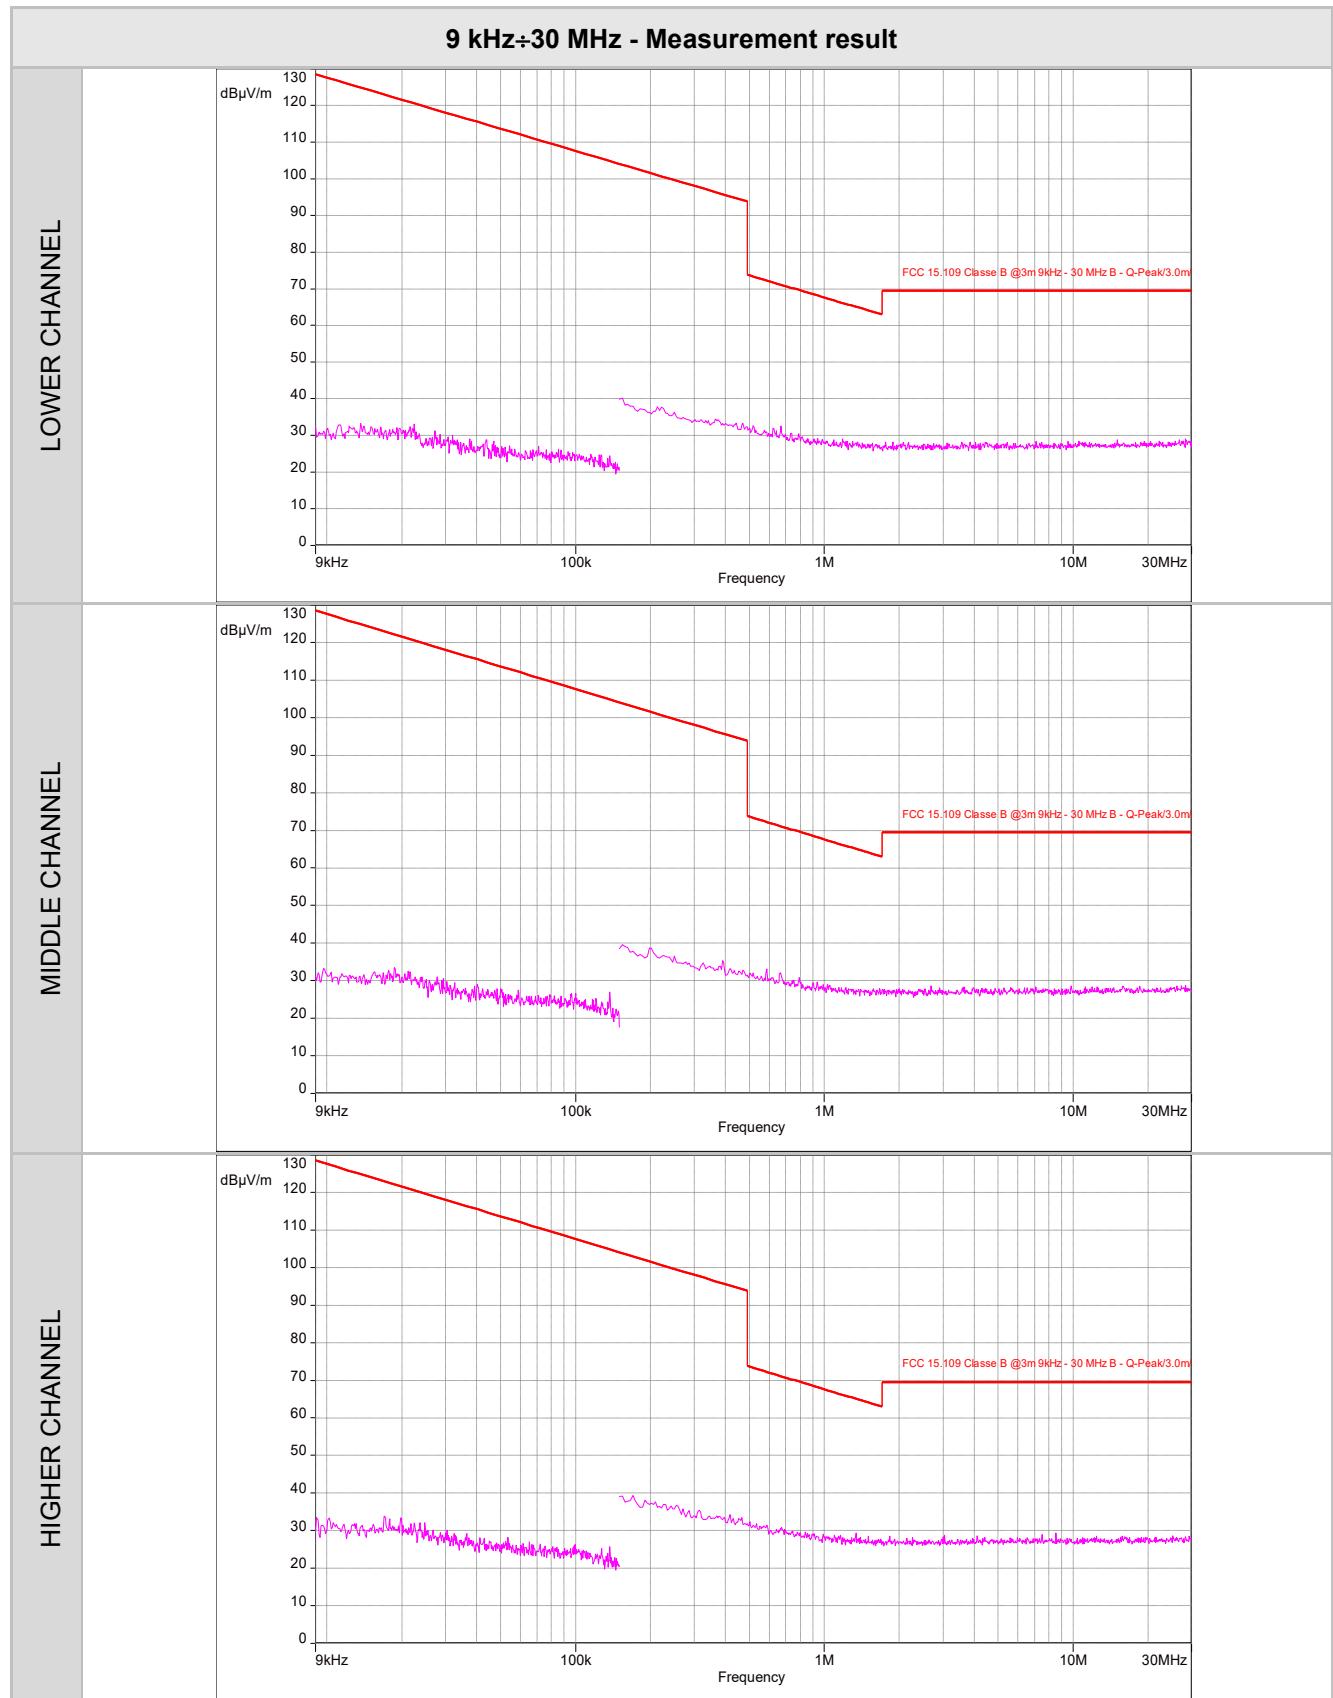

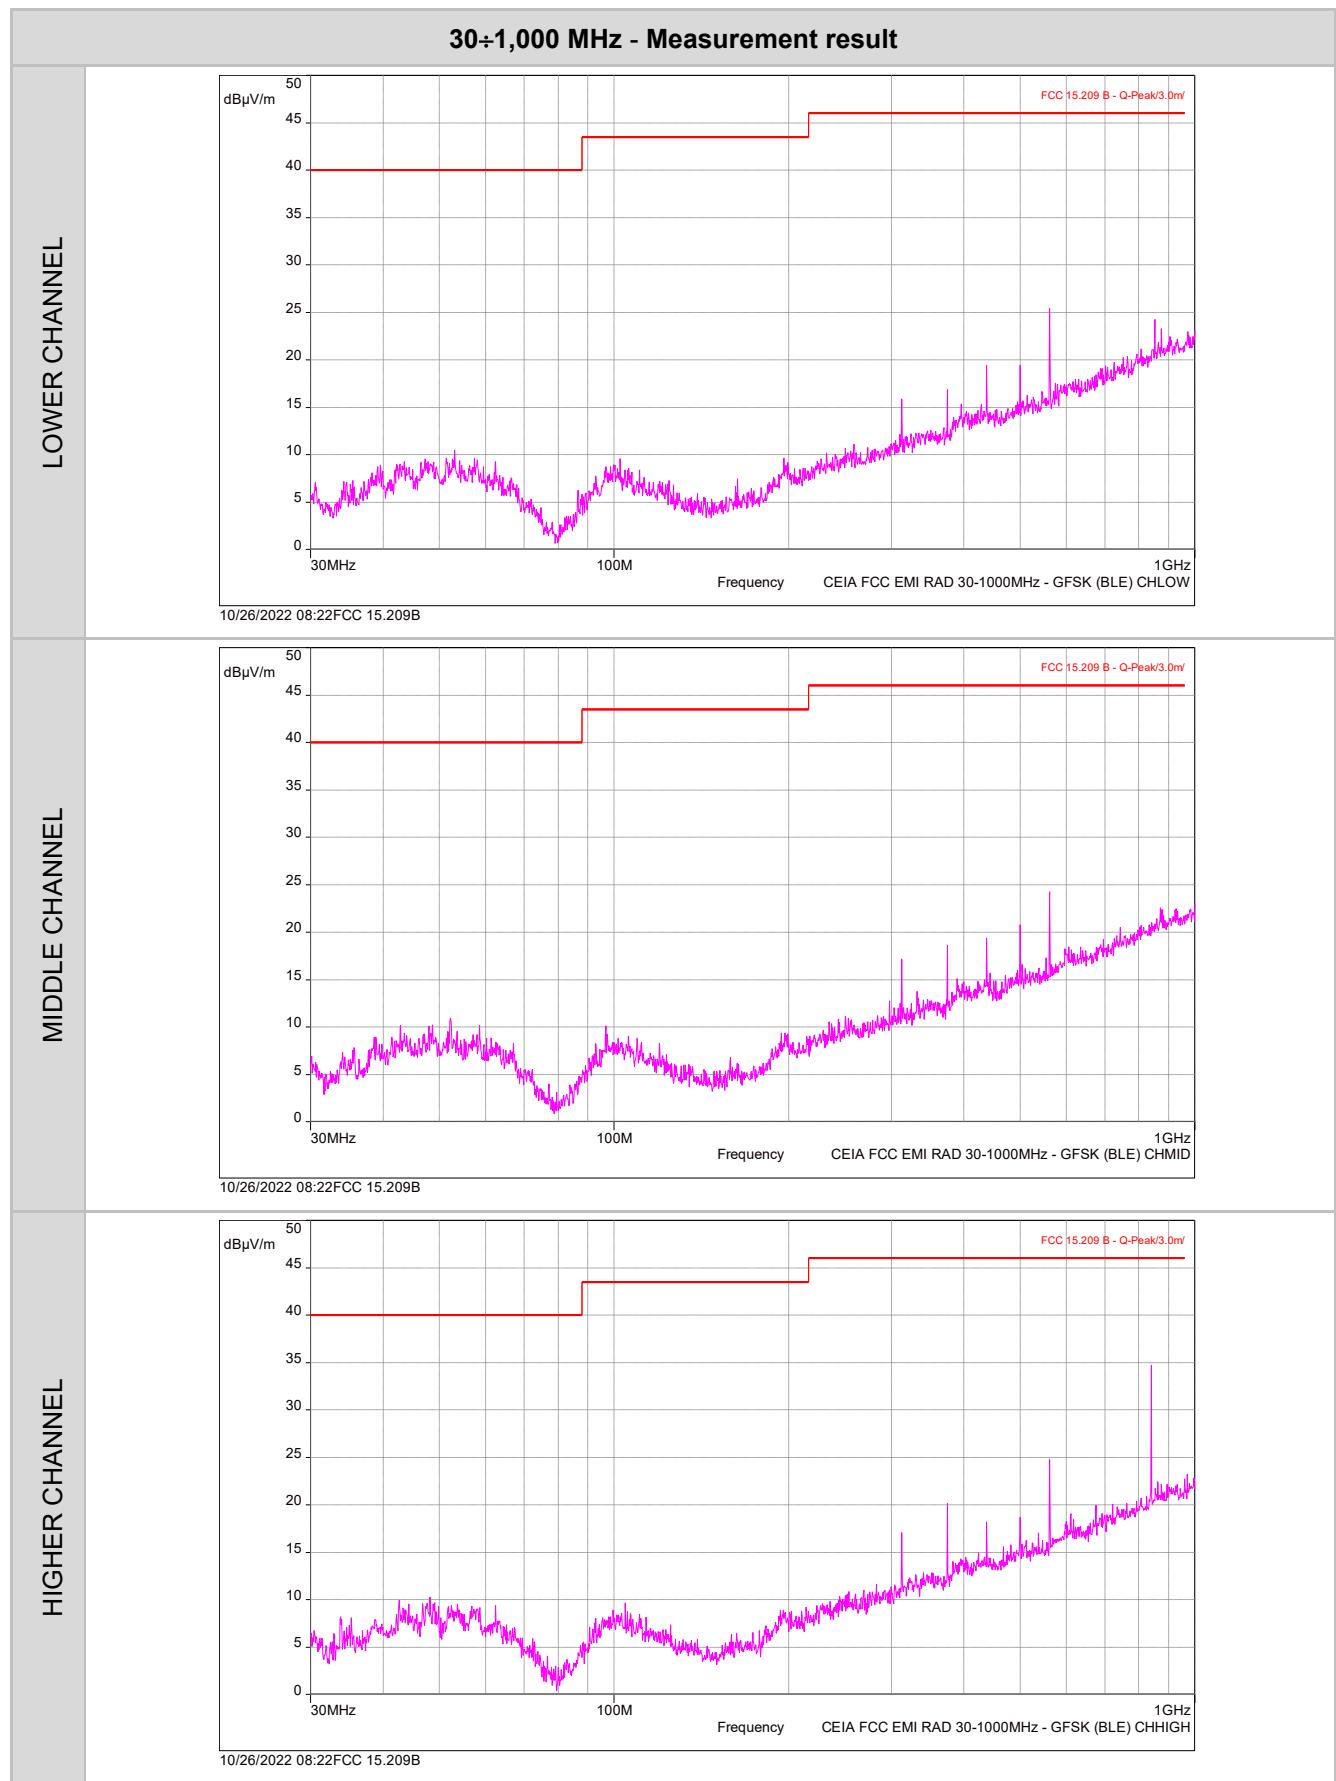

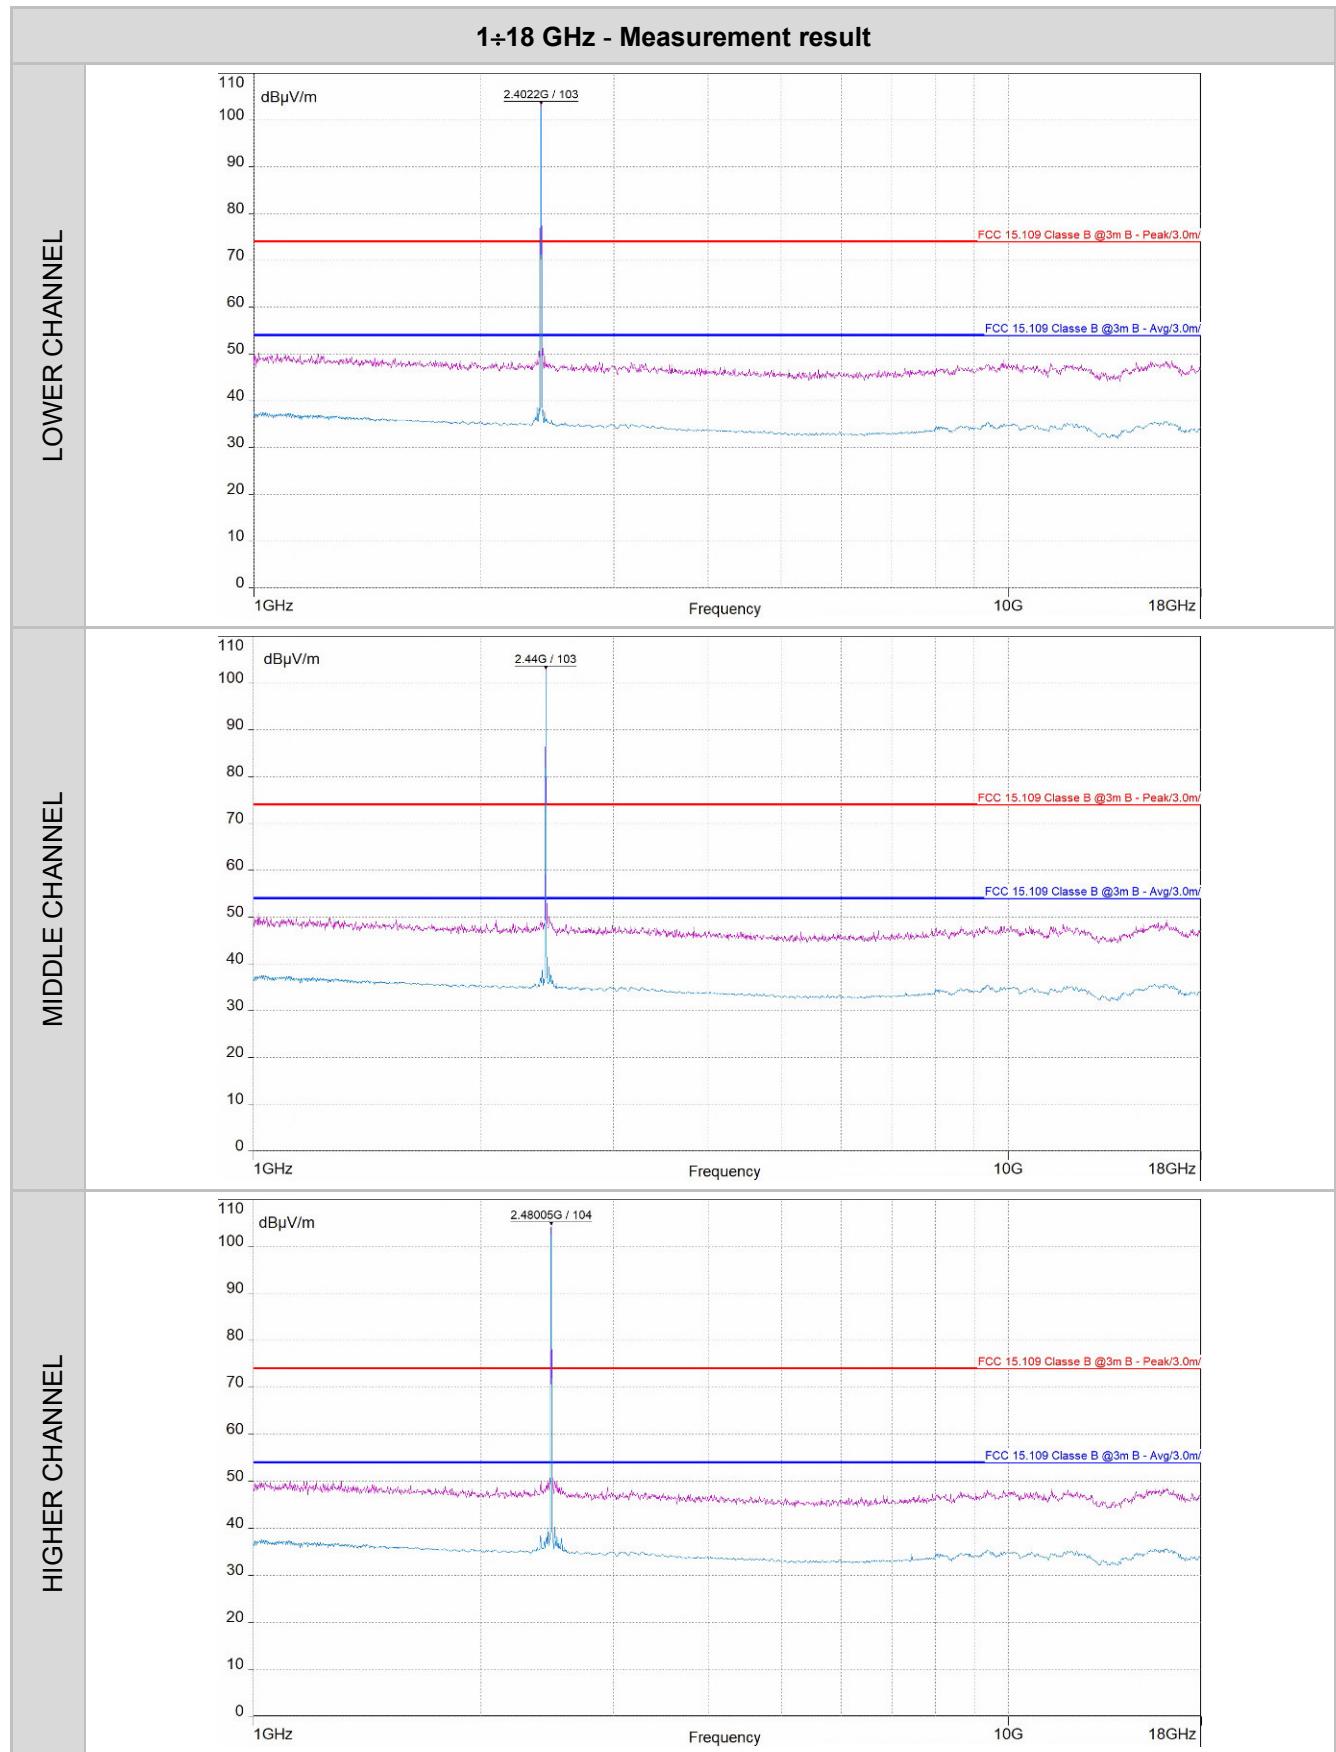

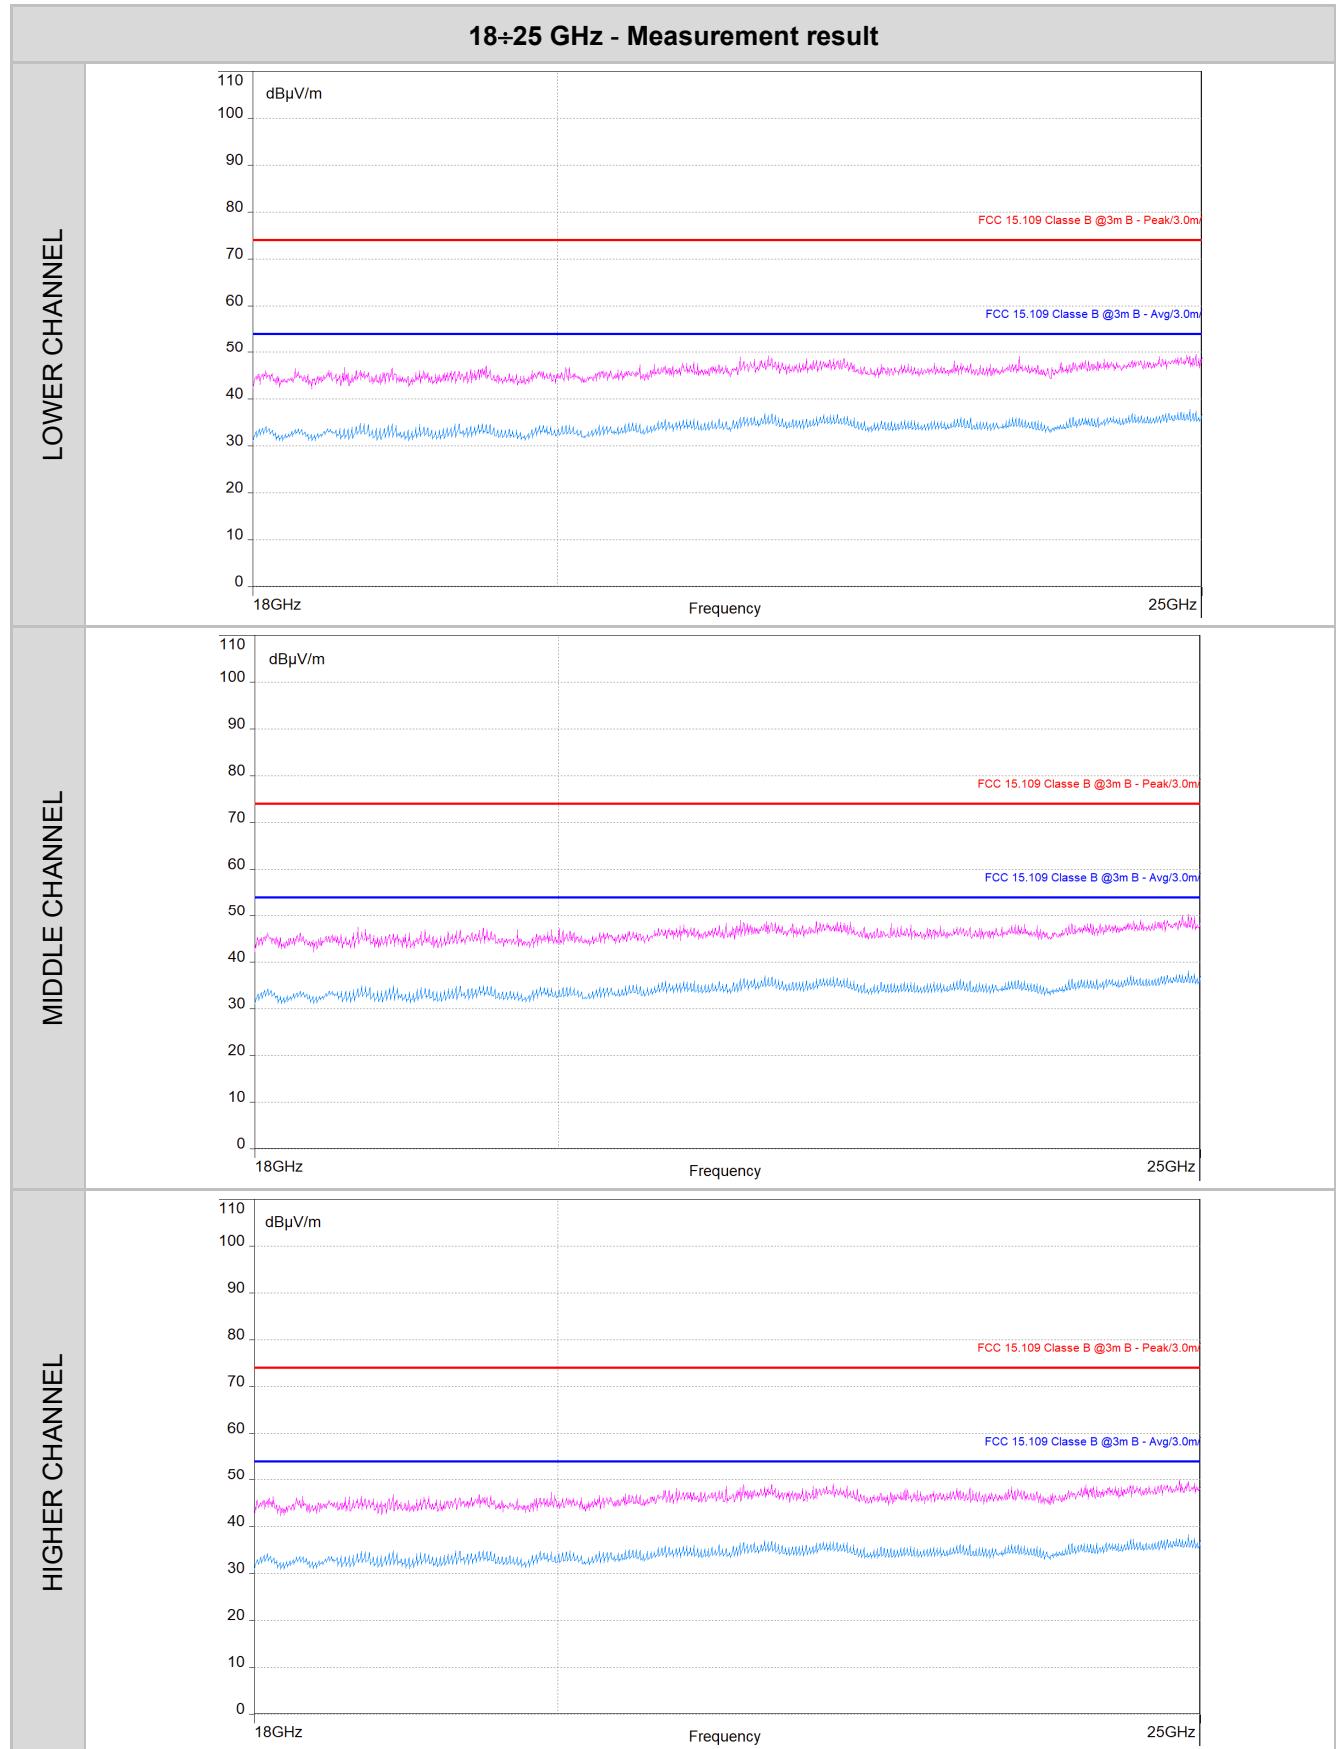


**LOWER CHANNEL – BAND-EDGE
PEAK**

 Ref Level 107.00 dB μ V/m RBW 1 MHz
 Att 10 dB SWT 1.01 ms VBW 1 MHz Mode Auto Sweep

TDF "1-18 AMPL"

1 Frequency Sweep

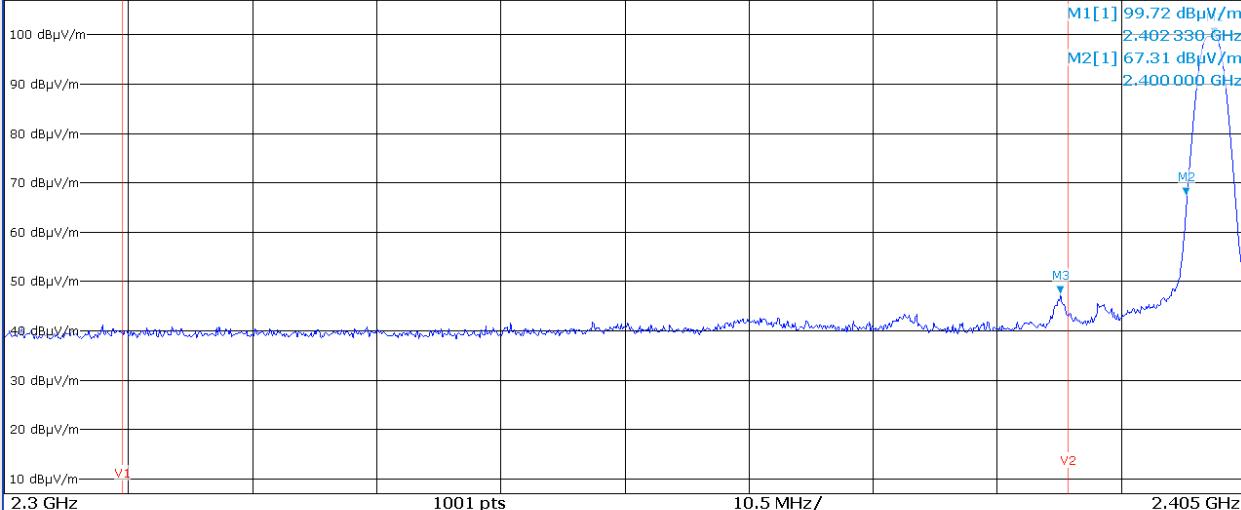

2 Marker Table


Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.402 33 GHz	99.72 dBμV/m		
M2	1		2.4 GHz	67.31 dBμV/m		
M3	1		2.389 32 GHz	47.29 dBμV/m		

AVERAGE

 Ref Level 107.00 dB μ V/m RBW 1 MHz
 Att 10 dB SWT 7.35 s VBW 10 Hz Mode Auto Sweep


TDF "1-18 AMPL"

1 Frequency Sweep

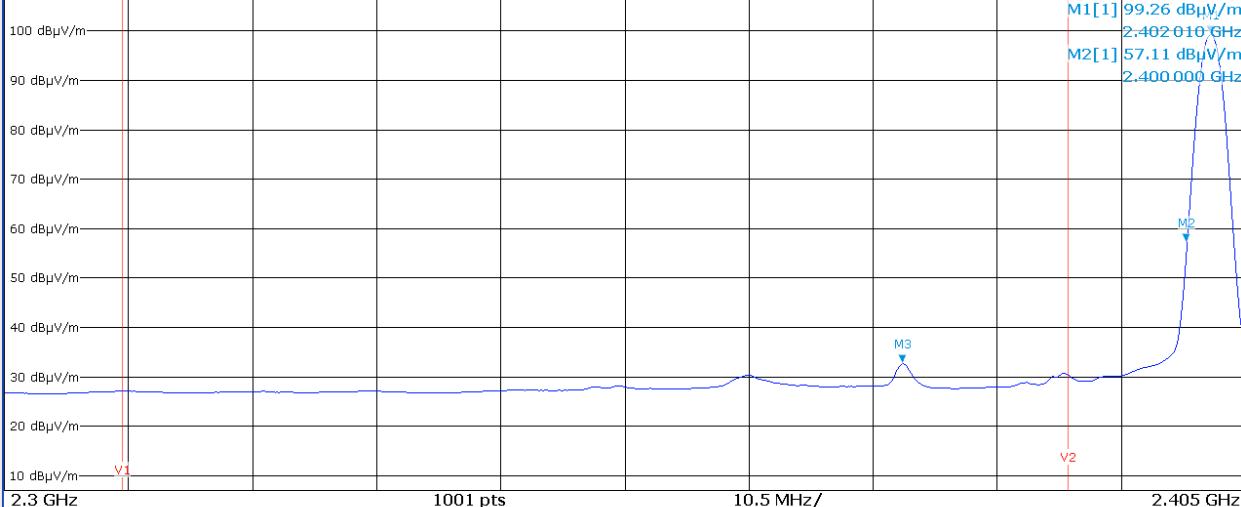

2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		2.402 01 GHz	99.26 dBμV/m		
M2	1		2.4 GHz	57.11 dBμV/m		
M3	1		2.376 GHz	32.61 dBμV/m		

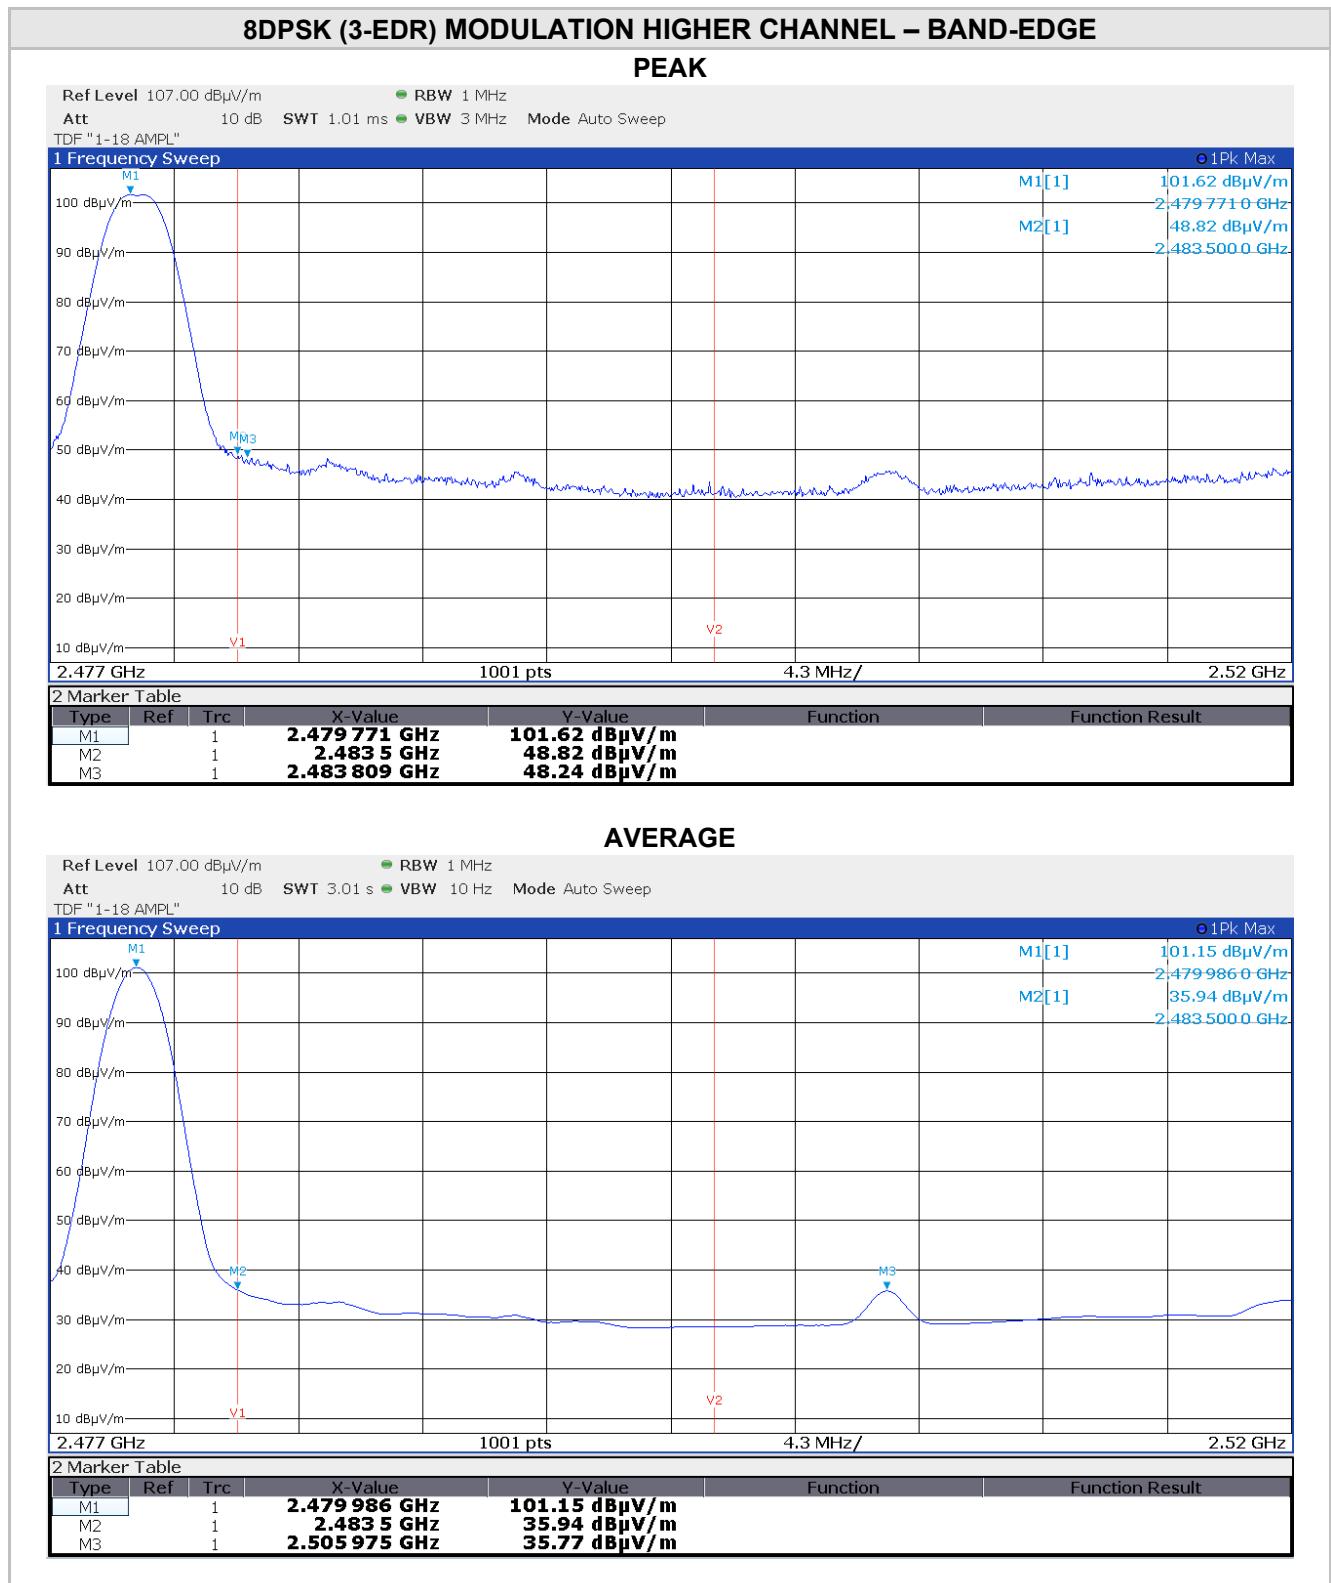

7.4 6dB & 99% BANDWIDTH

TEST REQUIREMENT

Spectrum analyzer settings

Span	Wide enough for the measurement to be made
Resolution bandwidth (RBW)	100 kHz
Video bandwidth (VBW)	300 kHz
Sweep time (SWT)	AUTO
Detector function	Peak
Trace	Max hold
EUT operating condition	1 to 3
Remark	None
Testing dates	2022-10-21


TEST RESULT


The EUT meets the requirements of sections 15.247 (a)(2), RSS -247 § 5.2 (a) and RSS -Gen § 6.7

TEST PROCEDURE

The Channel bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

For 99% BW was used the measurement facility function of spectrum analyzer.

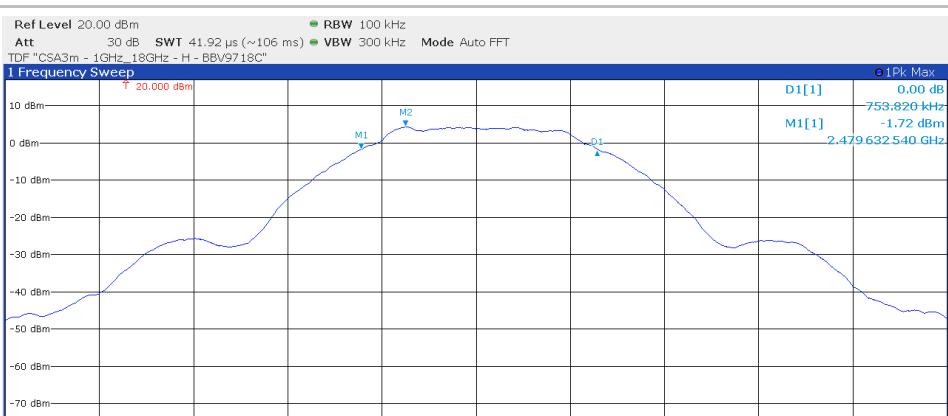Modulation	Channel	Frequency	-6dB Bandwidth (MHz)																												
GFSK (BLE)	Lower	2402	0.75322																												
	Middle	2440	0.73463																												
	Higher	2480	0.75382																												
LOWER CHANNEL	Ref Level 20.00 dBm RBW 100 kHz Att 30 dB SWT 41.92 µs (~106 ms) VBW 300 kHz Mode Auto FFT TDF "CSA3m - 1GHz_18GHz - H - BBV9718C" 1 Frequency Sweep  2.4005 GHz 10001 pts 300.0 kHz/ 2.4035 GHz																														
	2 Marker Table <table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td>2.401 634 04 GHz</td><td>-3.31 dBm</td><td></td><td></td><td></td></tr> <tr> <td>D1</td><td>M1</td><td>1</td><td>753.22 kHz</td><td>0.01 dB</td><td></td><td></td></tr> <tr> <td>M2</td><td>1</td><td>2.401 779 22 GHz</td><td>2.69 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1	2.401 634 04 GHz	-3.31 dBm				D1	M1	1	753.22 kHz	0.01 dB			M2	1	2.401 779 22 GHz	2.69 dBm			
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																									
M1	1	2.401 634 04 GHz	-3.31 dBm																												
D1	M1	1	753.22 kHz	0.01 dB																											
M2	1	2.401 779 22 GHz	2.69 dBm																												
Ref Level 20.00 dBm RBW 100 kHz Att 30 dB SWT 41.92 µs (~106 ms) VBW 300 kHz Mode Auto FFT TDF "CSA3m - 1GHz_18GHz - H - BBV9718C" 1 Frequency Sweep  2.4385 GHz 10001 pts 300.0 kHz/ 2.4415 GHz																															
MIDDLE CHANNEL	2 Marker Table <table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td>2.439 644 54 GHz</td><td>-1.48 dBm</td><td></td><td></td><td></td></tr> <tr> <td>D1</td><td>M1</td><td>1</td><td>734.63 kHz</td><td>0.01 dB</td><td></td><td></td></tr> <tr> <td>M2</td><td>1</td><td>2.440 126 59 GHz</td><td>4.52 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1	2.439 644 54 GHz	-1.48 dBm				D1	M1	1	734.63 kHz	0.01 dB			M2	1	2.440 126 59 GHz	4.52 dBm			
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																									
M1	1	2.439 644 54 GHz	-1.48 dBm																												
D1	M1	1	734.63 kHz	0.01 dB																											
M2	1	2.440 126 59 GHz	4.52 dBm																												
Ref Level 20.00 dBm RBW 100 kHz Att 30 dB SWT 41.92 µs (~106 ms) VBW 300 kHz Mode Auto FFT TDF "CSA3m - 1GHz_18GHz - H - BBV9718C" 1 Frequency Sweep  2.4785 GHz 10001 pts 300.0 kHz/ 2.4815 GHz																															
2 Marker Table <table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td>2.479 632 54 GHz</td><td>-1.72 dBm</td><td></td><td></td><td></td></tr> <tr> <td>D1</td><td>M1</td><td>1</td><td>753.82 kHz</td><td>0.00 dB</td><td></td><td></td></tr> <tr> <td>M2</td><td>1</td><td>2.479 775 32 GHz</td><td>4.28 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1	2.479 632 54 GHz	-1.72 dBm				D1	M1	1	753.82 kHz	0.00 dB			M2	1	2.479 775 32 GHz	4.28 dBm				
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																									
M1	1	2.479 632 54 GHz	-1.72 dBm																												
D1	M1	1	753.82 kHz	0.00 dB																											
M2	1	2.479 775 32 GHz	4.28 dBm																												

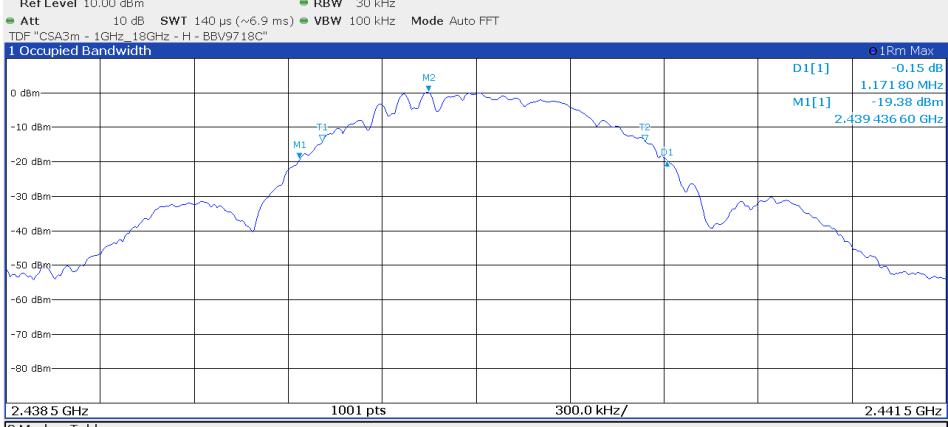Modulation	Channel	Frequency	99% Bandwidth (MHz)																																									
GFSK (BLE)	Lower	2402	1.03222																																									
	Middle	2440	1.02873																																									
	Higher	2480	1.03339																																									
LOWER CHANNEL	 <p>Ref Level 10.00 dBm Att 10 dB SWT 140 µs (~6.9 ms) RBW 30 kHz VBW 100 kHz Mode Auto FFT TDF "CSA3m - 1GHz_18GHz - H - BBV9718C" 1 Occupied Bandwidth</p> <p>D1[1] -0.13 dB 1.17480 MHz M1[1] -20.11 dBm 2.40143360 GHz</p>																																											
	<table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td></td><td>2.4014336 GHz</td><td>-20.11 dBm</td><td>Occ Bw</td><td>1.032219336 MHz</td></tr> <tr> <td>T1</td><td>1</td><td></td><td>2.40150526 GHz</td><td>-14.98 dBm</td><td>Occ Bw Centroid</td><td>2.402021374 GHz</td></tr> <tr> <td>T2</td><td>1</td><td></td><td>2.40253748 GHz</td><td>-14.21 dBm</td><td>Occ Bw Freq Offset</td><td>21.374470654 kHz</td></tr> <tr> <td>D1</td><td>M1</td><td>1</td><td>1.1748 MHz</td><td>-0.13 dB</td><td></td><td></td></tr> <tr> <td>M2</td><td>1</td><td></td><td>2.4018412 GHz</td><td>-0.37 dBm</td><td></td><td></td></tr> </tbody> </table>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4014336 GHz	-20.11 dBm	Occ Bw	1.032219336 MHz	T1	1		2.40150526 GHz	-14.98 dBm	Occ Bw Centroid	2.402021374 GHz	T2	1		2.40253748 GHz	-14.21 dBm	Occ Bw Freq Offset	21.374470654 kHz	D1	M1	1	1.1748 MHz	-0.13 dB			M2	1		2.4018412 GHz	-0.37 dBm	
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																						
M1	1		2.4014336 GHz	-20.11 dBm	Occ Bw	1.032219336 MHz																																						
T1	1		2.40150526 GHz	-14.98 dBm	Occ Bw Centroid	2.402021374 GHz																																						
T2	1		2.40253748 GHz	-14.21 dBm	Occ Bw Freq Offset	21.374470654 kHz																																						
D1	M1	1	1.1748 MHz	-0.13 dB																																								
M2	1		2.4018412 GHz	-0.37 dBm																																								
MIDDLE CHANNEL	 <p>Ref Level 10.00 dBm Att 10 dB SWT 140 µs (~6.9 ms) RBW 30 kHz VBW 100 kHz Mode Auto FFT TDF "CSA3m - 1GHz_18GHz - H - BBV9718C" 1 Occupied Bandwidth</p> <p>D1[1] -0.15 dB 1.17180 MHz M1[1] -19.38 dBm 2.43943660 GHz</p>																																											
	<table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td></td><td>2.4394366 GHz</td><td>-19.38 dBm</td><td>Occ Bw</td><td>1.028726268 MHz</td></tr> <tr> <td>T1</td><td>1</td><td></td><td>2.43950929 GHz</td><td>-14.29 dBm</td><td>Occ Bw Centroid</td><td>2.440023649 GHz</td></tr> <tr> <td>T2</td><td>1</td><td></td><td>2.44053801 GHz</td><td>-14.10 dBm</td><td>Occ Bw Freq Offset</td><td>23.649292397 kHz</td></tr> <tr> <td>D1</td><td>M1</td><td>1</td><td>1.1718 MHz</td><td>-0.15 dB</td><td></td><td></td></tr> <tr> <td>M2</td><td>1</td><td></td><td>2.4398472 GHz</td><td>0.21 dBm</td><td></td><td></td></tr> </tbody> </table>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4394366 GHz	-19.38 dBm	Occ Bw	1.028726268 MHz	T1	1		2.43950929 GHz	-14.29 dBm	Occ Bw Centroid	2.440023649 GHz	T2	1		2.44053801 GHz	-14.10 dBm	Occ Bw Freq Offset	23.649292397 kHz	D1	M1	1	1.1718 MHz	-0.15 dB			M2	1		2.4398472 GHz	0.21 dBm	
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																						
M1	1		2.4394366 GHz	-19.38 dBm	Occ Bw	1.028726268 MHz																																						
T1	1		2.43950929 GHz	-14.29 dBm	Occ Bw Centroid	2.440023649 GHz																																						
T2	1		2.44053801 GHz	-14.10 dBm	Occ Bw Freq Offset	23.649292397 kHz																																						
D1	M1	1	1.1718 MHz	-0.15 dB																																								
M2	1		2.4398472 GHz	0.21 dBm																																								
HIGHER CHANNEL	 <p>Ref Level 10.00 dBm Att 10 dB SWT 140 µs (~6.9 ms) RBW 30 kHz VBW 100 kHz Mode Auto FFT TDF "CSA3m - 1GHz_18GHz - H - BBV9718C" 1 Occupied Bandwidth</p> <p>D1[1] -0.12 dB 1.17780 MHz M1[1] -18.73 dBm 2.47943360 GHz</p>																																											
	<table border="1"> <thead> <tr> <th>Type</th><th>Ref</th><th>Trc</th><th>X-Value</th><th>Y-Value</th><th>Function</th><th>Function Result</th></tr> </thead> <tbody> <tr> <td>M1</td><td>1</td><td></td><td>2.4794336 GHz</td><td>-18.73 dBm</td><td>Occ Bw</td><td>1.03339005 MHz</td></tr> <tr> <td>T1</td><td>1</td><td></td><td>2.47950587 GHz</td><td>-13.37 dBm</td><td>Occ Bw Centroid</td><td>2.480022562 GHz</td></tr> <tr> <td>T2</td><td>1</td><td></td><td>2.48053926 GHz</td><td>-13.02 dBm</td><td>Occ Bw Freq Offset</td><td>22.562404135 kHz</td></tr> <tr> <td>D1</td><td>M1</td><td>1</td><td>1.1778 MHz</td><td>-0.12 dB</td><td></td><td></td></tr> <tr> <td>M2</td><td>1</td><td></td><td>2.4798412 GHz</td><td>1.21 dBm</td><td></td><td></td></tr> </tbody> </table>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4794336 GHz	-18.73 dBm	Occ Bw	1.03339005 MHz	T1	1		2.47950587 GHz	-13.37 dBm	Occ Bw Centroid	2.480022562 GHz	T2	1		2.48053926 GHz	-13.02 dBm	Occ Bw Freq Offset	22.562404135 kHz	D1	M1	1	1.1778 MHz	-0.12 dB			M2	1		2.4798412 GHz	1.21 dBm	
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																						
M1	1		2.4794336 GHz	-18.73 dBm	Occ Bw	1.03339005 MHz																																						
T1	1		2.47950587 GHz	-13.37 dBm	Occ Bw Centroid	2.480022562 GHz																																						
T2	1		2.48053926 GHz	-13.02 dBm	Occ Bw Freq Offset	22.562404135 kHz																																						
D1	M1	1	1.1778 MHz	-0.12 dB																																								
M2	1		2.4798412 GHz	1.21 dBm																																								

7.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER


TEST REQUIREMENT	
Spectrum analyzer settings	
Resolution bandwidth (RBW)	>20dB BW of the emission being measured
Video bandwidth (VBW)	≥ RBW
Sweep time (SWT)	AUTO
Detector function	Peak
Trace	Max hold
EUT operating condition	1 to 3
Remark	None
Testing dates	2022-10-28

TEST RESULT	
The EUT meets the requirements of sections 15.247 (b) (3) and RSS -247 § 5.4 (a)	

LIMITS	
0,125 Watt (21dBm)	

Conducted measurements test procedure	
The EUT RF output port is connected directly to RF input port of spectrum analyzer. Set the EUT to work at lower, middle and higher channel. With a SPAN of about five times the measured -20dB BW and centered on a channel, wait until the trace has stabilized and set the marker to the peak of emission.	

MEASURED CONDUCTED OUTPUT POWER				
Test Mode	Test Channel	Peak Power (dBm)	Limits (dBm)	Result
GFSK(BLE)	Lower	8.97	≤30	Pass
	Middle	9.33	≤30	Pass
	Higher	9.62	≤30	Pass

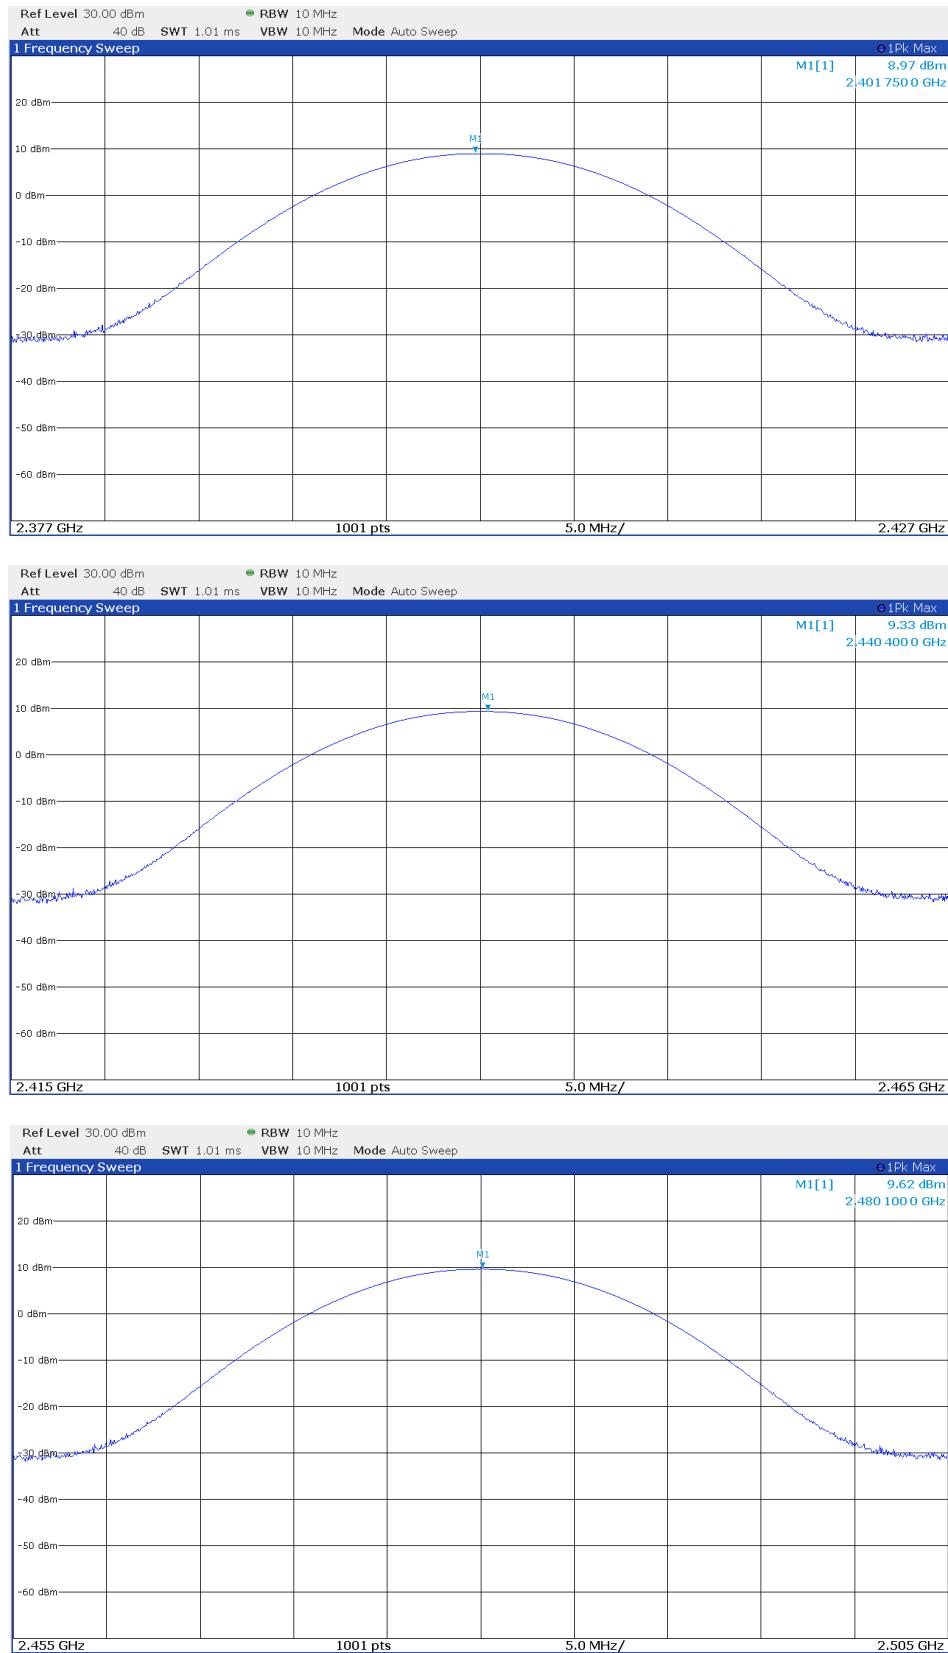GFSK (BLE) MODULATION


7.6 100kHz EMISSIONS OUTSIDE THE FREQUENCY BAND

TEST REQUIREMENT

Spectrum analyzer settings

Resolution bandwidth (RBW)	100 kHz
Video bandwidth (VBW)	300 kHz
Sweep time (SWT)	Auto
Detector function	Peak
Trace	Max hold
EUT operating condition	1 to 3
Testing dates	2022-10-28

TEST PROCEDURE


The EUT RF output port is connected directly to RF input port of spectrum analyzer by short RF pigtail adapter. Set the EUT to work at lower, middle and higher channel. With a SPAN adjusted as necessary to best identify the center of each individual channel, wait until the trace has stabilized and set the markers to the peak of affected frequencies emission.


LIMITS


-20dBc below peak output power


TEST RESULT


All out of band spurious emissions are more -20dBc of the in-band power of the fundamental.
The EUT meets the requirements of sections 15.247 (d) and RSS -247 § 5.5

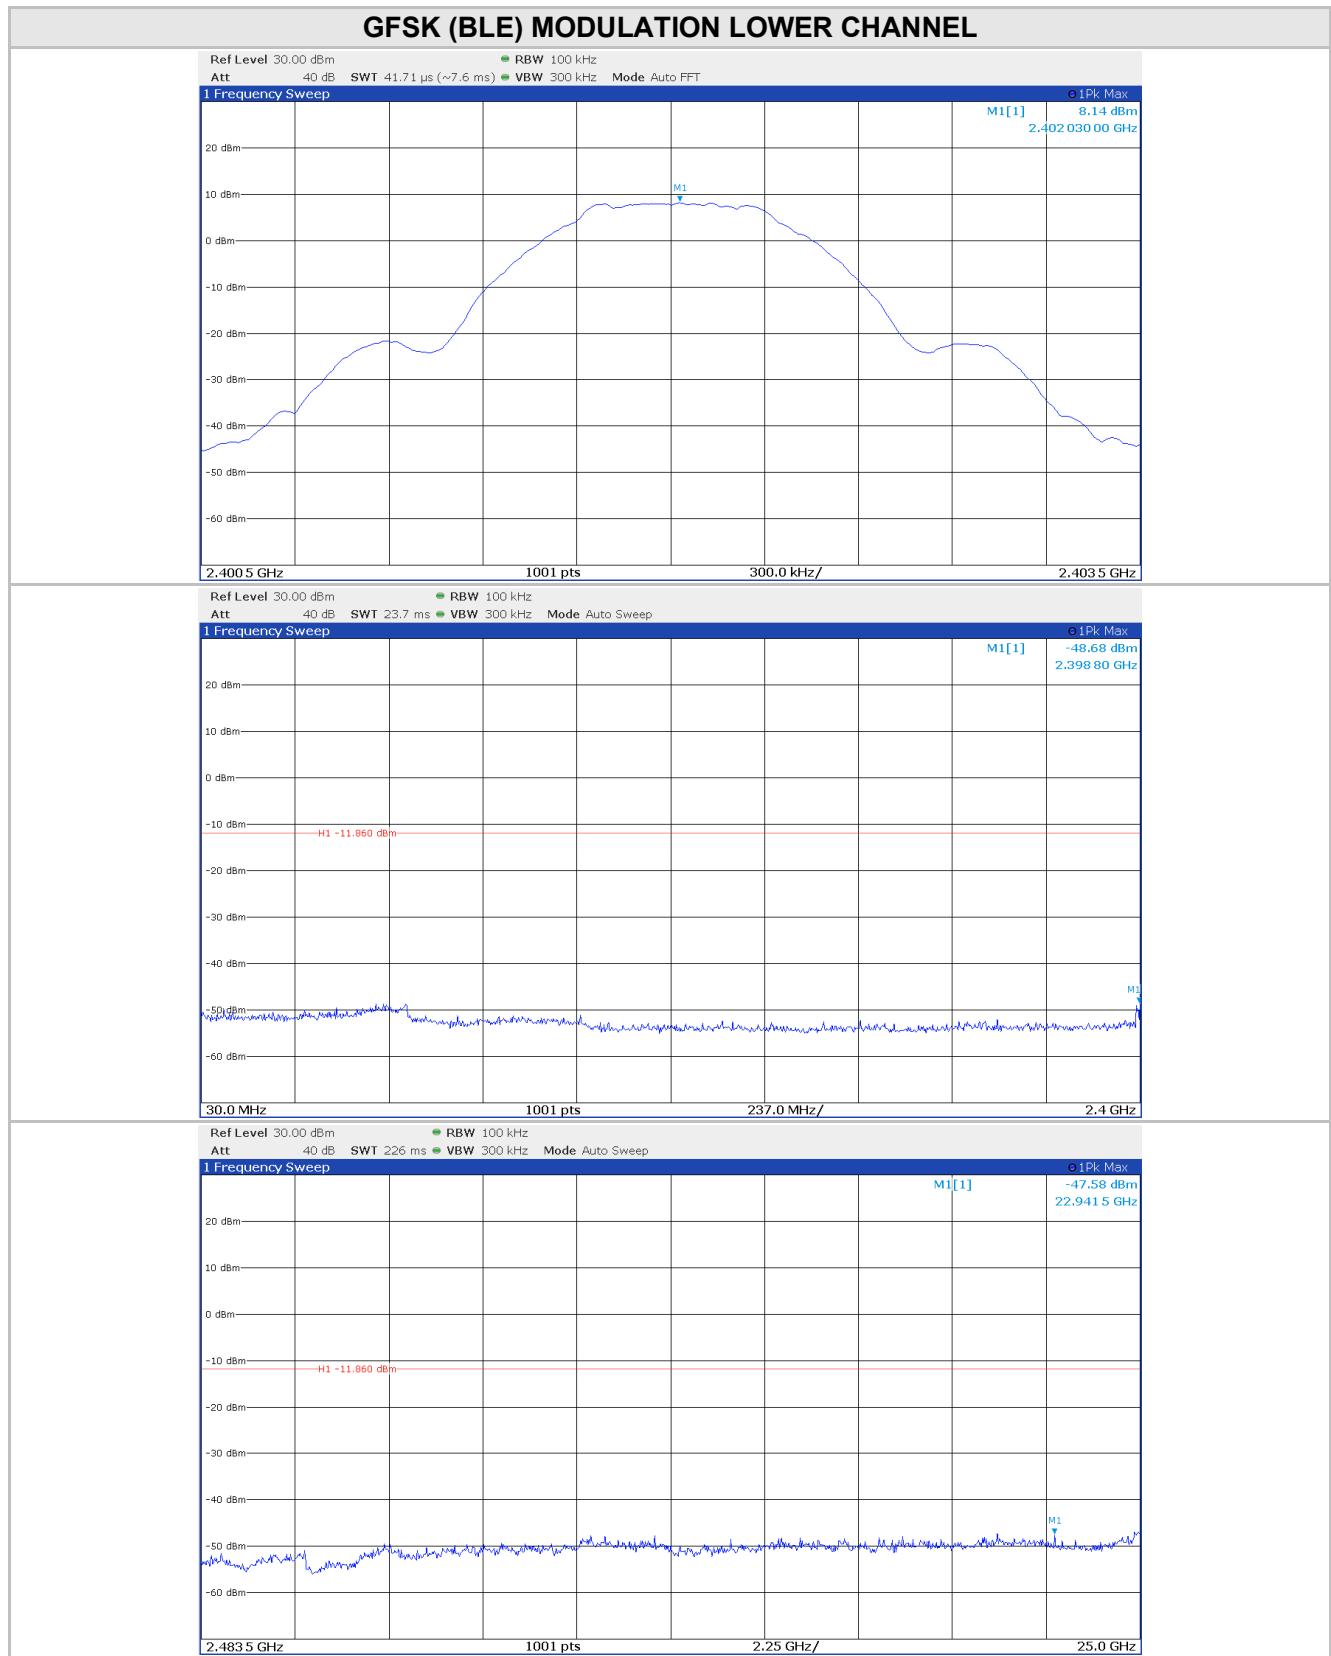

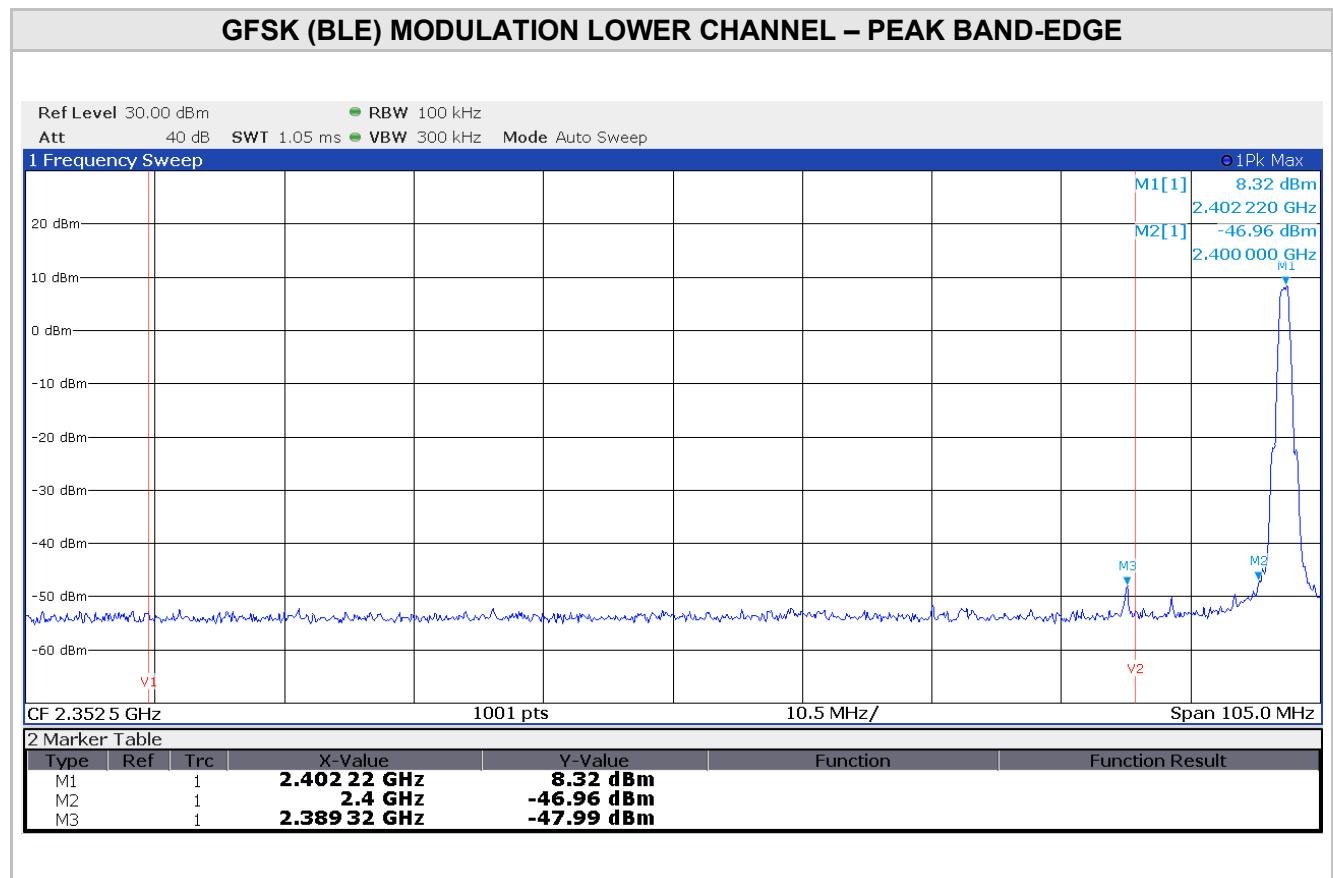

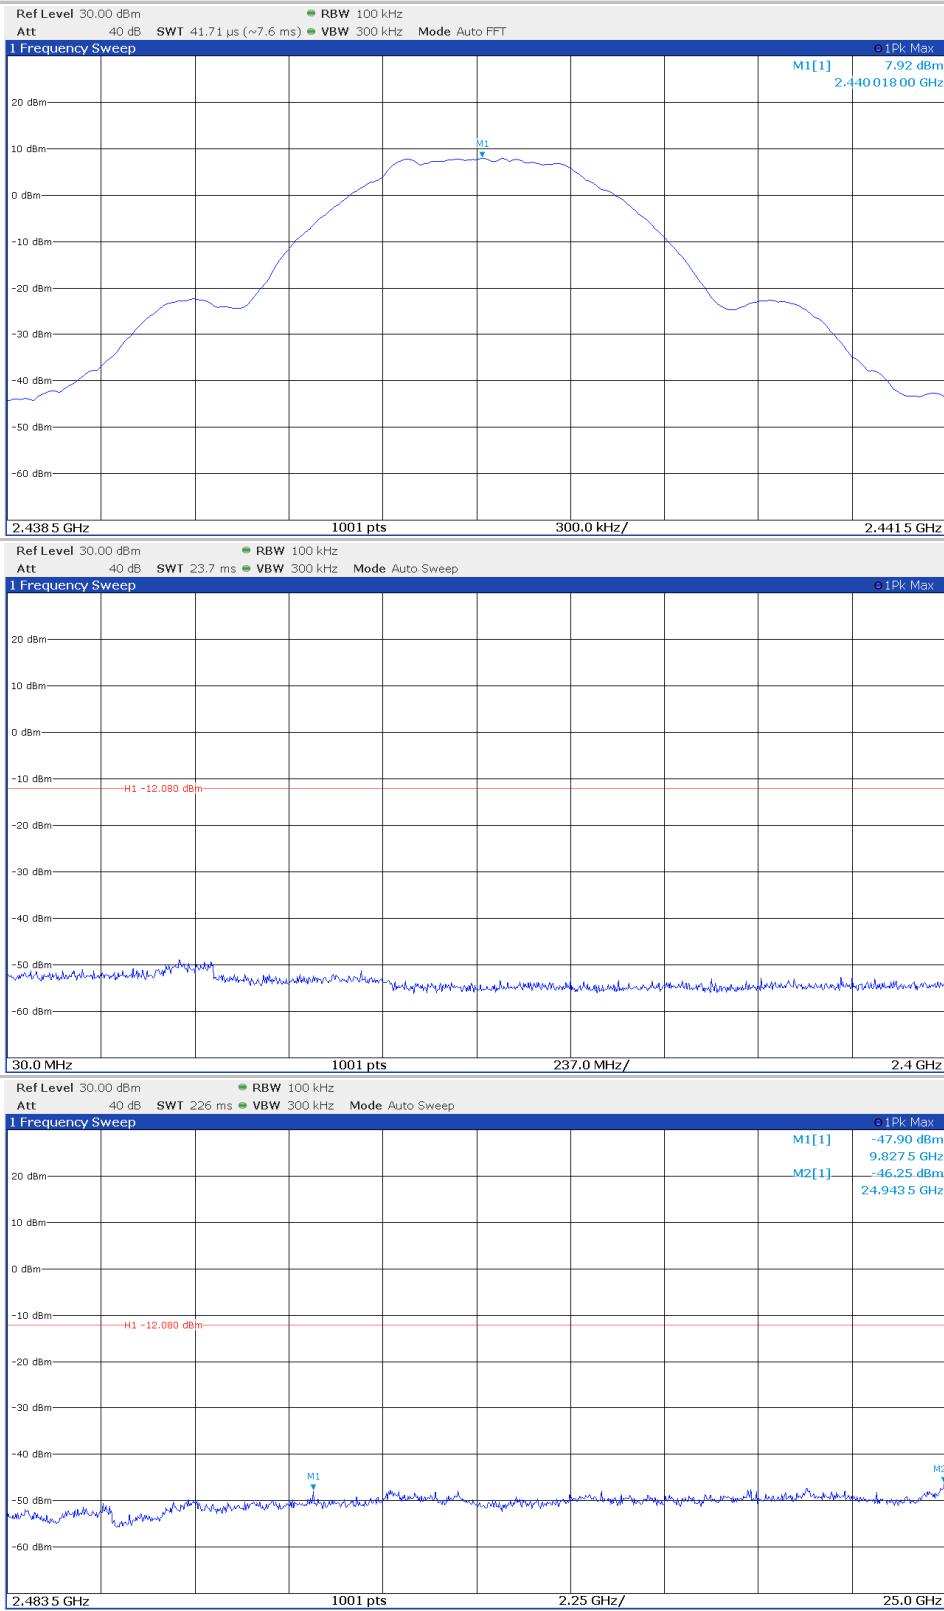GFSK (BLE) MODULATION MIDDLE CHANNEL

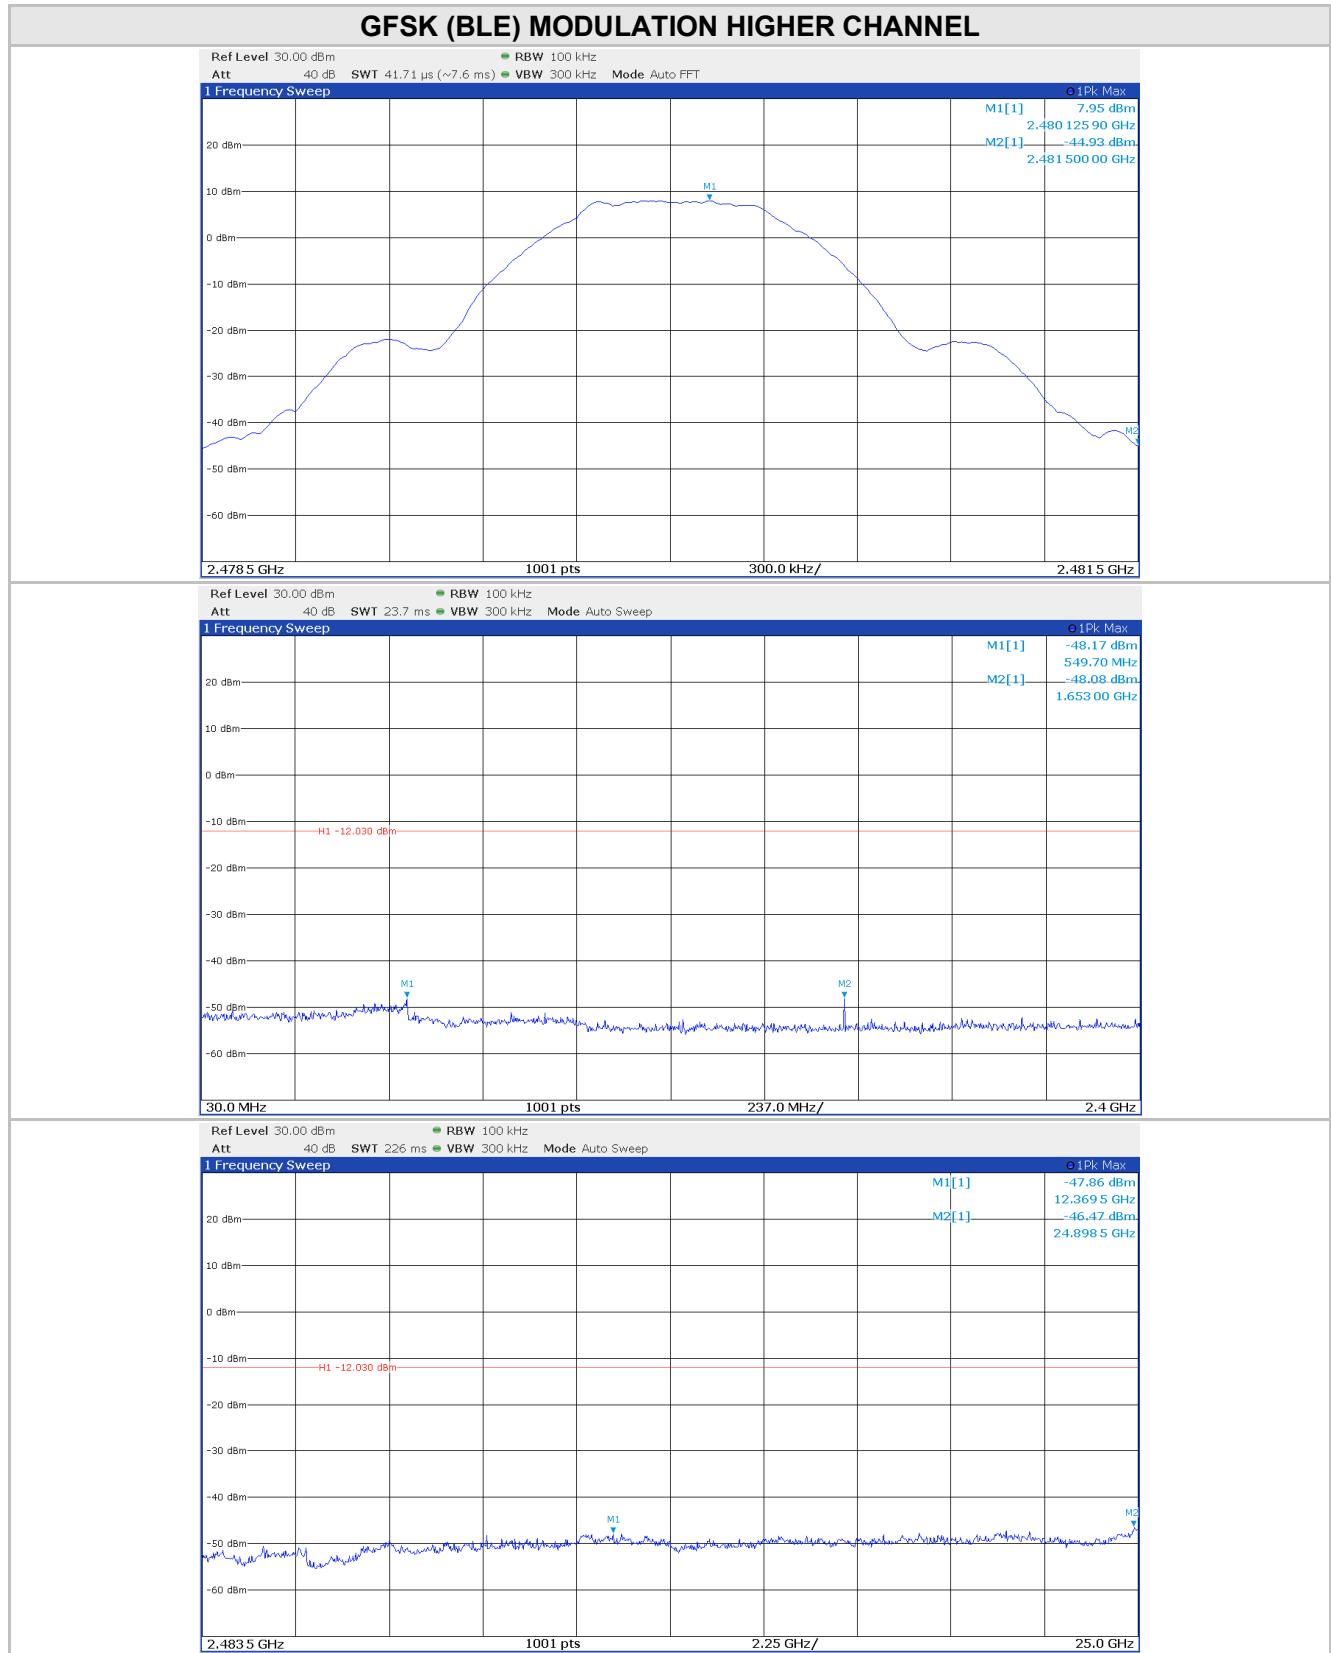

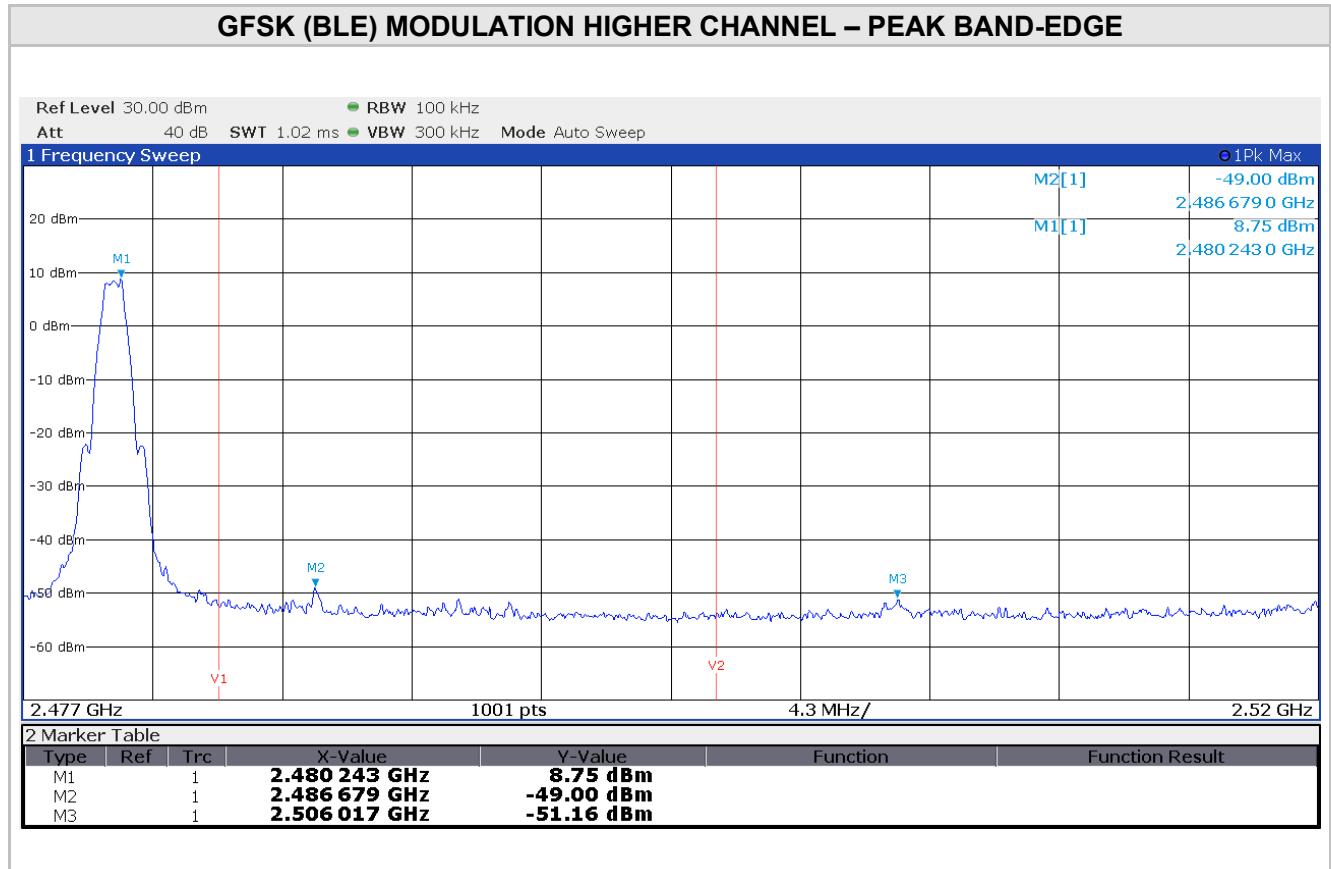




7.7 TRANSMITTER POWER SPECTRAL DENSITY


TEST REQUIREMENT	
Spectrum analyzer settings	
Resolution bandwidth (RBW)	3 kHz
Video bandwidth (VBW)	10 kHz
Sweep time (SWT)	AUTO
Detector function	Peak
Trace	Max hold
EUT operating condition	1 to 3
Testing dates	2022-10-21

TEST RESULT
The EUT meets the requirements of sections 15.247 (e) and RSS -247 § 5.2 (b)

LIMITS
8 dBm in 3 kHz bandwidth.

TEST PROCEDURE
The EUT RF output port is connected directly to RF input port of spectrum analyzer. Set the EUT to work at lower, middle and higher channel. With a SPAN of about the measured -20dB BW and centered on a channel, wait until the trace has stabilized and set the marker to the peak of emission.

MEASURED CONDUCTED OUTPUT POWER SPECTRAL DENSITY				
Test Mode	Test Channel	Peak Power (dBm/3kHz)	Limits (dBm)	Result
GFSK(BLE)	Lower	-7.91	≤8	Pass
	Middle	-7.20	≤8	Pass
	Higher	-7.14	≤8	Pass

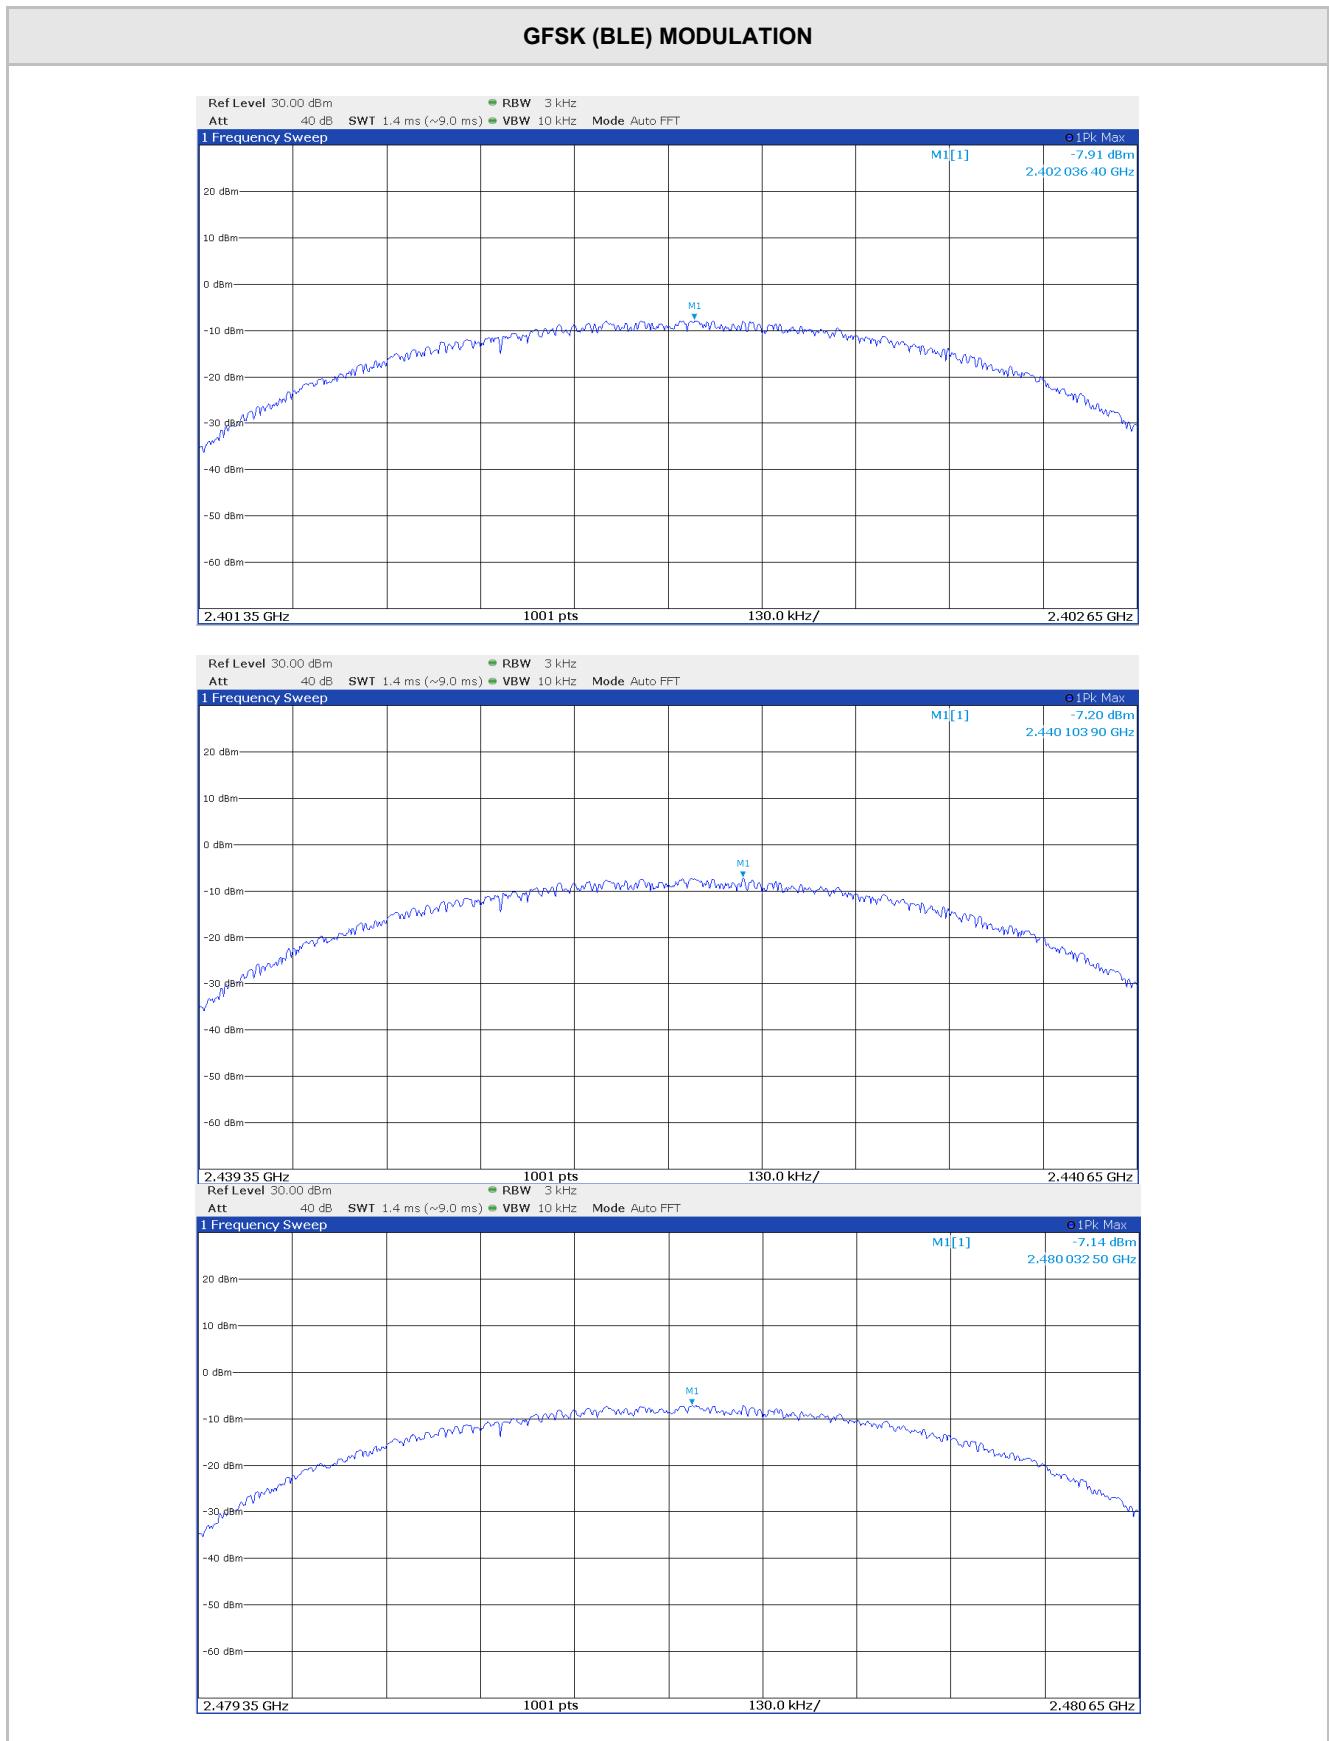

8. MEASUREMENTS AND TESTS UNCERTAINTY

Unless otherwise stated the uncertainties for the tests and measurements are evaluated in according to IMQ Operational Instruction IO-LAB-001, IO-LAB-004 and IO-LAB-009. and requirement of NIST Technical Note 1297 and NIS 81: 1994 "The Treatment of Uncertainty in EMC Measurements"

The expanded uncertainty was calculated for all measurements and tests listed in this test report according to CISPR 16-4-2 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainty in EMC Measurements", with UKAS document LAB 34 and is documented in the quality system accordance to ISO/IEC 17025.

Internal Procedure PG-037 ensures that the requirements for traceability of calibrations, of all test equipment requiring calibration, and calibration intervals are met.

Methods Standard	Parameter	Expanded Uncertainty	Unit	Confidence level
Continuous disturbance	Terminal disturbance voltages (9 – 150 kHz)	2.4	dB	95%
	Terminal disturbance voltages (150 k – 30 MHz)	2.7	dB	95%
Radiated disturbance	Radiation disturbance (30-200 MHz – Horizontal Polariz.)	4.0	dB	95%
	Radiation disturbance (30-200 MHz – Vertical Polariz.)	4.0	dB	95%
	Radiation disturbance (200 -1000 MHz – Horizontal Polariz.)	3.5	dB	95%
	Radiation disturbance (200-1000 MHz – Vertical Polariz.)	3.4	dB	95%
	Radiation disturbance (1-6 GHz – H/V Polarization)	4.3	dB	95%
	Radiation disturbance (6-18 GHz – H/V Polarization)	4.8	dB	95%
	Radiation disturbance (18-26 GHz – H/V Polarization)	5.0	dB	95%
	Radiation disturbance (26-40 GHz – H/V Polarization)	5.2	dB	95%

9. TEST EQUIPMENT

Instrument	Manufacturer	Model	IMQ Ref.	Calibration	
				Last date	Due date
Shielded semi-anechoic chamber	ETS-LINDGREN	--	P04112	/	/
Shielded anechoic chamber	SIDT	--	P02386	/	/
EMI Receiver	Rhode & Schwarz	ESU8	S05562	2022-02-15	2022-03-15
Spectrum Analyser	Rohde & Schwarz	ESW44	S07965	2022-08-10	2023-08-10
Spectrum Analyser	Rohde & Schwarz	FSW50	S07990	2021-10-13	2022-12-13(*)
POWER SENSOR	Rohde & Schwarz	NRP-Z81	S06704	2022-06-02	2023-06-02
LISN	Rohde & Schwarz	ENV216	S03631	2022-02-07	2023-02-07
Broadband preamplifier	SCHWARZBECK	BBV 9744	S09213	2022-08-03	2023-08-03
Broadband preamplifier	SCHWARZBECK	BBV9718C	S09214	2022-07-22	2023-07-22
Broadband preamplifier	HEWLETT & PACKARD	HP8449B	S03542	2022-02-08	2023-02-08
Broadband preamplifier	SCHWARZBECK	BBV 9721	S09215	2022-08-24	2023-08-24
LOOP ANTENNA	ROHDE & SCHWARZ	HFH2-Z2E	S08326	2022-01-26	2023-01-26
LOG ANTENNA	SCHWARZBECK	VULB 9160	S03511	2022-09-20	2023-09-20
HORN ANTENNA	SCHWARZBECK	BBHA9120D	S03463	2020-07-06	2023-07-06
HORN ANTENNA	SCHWARZBECK	BBHA9170	S03724	2020-07-29	2023-07-29
SOFTWARE	Nexio	BAT-EMC V3.21.0.14	/	/	/

Note

(*) Some calibration intervals may be extended, based on sufficient calibration data and experience of use (see IECEE OD-5011:2015 clause 8.3)

END OF TEST REPORT