
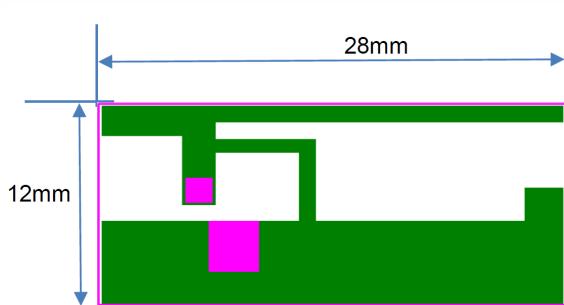


WiFi antenna

Company: Fujian Minwei Circuit Board Industrial Co., LTD

Address: 300 meters west of Aotan Park, Zili Fudu Line, Tantou Town, Changle District, Fuzhou City, Fujian Province

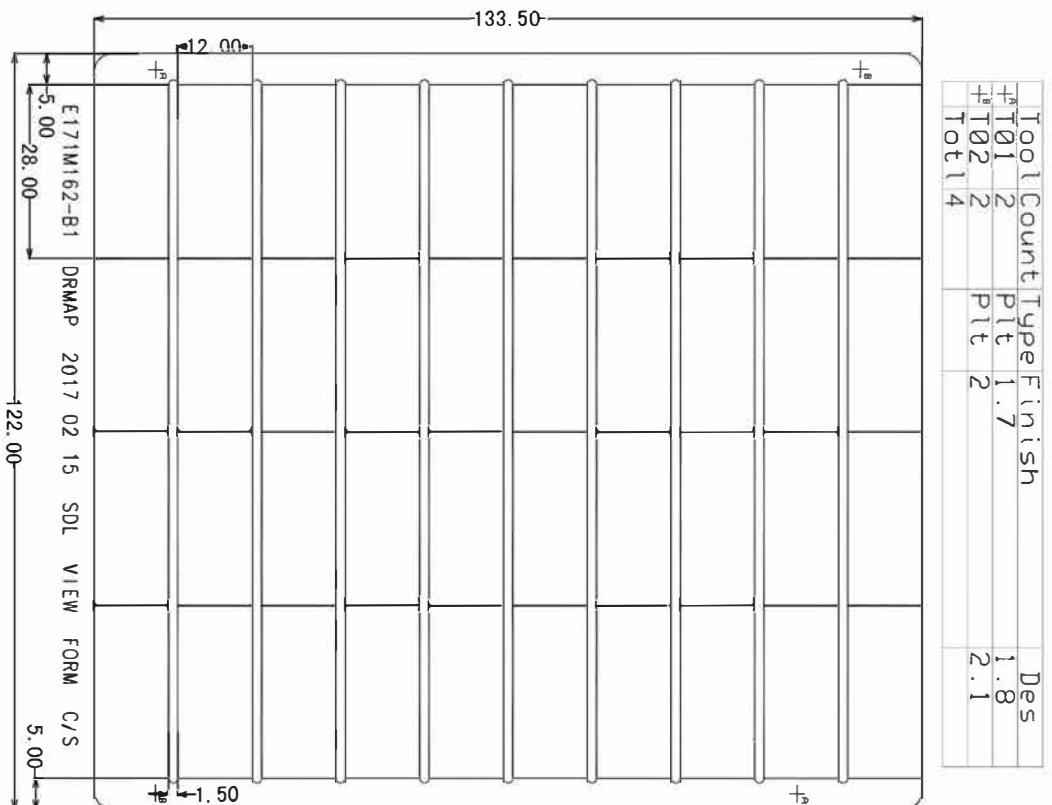

GAIN:

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	-4.09	24.14
2410	-3.47	25.81
2420	-2.52	26.57
2430	-1.79	30.07
2440	-1.28	32.63
2450	-0.65	34.00
2460	-0.32	35.87
2470	0.02	37.99
2480	0.21	39.66
2490	0.46	41.53
2500	0.72	42.35
5150	-0.50	55.13
5250	0.54	58.66
5350	0.85	61.56
5450	1.35	63.62
5550	2.68	65.15
5650	2.68	68.71
5750	2.36	64.61
5850	2.71	60.82

2D/3D Peak Gain

