


PCB onboard antenna , Model name: V1.0

Antenna Gain & Efficiency


Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	28.86	-5.4	-2.07
2405	27.99	-5.53	-2.2
2410	27.85	-5.55	-1.91
2415	26.95	-5.69	-1.74
2420	26.24	-5.81	-1.63
2425	26.21	-5.82	-1.31
2430	26.23	-5.81	-0.87
2435	25.4	-5.95	-0.61
2440	25.39	-5.95	-0.32
2445	24.81	-6.05	-0.19
2450	25.36	-5.96	0.02
2455	27.12	-5.67	0.35
2460	28.42	-5.46	0.45
2465	30.96	-5.09	0.66
2470	31.61	-5	0.65
2475	33.35	-4.77	0.81
2480	35.61	-4.48	1
2485	35.25	-4.53	0.83
2490	36.55	-4.37	0.86
2495	35.13	-4.54	0.59
2500	38.58	-4.14	0.82

Dimension of Antenna

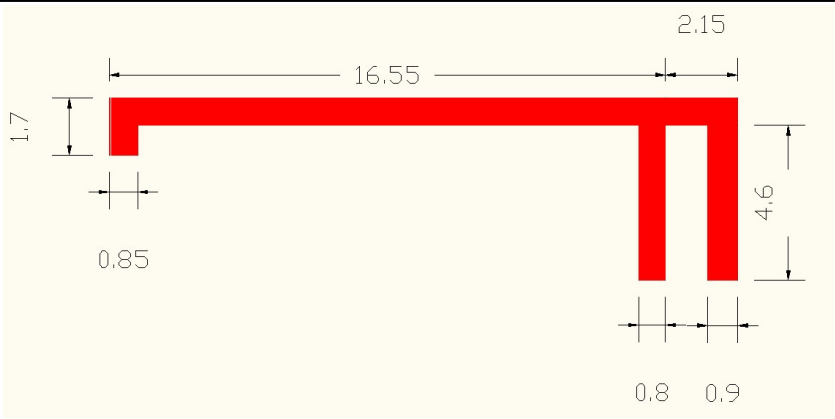


2D Test Pattern


2400.000MHz




2440.000MHz




2480.000MHz




Horizontal



E1 Face



E2 Face



Antenna Manufacturer

Applicant:Qiaolian Electronics DongGuan co.,LTD
Address:Dongxing Industrial park,Qishi Town,Dongguan City,Guangdong Prov.China