



FCC PART 15E TEST REPORT No.24T04Z103041-006

for

IMOO INTERNATIONAL PTE. LTD

Watch Phone

W2432AO

FCC ID: 2A6PP-GLI32

with

Hardware Version: GLI32-M-0

Software Version: 1.0.0

Issued Date: 2025-03-03

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z103041-006	Rev.0	1st edition	2025-03-03

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1.	TEST LABORATORY	5
1.1.	INTRODUCTION & ACCREDITATION	5
1.2.	TESTING LOCATION	5
1.3.	TESTING ENVIRONMENT.....	5
1.4.	PROJECT DATE	5
1.5.	SIGNATURE	6
2.	CLIENT INFORMATION.....	7
2.1	APPLICANT INFORMATION	7
2.2	MANUFACTURER INFORMATION	7
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1.	ABOUT EUT	8
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
3.4.	GENERAL DESCRIPTION.....	8
3.5.	INTERPRETATION OF THE TEST ENVIRONMENT.....	9
4.	REFERENCE DOCUMENTS	9
4.1.	DOCUMENTS SUPPLIED BY APPLICANT	9
4.2.	REFERENCE DOCUMENTS FOR TESTING.....	9
5.	LABORATORY ENVIRONMENT.....	9
6.	TEST RESULTS.....	10
6.1.	SUMMARY OF TEST RESULTS.....	10
6.2.	STATEMENTS.....	10
6.3.	TEST CONDITIONS	10
7.	TEST FACILITIES UTILIZED	11
8.	MEASUREMENT UNCERTAINTY	12
8.1	TRANSMITTER OUTPUT POWER.....	12
8.2	PEAK POWER SPECTRAL DENSITY	12
8.3	26DB EMISSION BANDWIDTH.....	12
8.4	BAND EDGES COMPLIANCE	12
8.5	RADIATED UNWANTED EMISSION.....	12
8.6	AC POWER-LINE CONDUCTED EMISSION	12
ANNEX A:	DETAILED TEST RESULTS.....	13
A.1.	MEASUREMENT METHOD	13
A.2.	MAXIMUM OUTPUT POWER	14
A.2.1	ANTENNA GAIN	14
A.2.2	MAXIMUM OUTPUT POWER-CONDUCTED.....	14

A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED).....	17
A.4. 26dB EMISSION BANDWIDTH (CONDUCTED).....	19
A.5. RADIATED UNWANTED EMISSION	34
A.5.1 LIMITS	34
A.5.2 TEST SETUP	35
A.5.3 TEST PROCEDURES	36
A.5.4 CALCULATION.....	36
A.6. AC POWERLINE CONDUCTED EMISSION (150KHz- 30MHz).....	48
A.6.1 SUMMARY	48
A.6.2 METHOD OF MEASUREMENT	48
A.6.3 TEST CONDITION	48
A.6.4 TEST SETUP	48
A.7. 99% OCCUPIED BANDWIDTH	52
A.8. POWER CONTROL	67
A.9. ANTENNA REQUIREMENT	67
ANNEX B: EUT PARAMETERS.....	67
ANNEX C: ACCREDITATION CERTIFICATE	68

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
100191, P. R. China

1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.4. Project date


Testing Start Date: 2024-12-31

Testing End Date: 2025-03-03

1.5. Signature



Dong Jiaxuan
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Pang Shuai
(Approved this test report)

2. Client Information

2.1 Applicant Information

Company Name: IMOO INTERNATIONAL PTE. LTD
Address: 9 RAFFLES PLACE #26-01 REPUBLIC PLAZA
SINGAPORE(048619)
Contact: Timotthy
Email: timothy@imoo.com
Telephone: 13537401347
Fax: /

2.2 Manufacturer Information

Company Name: IMOO INTERNATIONAL PTE. LTD
Address: 9 RAFFLES PLACE #26-01 REPUBLIC PLAZA
SINGAPORE(048619)
Contact: Timotthy
Email: timothy@imoo.com
Telephone: 13537401347
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Watch Phone
Model name	W2432AO
FCC ID	2A6PP-GLI32
WLAN Frequency Band	ISM Bands: -5150MHz~5250MHz -5250MHz~5350MHz -5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
Nominal Voltage	3.87V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
EUT2	867331070003257	GLI32-M-0	1.0.0	2025-01-07
EUT1	867331070003125	GLI32-M-0	1.0.0	2025-01-07

*EUT ID: is used to identify the test sample in the lab internally.

EUT2 is used for Conduction test, EUT1 is used for Radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Dummy battery		/
AE2	Charger(Provided by the lab.)	/	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Watch Phone with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2021
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

Note: UNII: KDB 789033 D02 is not in the scope of ISO/IEC 17025 accreditation by A2LA.

5. Laboratory Environment

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Peak Power Spectral Density	15.407	/	P
Occupied 26dB Bandwidth	15.403	/	P
Radiated Unwanted Emission	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P
99% Occupied bandwidth	/	/	P
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.87V
Humidity	44%

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2025-08-11
2	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2025-04-30
3	Test Receiver	ESCI	100344	R&S	1 year	2025-04-01
4	LISN	ENV216	101200	R&S	1 year	2025-05-16
5	Attenuator	10dB/2W	/	Rosenberger	/	/
6	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103023	R&S	1 year	2025-06-06
2	EMI Antenna	VULB 9163	01222	SCHWARZBECK	1 year	2025-09-11
3	EMI Antenna	3115	0016725	ETS-Lindgren	1 year	2025-04-11
4	EMI Antenna	3116	2663	ETS-Lindgren	1 year	2025-07-21

Test Software

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V8.53.0	R&S
	EMC32 V10.60.20	R&S
Conducted Emission	EMC32 V8.53.0	R&S

8. Measurement Uncertainty

8.1 Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2 Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3 26dB Emission Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4 Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5 Radiated Unwanted Emission

Frequency Range	Uncertainty(dB) (k=2)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.73
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.58
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.37

8.6 AC Power-line Conducted Emission


Measurement Uncertainty : 3.08dB,k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

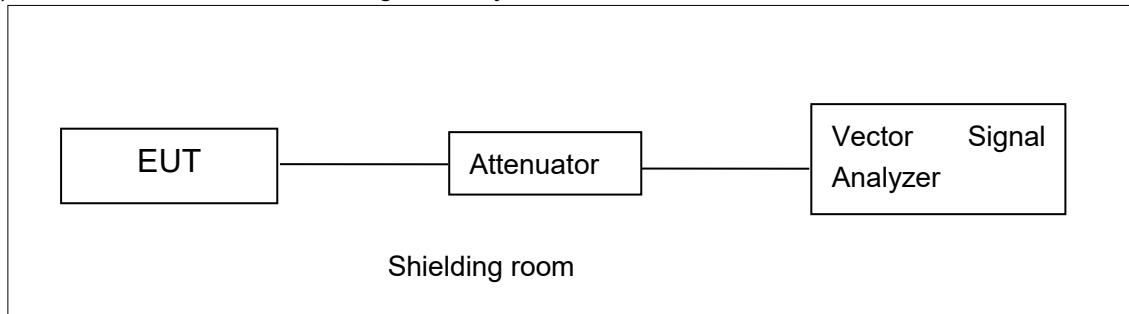

A.1.2. Radiated Emission Measurements

Measurement performed according to Clause 6.4, 6.5, 6.6 in ANSI C63.10-2013 and II.G.4, II.G.5, II.G.6 in KDB 789033.

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-2 is made according to KDB 789033

A.2.1 Antenna Gain

Antenna gain is -1.5dBi and the value is supplied by the applicant or manufacturer.

A.2.2 Maximum output Power-Conducted

EUT ID: EUT2

Measurement Results:

802.11a mode

Mode	Frequency	Test Result (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11a	5180MHz	9.40	/	/	/	/	/	/	/
	5200MHz	9.59	/	/	/	/	/	/	/
	5240MHz	9.97	/	/	/	/	/	/	/
	5260MHz	10.28	/	/	/	/	/	/	/
	5280MHz	10.30	/	/	/	/	/	/	/
	5320MHz	10.62	/	/	/	/	/	/	/
	5500MHz	11.90	/	/	/	/	/	/	/
	5580MHz	10.17	/	/	/	/	/	/	/
	5700MHz	11.69	/	/	/	/	/	/	/
	5720MHz	10.93	/	/	/	/	/	/	/

The data rate 6Mbps is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT20)	5180MHz	9.32	/	/	/	/	/	/	/
	5200MHz	9.65	/	/	/	/	/	/	/
	5240MHz	9.98	/	/	/	/	/	/	/
	5260MHz	10.24	/	/	/	/	/	/	/
	5280MHz	10.26	/	/	/	/	/	/	/
	5320MHz	10.58	/	/	/	/	/	/	/

	5500MHz	11.59	/	/	/	/	/	/	/
	5580MHz	10.63	/	/	/	/	/	/	/
	5700MHz	11.51	/	/	/	/	/	/	/
	5720MHz	10.81	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT40)	5190MHz	11.04	/	/	/	/	/	/	/
	5230MHz	10.87	/	/	/	/	/	/	/
	5270MHz	10.85	/	/	/	/	/	/	/
	5310MHz	11.57	/	/	/	/	/	/	/
	5510MHz	11.86	/	/	/	/	/	/	/
	5550MHz	11.61	/	/	/	/	/	/	/
	5670MHz	11.94	/	/	/	/	/	/	/
	5710MHz	11.99	/	/	/	/	/	/	/


The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle

802.11a mode
87%

802.11n-HT20 mode
86%

802.11n-HT40 mode
76%

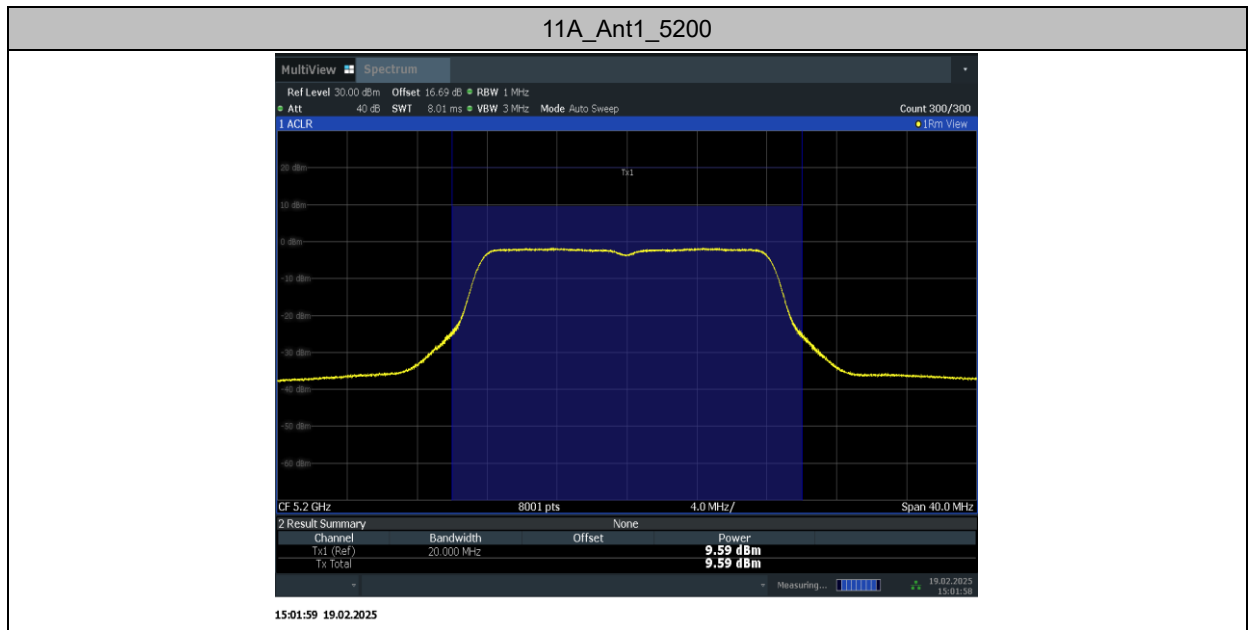

Maximum output Power

Conclusion: PASS

A.3. Peak Power Spectral Density (conducted)

Measurement Limit:


Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11

The output power measurement method Section F is made according to KDB 789033

EUT ID: EUT2

Measurement Results:

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	-1.55	≤11.00	PASS
		5200	-1.75	≤11.00	PASS
		5240	-1.26	≤11.00	PASS
		5260	-0.43	≤11.00	PASS
		5280	-0.64	≤11.00	PASS
		5320	-0.05	≤11.00	PASS
		5500	1.30	≤11.00	PASS
		5580	-1.39	≤11.00	PASS
		5700	0.29	≤11.00	PASS
		5720	0.51	≤11.00	PASS
11N20SISO	Ant1	5180	-2.24	≤11.00	PASS
		5200	-1.79	≤11.00	PASS
		5240	-1.29	≤11.00	PASS
		5260	-1.29	≤11.00	PASS
		5280	-1.31	≤11.00	PASS
		5320	-0.92	≤11.00	PASS
		5500	0.68	≤11.00	PASS
		5580	0.71	≤11.00	PASS
		5700	0.46	≤11.00	PASS
		5720	0.44	≤11.00	PASS
11N40SISO	Ant1	5190	-3.01	≤11.00	PASS
		5230	-3.33	≤11.00	PASS
		5270	-3.44	≤11.00	PASS
		5310	-2.55	≤11.00	PASS
		5510	-1.87	≤11.00	PASS
		5550	-2.55	≤11.00	PASS
		5670	-1.21	≤11.00	PASS
		5710	-1.22	≤11.00	PASS

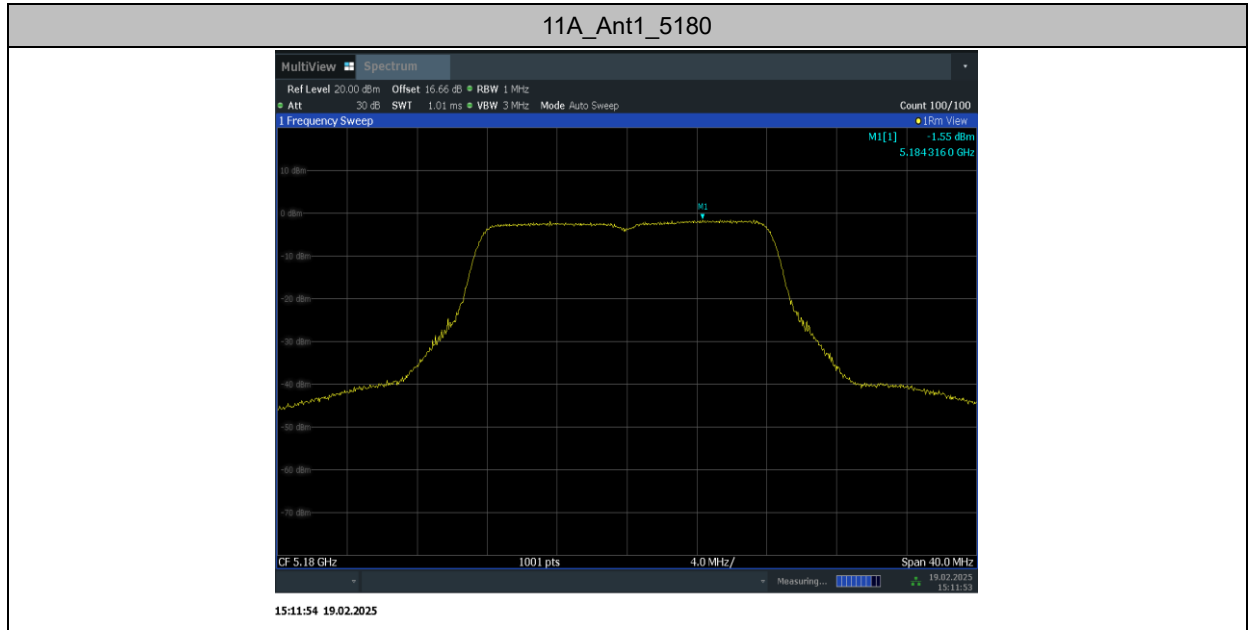

Peak Power Spectral Density

Conclusion: PASS

A.4. 26dB Emission Bandwidth (conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:


Measurement Uncertainty	60.80Hz
-------------------------	---------


EUT ID: EUT2

Measurement Result:

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	22.20	5168.84	5191.04	---	---
		5200	21.96	5188.92	5210.88	---	---
		5240	21.96	5228.96	5250.92	---	---
		5260	22.08	5248.80	5270.88	---	---
		5280	22.40	5268.48	5290.88	---	---
		5320	22.32	5308.68	5331.00	---	---
		5500	21.96	5489.16	5511.12	---	---
		5580	22.36	5568.72	5591.08	---	---
		5700	22.00	5688.88	5710.88	---	---
		5720	22.20	5708.84	5731.04	---	---
11N20SISO	Ant1	5180	22.48	5168.64	5191.12	---	---
		5200	21.96	5188.92	5210.88	---	---
		5240	22.24	5228.88	5251.12	---	---
		5260	22.16	5248.88	5271.04	---	---
		5280	22.52	5268.72	5291.24	---	---
		5320	22.48	5308.72	5331.20	---	---
		5500	22.64	5488.64	5511.28	---	---
		5580	24.32	5567.24	5591.56	---	---
		5700	22.32	5688.76	5711.08	---	---
		5720	22.80	5708.48	5731.28	---	---
11N40SISO	Ant1	5190	47.52	5164.72	5212.24	---	---
		5230	44.40	5207.92	5252.32	---	---
		5270	44.96	5247.36	5292.32	---	---
		5310	45.84	5286.56	5332.40	---	---
		5510	49.84	5483.68	5533.52	---	---
		5550	47.44	5524.64	5572.08	---	---
		5670	49.68	5645.52	5695.20	---	---
		5710	49.92	5683.20	5733.12	---	---


Test graphs as below:

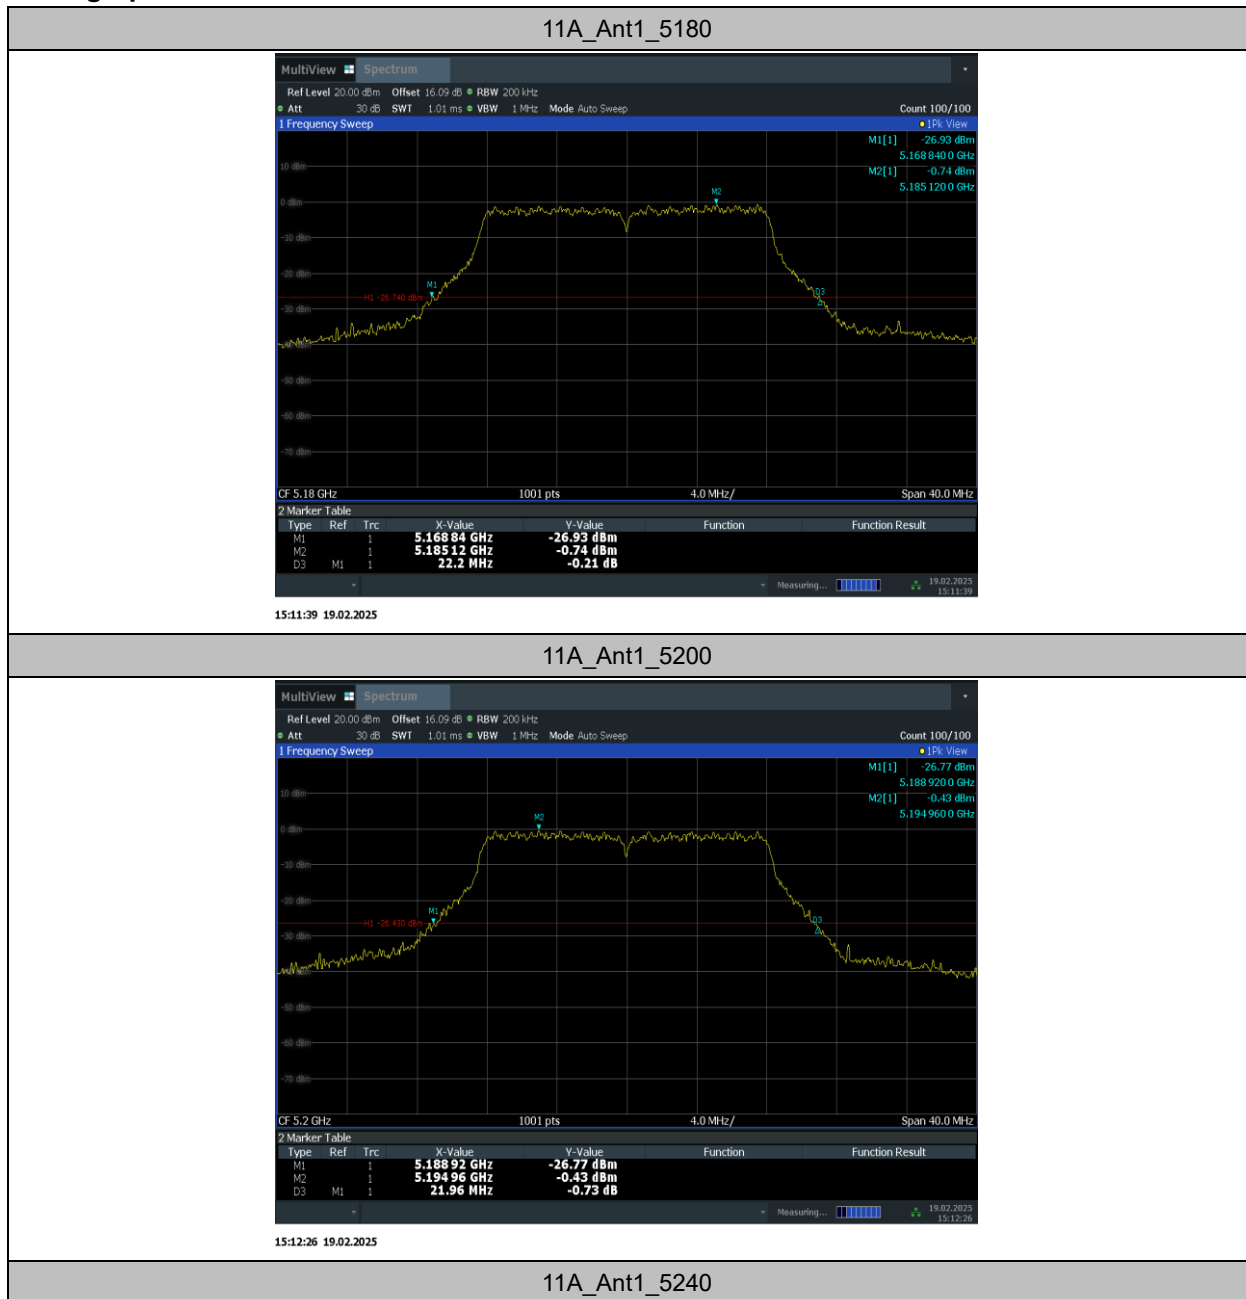

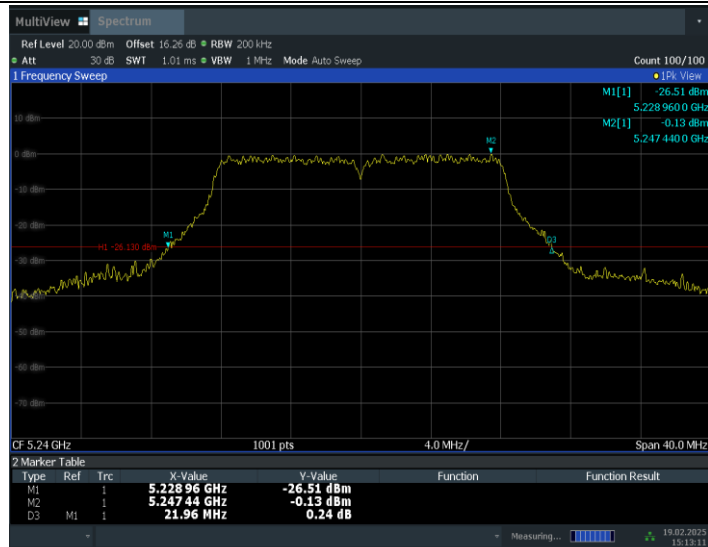


15:13:12 19.02.2025

11A_Ant1_5260

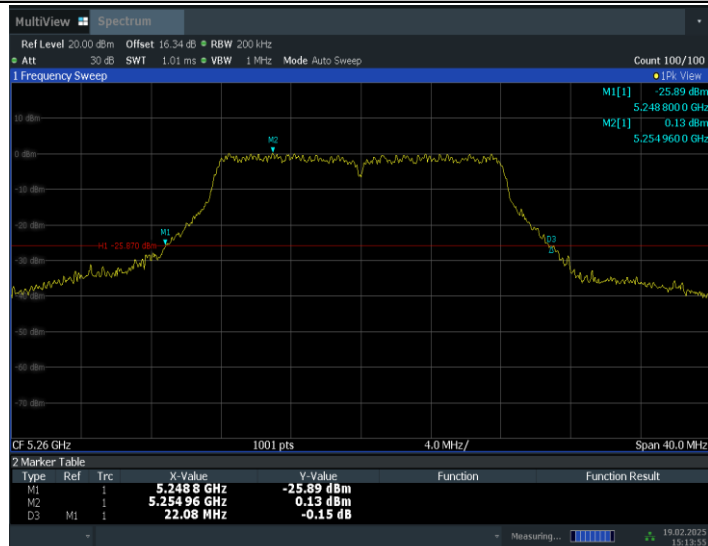


15:13:55 19.02.2025

11A_Ant1_5280

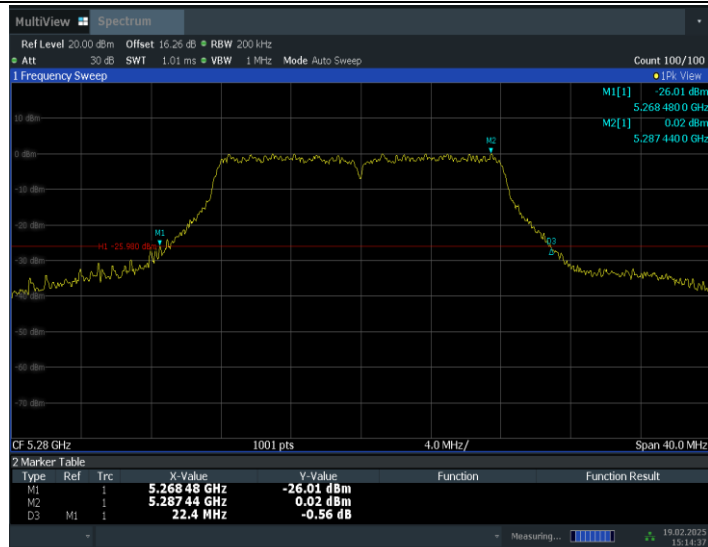


15:14:38 19.02.2025

11A_Ant1_5320

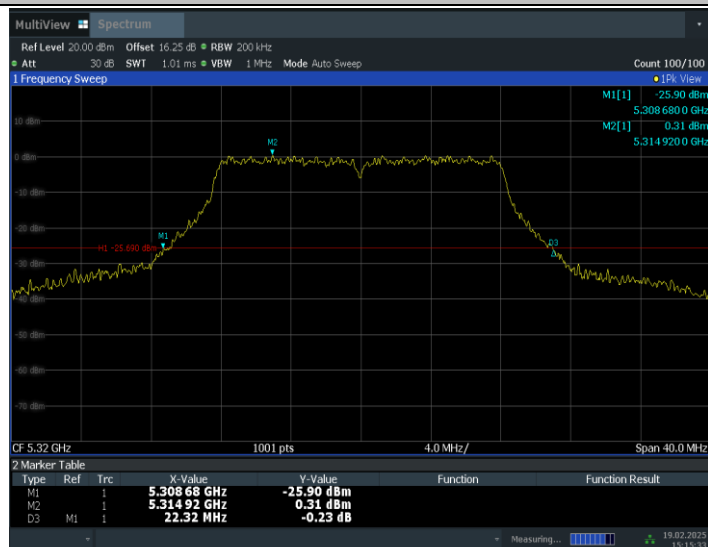


15:15:34 19.02.2025

11A_Ant1_5500

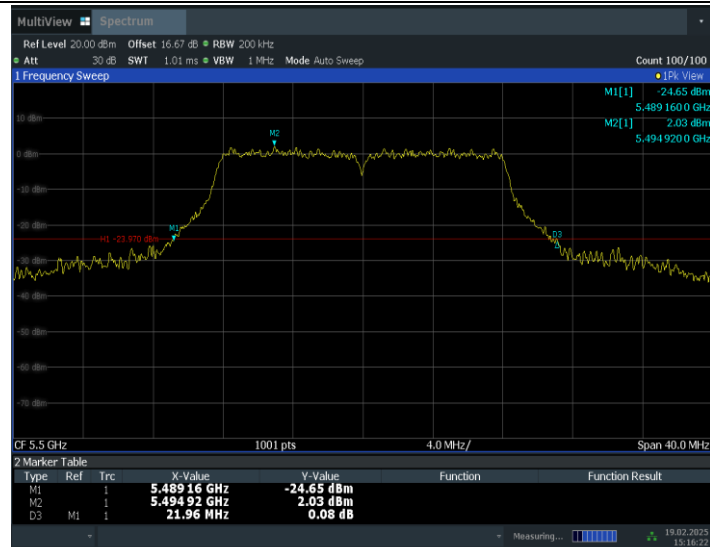


15:16:22 19.02.2025

11A_Ant1_5580

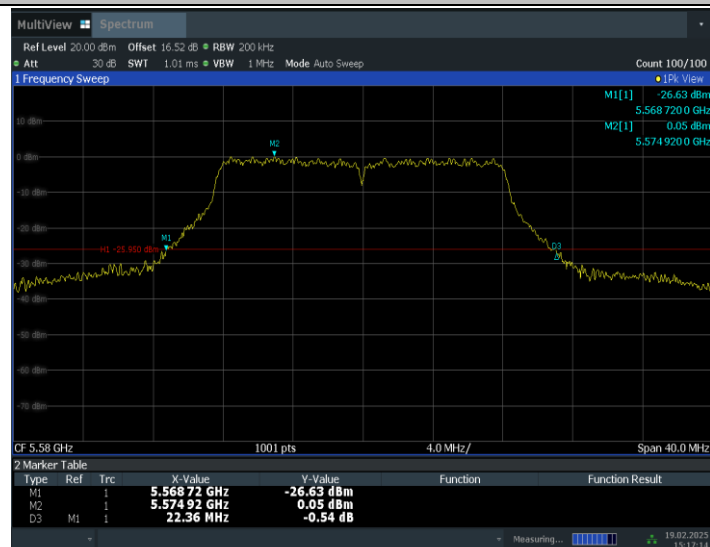


15:17:14 19.02.2025

11A_Ant1_5700

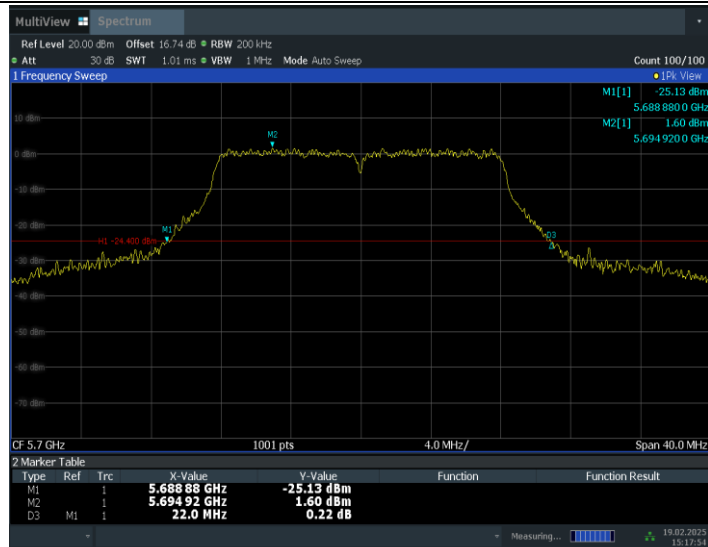


15:17:55 19.02.2025

11A_Ant1_5720

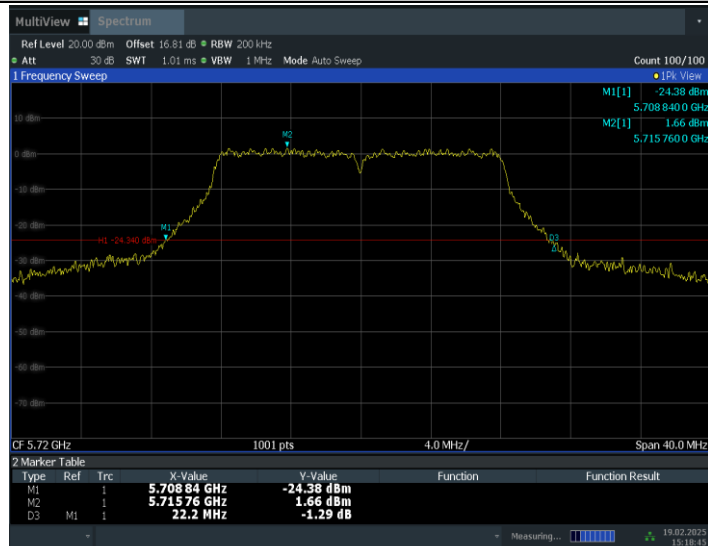


15:18:45 19.02.2025

11N20SISO_Ant1_5180

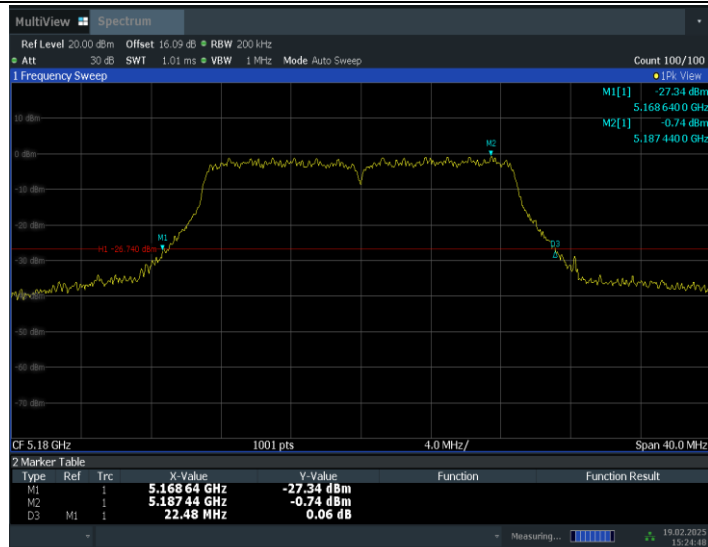


15:24:48 19.02.2025

11N20SISO_Ant1_5200

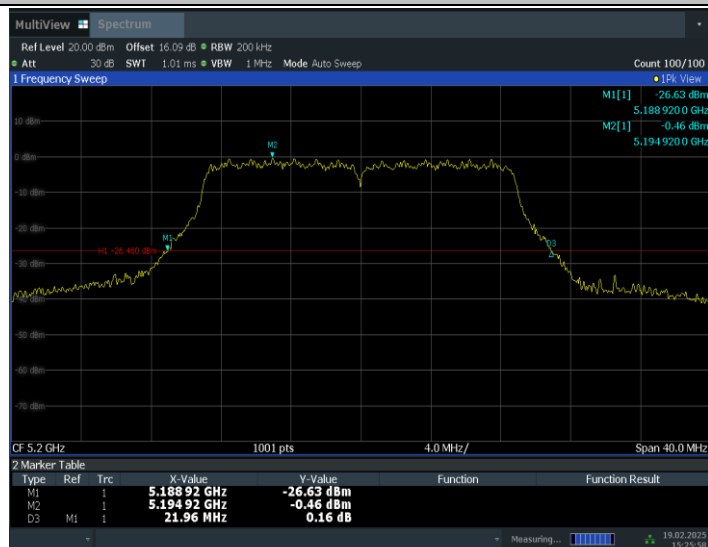


15:25:59 19.02.2025

11N20SISO_Ant1_5240

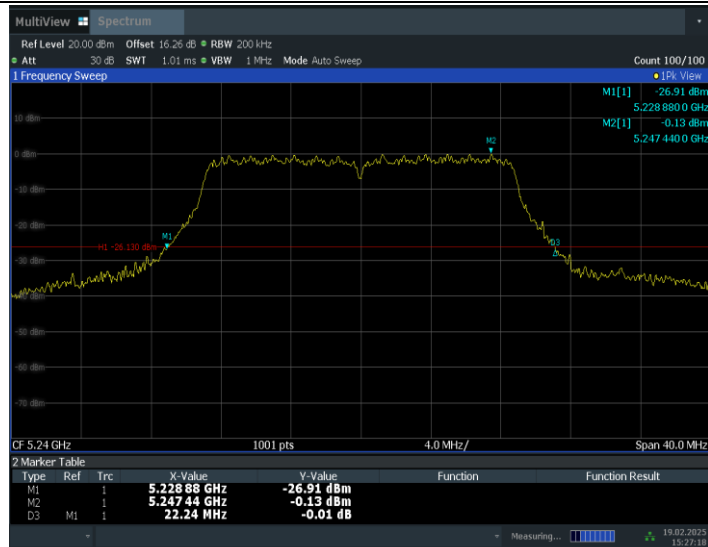


15:27:18 19.02.2025

11N20SISO_Ant1_5260

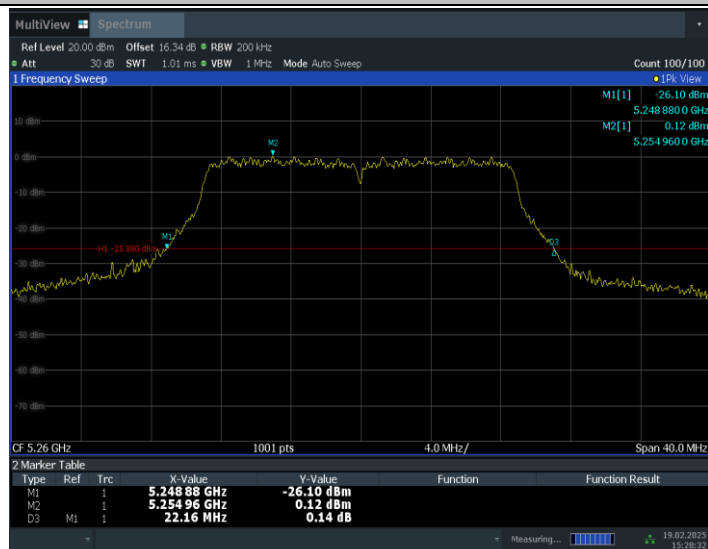


15:28:32 19.02.2025


11N20SISO_Ant1_5280

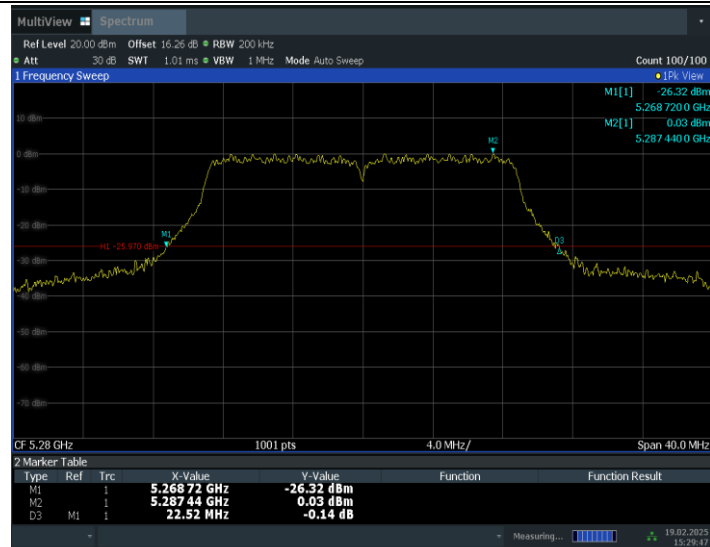


11N20SISO_Ant1_5320

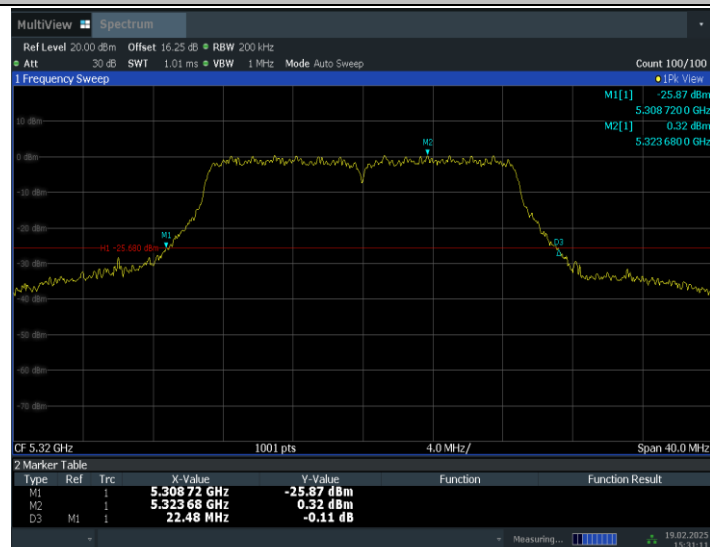


11N20SISO_Ant1_5500

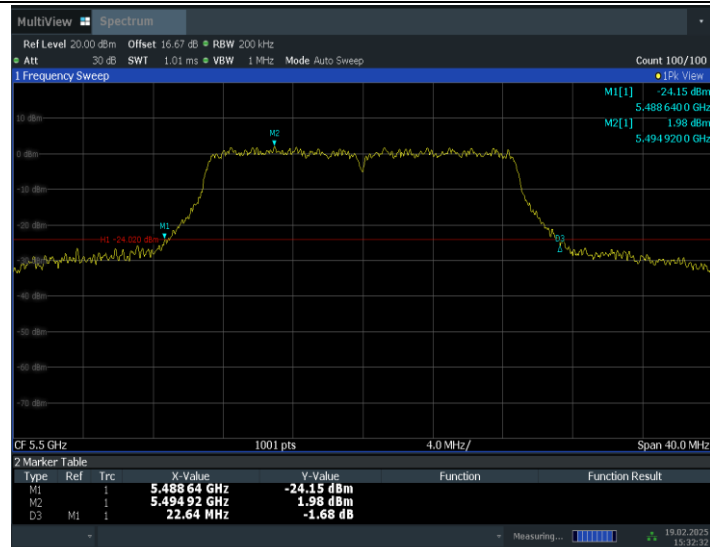

11N20SISO_Ant1_5580

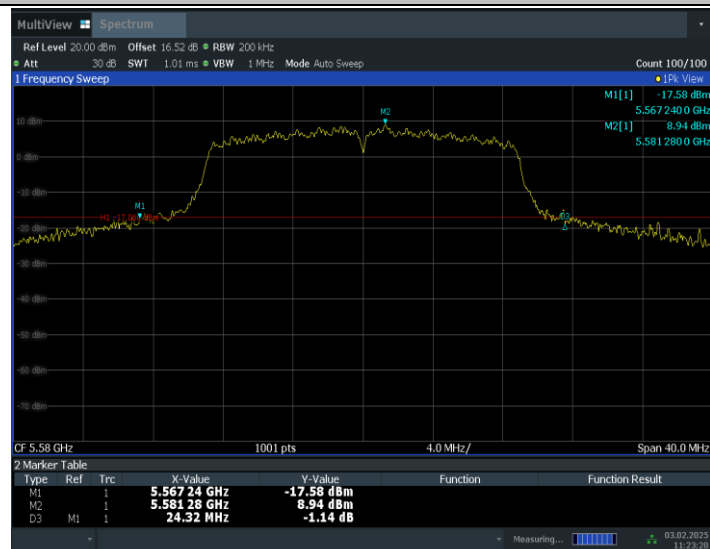


11N20SISO_Ant1_5700

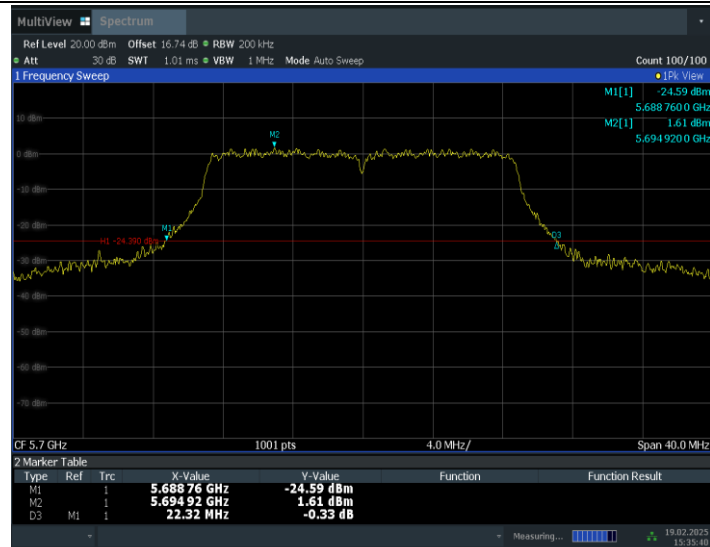


15:35:41 19.02.2025

11N20SISO_Ant1_5720

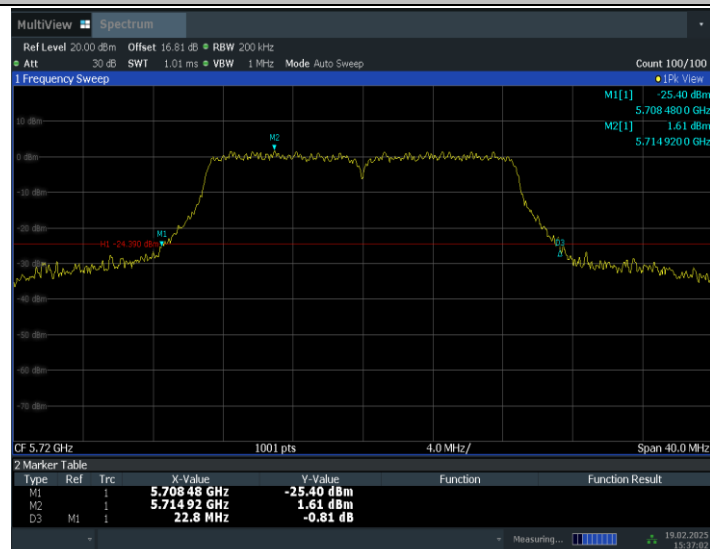


15:37:02 19.02.2025

11N40SISO_Ant1_5190

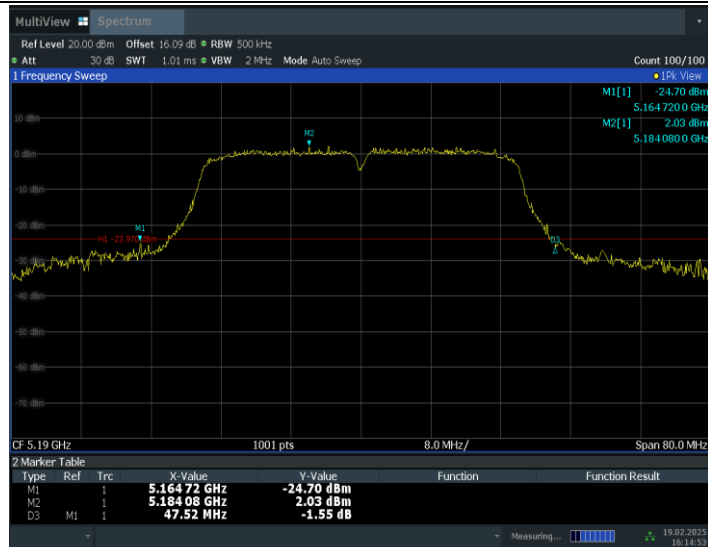


16:14:54 19.02.2025

11N40SISO_Ant1_5230

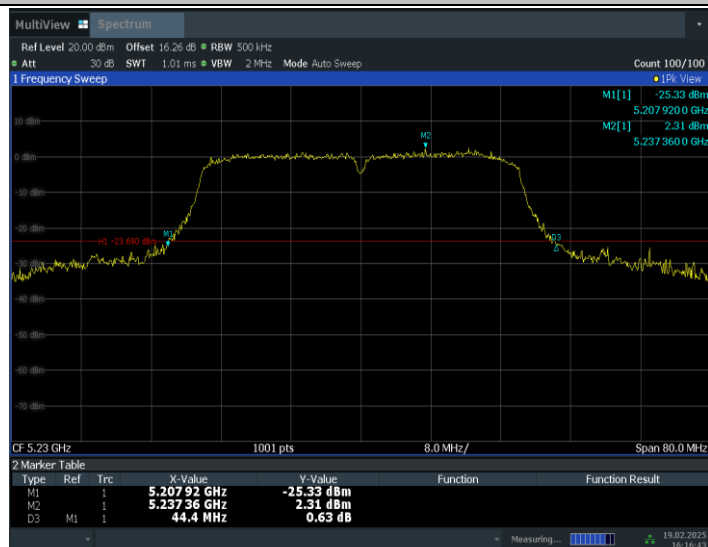

16:16:44 19.02.2025

11N40SISO_Ant1_5270

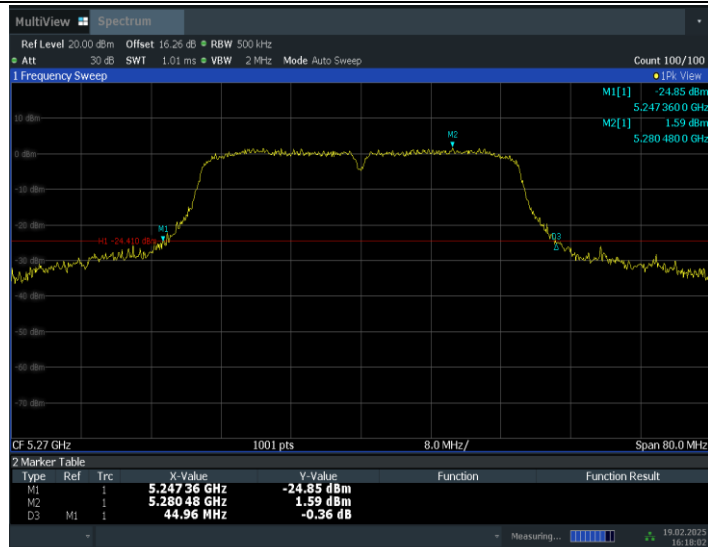


16:18:02 19.02.2025

11N40SISO_Ant1_5310



16:19:13 19.02.2025

11N40SISO_Ant1_5510

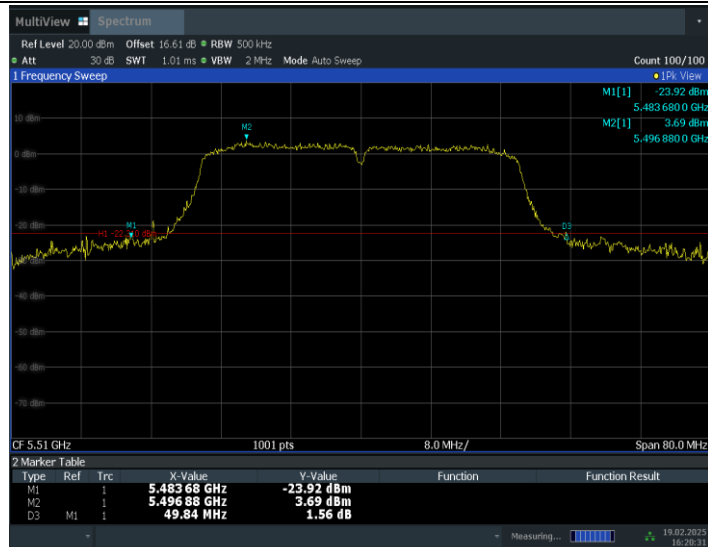

16:20:32 19.02.2025

11N40SISO_Ant1_5550



16:21:53 19.02.2025

11N40SISO_Ant1_5670



16:23:10 19.02.2025

11N40SISO_Ant1_5710



16:24:31 19.02.2025

Conclusion: PASS

A.5. Radiated Unwanted Emission

A.5.1 Limits

Unwanted Emissions in the unrestricted bands shall not exceed the limits that shown in 15.407:

Standard	Limit
FCC 47 CFR Part 15.407	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (μ V/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor (as defined in KDB 789033 II.G.2.d).

A.5.2 Test setup

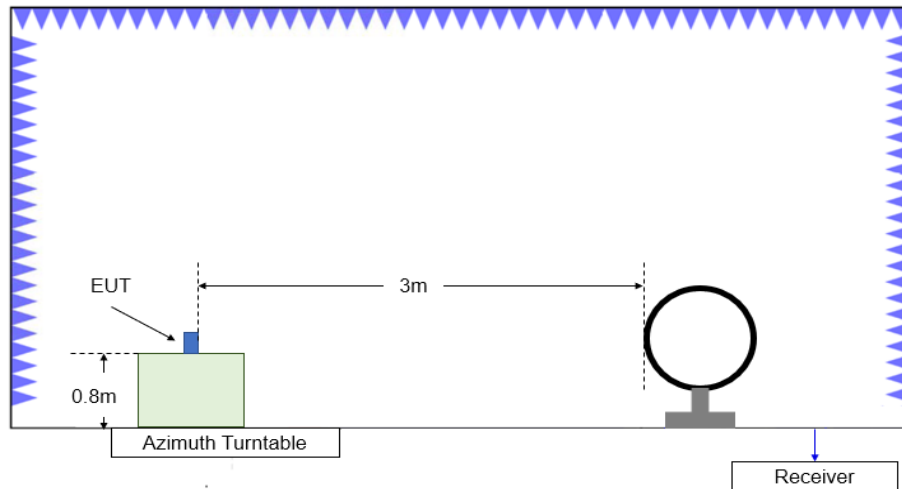


Figure A.5.1. Test Site Diagram (9kHz-30MHz)

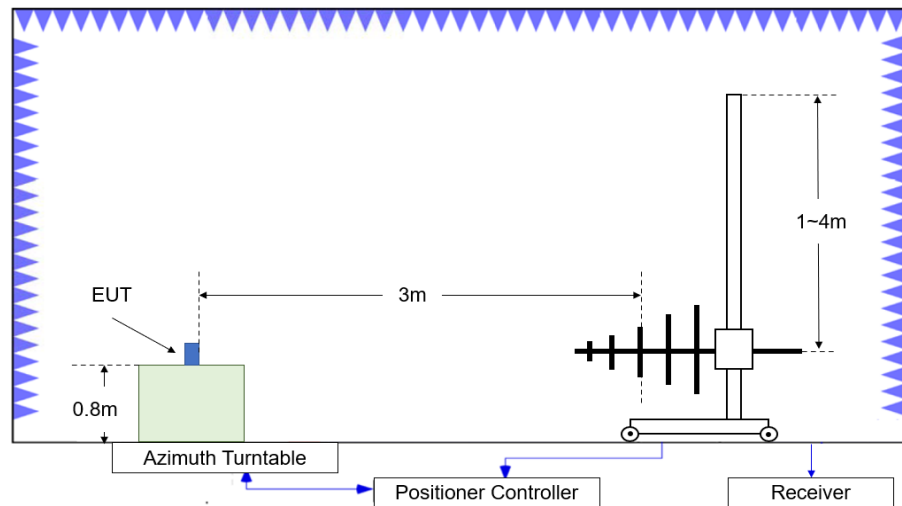


Figure A.5.2. Test Site Diagram (30MHz-1GHz)

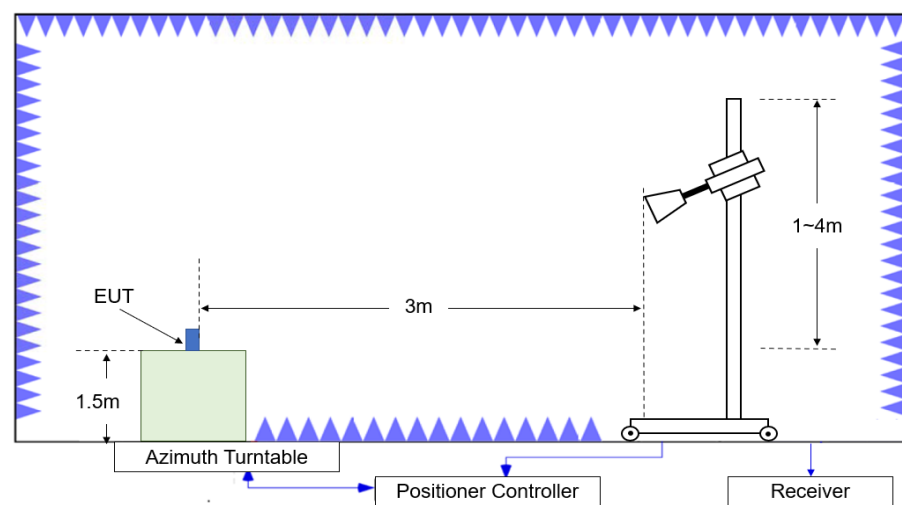


Figure A.5.3. Test Site Diagram (1GHz-40GHz)

A.5.3 Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10 and KDB 789033 D02 v02r01.

Test setting

Frequency of emission (MHz)	RBW/VBW
30-1000	100kHz/300kHz
1000-4000	1MHz/3MHz
4000-18000	1MHz/3MHz
18000-26500	1MHz/3MHz
26500-40000	1MHz/3MHz

A.5.4 Calculation

1. The measurement results reported below is calculated by:

Measurement Results (dB μ V/m) = $P_{\text{measurement}}$ (dB μ V) + Cable Loss (dB) + Antenna Factor (dB/m)

Where: $P_{\text{measurement}}$ is the field strength recorded from the instrument

2. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log(D) + 104.77$$

Where:

E is the field strength in dB μ V/m

D is the measurement distance in meters

EIRP is the equivalent isotropically radiated power in dBm

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept.
5. EUT in each of three orthogonal axis emissions had been tested out only the worst case (axis data) recorded in the report.
6. Measurement frequencies were performed from 9 kHz to the 10th harmonic of highest fundamental frequency or 40GHz, whichever is lower.
7. No spurious emissions were detected within 20dB of the limit below 30MHz. OFS and semi-chamber comparison testing had been performed and the result came out very similar. (KDB 414788)

Measurement Results:
Average Results:
802.11a
Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17896.05	45.36	-25.55	42.3	28.61	54	8.64	V
17919.15	45.36	-25.55	42.3	28.61	54	8.64	V
13285.95	39.5	-29.75	40.3	28.95	54	14.5	V
13284.85	39.47	-29.75	40.3	28.92	54	14.53	H
5127.94	40.94	-27.34	32.7	35.58	54	13.06	V
5127.56	40.73	-27.34	32.7	35.37	54	13.27	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17913.1	45.69	-25.55	42.3	28.94	54	8.31	H
17917.5	45.66	-25.55	42.3	28.91	54	8.34	V
13289.25	39.51	-29.75	40.3	28.96	54	14.49	H
13295.85	39.4	-29.75	40.3	28.85	54	14.6	H
5372.496	41.34	-27.08	33.5	34.92	54	12.66	H
5372.032	41.07	-27.08	33.5	34.65	54	12.93	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17921.35	45.38	-25.55	42.3	28.63	54	8.62	V
17930.7	45.32	-25.55	42.3	28.57	54	8.68	V
13291.45	39.64	-29.75	40.3	29.09	54	14.36	H
13271.65	39.5	-29.75	40.3	28.95	54	14.5	H
5447.635	41.29	-27.06	33.7	34.65	54	12.71	H
5447.875	41.2	-27.06	33.7	34.56	54	12.8	H

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17918.6	45.49	-25.55	42.3	28.74	54	8.51	V
17912.55	45.39	-25.55	42.3	28.64	54	8.61	H
13265.6	39.44	-29.75	40.2	28.99	54	14.56	V
13285.4	39.4	-29.75	40.3	28.85	54	14.6	H
5149.76	47.73	-27.27	32.7	42.3	54	6.27	H
5148.5	47.65	-27.34	32.7	42.29	54	6.35	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17911.45	45.56	-25.55	42.3	28.81	54	8.44	H
17897.7	45.42	-25.55	42.3	28.67	54	8.58	V
13282.1	39.57	-29.75	40.3	29.02	54	14.43	H
13268.9	39.39	-29.75	40.3	28.84	54	14.61	V
5350.256	44.99	-27.08	33.5	38.57	54	9.01	H
5351.072	44.87	-27.08	33.5	38.45	54	9.13	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17912.55	45.58	-25.55	42.3	28.83	54	8.42	V
17912	45.37	-25.55	42.3	28.62	54	8.63	V
13276.05	39.42	-29.75	40.3	28.87	54	14.58	V
13282.65	39.42	-29.75	40.3	28.87	54	14.58	V
5448.025	43.58	-27.06	33.7	36.94	54	10.42	H
5448.655	43.55	-27.06	33.7	36.91	54	10.45	H