

Sample specification

Manufacturer:WILLSEA LIMITED

Manufacturer add.:Room501, BuildingA1, Yuanchuang Space Xuexiangyuan, No.33 Zhonghao 2nd Road, Bantian Street, Longgang District, Shenzhen, China

client:	
Pr oject name:	JS811
Mater ial class:	L-BT A N T
edition:	V1.0
date:	2025.01.09

catalogue


1: Passive test report.....	3
2: OTA parameters.....	6
3: installation precautions.....	7
4: Matching circuit.....	8
5: Structure drawing file.....	9

Change record field			
Compile/change date	Reason for change	Change content	edition
2025. 01. 09	Initial release	Initial release	V1.0

1: Passive test report




Angilent E5071C

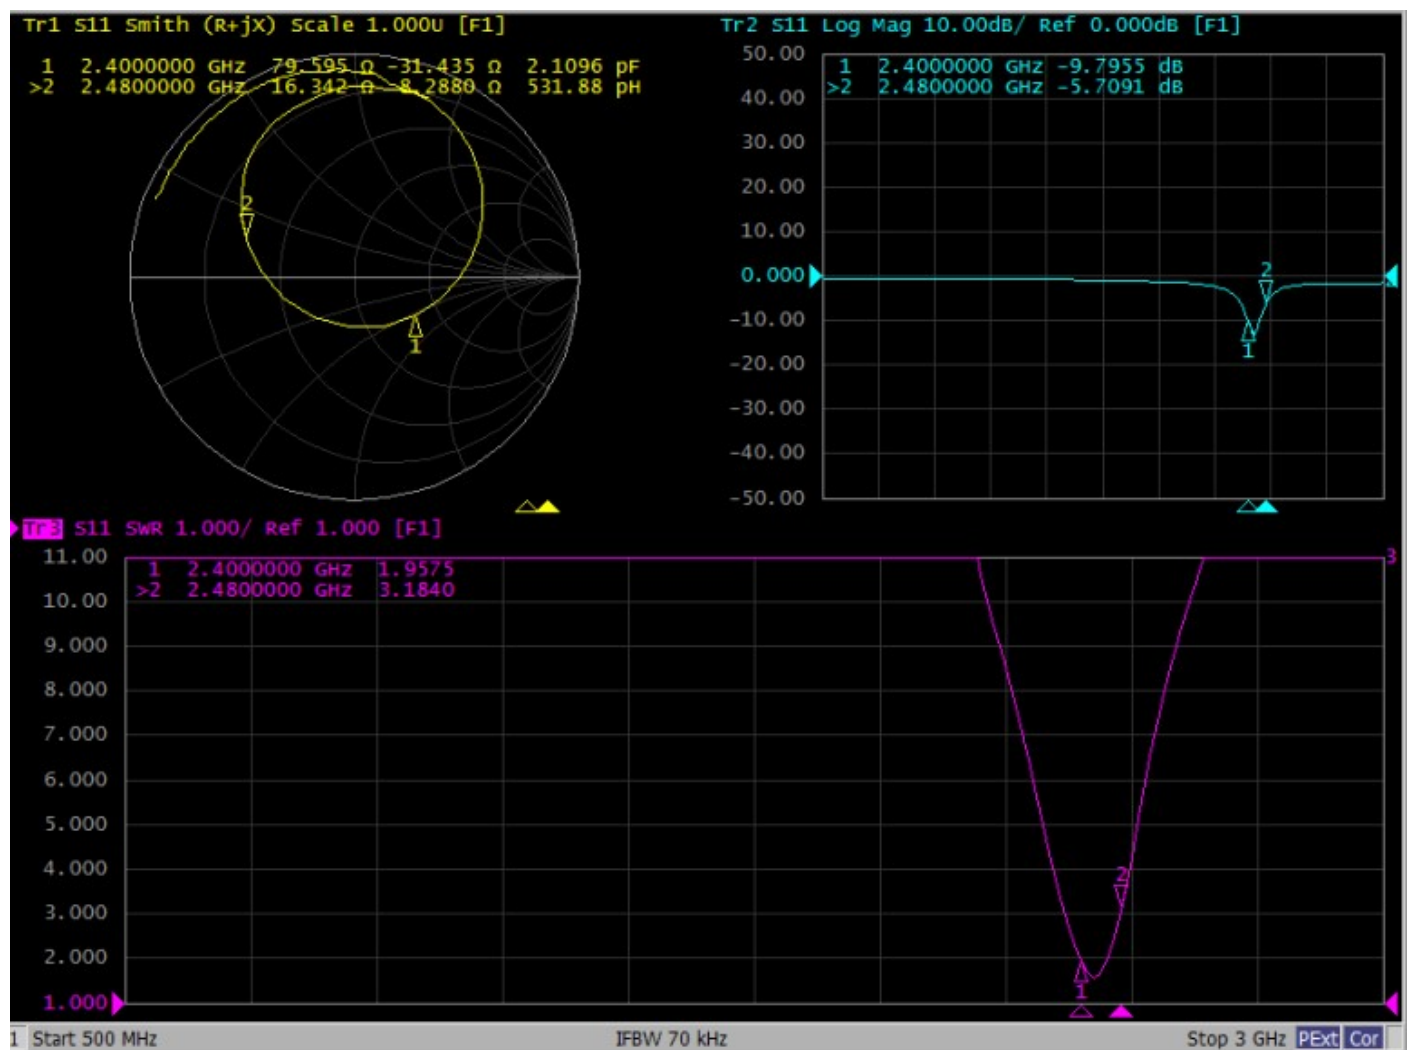

Antenna passive efficiency:


L: Free space; PIFA			
Frequency MHz	efficiency%	efficiency(dB)	gain(dBi)
2400	12.7%	-8.95	-4.62
2410	13.6%	-8.66	-4.33
2420	14.6%	-8.36	-4.09
2430	14.9%	-8.28	-3.87
2440	14.9%	-8.26	-3.78
2450	15.5%	-8.11	-3.62
2460	14.8%	-8.29	-3.77
2470	15.0%	-8.24	-3.76
2480	14.4%	-8.41	-3.93
Mean value	14.5%	-8.40	-3.97

Left ear antenna passive 3D direction diagram:

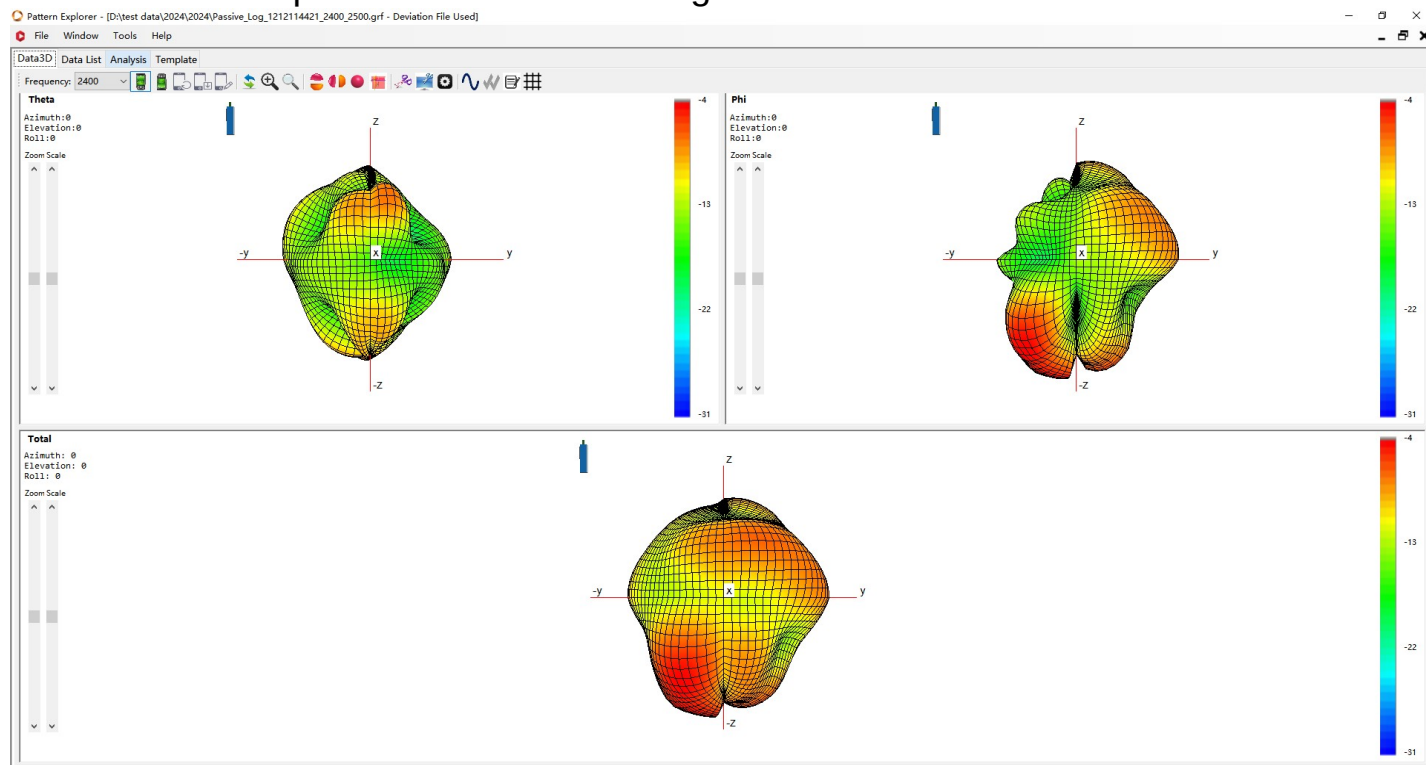


Left ear antenna passive 2D pattern:


Theta=90.00deg

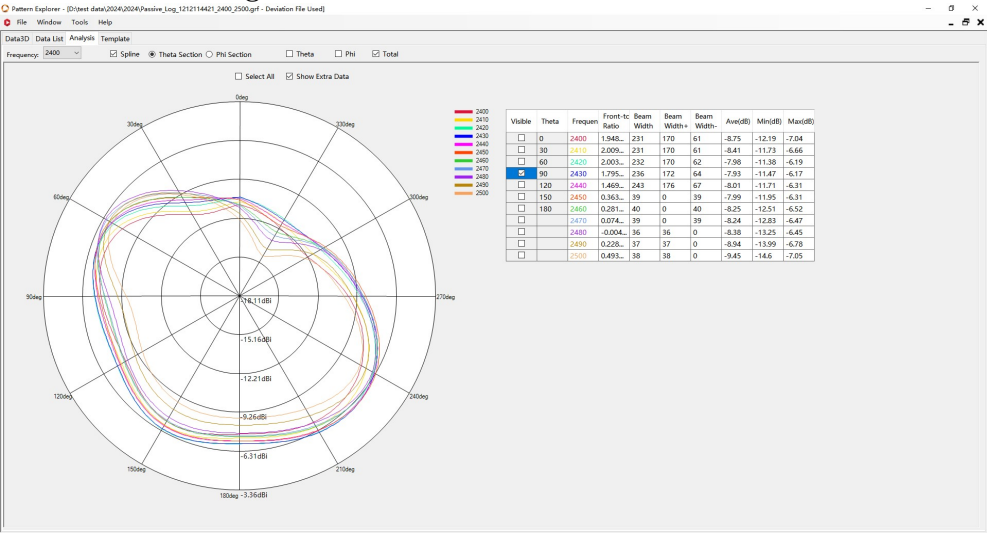

Phi=90.00deg

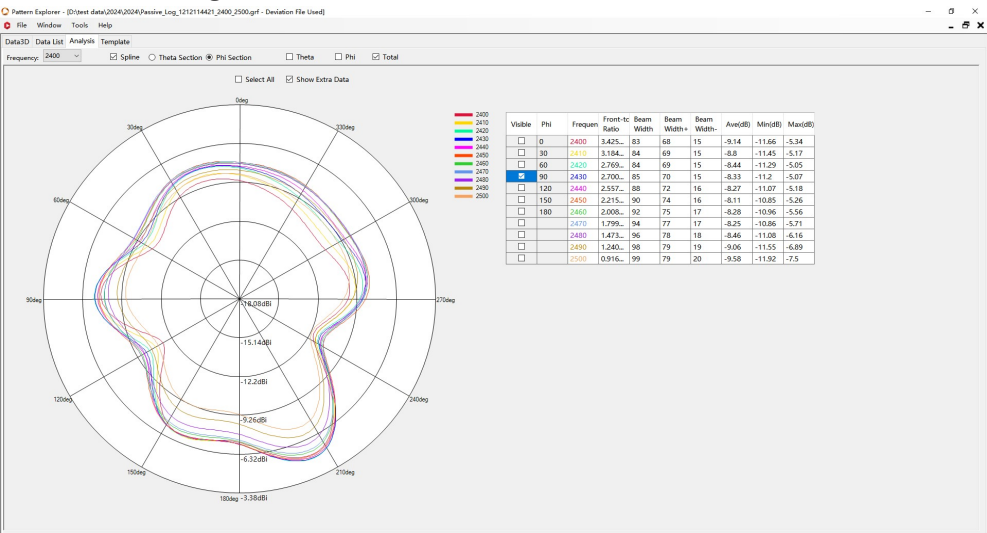

Phi=0.00deg

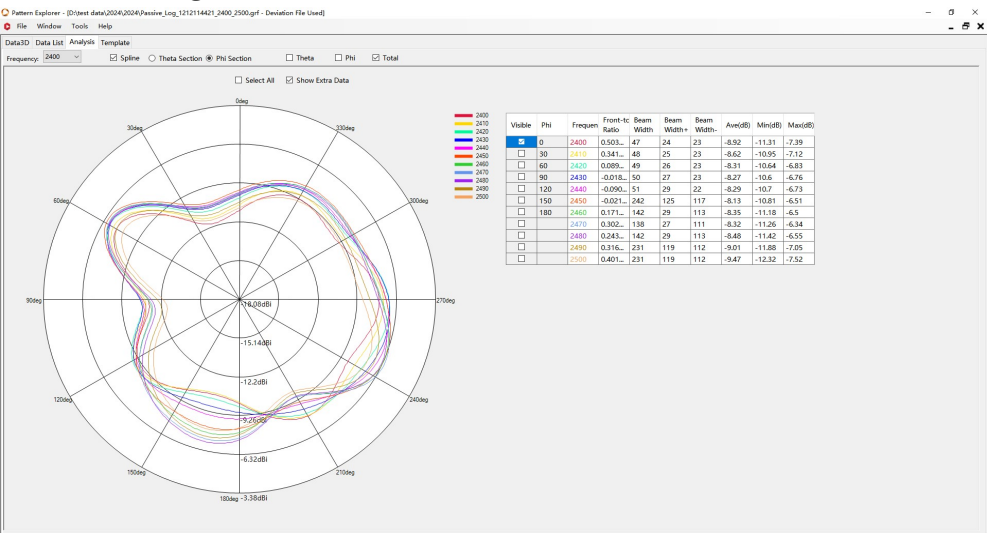


2: OTA parameters

3	Channel	TRP	TIS	TRP	TIS
L	CH 0	-1.4	-83.8	-5.7	-79.8
	CH 39	0.5	-86.3	-5.6	-80.2
	CH 78	-0.1	-86.3	-6.4	-79.9



2	Channel	TRP	TIS	TRP	TIS
L	CH 0	-1.3	-83.0	-5.3	-79.7
	CH 39	1.3	-86.2	-5.2	-80.6
	CH 78	1.1	-86.3	-6.0	-80.0

6	Channel	TRP	TIS	TRP	TIS
L	CH 0	-1.4	-83.2	-6.1	-80.4
	CH 39	0.5	-86.0	-4.8	-80.8
	CH 78	1.3	-86.8	-5.0	-80.7

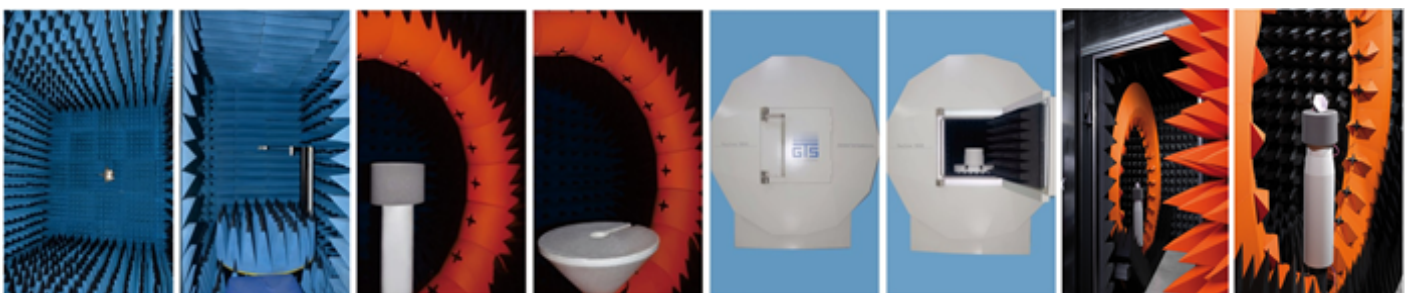

OTA Standard Chamber




3: installation precautions

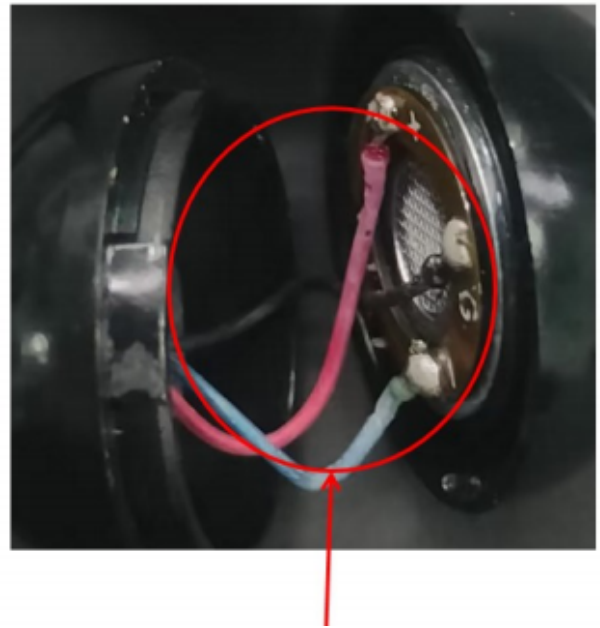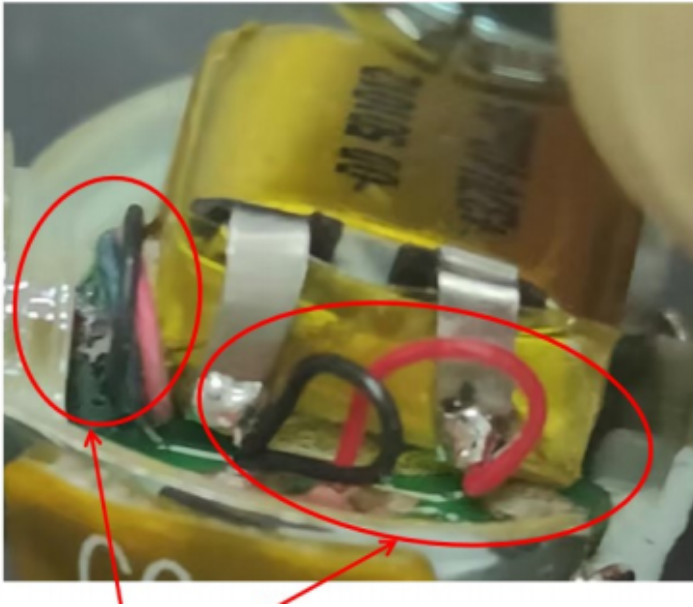

Note that the length of the wire can not be changed at will, and the placement and assembly method of the wire should be controlled according to the above illustration, otherwise there may be a risk of consistency.

4: Matching circuit

Element	Value
E1(0201)	4.7NH
E2(0201)	0Ω
E3(0201)	N/A

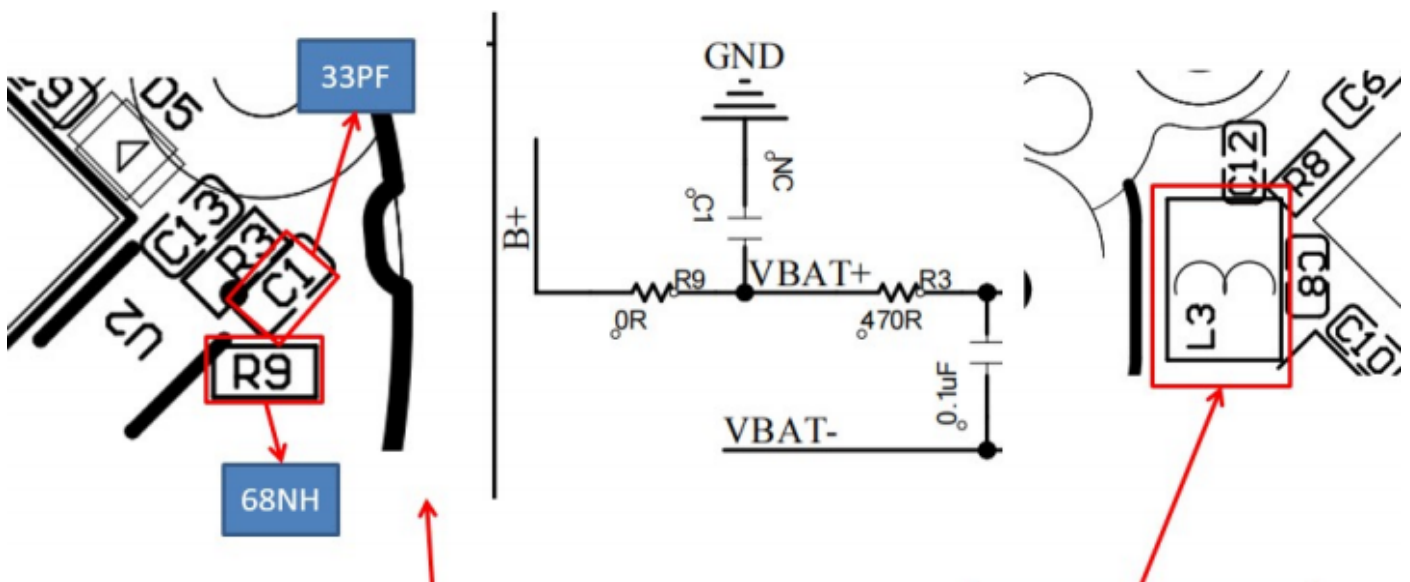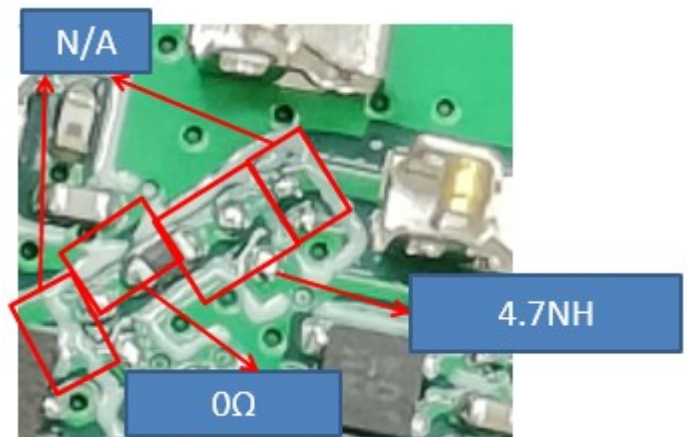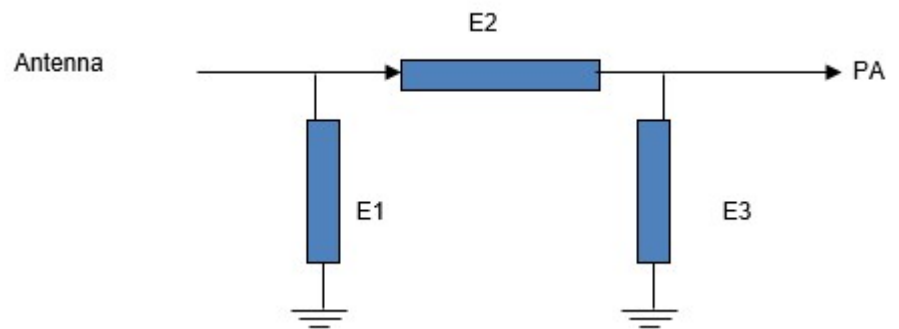

5: Structure drawing file

