



# TEST REPORT

No.24T04Z103041-001

for

**IMO INTERNATIONAL PTE. LTD**

**Watch Phone**

**W2432AO**

**FCC ID: 2A6PP-GLI32**

**with**

**Hardware Version: GLI32-M-0**

**Software Version: 1.0.0**

**Issued Date: 2025-03-31**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
24T04Z103041-001	Rev.0	1st edition	2025-03-31

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION .....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.4. PROJECT DATA .....</b>	<b>4</b>
<b>1.5. SIGNATURE .....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION .....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT .....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE .....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
<b>4.1. DOCUMENTS SUPPLIED BY APPLICANT .....</b>	<b>7</b>
<b>4.2. REFERENCE DOCUMENTS FOR TESTING .....</b>	<b>7</b>
<b>5. TEST RESULTS .....</b>	<b>8</b>
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>9</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
<b>ANNEX A: EUT PARAMETERS .....</b>	<b>11</b>
<b>ANNEX B: DETAILED TEST RESULTS .....</b>	<b>12</b>
<b>ANNEX C: PERSONS INVOLVED IN THIS TESTING .....</b>	<b>23</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### **1.2. Testing Location**

Location 1: CTTL(Huayuan North Road)

Address: No. 52 Huayuan North Road, Haidian District, Beijing,  
100191, P. R. China

### **1.3. Testing Environment**

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### **1.4. Project data**

Testing Start Date: 2025-01-13

Testing End Date: 2025-02-27

### **1.5. Signature**




Zhang Xia

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Zang Qi

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: IMOON INTERNATIONAL PTE. LTD  
Address: 9 RAFFLES PLACE #26-01 REPUBLIC PLAZA  
SINGAPORE(048619)  
Contact: Timothy  
Telephone: 13537401347  
Email: timothy@imoo.com

### **2.2. Manufacturer Information**

Company Name: IMOON INTERNATIONAL PTE. LTD  
Address: 9 RAFFLES PLACE #26-01 REPUBLIC PLAZA  
SINGAPORE(048619)  
Contact: Timothy  
Telephone: 13537401347  
Email: timothy@imoo.com

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Watch Phone
Model Name	W2432AO

Note: The EUT functions are described in Annex A of this test report. Specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the client. Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
EUT1	867331070003158	GLI32-M-0	1.0.0	2025-01-07

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>Model</b>	<b>Manufacturer</b>	<b>Note</b>
AE1	USB Cable	XCP05V2	DONGGUAN IMO TECHNOLOGY LIMITED	---
AE2	Charger	/	Provided by the laboratory	---

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. EUT set-ups**

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1 + AE1 + AE2	Charging
Set.2	EUT1 + AE1 + PC	Connected to PC

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, were supplied by the client or manufacturer, which is the basis of testing. CAICT is not responsible for the accuracy of customer supplied technical information that may affect the test results (for example, antenna gain and loss of customer supplied cable).

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2023
ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

## 5. Test Results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	BR	Re-use test data from basic model report.
	NA	Not applicable
	NM	Not measured

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(Huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(Huayuan North Road)

## 6. Test Facilities Utilized

### Test instruments list:

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	LISN	ENV216	101200	R&S	1 year	2025-05-16
2	Test Receiver	ESCI	100344	R&S	1 year	2025-04-01
3	Universal Radio Communication Tester	CMW500	150344	R&S	1 year	2025-02-03
4	Test Receiver	ESW44	103023	R&S	1 year	2025-06-06
5	BiLog Antenna	VULB9163	01222	Schwarzbeck	1 year	2025-09-11
6	EMI Antenna	3115	0016725	ETS-Lindgren	1 year	2025-04-11
7	PC With mouse and keyboard	M4000e-17	M706GWXD	Lenovo	N/A	N/A
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Universal Radio Communication Tester	CMW500	116588	R&S	1 year	2026-01-25

Note: the No.3 equipment was in calibration due date when used for testing.

### Test software list:

Test Item	Test Software	Software Vendor
Radiated Emission	EMC32	R&S
Conducted Emission	EMC32	R&S

### Semi-anechoic chamber utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S <sub>VSWR</sub> )	Between 0 and 6 dB, from 1GHz to 18GHz

### Shielded room utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

## 7. Measurement Uncertainty

Where relevant, the following measurement uncertainty(worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

### Location 1: CTT(huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	5.15dB( $k=2$ )
	1GHz-18GHz	5.54dB( $k=2$ )
Conducted Emission	150kHz-30MHz	AC Power Line: 3.08dB( $k=2$ )

## ANNEX A: EUT parameters

Cellular Bands operate between 30MHz-960MHz	<input checked="" type="checkbox"/> LTE	Band 5/12/13/26
	<input checked="" type="checkbox"/> UMTS	Band 850MHz
	<input checked="" type="checkbox"/> GSM	Band 850MHz
Other FCC Part 15B related features	<input type="checkbox"/> FM <input checked="" type="checkbox"/> MP3 <input checked="" type="checkbox"/> Video <input checked="" type="checkbox"/> Camera <input checked="" type="checkbox"/> USB data/charging	

## **ANNEX B: Detailed Test Results**

### **B.1. Radiated Emission**

**Reference:** FCC Part 15.109(a).

**Method of measurement:** The field strength of radiated emissions from the unintentional radiator at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) were tested. The test was in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at the specified distance from the EUT. During the test, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

**EUT operating mode:** The EUT was operating in the USB data and/or charging mode. During the test, the EUT was connected to a charger in the case of charging mode. The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in Annex A, were investigated. Only the worst case emissions are reported. All equipment was placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

#### **Measurement limit:**

Frequency range (MHz)	Field strength limit ( $\mu$ V/m)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. The limits for 10 meters distance is got by converting: Limit(10m) = Limit(3m) + 20[log(3/10)], which is according to FCC 15.109(g)(2)

#### **Test settings:**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

#### **Measurement results:**

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{RPL} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{PL}$ : Path Loss

$P_{Mea}$ : Measurement result on receiver.

Note: The measurement results showed as followed are worst cases, and the combinations of different batteries, cables and headsets were considered if applicable.

### EUT1 Rear camera and charger mode, Set.1

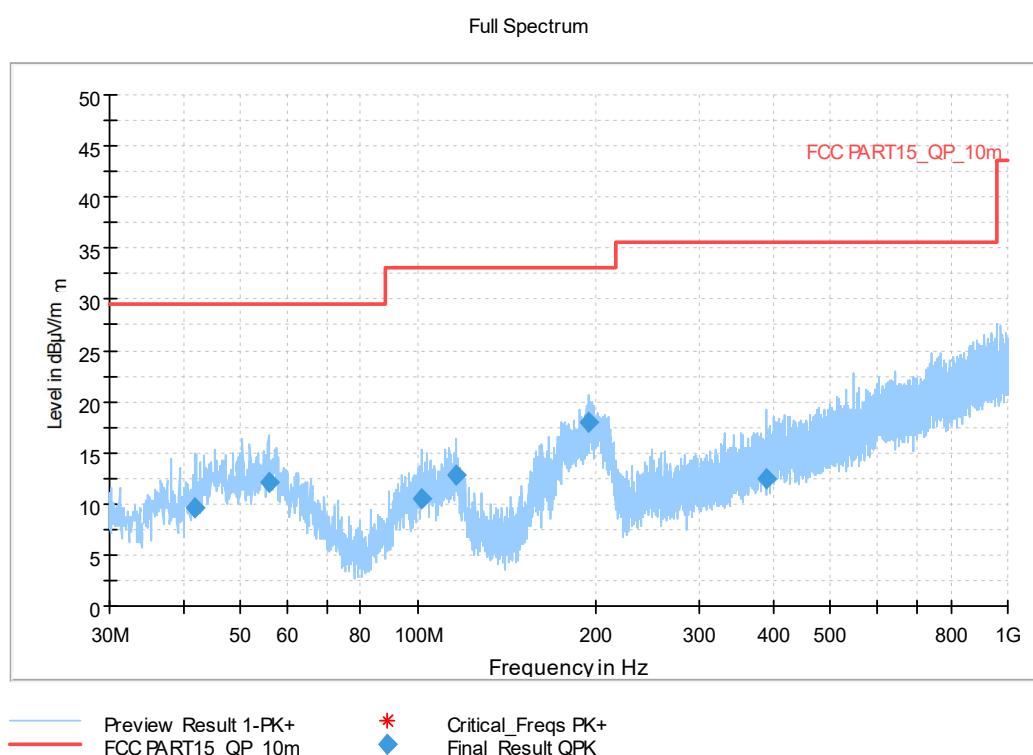
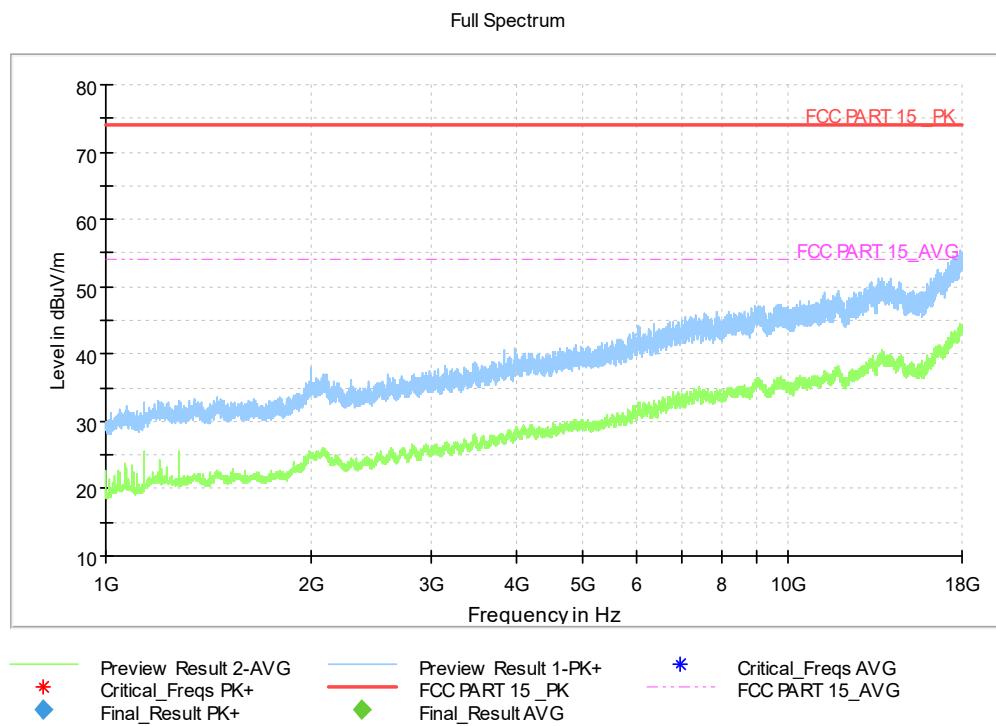


Figure A.1 Radiated Emission from 30MHz to 1GHz

#### QP detector

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
41.979500	9.60	29.54	19.94	120.000	325.0	V	114.0
55.802000	12.04	29.54	17.50	120.000	223.0	V	135.0
101.392000	10.59	33.06	22.47	120.000	125.0	V	135.0
116.136000	12.90	33.06	20.16	120.000	223.0	V	180.0
194.415000	17.92	33.06	15.14	120.000	109.0	V	255.0
388.609000	12.40	35.56	23.16	120.000	225.0	V	-15.0



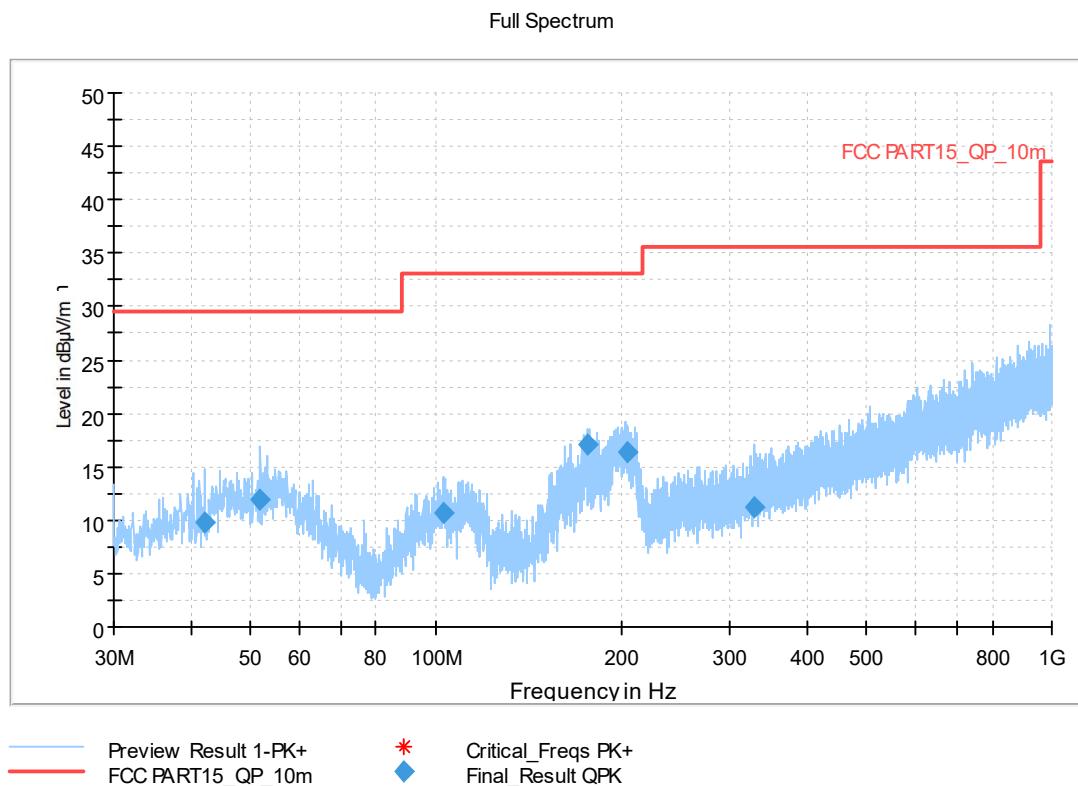
**Figure A.2 Radiated Emission from 1GHz to 18GHz**

#### Average detector

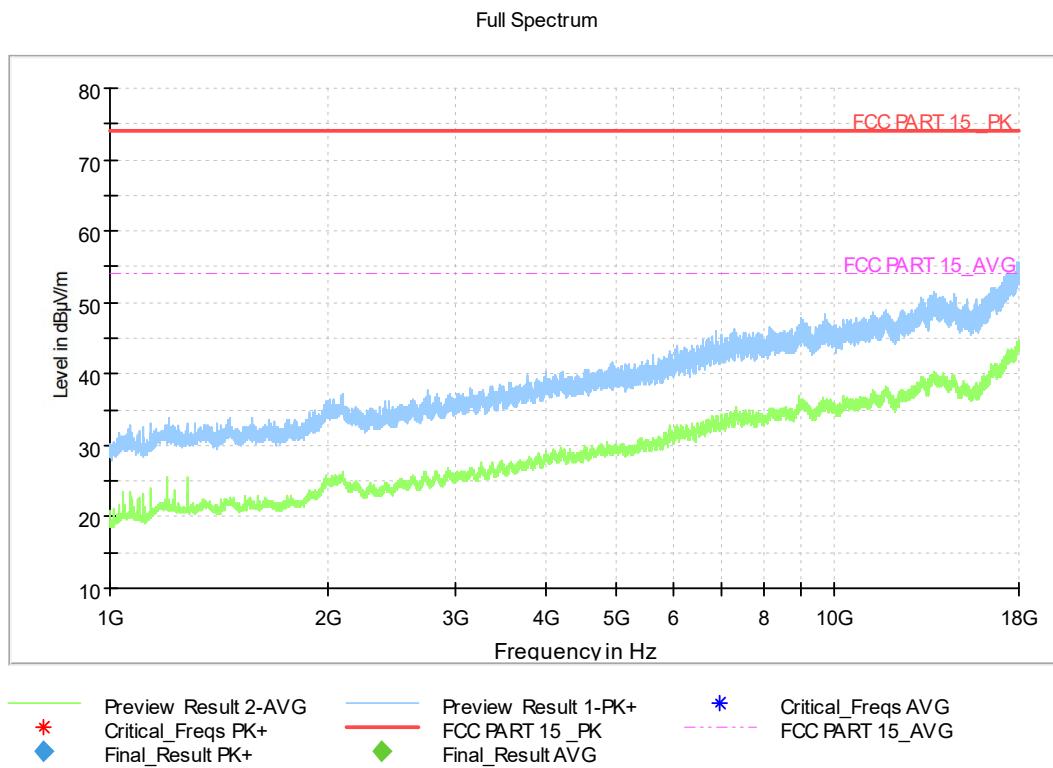
Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17936.4	44.26	-26.8	42.3	28.76	54	9.74	V
17952.7	44.25	-26.8	42.3	28.75	54	9.75	V
17942.5	44.1	-26.8	42.3	28.6	54	9.9	H
17917	44.09	-26.8	42.3	28.59	54	9.91	H
17962.9	44.08	-26.8	42.3	28.58	54	9.92	V
17909.6	44.04	-26.8	42.3	28.54	54	9.96	H

#### Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17926.2	55.46	-26.8	42.3	39.96	74	18.54	V
17943.9	55.27	-26.8	42.3	39.77	74	18.73	H
17944.9	55.24	-26.8	42.3	39.74	74	18.76	V
17974.8	55.22	-26.8	42.3	39.72	74	18.78	H
17917	55.03	-26.8	42.3	39.53	74	18.97	H
17899.7	54.87	-26.8	42.3	39.37	74	19.13	H

**EUT1 LTE Band 5 idle, front camera and charger mode, Set.1**

**Figure A.3 Radiated Emission from 30MHz to 1GHz**
**QP detector**

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
42.125000	9.72	29.54	19.82	120.000	176.0	V	-45.0
51.922000	11.84	29.54	17.70	120.000	109.0	V	20.0
103.041000	10.63	33.06	22.43	120.000	125.0	V	135.0
176.615500	17.12	33.06	15.94	120.000	104.0	V	75.0
204.066500	16.44	33.06	16.62	120.000	101.0	V	248.0
328.566000	11.18	35.56	24.38	120.000	225.0	H	154.0



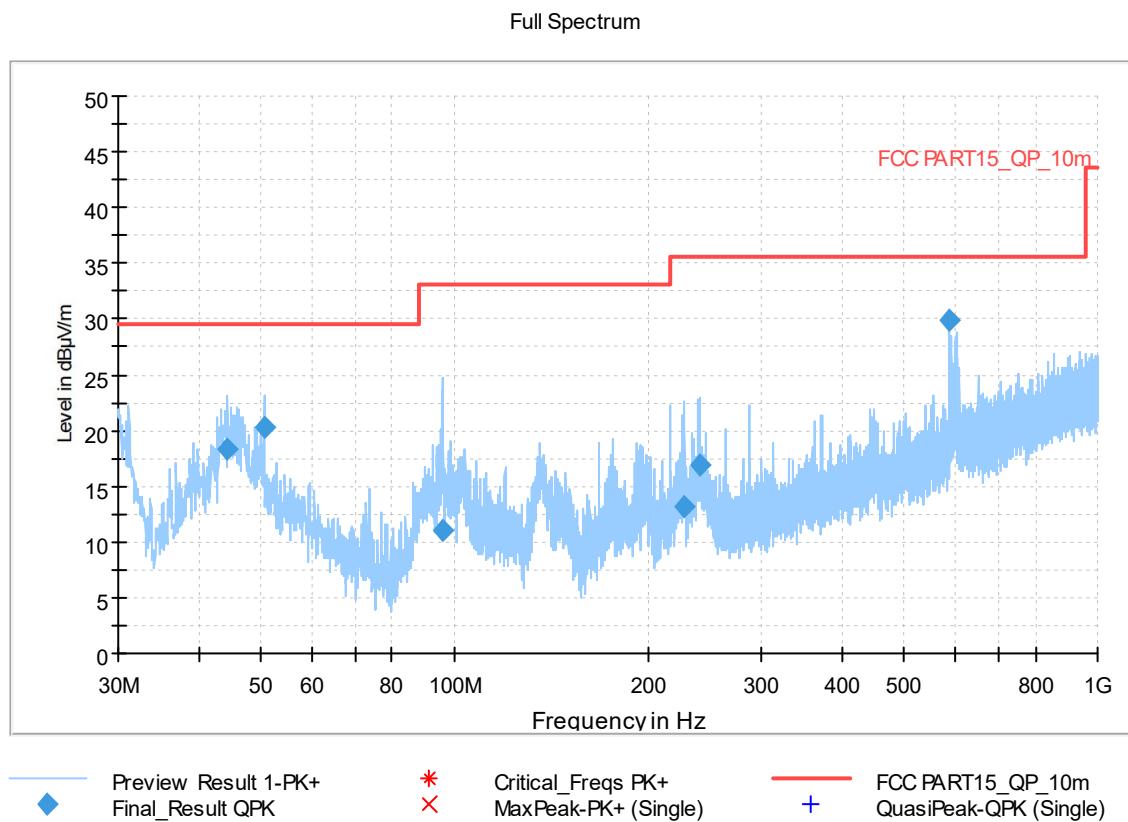
**Figure A.4 Radiated Emission from 1GHz to 18GHz**

#### Average detector

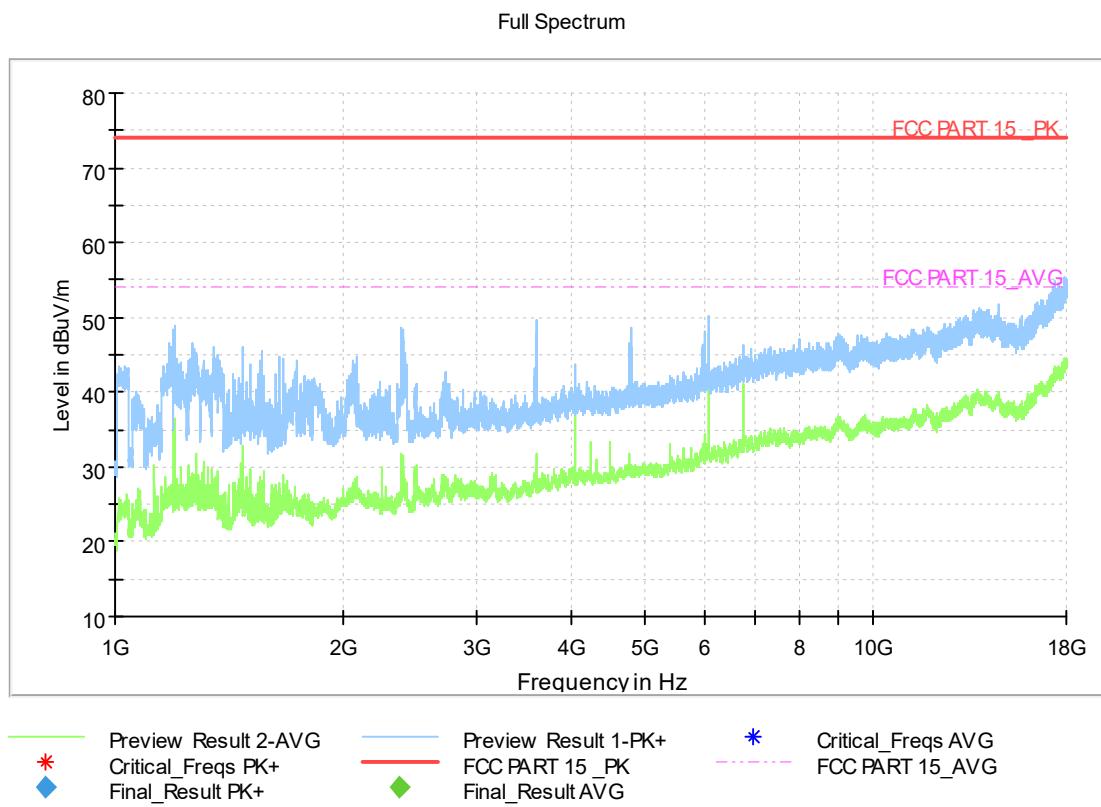
Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17897.3	44.39	-26.8	42.3	28.89	54	9.61	H
17931	44.2	-26.8	42.3	28.7	54	9.8	H
17961.2	44.18	-26.8	42.3	28.68	54	9.82	H
17978.2	44.17	-26.8	42.3	28.67	54	9.83	H
17977.2	44.12	-26.8	42.3	28.62	54	9.88	V
17983	44.12	-26.8	42.3	28.62	54	9.88	V

#### Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17969.7	55.7	-26.8	42.3	40.2	74	18.3	V
17933.7	55.52	-26.8	42.3	40.02	74	18.48	V
17943.2	55.24	-26.8	42.3	39.74	74	18.76	H
17960.6	55.11	-26.8	42.3	39.61	74	18.89	V
17995.9	55.09	-26.8	42.3	39.59	74	18.91	H
17992.9	55.01	-26.8	42.3	39.51	74	18.99	H

**EUT1 USB connected to PC and video play mode, Set.2**

**Figure A.5 Radiated Emission from 30MHz to 1GHz**
**QP detector**

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
44.404500	18.34	29.54	11.20	120.000	275.0	V	16.0
50.515500	20.21	29.54	9.33	120.000	102.0	V	53.0
95.863000	11.09	33.06	21.97	120.000	101.0	V	45.0
228.268000	13.12	35.56	22.44	120.000	290.0	H	-8.0
240.296000	16.85	35.56	18.71	120.000	325.0	H	-22.0
588.283500	29.84	35.56	5.72	120.000	225.0	V	315.0



**Figure A.6 Radiated Emission from 1GHz to 18GHz**

#### Average detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
6057.2	47.82	-36.15	35.4	48.57	54	6.18	V
6057.5	46.94	-36.15	35.4	47.69	54	7.06	V
6056.8	46.91	-36.15	35.4	47.66	54	7.09	V
6056.5	44.56	-36.15	35.4	45.31	54	9.44	V
17910.6	44.37	-26.8	42.3	28.87	54	9.63	V
17903.8	44.23	-26.8	42.3	28.73	54	9.77	V

#### Peak detector

Frequency (MHz)	Measurement Result (dB $\mu$ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB $\mu$ V)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pol. (H/V)
17921.1	55.43	-26.8	42.3	39.93	74	18.57	V
17943.2	55.15	-26.8	42.3	39.65	74	18.85	H
17956.8	55.14	-26.8	42.3	39.64	74	18.86	V
17873.9	55.11	-26.8	42.3	39.61	74	18.89	V
17905.5	55.11	-26.8	42.3	39.61	74	18.89	V
17955.8	55.05	-26.8	42.3	39.55	74	18.95	H

## B.2. Conducted Emission

**Reference:** FCC: Part 15.107(a).

**Method of measurement:** For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

**EUT operating mode:** The EUT is operating in the charging mode and USB data mode if applicable.

**Measurement limit:**

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

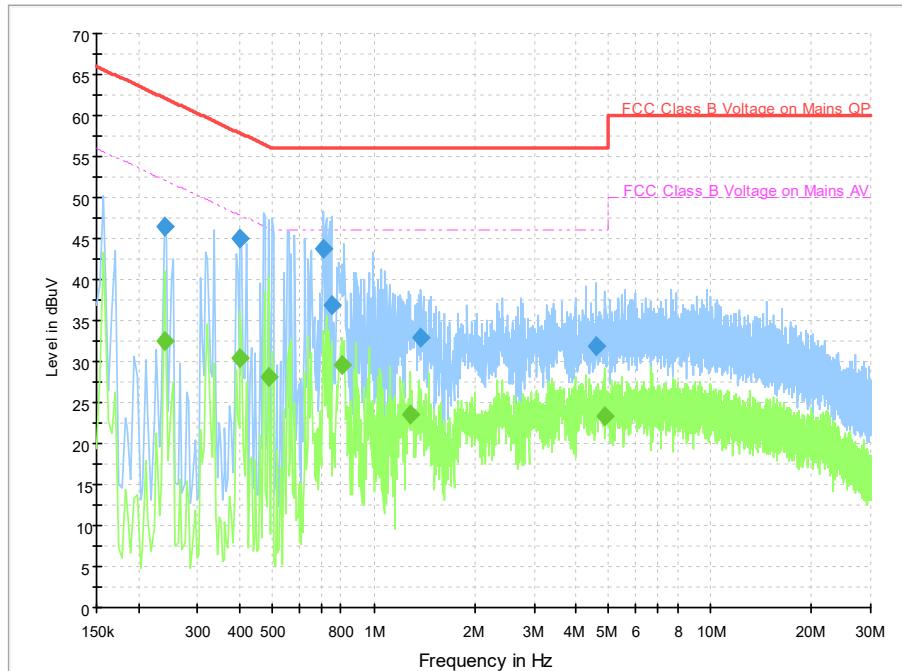
**Test Settings:**

Voltage(V)	Frequency(Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

**Measurement results:**

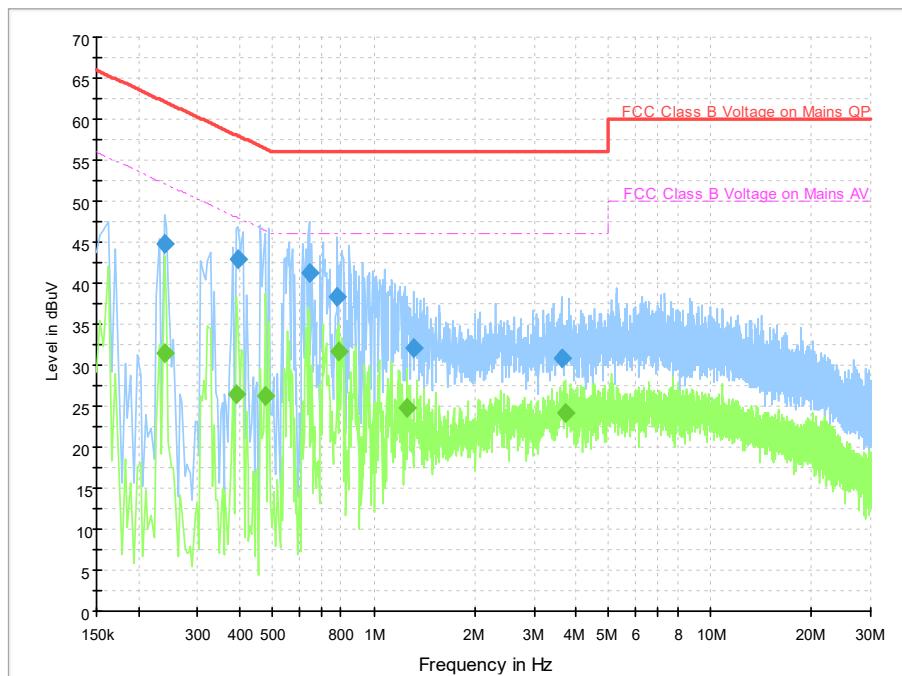
The measurement results showed as followed are worst cases, and the combinations of different batteries, cables and headsets were considered if applicable.

**EUT1 Rear camera and charger mode, Set.1**

**Figure A.9 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.238000	46.5	2000.0	9.000	On	L1	19.9	15.7	62.2
0.402000	45.1	2000.0	9.000	On	L1	20.0	12.7	57.8
0.710000	43.9	2000.0	9.000	On	N	19.8	12.1	56.0
0.750000	36.8	2000.0	9.000	On	N	19.8	19.2	56.0
1.382000	32.8	2000.0	9.000	On	L1	19.9	23.2	56.0
4.570000	31.8	2000.0	9.000	On	L1	19.8	24.2	56.0

**Final Result 2**

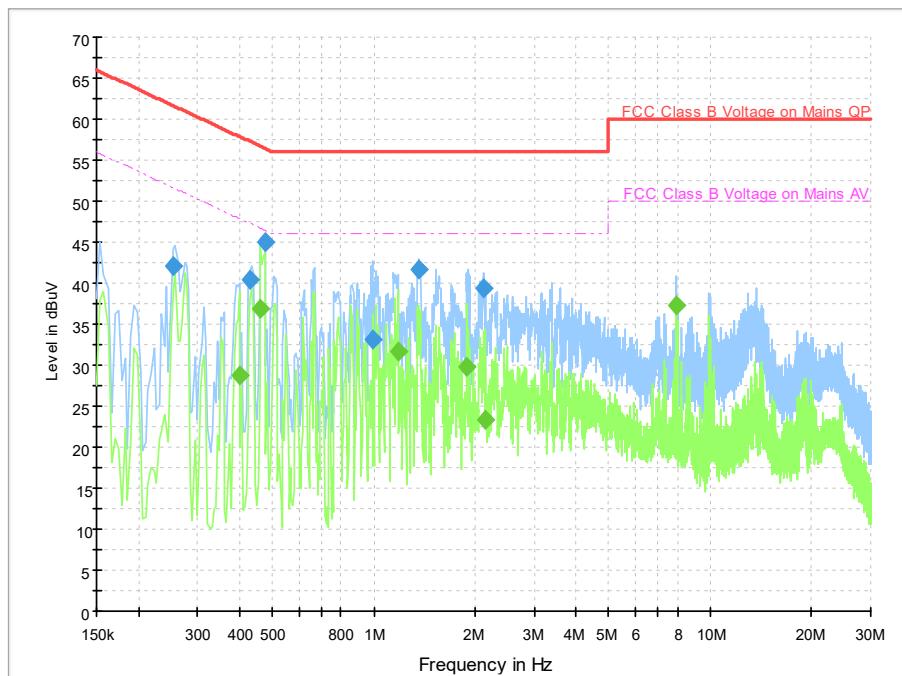
Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.238000	32.6	2000.0	9.000	On	L1	19.9	19.6	52.2
0.402000	30.5	2000.0	9.000	On	L1	20.0	17.3	47.8
0.486000	28.1	2000.0	9.000	On	L1	20.0	18.1	46.2
0.802000	29.5	2000.0	9.000	On	L1	19.9	16.5	46.0
1.286000	23.6	2000.0	9.000	On	L1	19.9	22.4	46.0
4.838000	23.4	2000.0	9.000	On	L1	19.8	22.6	46.0

**EUT1 LTE Band 5 idle, front camera and charger mode, Set.1**

**Figure A.10 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.238000	44.9	2000.0	9.000	On	L1	19.9	17.3	62.2
0.394000	42.8	2000.0	9.000	On	N	19.9	15.2	58.0
0.642000	41.2	2000.0	9.000	On	N	19.8	14.8	56.0
0.782000	38.4	2000.0	9.000	On	N	19.8	17.6	56.0
1.318000	32.0	2000.0	9.000	On	N	19.7	24.0	56.0
3.610000	30.9	2000.0	9.000	On	L1	19.8	25.1	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.238000	31.5	2000.0	9.000	On	L1	19.9	20.7	52.2
0.390000	26.4	2000.0	9.000	On	L1	19.9	21.6	48.1
0.478000	26.2	2000.0	9.000	On	N	19.9	20.2	46.4
0.790000	31.7	2000.0	9.000	On	L1	19.9	14.3	46.0
1.258000	24.9	2000.0	9.000	On	L1	19.9	21.1	46.0
3.714000	24.2	2000.0	9.000	On	L1	19.8	21.8	46.0

**EUT1 USB connected to PC and video play mode, Set.2**

**Figure A.11 Conducted Emission**
**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.254000	42.0	2000.0	9.000	On	N	19.8	19.6	61.6
0.430000	40.5	2000.0	9.000	On	L1	20.0	16.8	57.3
0.474000	45.0	2000.0	9.000	On	N	19.9	11.4	56.4
0.990000	33.1	2000.0	9.000	On	L1	19.9	22.9	56.0
1.358000	41.6	2000.0	9.000	On	L1	19.9	14.4	56.0
2.130000	39.4	2000.0	9.000	On	N	19.6	16.6	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.398000	28.9	2000.0	9.000	On	L1	20.0	19.0	47.9
0.462000	36.9	2000.0	9.000	On	L1	20.0	9.7	46.7
1.178000	31.8	2000.0	9.000	On	L1	19.9	14.2	46.0
1.898000	29.8	2000.0	9.000	On	N	19.6	16.2	46.0
2.150000	23.2	2000.0	9.000	On	L1	19.8	22.8	46.0
7.922000	37.4	2000.0	9.000	On	N	19.7	12.6	50.0

**ANNEX C: Persons involved in this testing**

Test Item	Tester
Radiated Emission	Zhang Tianli, Guo Zilong
Conducted Emission	Wang Zixuan, Li Pengfei, Ding Zai, Zhang Tianli

**\*\*\*END OF REPORT\*\*\***