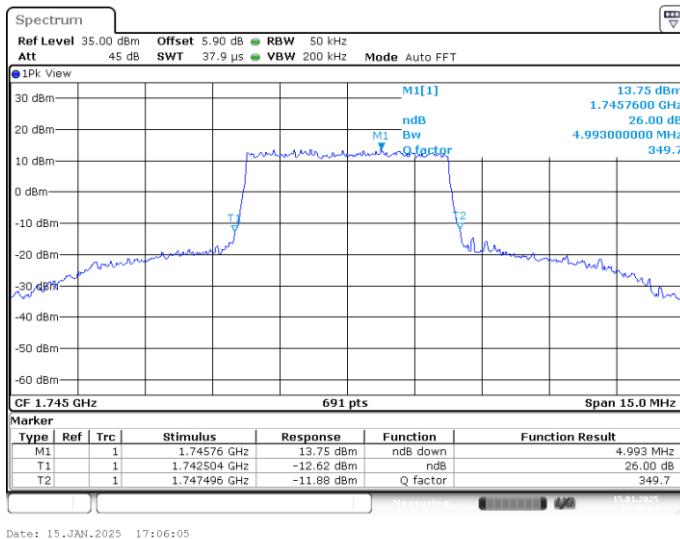
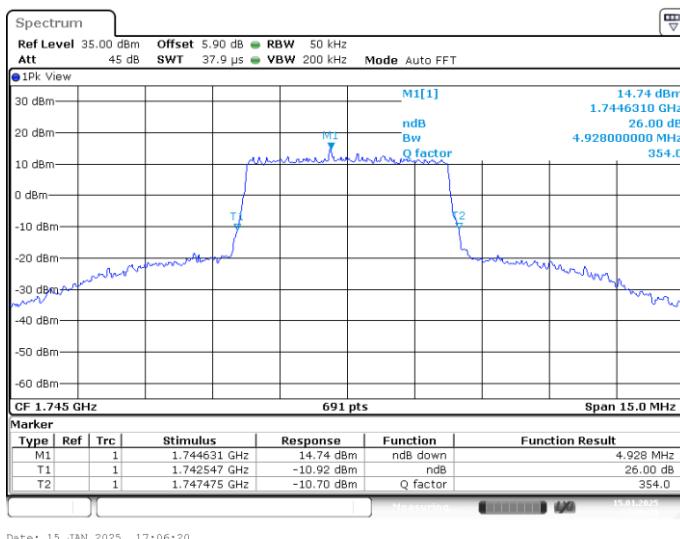




LTE band 66,5MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	4.993	4.928

LTE band 66 , 5MHz Bandwidth,MID,QPSK (-26dBc BW)

LTE band 66 , 5MHz Bandwidth,MID,16QAM (-26dBc BW)


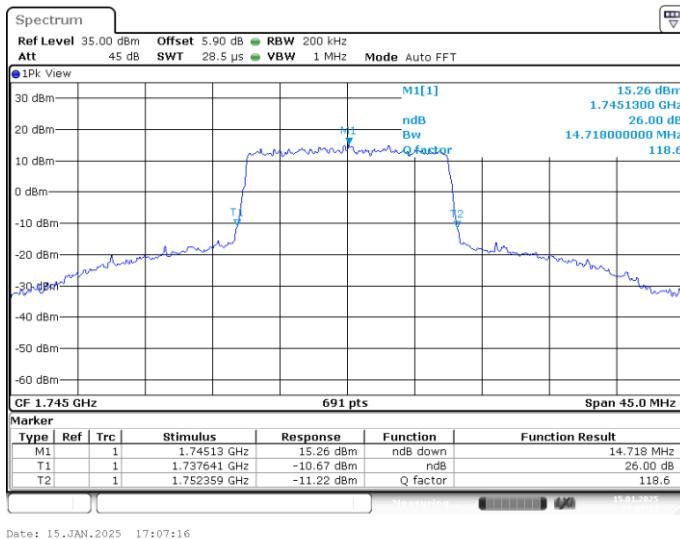
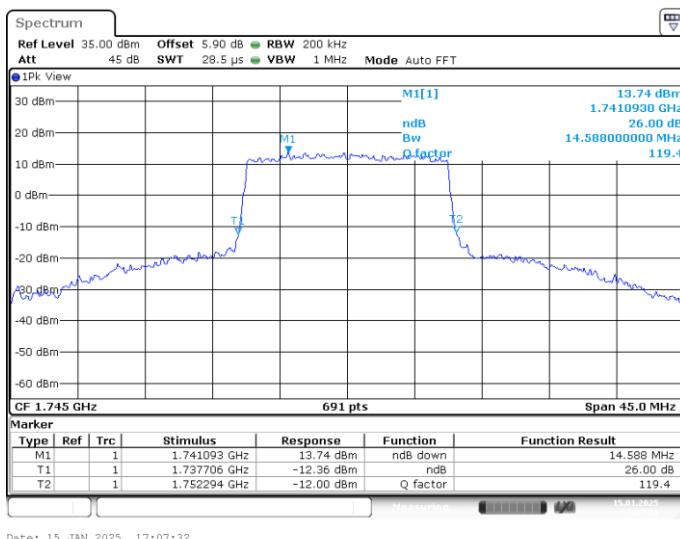
LTE band 66,10MHz(-26dBc)

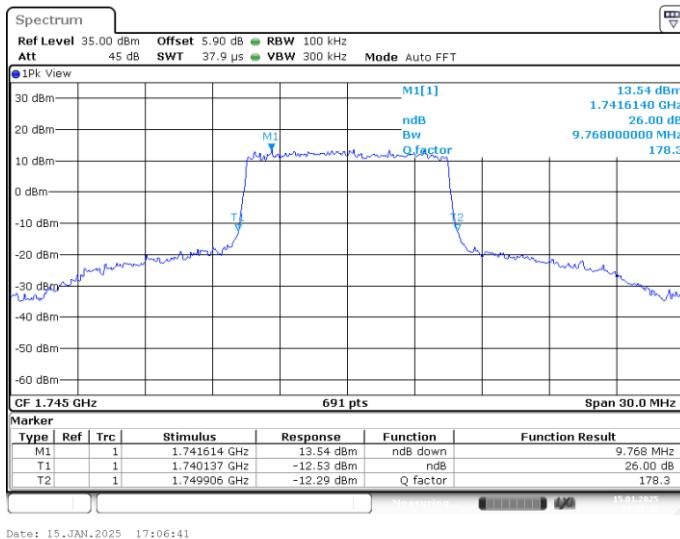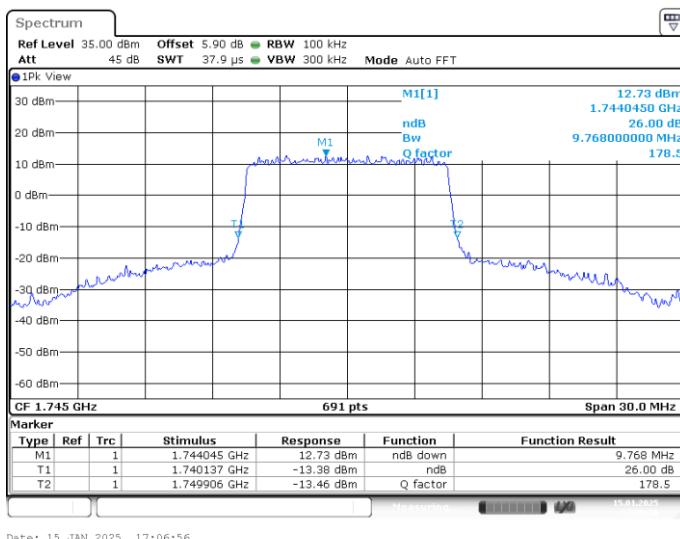Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	9.768	9.768

LTE band 66 , 10MHz Bandwidth,MID,QPSK (-26dBc BW)

LTE band 66 , 10MHz Bandwidth,MID,16QAM (-26dBc BW)


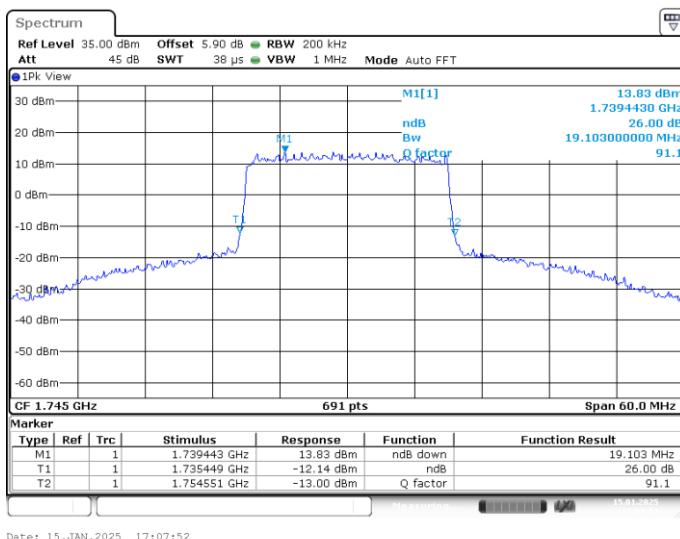
LTE band 66,15MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	14.718	14.588


LTE band 66 , 15MHz Bandwidth,MID,QPSK (-26dBc BW)

LTE band 66 , 15MHz Bandwidth,MID,16QAM (-26dBc BW)


LTE band 66,20MHz(-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	QPSK	16QAM
1745	19.103	19.190

LTE band 66 , 20MHz Bandwidth,MID,QPSK (-26dBc BW)

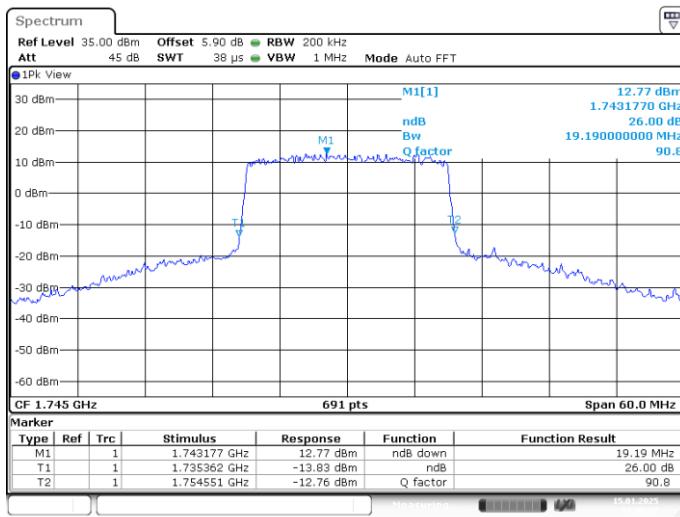
Date: 15.JAN.2025 17:07:52

LTE band 66 , 20MHz Bandwidth,MID,16QAM (-26dBc BW)


Date: 15.JAN.2025 17:08:08

A.6 Band Edge Compliance

A.6.1 Measurement limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.


Part 27.53(g) states for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Part 90.691 states that out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


A.6.2 Measurement result

LTE band 2


OBW: 1RB-LOW_offset

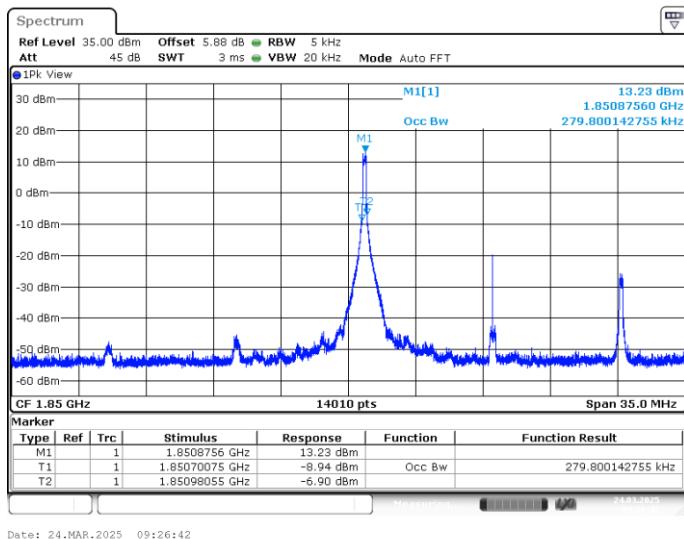


LOW BAND EDGE BLOCK-1RB-LOW_offset

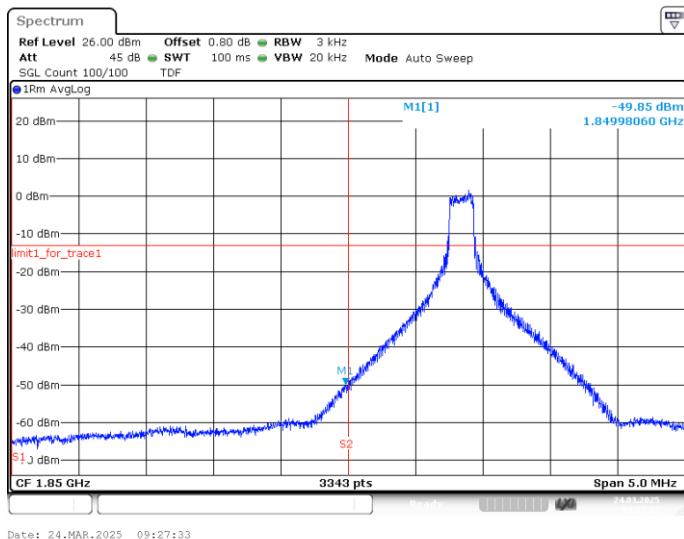


OBW: 1RB-HIGH_offset

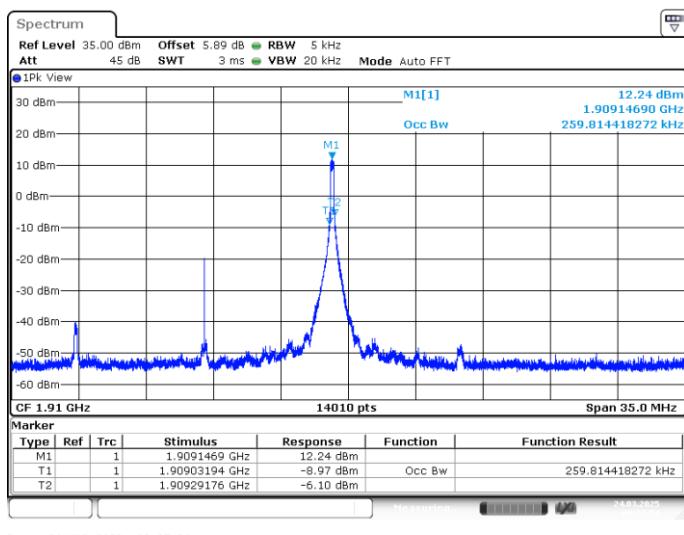


HIGH BAND EDGE BLOCK-1RB-HIGH_offset

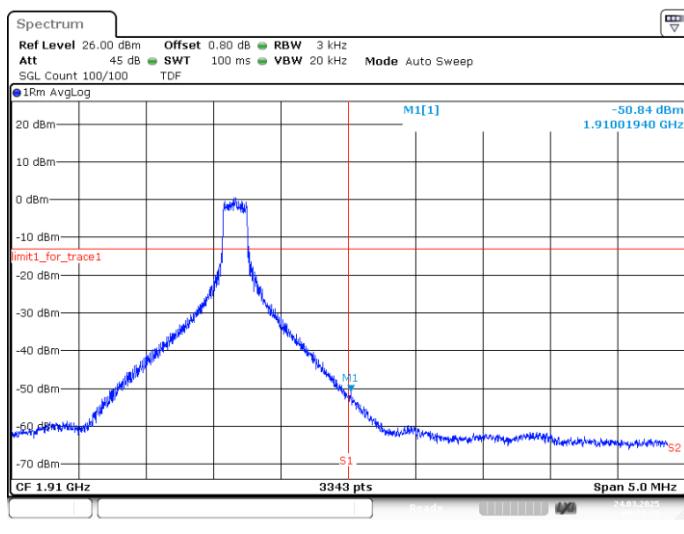

LOW BAND EDGE BLOCK-20MHz-100%RB

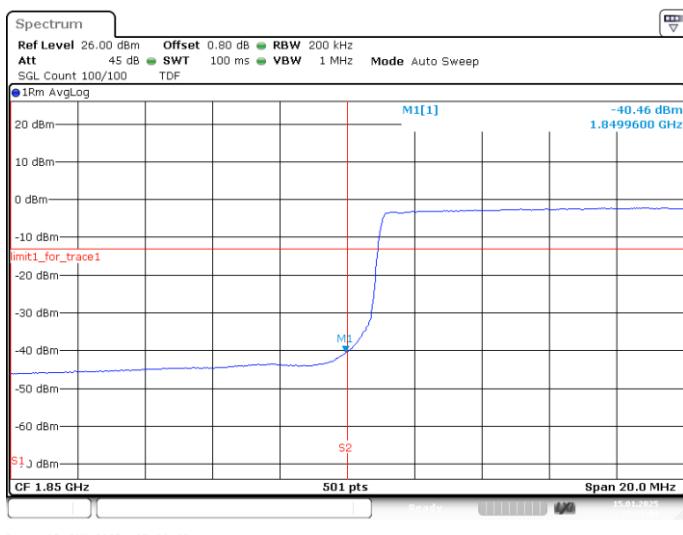


HIGH BAND EDGE BLOCK-20MHz-100%RB

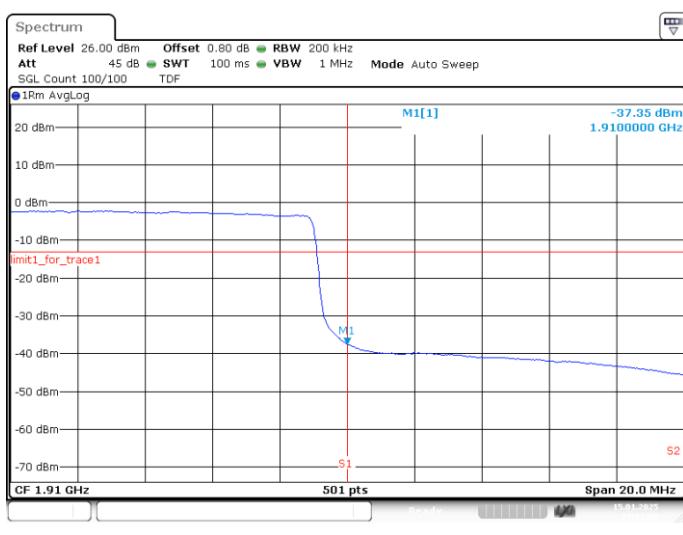


LTE band 4

OBW: 1RB-LOW_offset

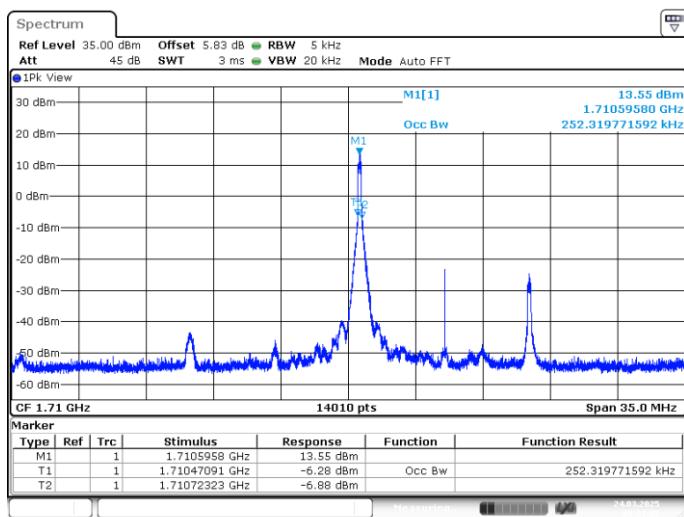


Date: 24.MAR.2025 09:31:02

LOW BAND EDGE BLOCK-1RB-LOW_offset

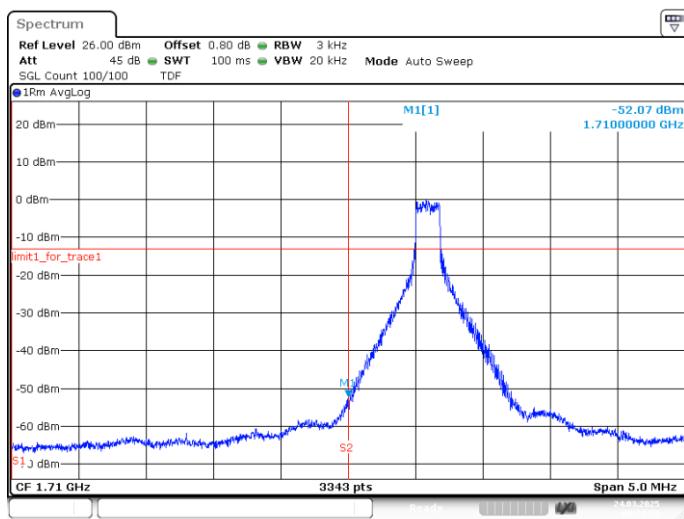


Date: 24.MAR.2025 09:31:52


OBW: 1RB-HIGH_offset

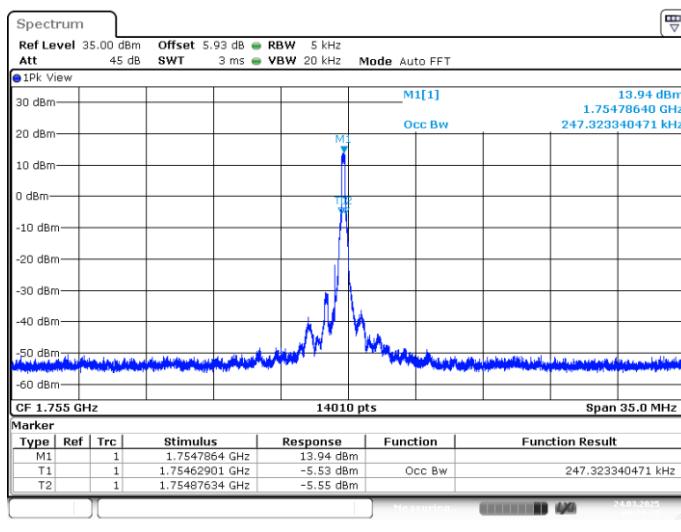


HIGH BAND EDGE BLOCK-1RB-HIGH_offset

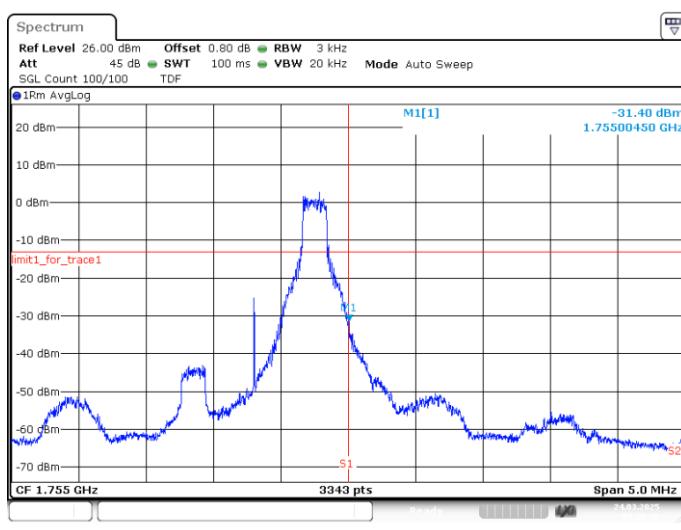

LOW BAND EDGE BLOCK-20MHz-100%RB

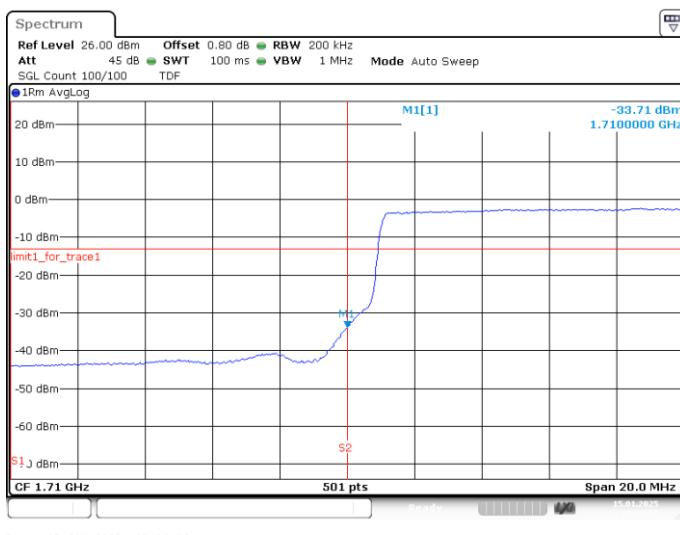


HIGH BAND EDGE BLOCK-20MHz-100%RB

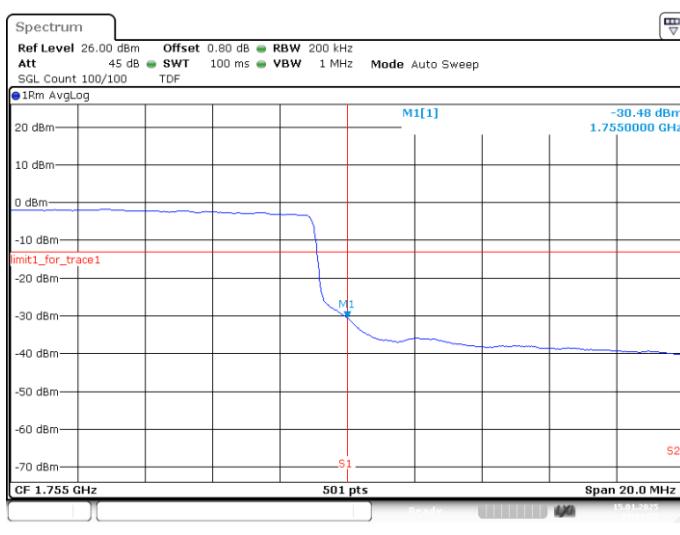


LTE band 5


OBW: 1RB-LOW_offset

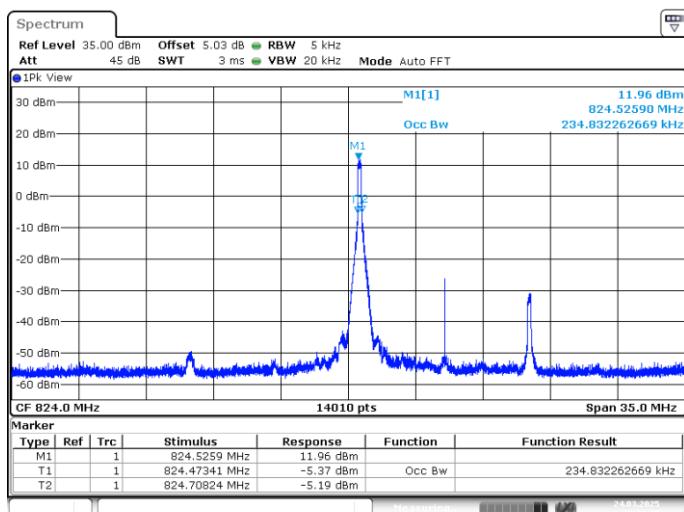


LOW BAND EDGE BLOCK-1RB-LOW_offset

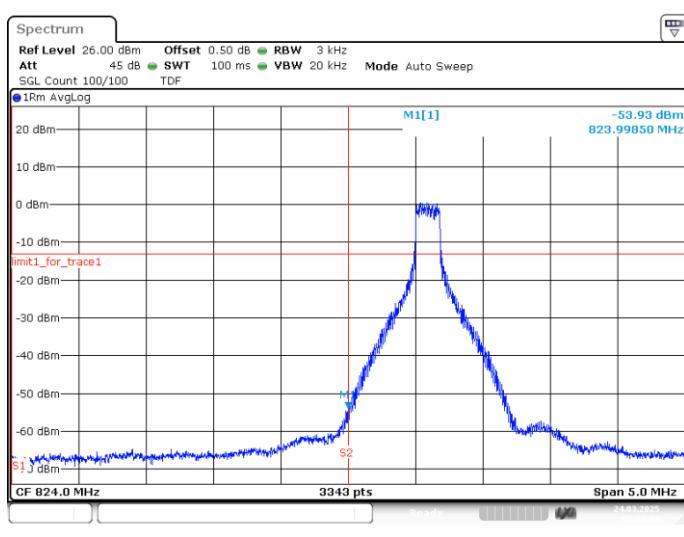


OBW: 1RB-HIGH_offset

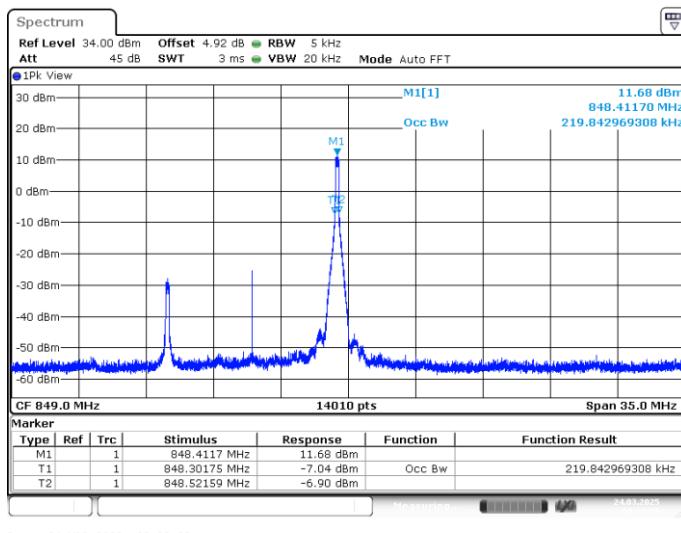

HIGH BAND EDGE BLOCK-1RB-HIGH_offset

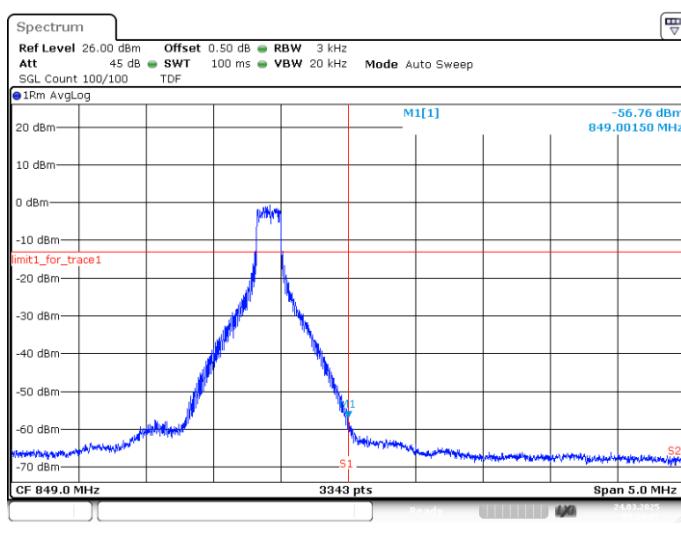


LOW BAND EDGE BLOCK-10MHz-100%RB

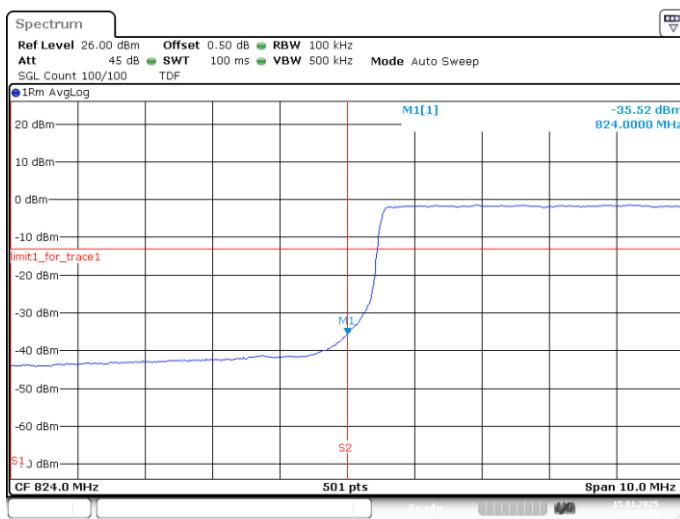

Date: 15.JAN.2025 17:15:58


HIGH BAND EDGE BLOCK-10MHz-100%RB

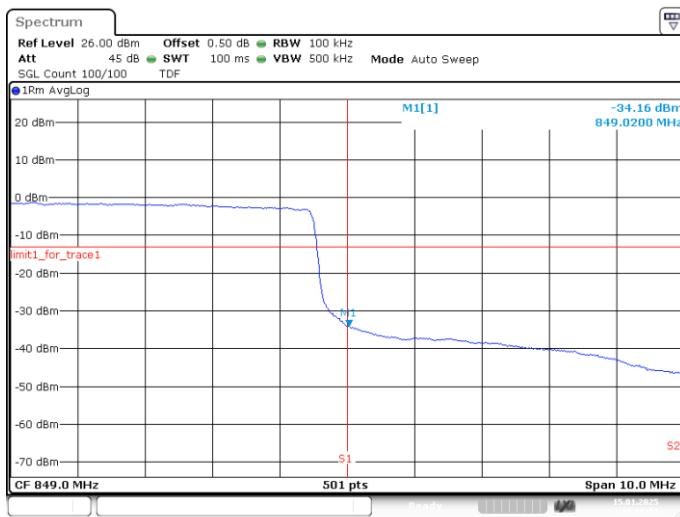


Date: 15.JAN.2025 17:16:53

LTE band 12


LOW BAND EDGE BLOCK-1RB-LOW_offset

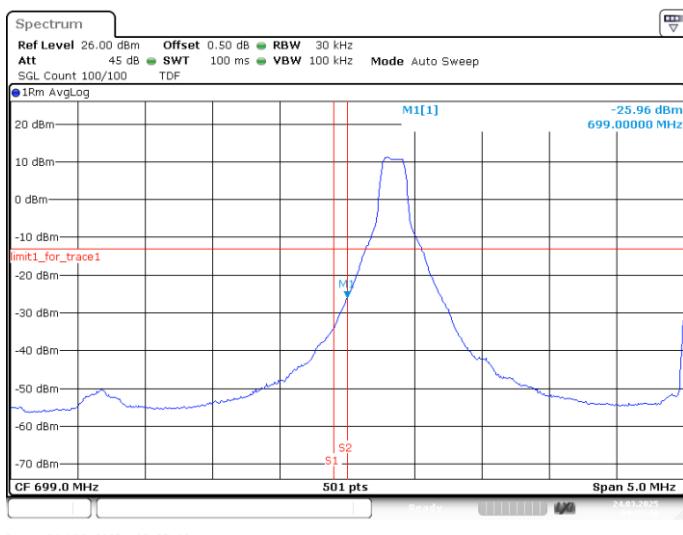

HIGH BAND EDGE BLOCK-1RB-HIGH_offset

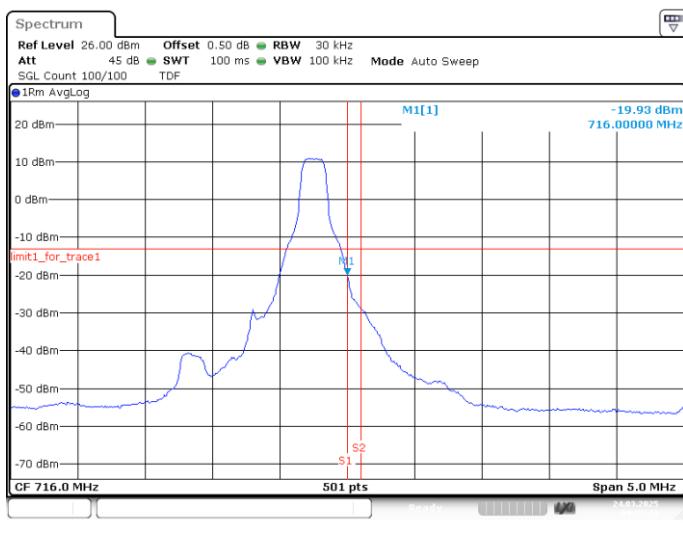


LOW BAND EDGE BLOCK-10MHz-100%RB

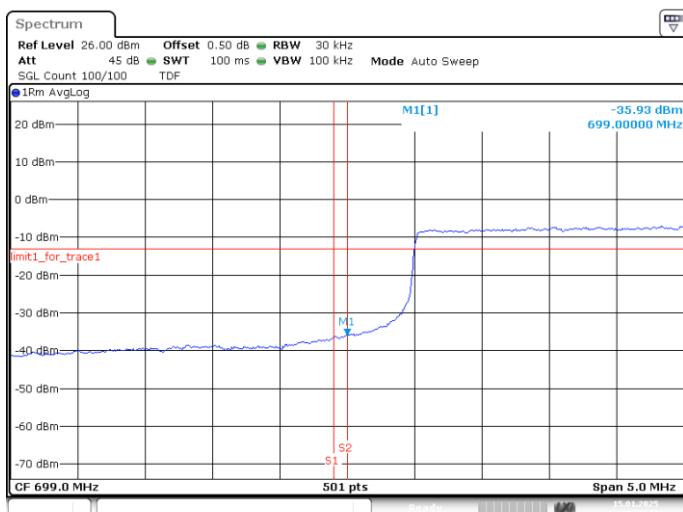

Date: 15.JAN.2025 17:17:49


HIGH BAND EDGE BLOCK-10MHz-100%RB

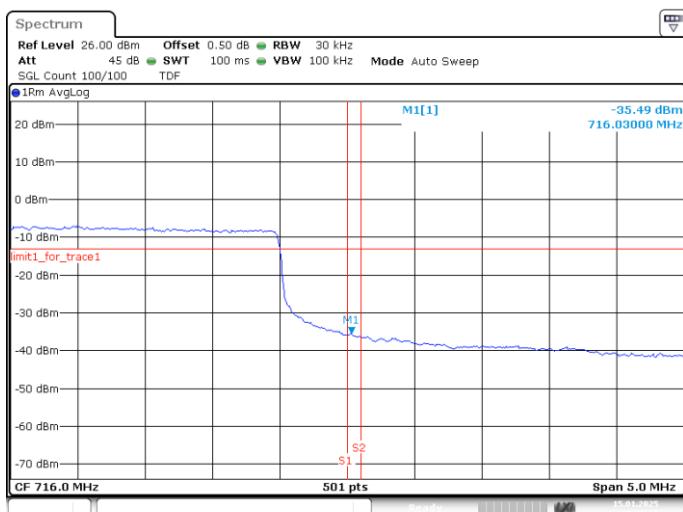


Date: 15.JAN.2025 17:19:35

LTE band 13


LOW BAND EDGE BLOCK-1RB-LOW_offset

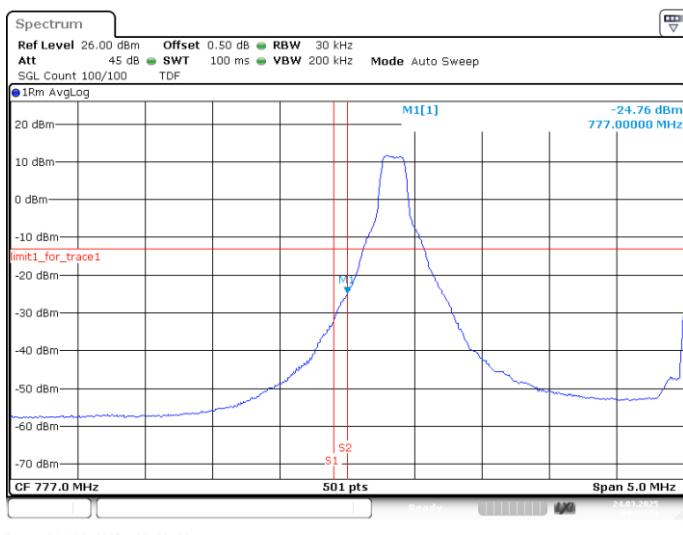

HIGH BAND EDGE BLOCK-1RB-HIGH_offset

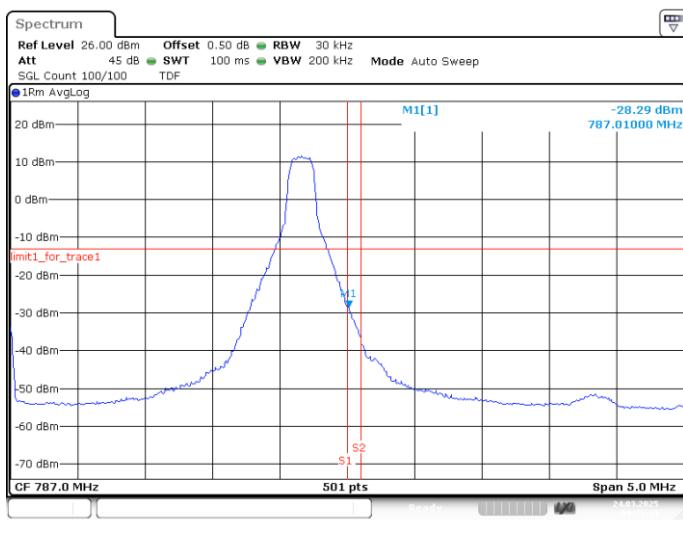


LOW BAND EDGE BLOCK-10MHz-100%RB

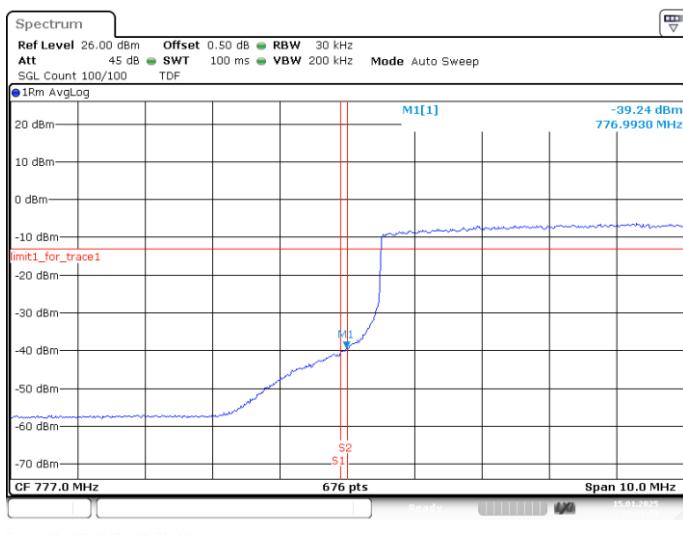

Date: 15.JAN.2025 17:21:19


HIGH BAND EDGE BLOCK-10MHz-100%RB

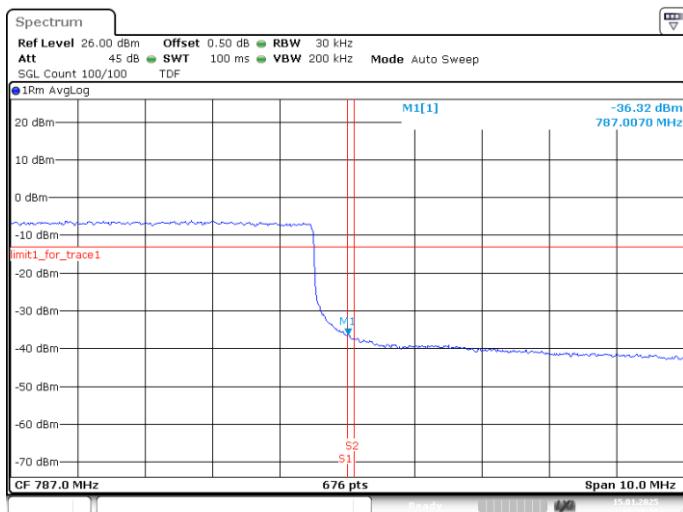


Date: 15.JAN.2025 17:23:21

LTE band 17


LOW BAND EDGE BLOCK-1RB-LOW_offset

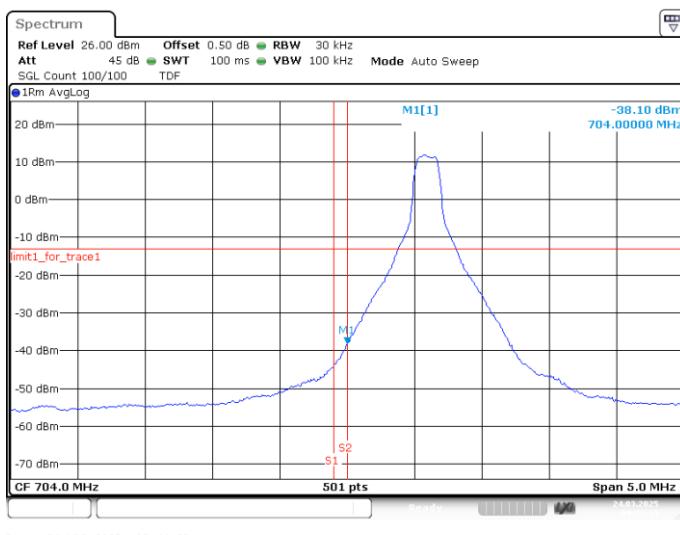


HIGH BAND EDGE BLOCK-1RB-HIGH_offset

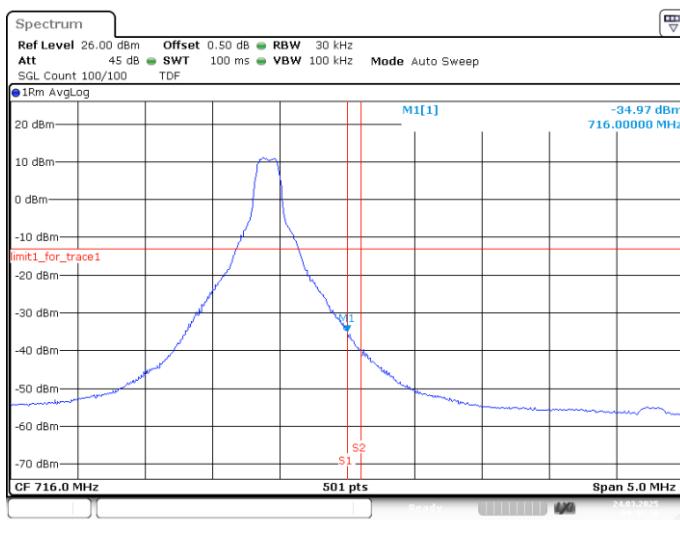

LOW BAND EDGE BLOCK-10MHz-100%RB

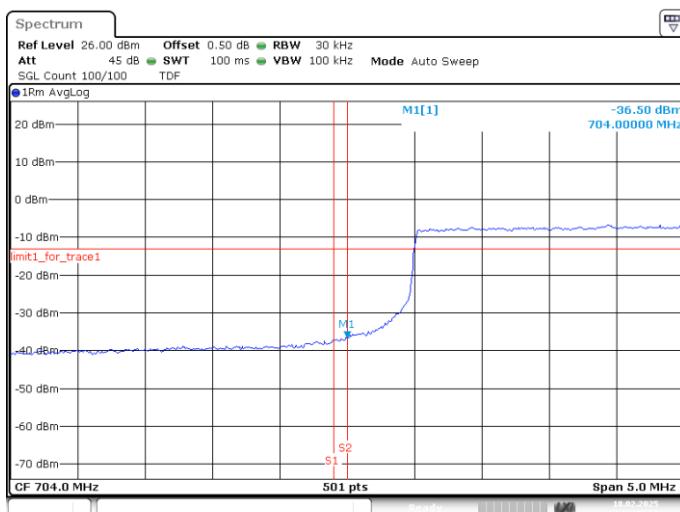


HIGH BAND EDGE BLOCK-10MHz-100%RB

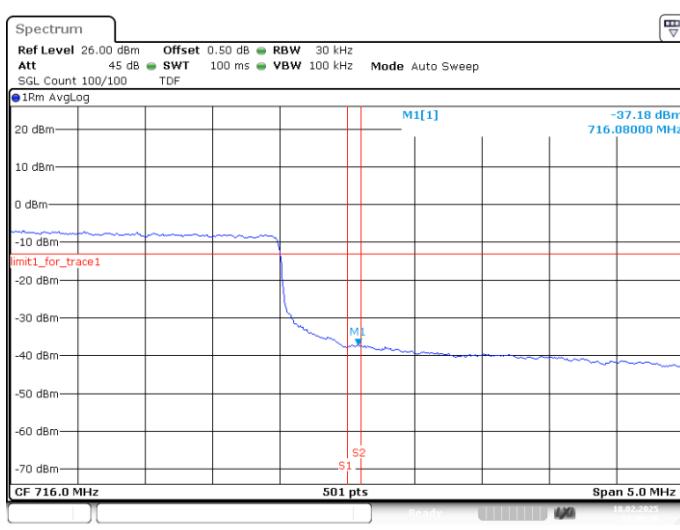


LTE band 26_Part22


OBW: 1RB-LOW_offset

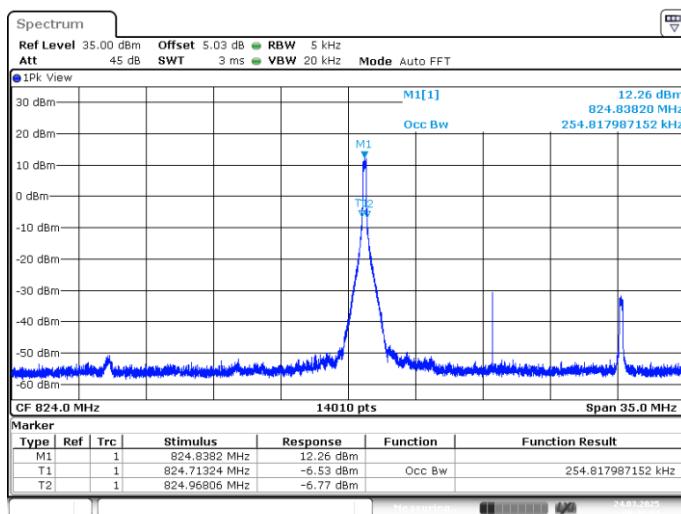

LOW BAND EDGE BLOCK-1RB-LOW_offset

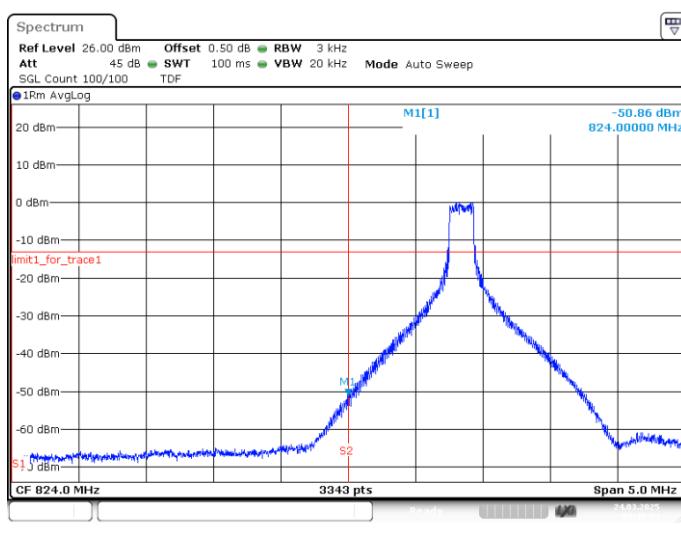


OBW: 1RB-HIGH_offset

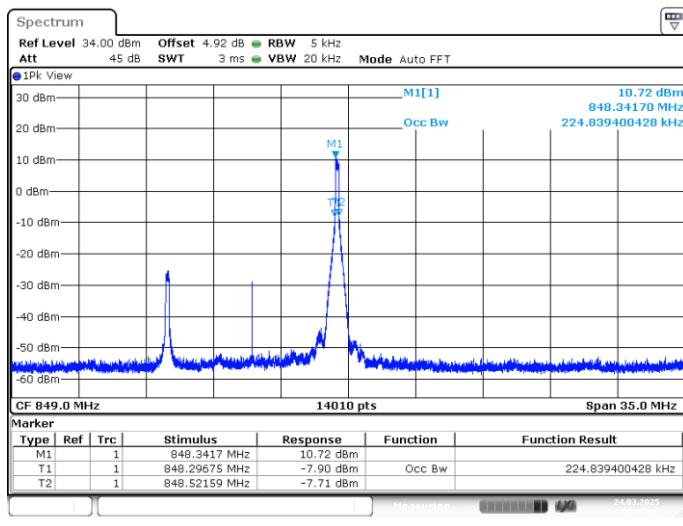


Date: 24.MAR.2025 09:47:49

HIGH BAND EDGE BLOCK-1RB-HIGH_offset

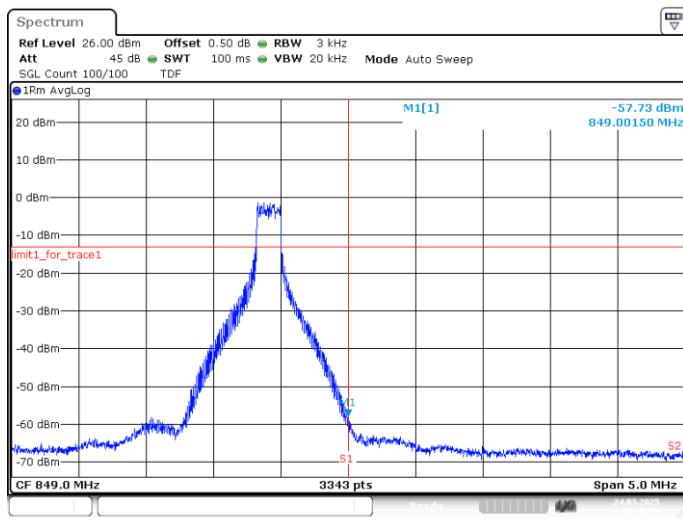

Date: 24.MAR.2025 09:48:39

LOW BAND EDGE BLOCK-15MHz-100%RB

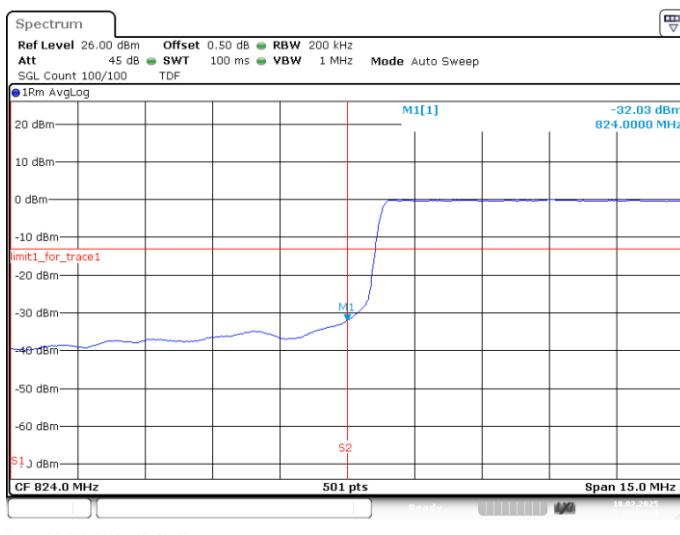

Date: 18.FEB.2025 13:51:25


HIGH BAND EDGE BLOCK-15MHz-100%RB



Date: 18.FEB.2025 13:52:20


LTE band 26_Part90

OBW: 1RB-LOW_offset

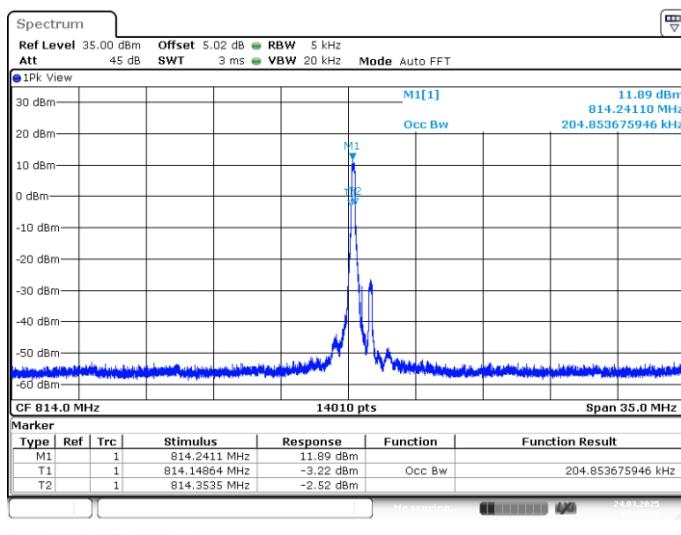


Date: 24.MAR.2025 09:50:43

LOW BAND EDGE BLOCK-1RB-LOW_offset

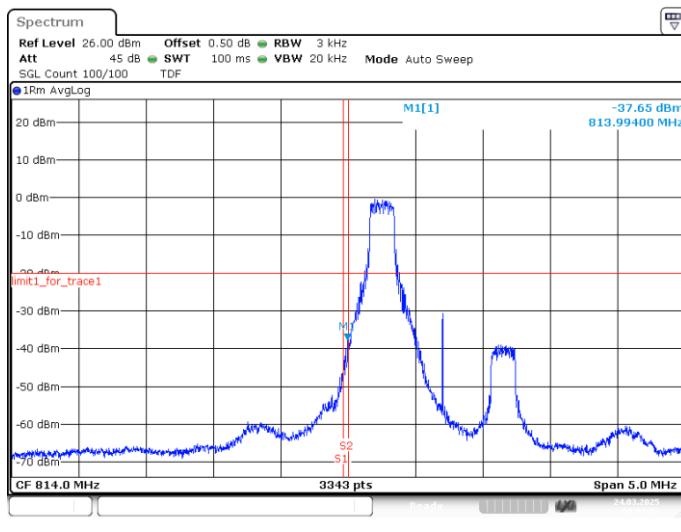


Date: 24.MAR.2025 09:51:32

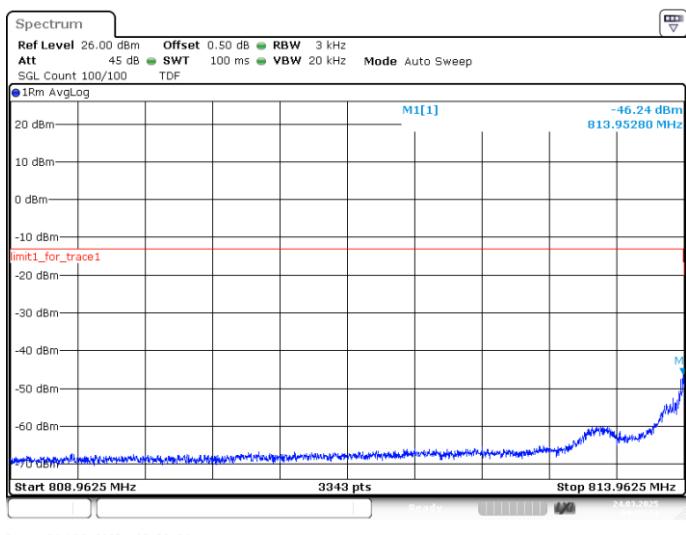
LOW BAND EDGE BLOCK-1RB-LOW_offset


Date: 24.MAR.2025 09:52:24

OBW: 1RB-HIGH_offset

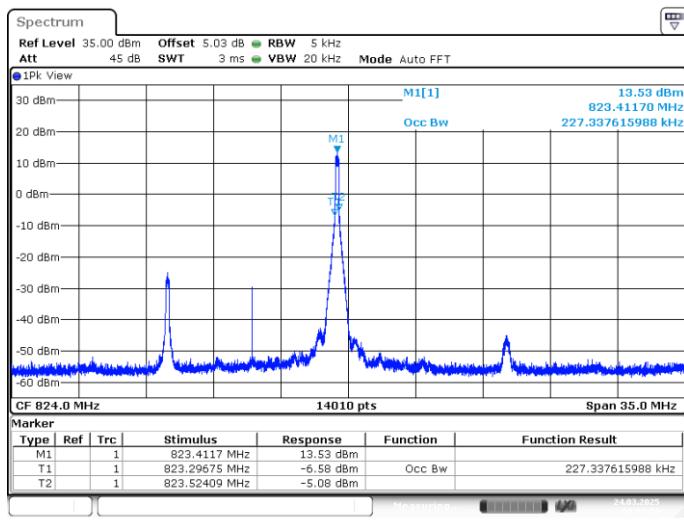


HIGH BAND EDGE BLOCK-1RB-HIGH_offset

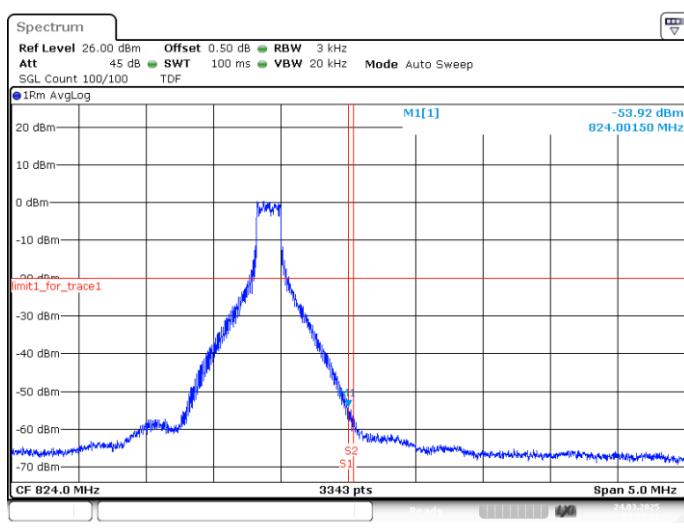

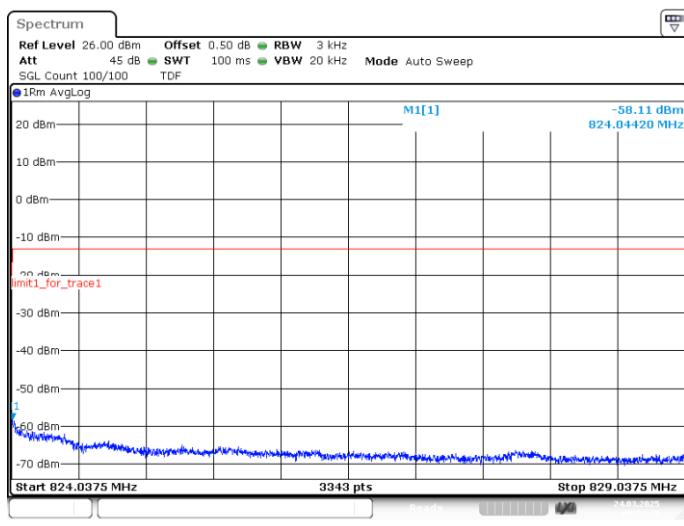HIGH BAND EDGE BLOCK-1RB-HIGH_offset


Date: 24.MAR.2025 09:54:31

LOW BAND EDGE BLOCK-10MHz-100%RB

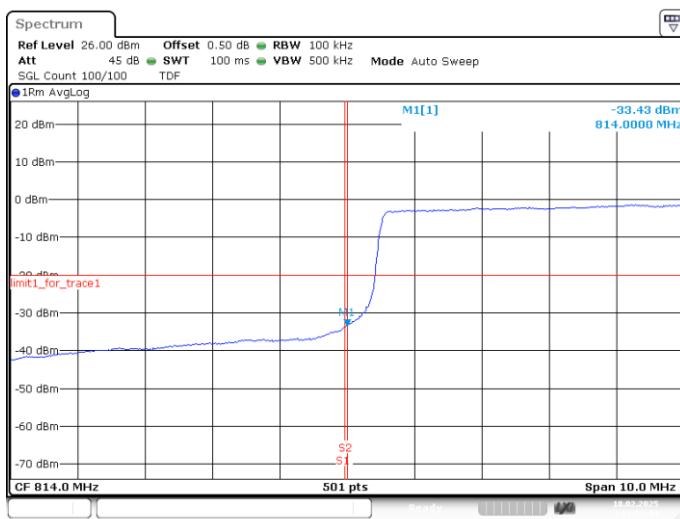


Date: 18.FEB.2025 13:54:03

LOW BAND EDGE BLOCK-10MHz-100%RB

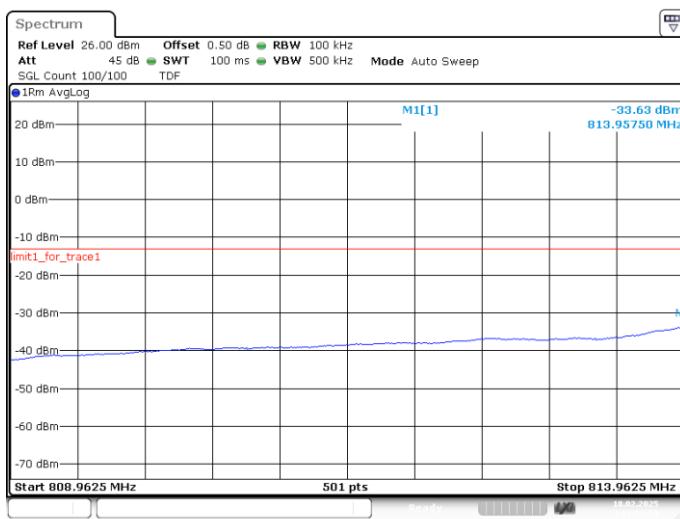


Date: 18.FEB.2025 13:54:53

HIGH BAND EDGE BLOCK-10MHz-100%RB

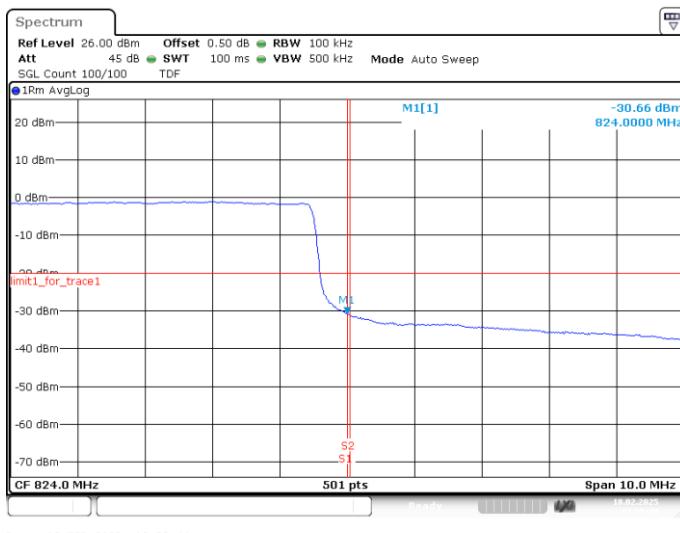

Date: 18.FEB.2025 13:55:44


HIGH BAND EDGE BLOCK-10MHz-100%RB

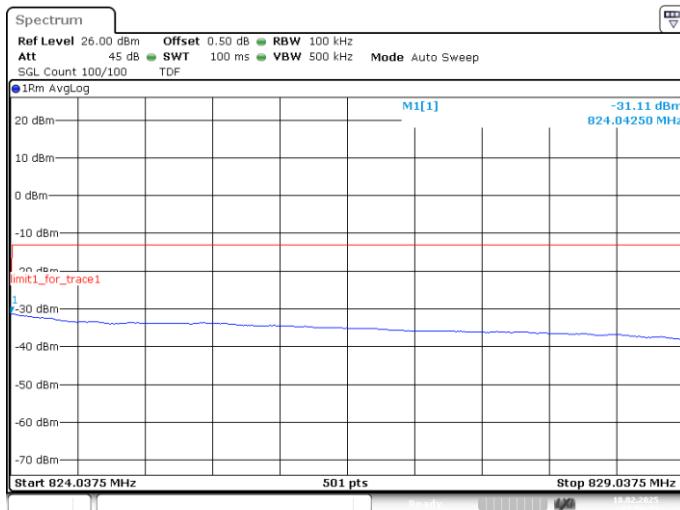


Date: 18.FEB.2025 13:56:35

LTE band 66


OBW: 1RB-LOW_offset

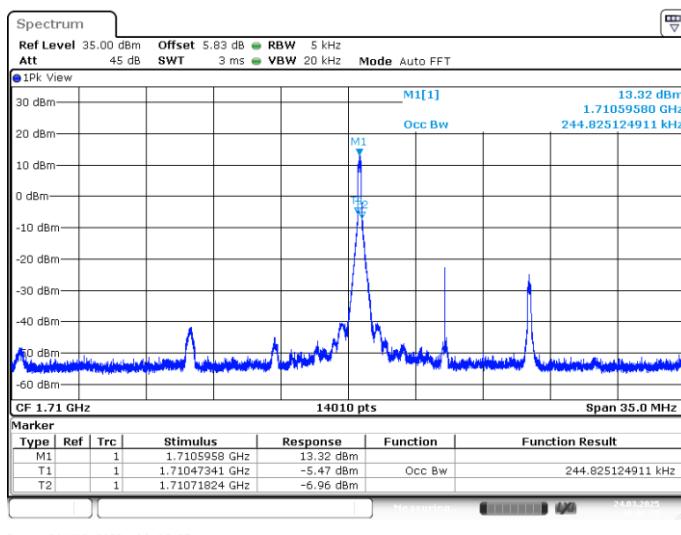

LOW BAND EDGE BLOCK-1RB-LOW_offset

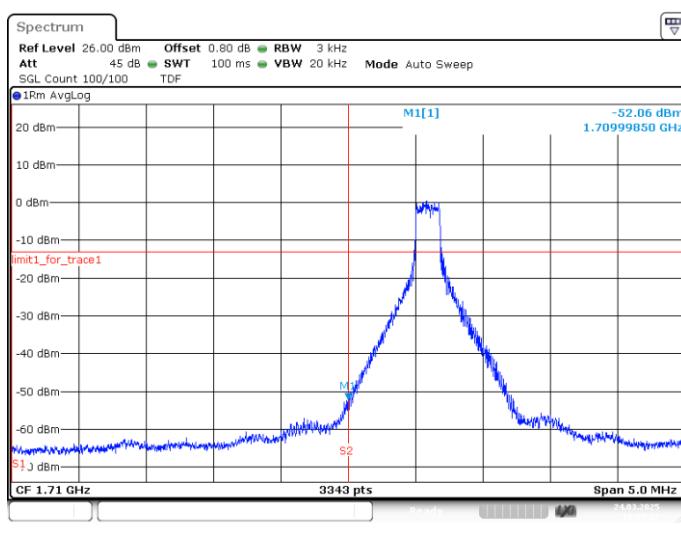


OBW: 1RB-HIGH_offset

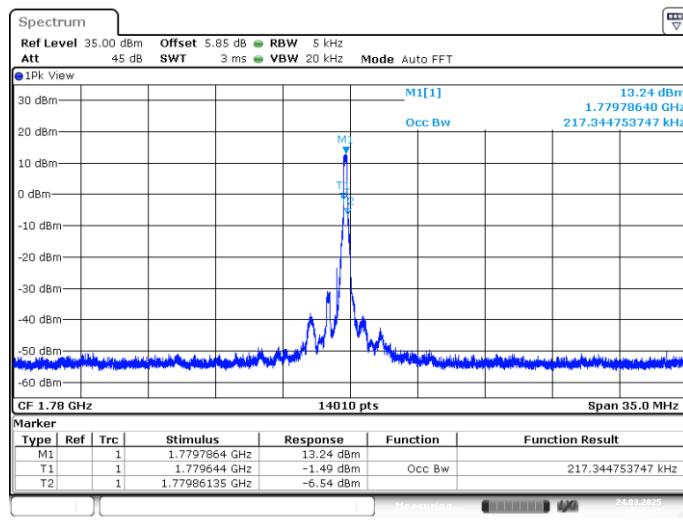


Date: 24.MAR.2025 10:05:22

HIGH BAND EDGE BLOCK-1RB-HIGH_offset

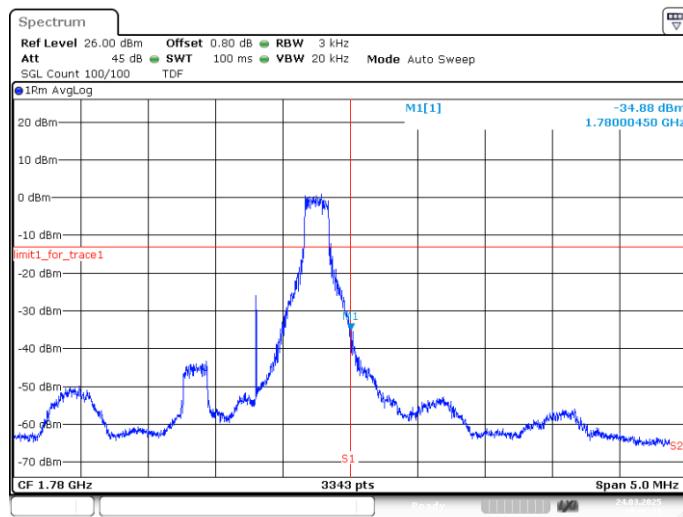


Date: 24.MAR.2025 10:06:11

LOW BAND EDGE BLOCK-20MHz-100%RB

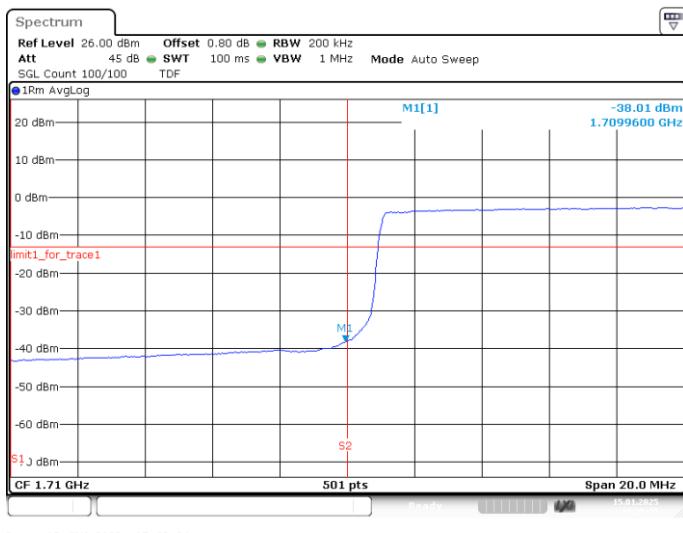

HIGH BAND EDGE BLOCK-20MHz-100%RB

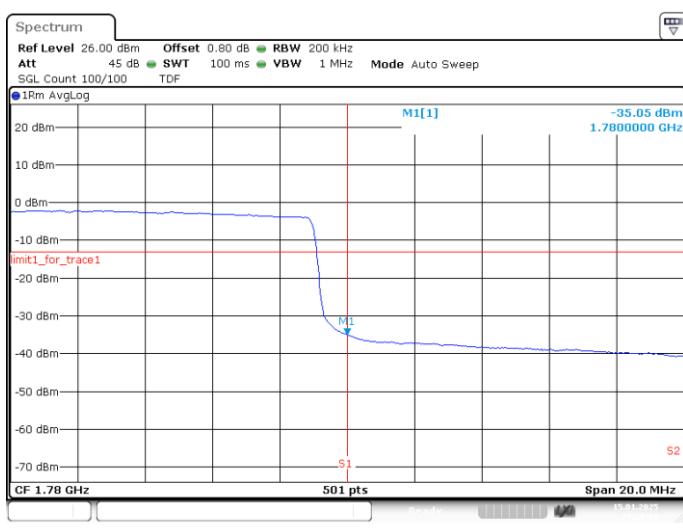

A.7 Conducted Spurious Emission

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
 - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than $2 \times \text{span}/\text{RBW}$.

A. 7.2 Measurement Limit

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Part 27.53(c) states for operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

Part 27.53(f) states for operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to $-70 \text{dBW}/\text{MHz}$ equivalent isotropically radiated power (EIRP) for wideband signals.

Part 27.53(g) states for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.



Part 90.691 states that out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$


decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

A.7.3 Measurement result

LTE band 2



NOTE: peak above the limit line is the carrier frequency.

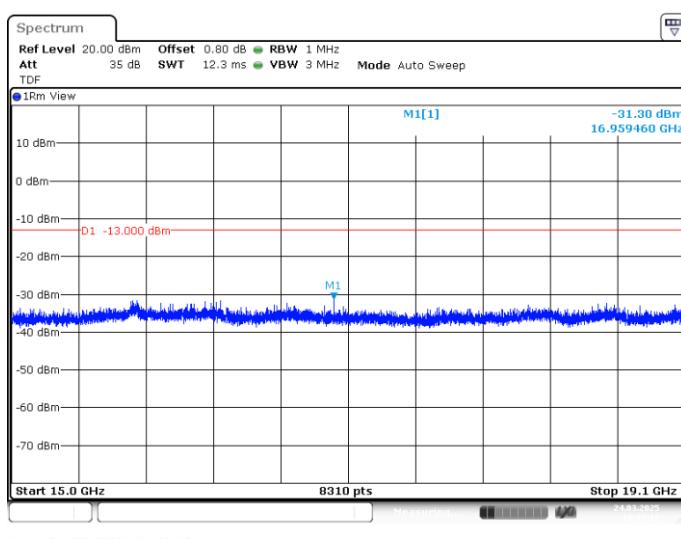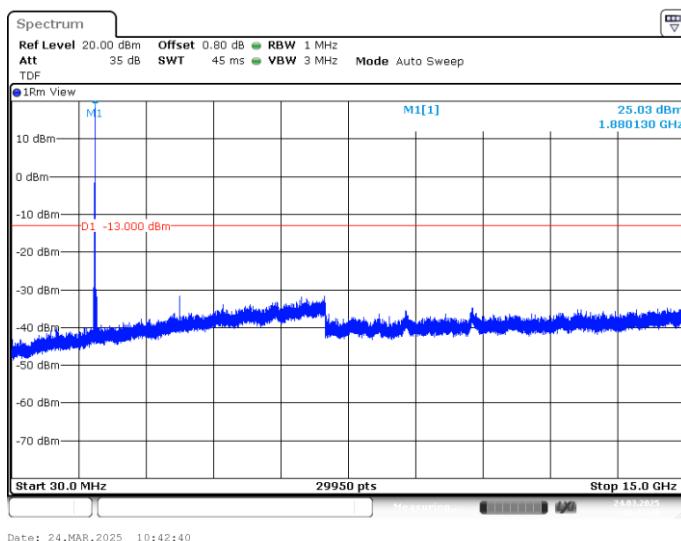


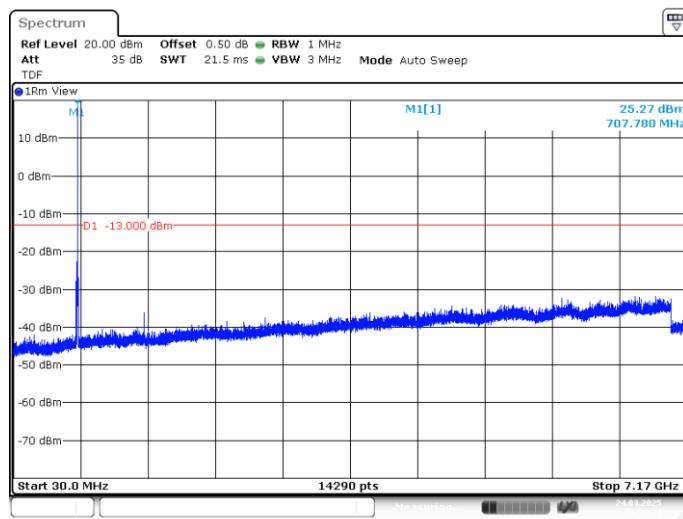LTE band 12**NOTE: peak above the limit line is the carrier frequency.**


LTE band 13

NOTE: peak above the limit line is the carrier frequency.

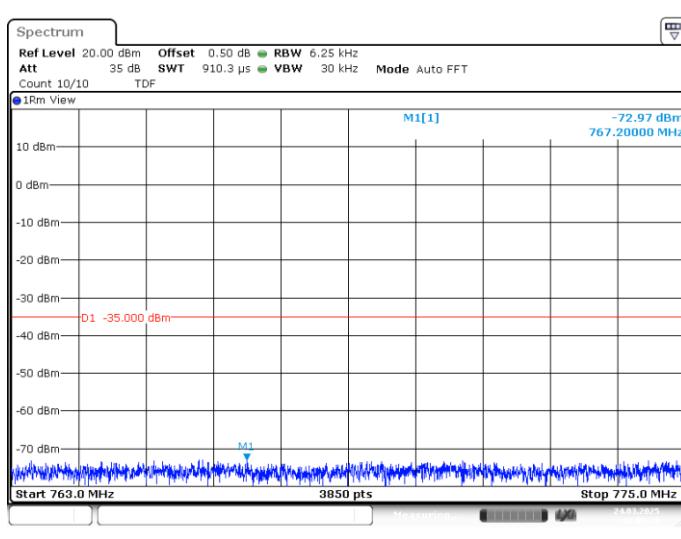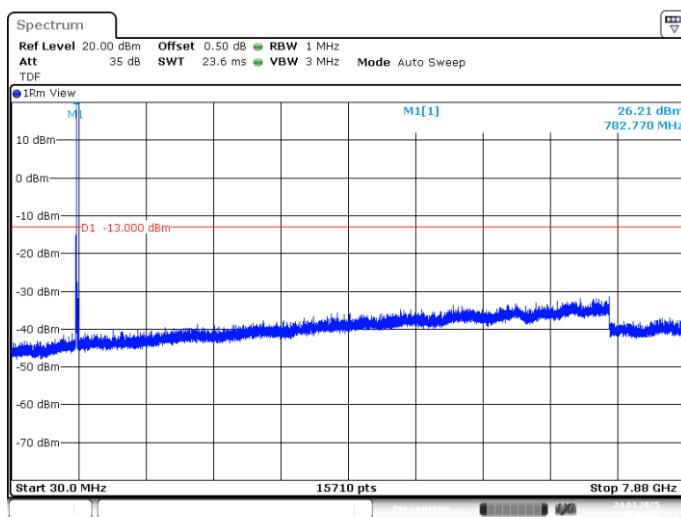

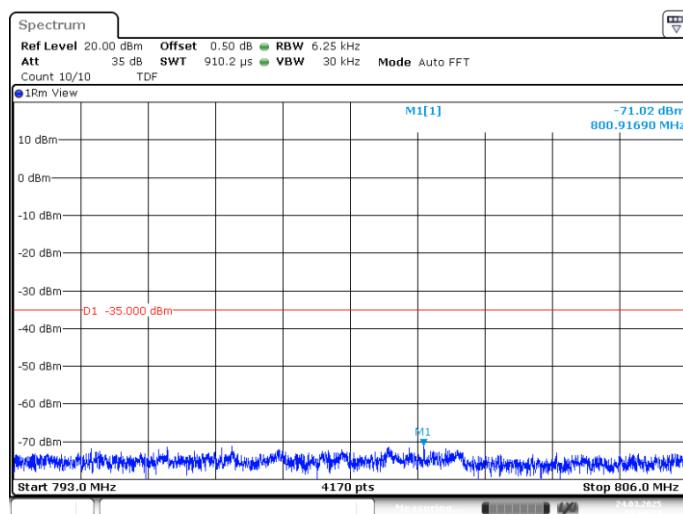


Date: 24.MAR.2025 10:00:53

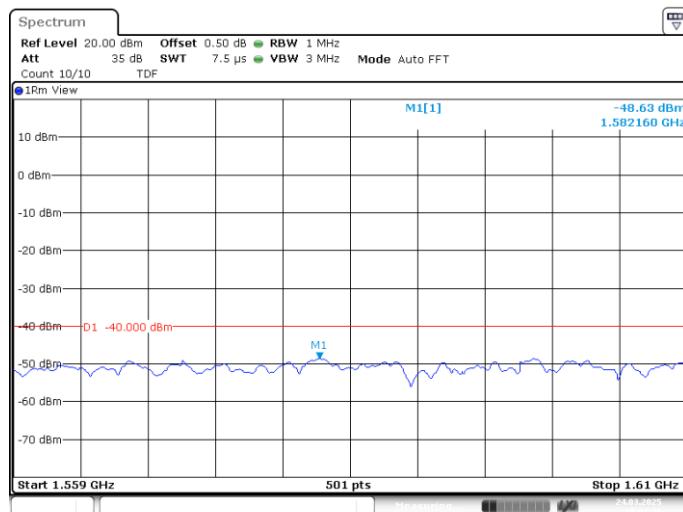

Date: 24.MAR.2025 10:01:26

LTE band 26_Part22


NOTE: peak above the limit line is the carrier frequency.

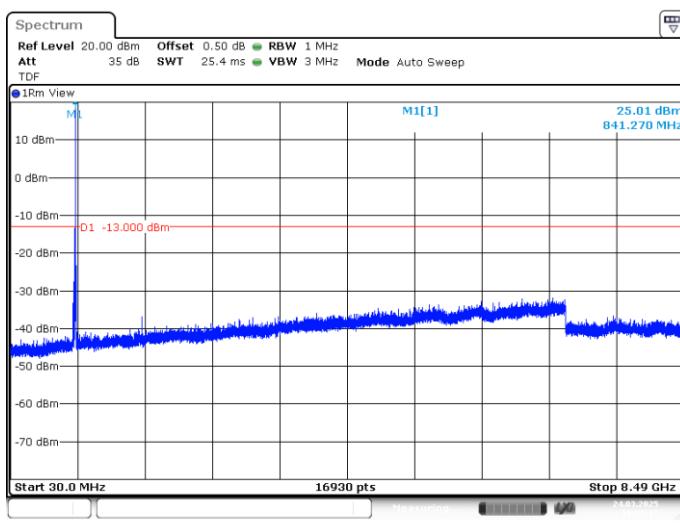

Date: 24.MAR.2025 10:02:17

LTE band 26_Part90


NOTE: peak above the limit line is the carrier frequency.

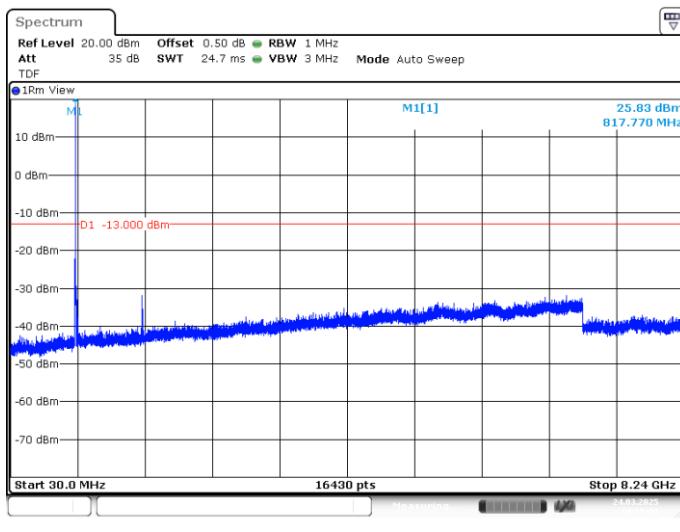


Date: 24.MAR.2025 10:15:09

LTE band 66

NOTE: peak above the limit line is the carrier frequency.

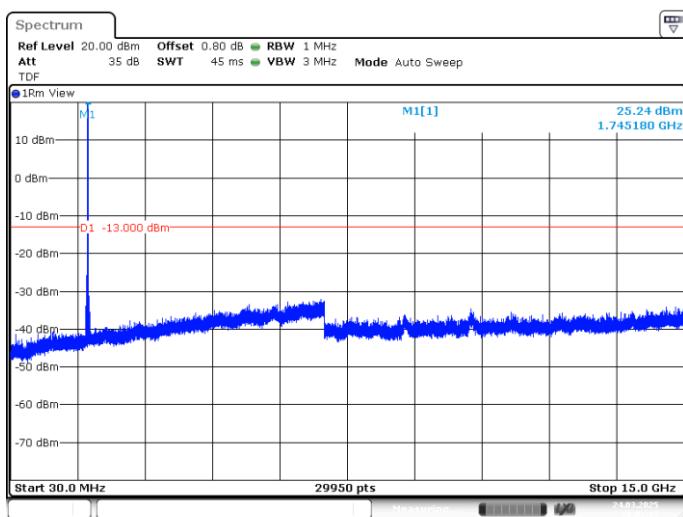

Date: 24.MAR.2025 10:03:15

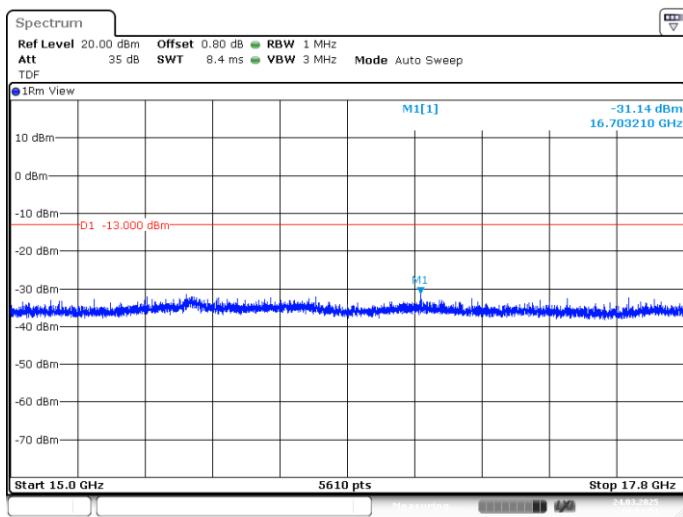

Date: 24.MAR.2025 10:03:54

A.8 Peak-to-Average Power Ratio


The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

Measurement results


LTE Band 2, 20MHz

Frequency (MHz)	RB	PAPR (dB)		
		QPSK	16QAM	64QAM
1880	100%,0	4.55	5.45	6.17

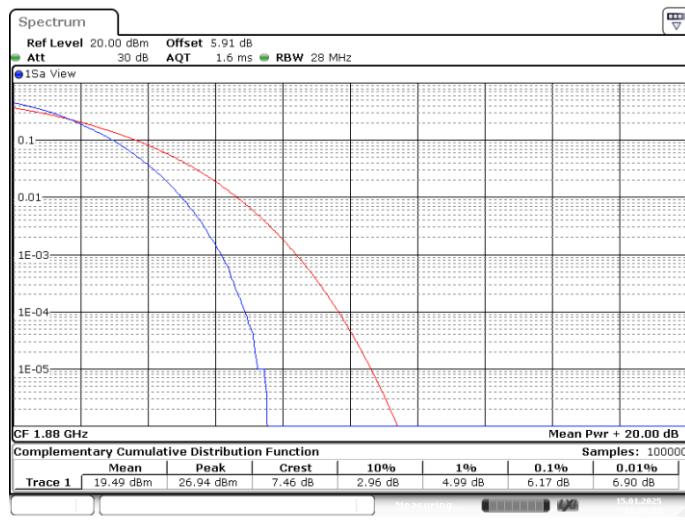


LTE Band 12, 10MHz

Frequency (MHz)	RB	PAPR (dB)		
		QPSK	16QAM	64QAM
707.5	100%,0	4.00	4.87	5.51

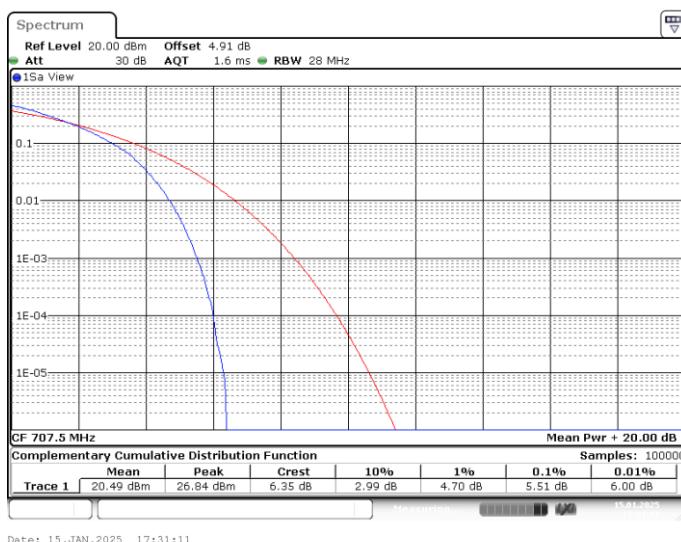

LTE Band 13, 10MHz

Frequency (MHz)	RB	PAPR (dB)		
		QPSK	16QAM	64QAM
782	100%,0	4.70	5.54	5.97

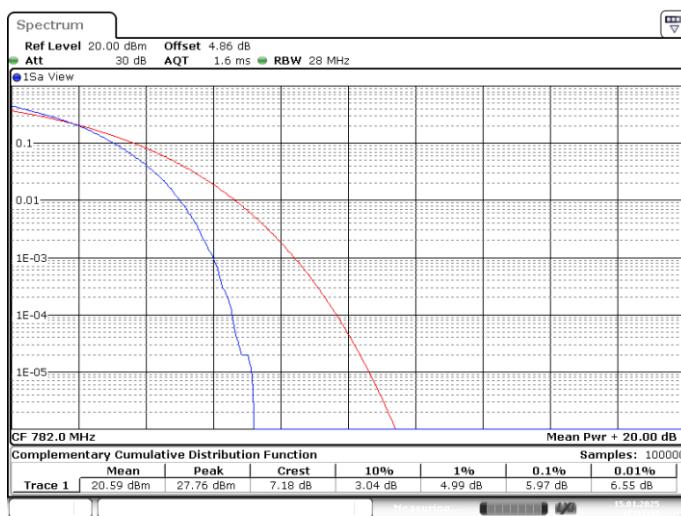

LTE Band 66, 20MHz

Frequency (MHz)	RB	PAPR (dB)		
		QPSK	16QAM	64QAM
1745	100%,0	3.86	4.81	5.54

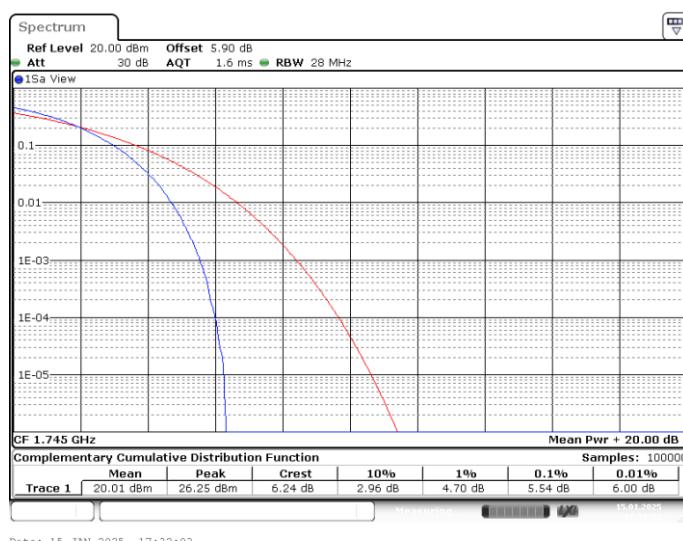

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017
General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates
technical competence for a defined scope and the operation of a laboratory quality management system
(refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****