



# Dual Button Remote

## Antenna Passive Test Report

Customer	IKEA
Report Date	2024-8-20
Model name	Dual Button Remote
Antenna Model No.	E2489
Build stage	<input type="checkbox"/> EVT <input checked="" type="checkbox"/> DVT <input type="checkbox"/> PVT <input type="checkbox"/> MP
Report Version	P1.2
Test Engineer	XiuWeiSong
Protocol	Matter
Antenna Frequency	2400 ~ 2500 MHz
Antenna Type	Stamping Antenna
PCB Version	P-SW-A1-01-A-V2.0
Factory	Haysonic IoT Technology Co. Ltd Xingtai Industrial Park, Economic Development Zone of Changtai County, Zhangzhou City, Fujian, P.R. China
DUT photo	

---

## CONTENTS

1 General .....	2
1.1 Revision History .....	2
1.2 Abbreviations .....	2
2 Summary of test results .....	2
3 VNA measurement.....	3
3.1 Test topology .....	3
3.2 Test setting.....	3
3.3 Test Result.....	4
4 OTA measurement .....	5
4.1 Test System .....	5
4.2 Test Result.....	6
4.2.1 Efficiency and Gain.....	6
4.2.2 Radiation Pattern.....	7

---

## TEST DATA

Table 1 VSWR and Return Loss.....	4
Table 2 Antenna Efficiency and Gain .....	6
Table 3 Product coordinates .....	7
Table 4 3D radiation pattern .....	7
Table 5 Radiation pattern in XY Plane .....	8
Table 6 Radiation pattern in XZ Plane .....	8
Table 7 Radiation pattern in YZ Plane .....	9

# 1 General

## 1.1 Revision History

Version	Date	Change Essentials	Author	Approver
V1.0	2024-7-19	P1.1 Antenna passive test	XiuWeiSong	OuyangLongji
V2.0	2024-8-20	P1.2 Antenna passive test	XiuWeiSong	OuyangLongji

## 1.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

Term/Acronym	Description
DUT	Device under test
OTA	Over the Air
RF	Radio Frequency
VNA	Vector Network Analyzer
VSWR	Voltage Standing Wave Ratio

## 2 Summary of test results

Test method	Items	Result	Limit	Judgment
VNA measurement	VSWR		/	/
OTA measurement	Antenna efficiency		/	/
OTA measurement	Antenna gain		/	/

### 3 VNA measurement

#### 3.1 Test topology

The following diagram contain 3 devices: a DUT, a RF Choke, a VNA.

When a testing cable is attached to the pigtail of a fixture, some residual current will flow on the surface of the cable. The RF Choke is used to mitigate the current on the surface of the cable.

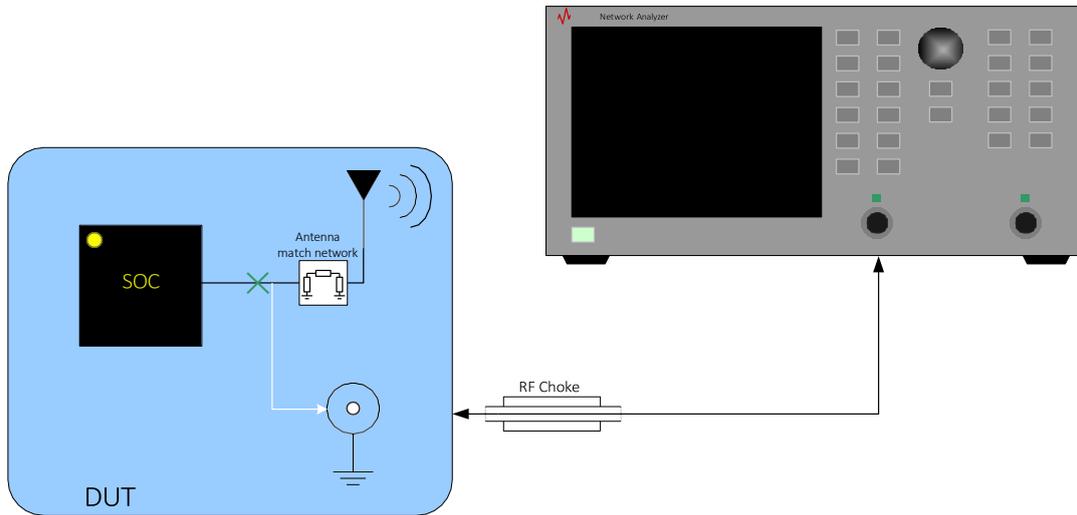


Figure 1 VNA Test topology

Instruments List:


Kind of Equipment	Manufacturer	Type No.
Network Analyzer	R&S	ZND
RF Choke	LEEDARSON RF LAB.	/

#### 3.2 Test setting

Figure 2 Coaxial cable setting

### 3.3 Test Result

Table 1 VSWR and Return Loss

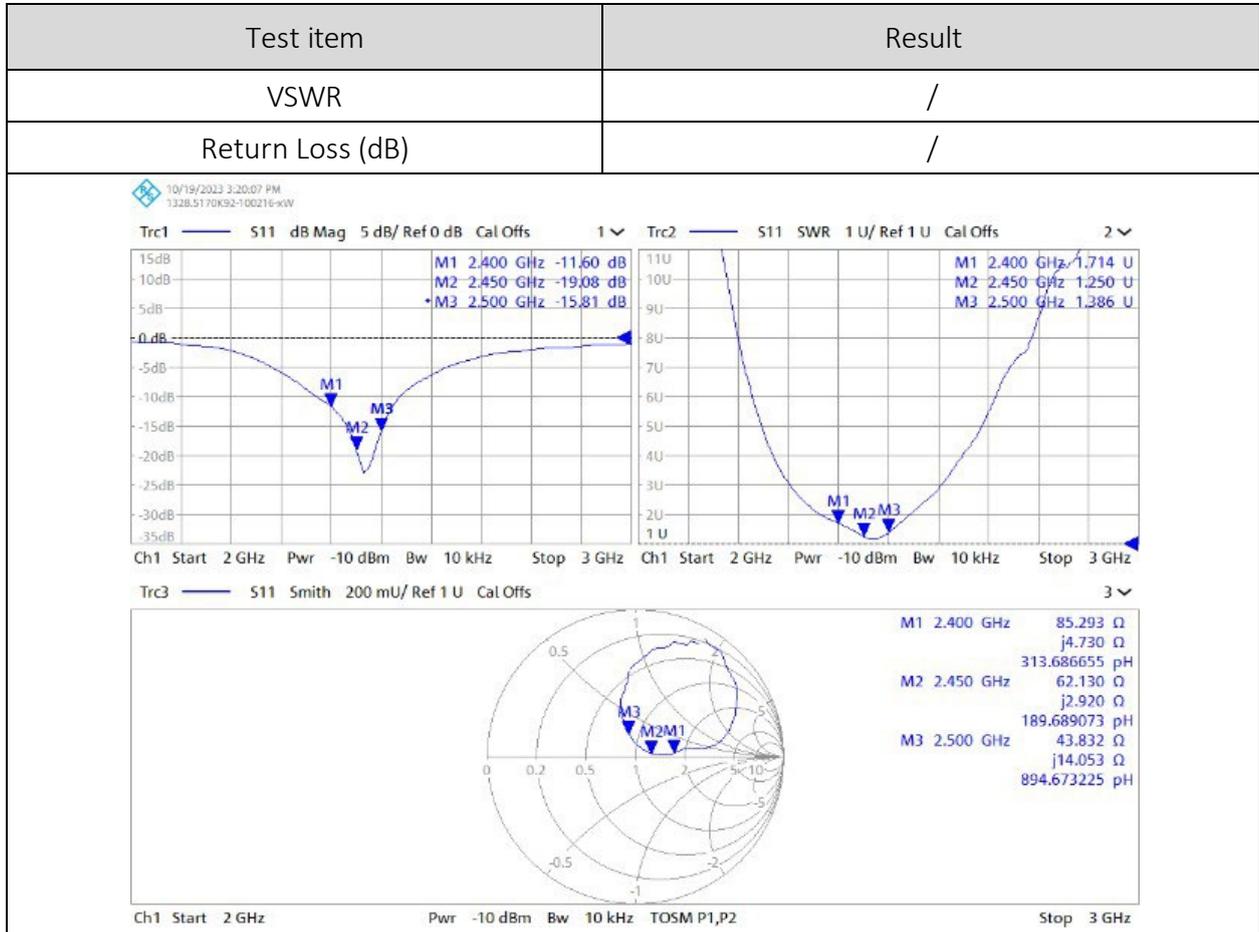

## 4 OTA measurement

### 4.1 Test System

The SY-16 OTA system is an anechoic chamber, which can measure antenna passive data such as antenna efficiency, antenna gain, and 2D&3D pattern. The coordinates and topology are shown as follows:

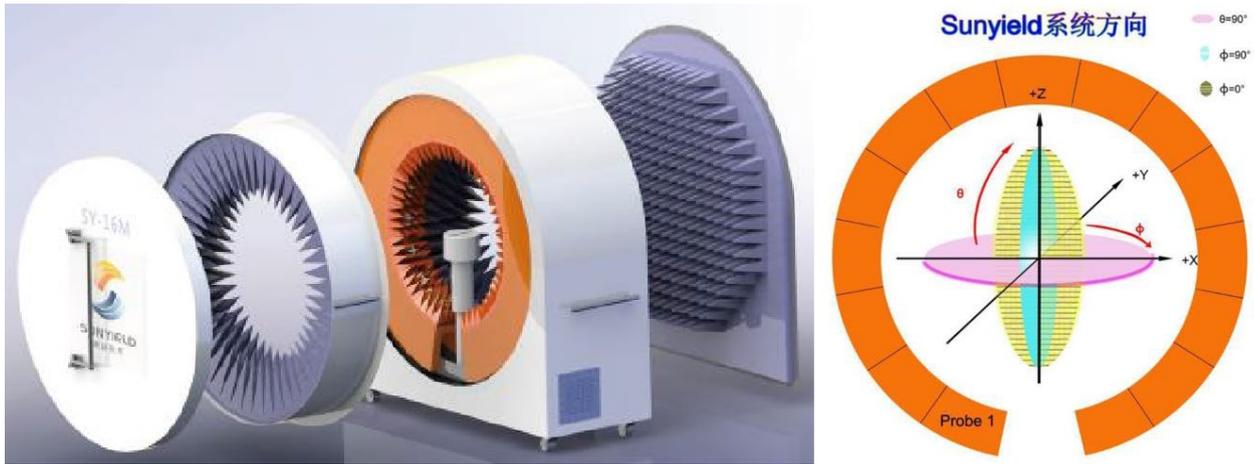


Figure 3 SY-16 OTA system

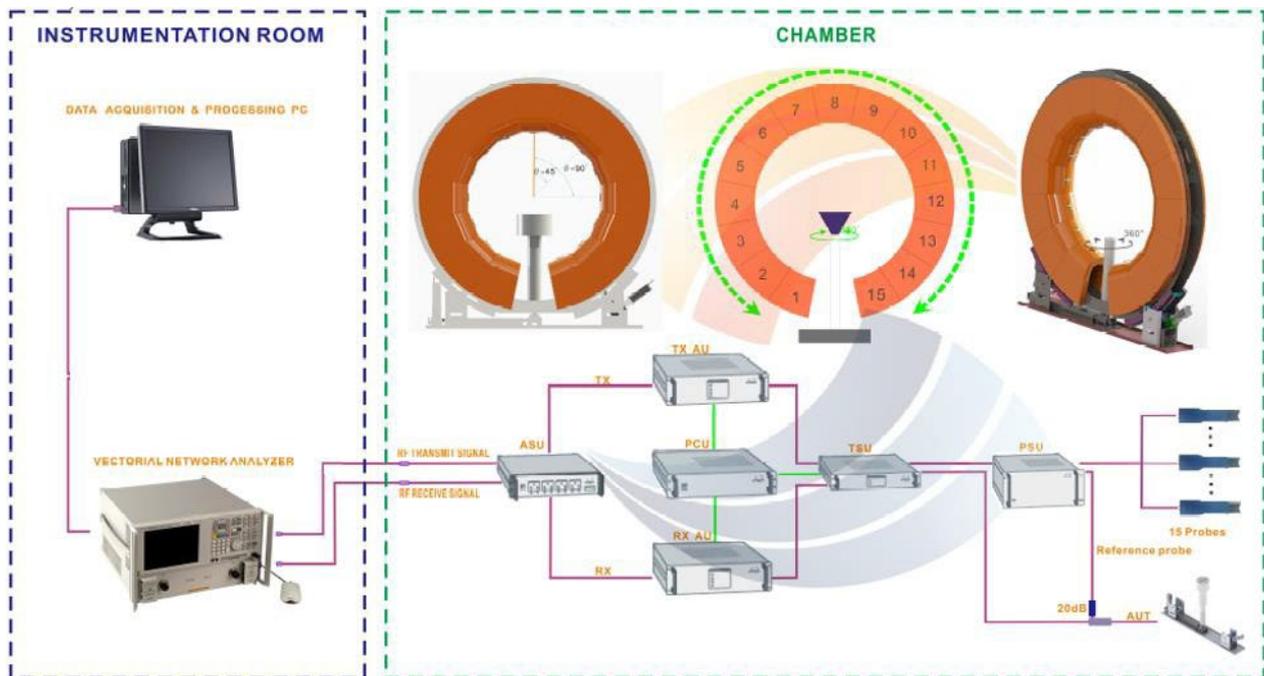


Figure 4 OTA measurement topology

## 4.2 Test Result

### 4.2.1 Efficiency and Gain

Table 2 Antenna Efficiency and Gain

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	-0.15	-5.36	29.08
2410	-0.45	-5.65	27.24
2420	-0.38	-5.55	27.88
2430	-0.20	-5.65	27.24
2440	-0.52	-5.89	25.79
2450	-0.45	-5.94	25.47
2460	-0.21	-5.69	26.99
2470	-0.43	-5.81	26.24
2480	-0.58	-5.99	25.21
2490	-0.46	-5.85	26.01
2500	-0.38	-5.74	26.65

## 4.2.2 Radiation Pattern

Table 3 Product coordinates

Product Coordinates	

Table 4 3D radiation pattern

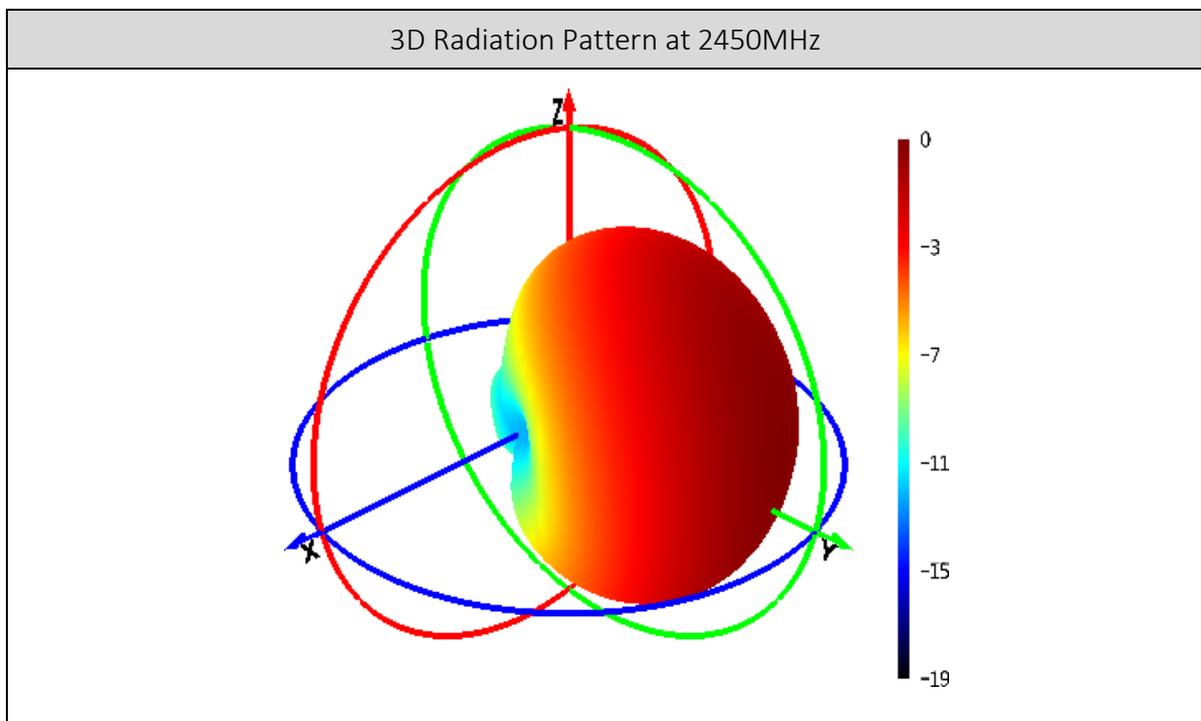


Table 5 Radiation pattern in XY Plane

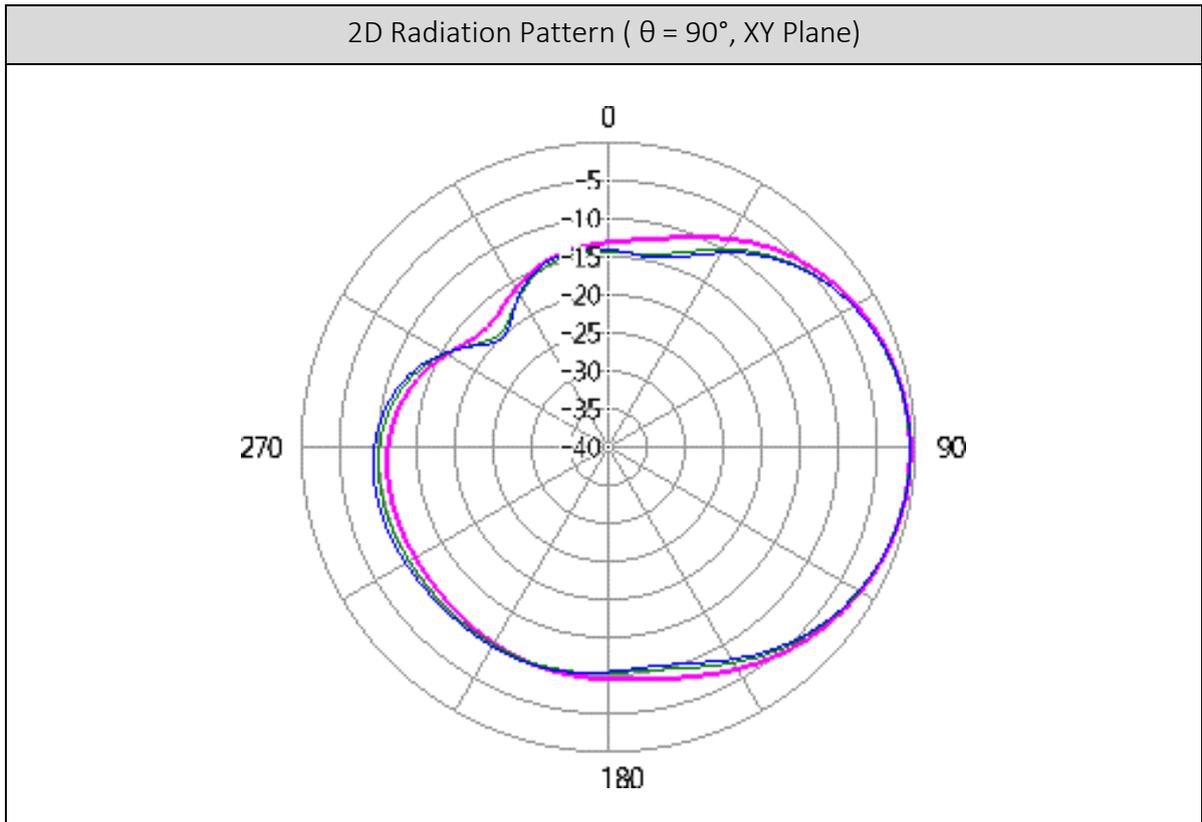


Table 6 Radiation pattern in XZ Plane

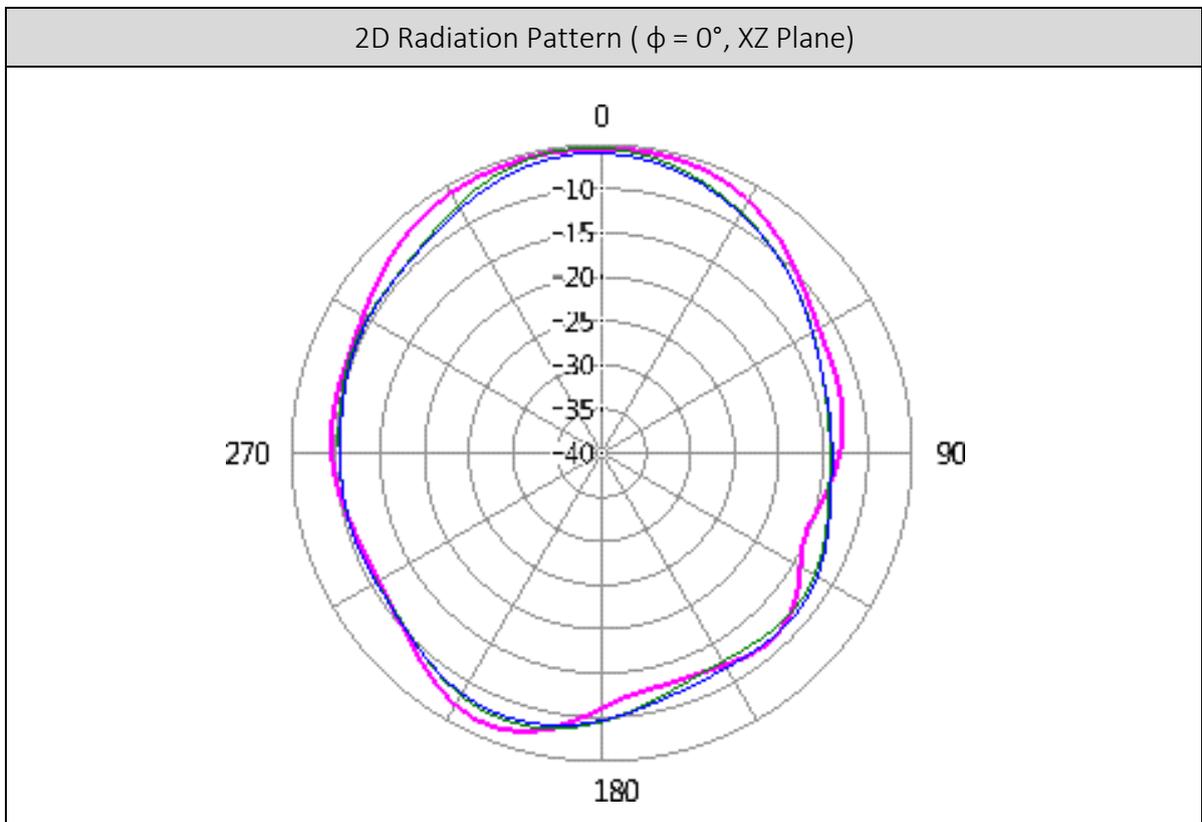


Table 7 Radiation pattern in YZ Plane

