

JH-888

Wireless AV Burglary-Resisting System

User Manual

Brand : JENN HUEY

Model :

JH-230E / JH-350R 、 JH-C1R / JH-22B

Wireless AV theft-proof Transmitter /
3.5" LCD & Wireless AV theft-proof Receiver /
Wireless Remote Controller

JH-888 User Manual :


1. Characteristic:

- a. JH-888 is a group that has 3.5" LCD, simple and easy wireless AV burglary-resisting system.

- b. JH-888 include JH-230E & JH-350R


2. JH-230E: Wireless AV theft-proof Transmitter

- a. Connect to Antenna and Adapter as fig. below:

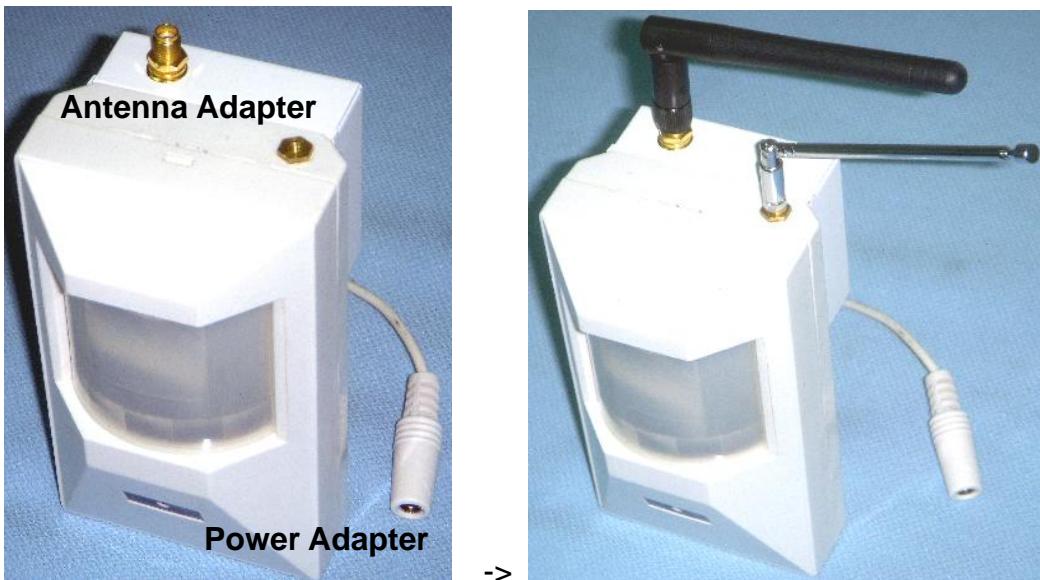

- b. Open the glue shell of the front of launcher, can see the circuit board of the following picture. You can adjust the group code and wireless AV channel on the circuit board.


JH-230E Circuit board & Sketch map

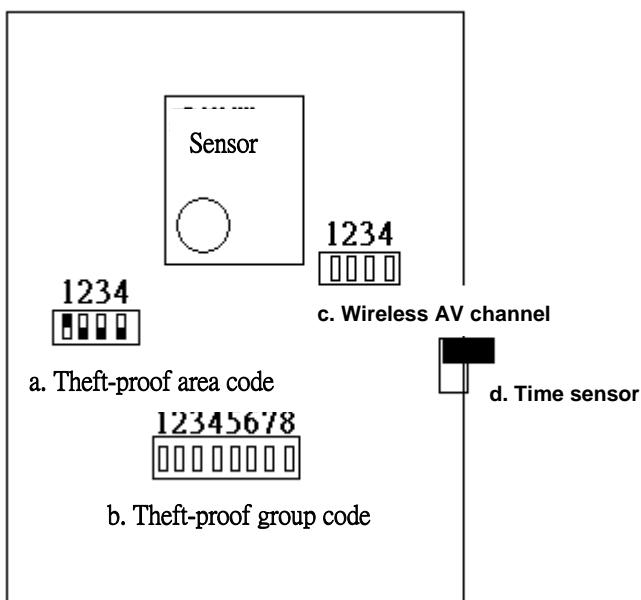

Comments:

- A. Guarding against theft area yard: Please don't adjust, it is had, is left on 2.3.4 that this code is 1
- B. Theft-proof group code: Need and JH-C1R is the same as JH-22B theft-proof group code
- C. Wireless audio-visual channel: There is adjustable channel 8 in all, the code is as follows
- D. The time switch of reaction:
Upwards: Every reaction of 3 seconds;
Downward: After reaction, need on-the-spot clearance not to will carry on the reaction of next time until 120 seconds.

* Wireless AV Coding Channel

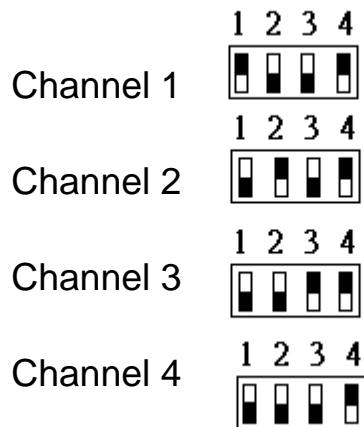

- Utilize the support fixed JH-230E.
Propose installing it highly: 1.8-2.1 meters.



Notices:
Install the essential screw hole down with support, otherwise unable to adjust the angle.

- c. 60 seconds after the infrared ray inductor needs heat engine, begin movements after the power until JH-230E answer.
- d. Notes:
 1. If interfere with the situation wirelessly and audio-visually (for example: Have already installed wireless 2.4G router at the scene) ,We can adjust the wireless audio-visual channel and solve this problem.
 2. Please don't device on draught (example launcher this: The gate, by the window, by the air conditioning mouth) ,If putting will probably produce the wrong report situation in the draught.
 3. Be sure to pursue the direction as above when the support is installed, otherwise may cause the angle to adjust the question.

3. **JH-350R: 3.5" LCD & Wireless AV theft-proof Receiver,**
 a. Connect Antenna on the JH-350R.



b. Side switch: The reaction sound switches over the switch

Forward	Bi~bi sound of the buzzer
Middle	silence
Backward	+12V alarm output, for the outer alarm loudspeaker to use.


c. Terminal Block on Back



Comments:

1. Input terminus son of the image: Camp's curtain image of the front is JH-230E wireless image at ordinary times, when the sons of this end input the image, camp's curtain image of the front switches over and inputs the image automatically.
2. The alarm exports DC12V: Loudspeaker use of the outer alarm.
3. Yellow AV mother's seat: The image is exported.
4. Red AV mother's seat: The sound exports.
5. White AV mother's seat: The sound exports.
6. White DC power seat: Connect Adapter DC power


d. Terminal Block on Bottom

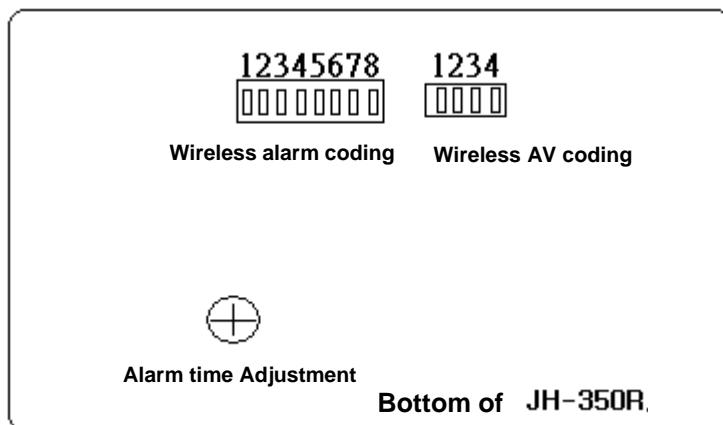

Comments:

- A. Wireless alarm code: Need and JH-230E is the same as JH-22B theft-proof group code
- B. Wireless audio-visual channel: There is channel 8 in all, can adjust in accordance with the table below.
- C. The time adjustment of the alarm: Show right that calls time to increase alertly.

*** Wireless AV coding**

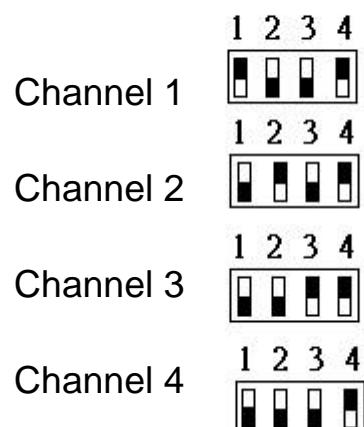


4. JH-22B: Wireless Remote Controller

- a. Group code adjusted: Open JH-22B glue shell, can see a group of theft-proof group codes, this group code needs and similarly JH-230E and JH-C1R theft-proof group code.



5. Wireless coding Contrast Table:

JH-230E circuit board explains

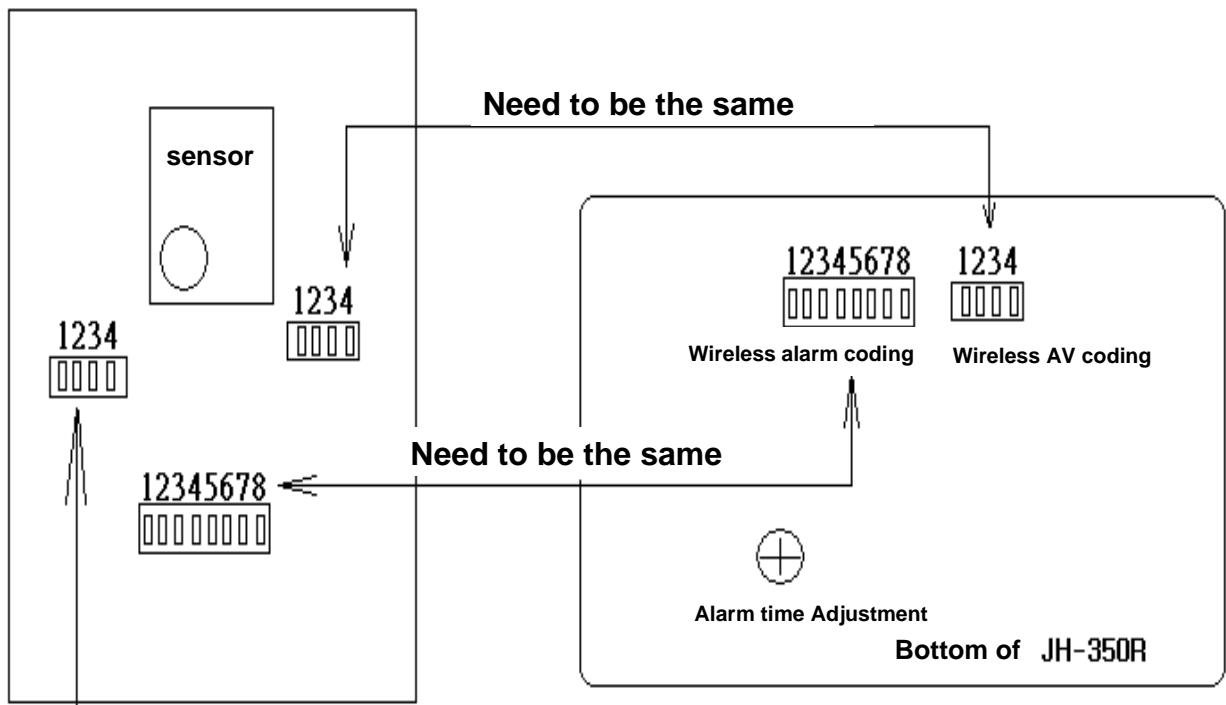

The channel of infrared ray:

Please keep 1 upwards, 234 is downward

FCC ID:

FCC Compliance and Advisory Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, according to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

1. Reorient the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help. Any special accessories needed for compliance must be specified in the instruction manual.

Warning:

A shielded-type power cord is required in order to meet FCC emission limits and also to prevent interference to the nearby radio and television reception. It is essential that only the supplied power cord be used. Use only shielded cables to connect I/O devices to this equipment.

CAUTION:

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.