

**FCC PART 15 SUBPART C TEST REPORT****FCC PART 15.225**

Report Reference No.....: BSL23061301-P01R03

FCC ID.....: 2A6RVPROM-HD

Approved by  
( position+printed name+signature)..: RF Manager Vivian Jiang

Date of issue.....: June 25, 2023

**Testing Laboratory Name**.....: **BSL Testing Co., Ltd.**

Address.....: 1/F, Building B, Xinshidai GR Park, Shiyuan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

**Applicant's name**.....: **Guangzhou Xinxiang Culture Ltd.**

Address.....: Room No. C02, 6th floor, No. 336, Huangpuadadaozhong, Tianhe District, Guangzhou City, Guangdong, China

**Test specification**.....:Standard.....: **FCC Part15 Subpart C, Section 15.225****BSL Testing Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the BSL Testing Co., Ltd. is acknowledged as copyright owner and source of the material. BSL Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Equipment description**.....: **MOBAPAD CHITU HD MECHANICAL CONTROLLER**

Trade Mark.....: MOBAPAD

Manufacturer.....: Dongguan Xiechuang Technology Co., Ltd

Model/Type reference.....: Pro-HD

Listed Models .....: Pro-PC

Modulation .....: ASK

Frequency.....: 13.56MHz

Ratings.....: DC 3.7V from battery or DC 5.0V from USB Port

Result.....: **PASS**

## TEST REPORT

**Equipment under Test** : **MOBAPAD CHITU HD MECHANICAL CONTROLLER**

Model /Type : Pro-HD

Listed Models : Pro-PC

Model Declaration : PCB board, structure and internal of these model(s) are the same,So no additional models were tested.

**Applicant** : **Guangzhou Xinxiang Culture Ltd.**

Address : Room No. C02, 6th floor, No. 336, HuangpuDadaoZhong, Tianhe District, Guangzhou City, Guangdong, China

**Manufacturer** : **Dongguan Xiechuang Technology Co., Ltd**

Address : Room 301 Building 1 ShaTouHe New Street ShaTou Community Chang'An Town DongGuan GuangDong

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1 TEST STANDARDS .....</b>	<b>4</b>
<b>2 SUMMARY .....</b>	<b>5</b>
<b>2.1 General Remarks.....</b>	<b>5</b>
<b>2.2 Product Description.....</b>	<b>5</b>
<b>2.3 Equipment Under Test.....</b>	<b>5</b>
<b>2.4 Short description of the Equipment under Test (EUT).....</b>	<b>5</b>
<b>2.5 Block Diagram of Test Setup.....</b>	<b>5</b>
<b>2.6 Special Accessories.....</b>	<b>6</b>
<b>2.7 Related Submittal(s) / Grant (s).....</b>	<b>6</b>
<b>2.8 Modifications.....</b>	<b>6</b>
<b>3 TEST ENVIRONMENT .....</b>	<b>7</b>
<b>3.1 Address of the test laboratory.....</b>	<b>7</b>
<b>3.2 Test Facility.....</b>	<b>7</b>
<b>3.3 Environmental conditions.....</b>	<b>7</b>
<b>3.4 Summary of measurement results.....</b>	<b>8</b>
<b>3.5 Statement of the measurement uncertainty.....</b>	<b>8</b>
<b>3.6 Equipments Used during the Test.....</b>	<b>9</b>
<b>4 TEST CONDITIONS AND RESULTS .....</b>	<b>11</b>
<b>4.1 AC Power Conducted Emission.....</b>	<b>11</b>
<b>4.2 Radiated Emission.....</b>	<b>14</b>
<b>4.3 Frequency Tolerance.....</b>	<b>22</b>
<b>4.4 20dB Bandwidth.....</b>	<b>23</b>
<b>4.5 Antenna Requirement.....</b>	<b>25</b>
<b>5 TEST SETUP PHOTOS OF THE EUT .....</b>	<b>26</b>
<b>6 PHOTOS OF THE EUT .....</b>	<b>27</b>

## **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.225](#):Operation within the band 26.96-27.28 MHz.

[ANSI C63.10:2013](#) : American National Standard for Testing Unlicensed Wireless Devices

## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	June 2, 2023
Testing commenced on	:	June 2, 2023
Testing concluded on	:	June 22, 2023

### 2.2 Product Description

Product Name:	MOBAPAD CHITU HD MECHANICAL CONTROLLER
Model/Type reference:	Pro-HD
Listed Models:	Pro-PC
Testing sample ID:	BSL23050501-P01R02-1# (Engineer sample), BSL23050501-P01R02-2# (Normal sample)
Power supply:	DC 3.7V from battery or DC 5.0V from USB Port
Adapter information (Auxiliary test supplied by testing Lab):	Model: EP-TA20CBC Input:AC 100-240V 50/60Hz Output:DC 5V 2A Firmware Version: EPTA5.14.2 Manufacture:Huizhou Dongyang Yienbi Electronics Co., Ltd
Modulation:	ASK
Operation frequency:	13.56MHz
Channel number:	1
Antenna type:	Induction coil antenna
Antenna gain:	0 dBi

### 2.3 Equipment Under Test

#### Power supply system utilised


Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz	
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC	
		<input checked="" type="radio"/> Other (specified in blank below)		

DC 3.7V from battery or DC 5.0V from USB Port

### 2.4 Short description of the Equipment under Test (EUT)

This is a MOBAPAD CHITU HD MECHANICAL CONTROLLER.  
For more details, refer to the user's manual of the EUT.

### 2.5 Block Diagram of Test Setup

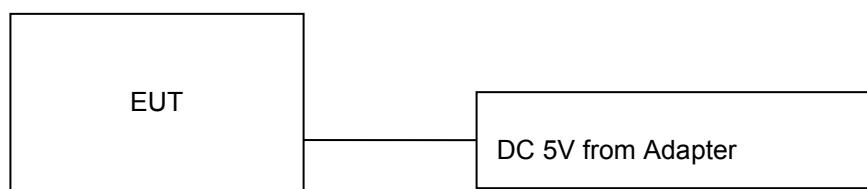

## **2.6 Special Accessories**

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
/	/	/	/	/	/

## **2.7 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for the device filing to comply with Section 15.227 of the FCC Part 15, Subpart C Rules.

## **2.8 Modifications**

No modifications were implemented to meet testing criteria.

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

**BSL Testing Co., Ltd.**

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

#### **3.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 562200 Designation Number: CN1338**

BSL Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**Industry Canada Registration Number. Is: 11093A CAB identifier: CN0019**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

**A2LA-Lab Cert. No.: 4707.01**

BSL Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

### 3.4 Summary of measurement results

<b>FCC Requirements</b>		
FCC Part 15.207	Conducted Emission	PASS
FCC Part 15.203	Antenna requirement	PASS
FCC Part 15.215	-20dB bandwidth	PASS
FCC Part 15.225(e)	Frequency Tolerance	PASS
FCC Part 15.225(a)(b)(c)(d)/15.209	Radiated Emissions	PASS

Remark: The measurement uncertainty is not included in the test result.

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the BSL Testing Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for BSL Testing Co., Ltd. :

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.20 dB	(1)
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.9KHz~30MHz	3.12 dB	(1)
Occupied Channel Bandwidth	/	5%	(1)
RF Frequency	/	0.082*10 <sup>-7</sup>	(1)
RF output power, conducted	/	0.73 dB	(1)
Unwanted Emission, conducted	/	1.6dB	(1)
AC Power Lines Conducted Emissions	/	2.72dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.6 Equipments Used during the Test

Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ROHDE&SCHWABERZ	ESPI 3	100379	2022-10-28	2023-10-27
Absorbing Clamp	ROHDE&SCHWABERZ	MDS-21	100126	2022-10-28	2023-10-27
Electrostatic analog generator	LIONCEL	ESD-203B	0210502	2022-10-28	2023-10-27
Signal Generator	HP	8648A	3633A02081	2022-10-28	2023-10-27
Amplifier	A&R	500A100	17034	2022-10-28	2023-10-27
Amplifier	A&R	100W/1000M1	17028	2022-10-28	2023-10-27
Isotropic Field Monitor	A&R	FM2000	16829	2022-10-28	2023-10-27
Isotropic Field Probe	A&R	FLW220100	16755	2022-10-28	2023-10-27
Biconic Antenna	EMCO	EVOD PROTANK8	9507-2534	2022-10-28	2023-10-27
Log-periodic Antenna	A&R	AT1080	16812	2022-10-28	2023-10-27
Injection Clamp	EMTEST	F-2031-23MM	368	2022-10-28	2023-10-27
Attenuator	EMTEST	ATT6	0010222a	2022-10-28	2023-10-27
Computer	IBM	8434	1S8434KCE99BL XLO*	-	-
Oscillator	KENWOOD	AG-203D	3070002	2022-10-28	2023-10-27
Spectrum Analyzer	HAMEG	HM5012	-	-	-
Power Supply	LW	APS1502	-	-	-
5K VA AC Power Source	California Instruments	5001iX	56060	2022-10-28	2023-10-27
CDN	EM TEST	CDN M2/M3	-	2022-10-28	2023-10-27
Attenuation	EM TEST	ATT6/75	-	2022-10-28	2023-10-27
Resistance	EM TEST	R100	-	2022-10-28	2023-10-27
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2022-10-28	2023-10-27
Inductive Components	EM TEST	MC2630	-	2022-10-28	2023-10-27
Antenna	EM TEST	MS100	-	2022-10-28	2023-10-27
Signal Generator	ROHDE&SCHWABERZ	SMT03	100029	2022-10-28	2023-10-27
Power DJ MIXER	AR	150W1000	300999	2022-10-28	2023-10-27
Field probe	Holaday	HI-6005	105152	2022-10-28	2023-10-27
Bilog Antenna	Chase	CBL6111C	2576	2022-10-28	2023-10-27
Loop Antenna	EMCO	6502	00042960	2022-10-28	2023-10-27
ESPI Test Receiver	ROHDE&SCHWABERZ	ESI7	838786/013	2022-10-28	2023-10-27
3m OATS	--	--	N/A	2022-10-28	2023-10-27
Horn Antenna	SCHWARZBECK	VULB9168	N/A	2022-10-28	2023-10-27
Horn Antenna	SCHWARZBECK	BBHA9120D	N/A	2022-10-28	2023-10-27
Power meter	Anritsu	ML2487A	6K00003613	2022-10-28	2023-10-27
Power sensor	Anritsu	MA2491A	32263	2022-10-28	2023-10-27
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-10-28	2023-10-27
9*6*6 Anechoic	--	--	N/A	2021-08-21	2024-8-20
Test Receiver	Rohde&Schwarz	ESC17(9kHz-7GHz)	100336	2022-10-28	2023-10-27
Broadband antenna	Schwarzbeck	VULB9168	01222	2022-10-28	2023-10-27
Horn antenna	Schwarzbeck	BBHA9120D	02476	2022-10-28	2023-10-27
Preamplifier	Schwarzbeck	BBV9745	00250	2022-10-28	2023-10-27
Preamplifier	N/A	TRLA-01018G440B	21081001	2022-10-28	2023-10-27


3M method semi anechoic chamber	SKET	9m*6m*6m	2021082304	2021-8-23	2024-8-22
Pointer hygrometer	M&G	ARC92570	N/A	2022-10-28	2023-10-27
Spectrometer	ROHDE&SCHWA RZ	FSP 9kHz-40GHz	N/A	2022-10-28	2023-10-27
Synthesizer	ROHDE&SCHWA RZ	CMW500	N/A	2022-10-28	2023-10-27

Note: The Cal.Interval was one year.

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

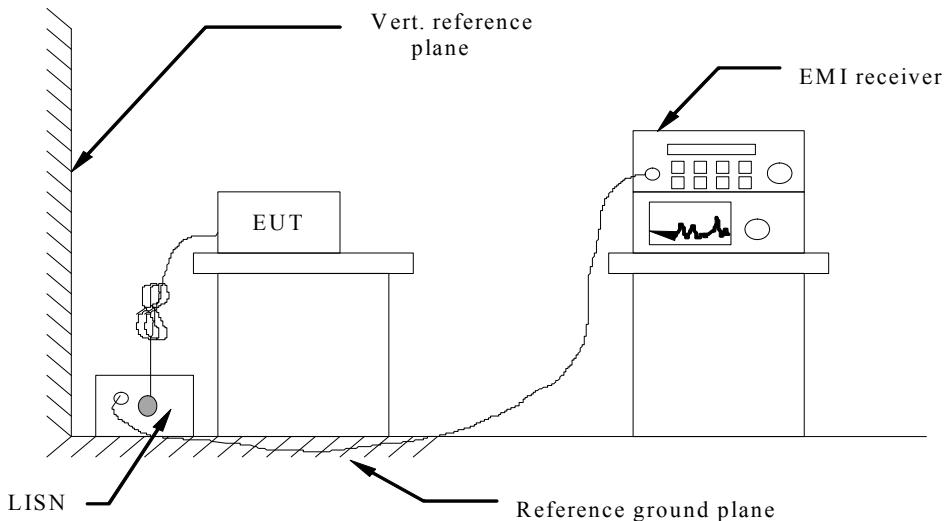

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.


#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

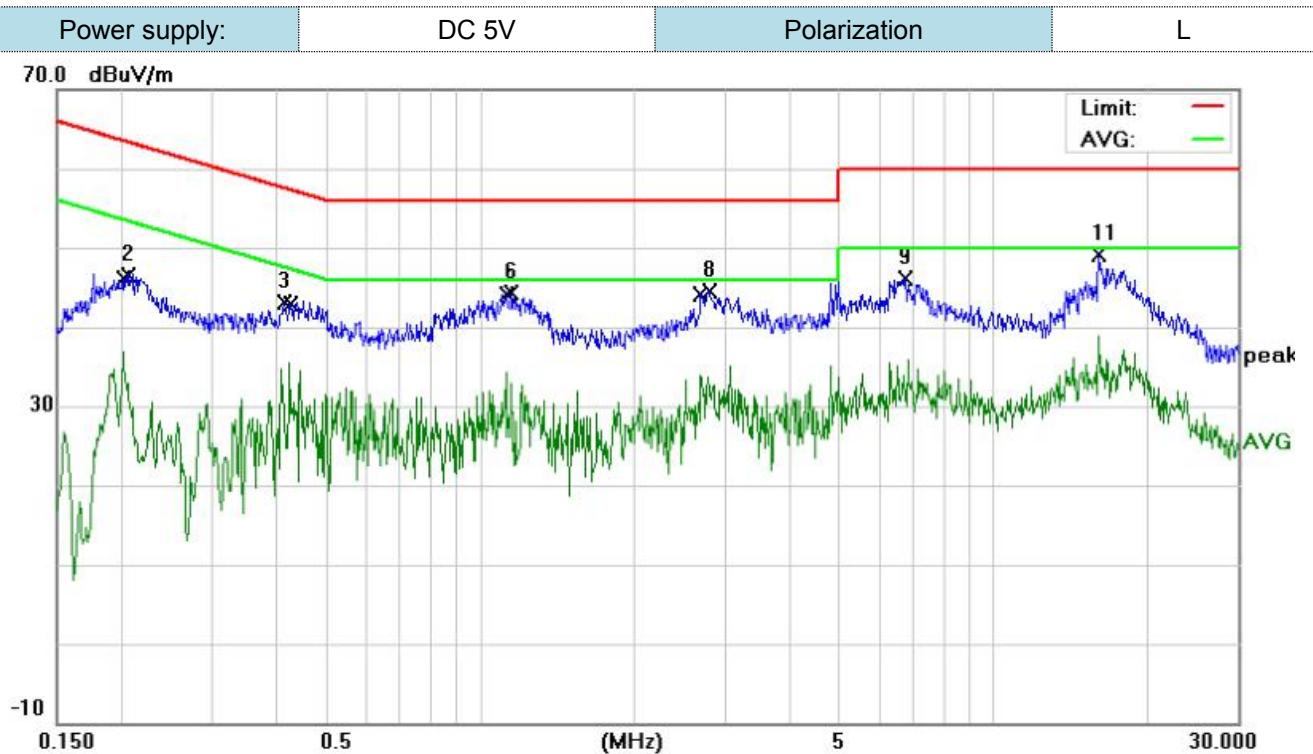


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1		0.2017	27.06	9.84	36.90	53.54	-16.64	AVG
2		0.2061	36.76	9.84	46.60	63.36	-16.76	peak
3		0.4148	33.32	9.88	43.20	57.55	-14.35	peak
4		0.4259	25.67	9.88	35.55	47.33	-11.78	AVG
5		1.1229	24.49	9.90	34.39	46.00	-11.61	AVG
6		1.1532	34.40	9.90	44.30	56.00	-11.70	peak
7		2.6924	24.05	9.92	33.97	46.00	-12.03	AVG
8		2.7942	34.67	9.93	44.60	56.00	-11.40	peak
9		6.7332	36.26	9.94	46.20	60.00	-13.80	peak
10		6.8048	25.90	9.95	35.85	50.00	-14.15	AVG
11	*	16.0545	48.20	1.00	49.20	60.00	-10.80	peak
12		16.0545	37.88	1.00	38.88	50.00	-11.12	AVG

Note:1).Level (dB $\mu$ V)= Reading (dB $\mu$ V)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBuV) - Level (dBuV)

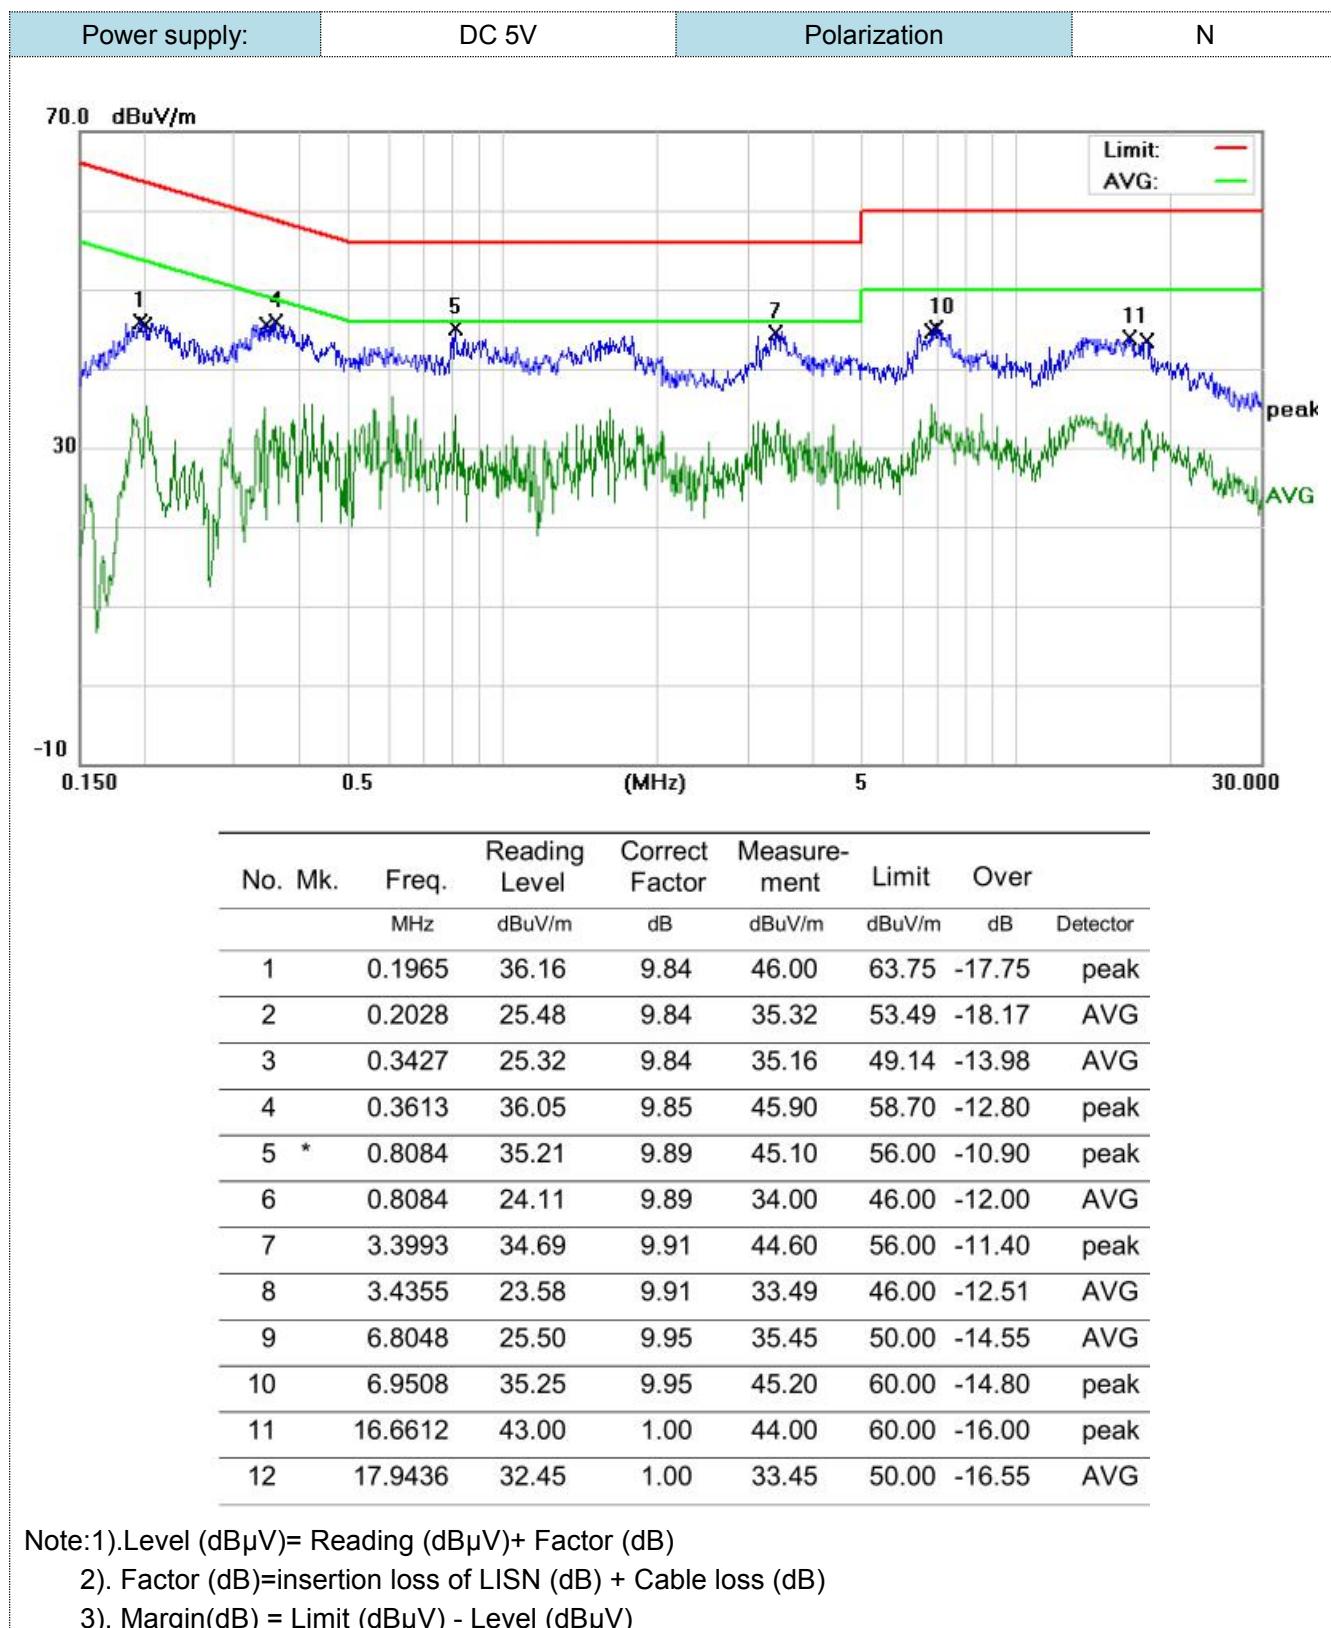

## 4.2 Radiated Emission

### Limit

For intentional device, according to 15.209 the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.49	2400/F(KHz)	300
0.49-1.705	24000/F(KHz)	30
1.705-30	30	30

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz and 110-490kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for above 1000MHz. Radiated emission limits above 1000MHz is based on measurements employing an average detector.

According to FCC Part1 5.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

Limits of radiated emission measurement(FCC 15.225)

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410- 13.553 MHz and 13.567- 13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in S1 5.209.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1 MHz for Peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~1 50kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz/ RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### **Test Procedure**


- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz and above 1GHz,
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to4 m.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item - EUT Test Photos.

#### **Note:**


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case. The worst case emissions were reported.

**Test Configuration**


(A) Radiated Emission Test-Up Frequency Below 30MHz

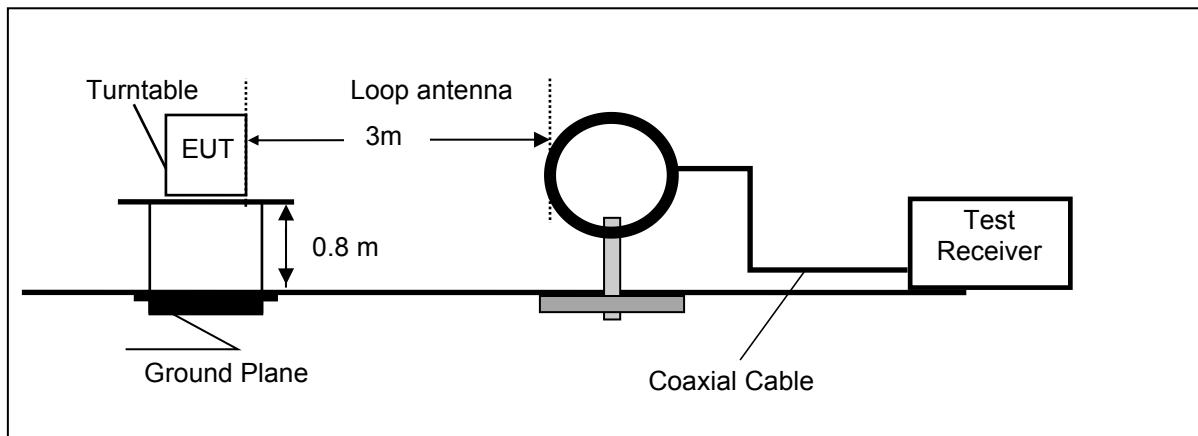


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

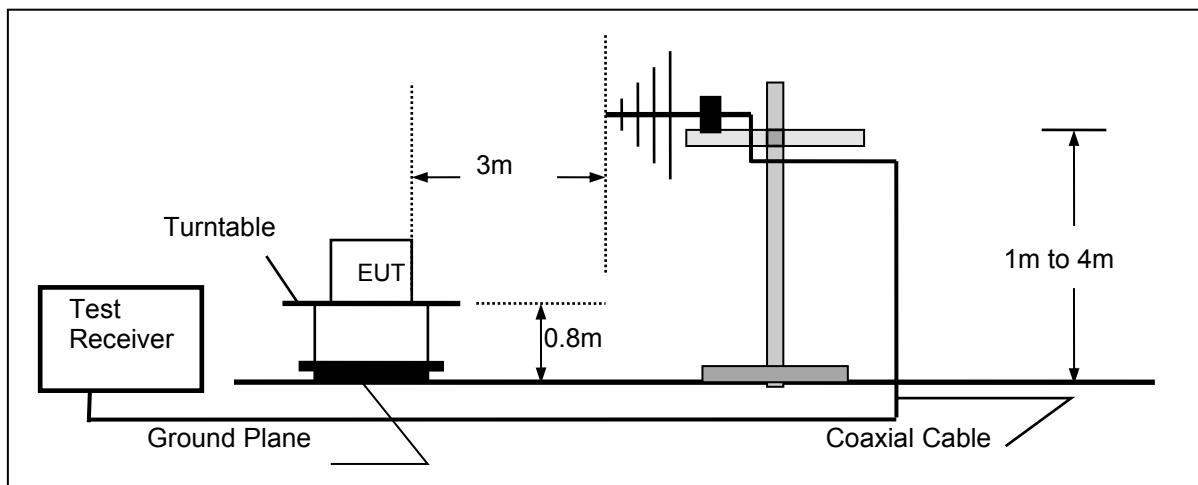


Above 1GHz

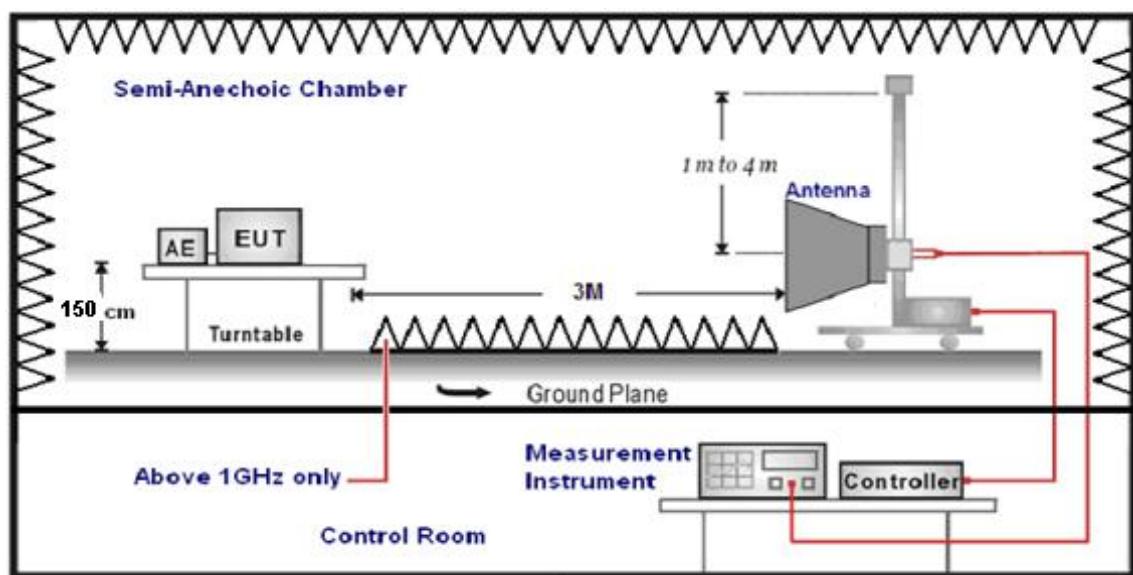


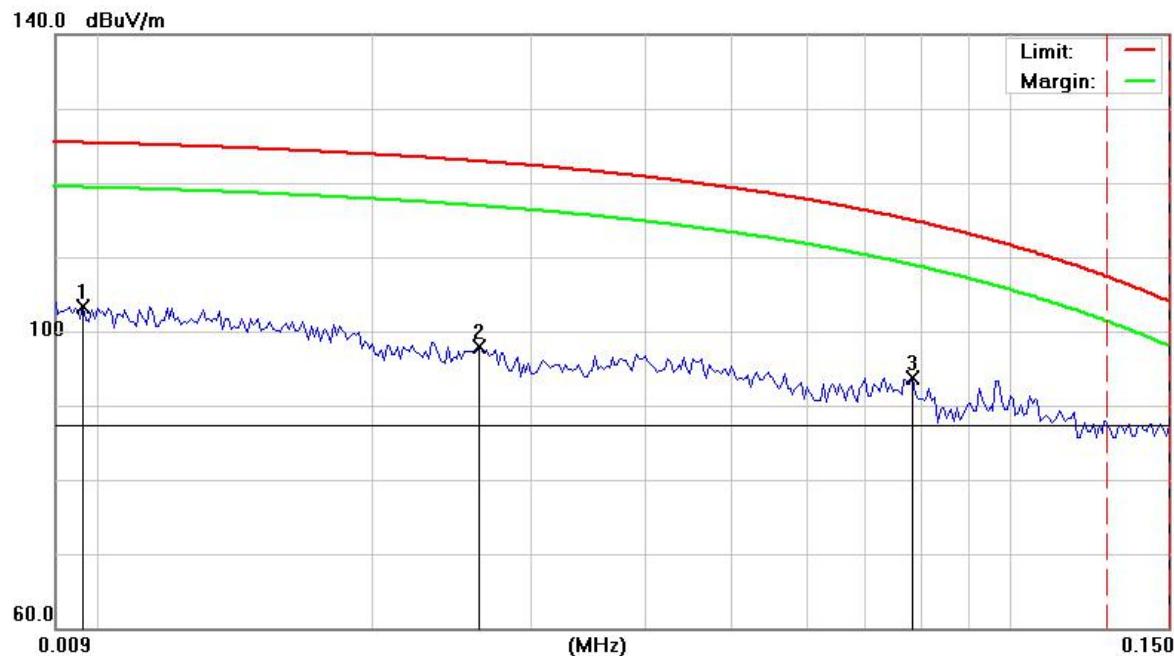**Spurious Emission below 150kHz (9KHz to 150kHz H-field)**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.0097	92.67	10.63	103.30	125.4	-22.11	peak
2		0.0262	89.37	8.63	98.00	122.9	-24.90	peak
3	*	0.0785	88.57	5.03	93.60	114.9	-21.35	peak

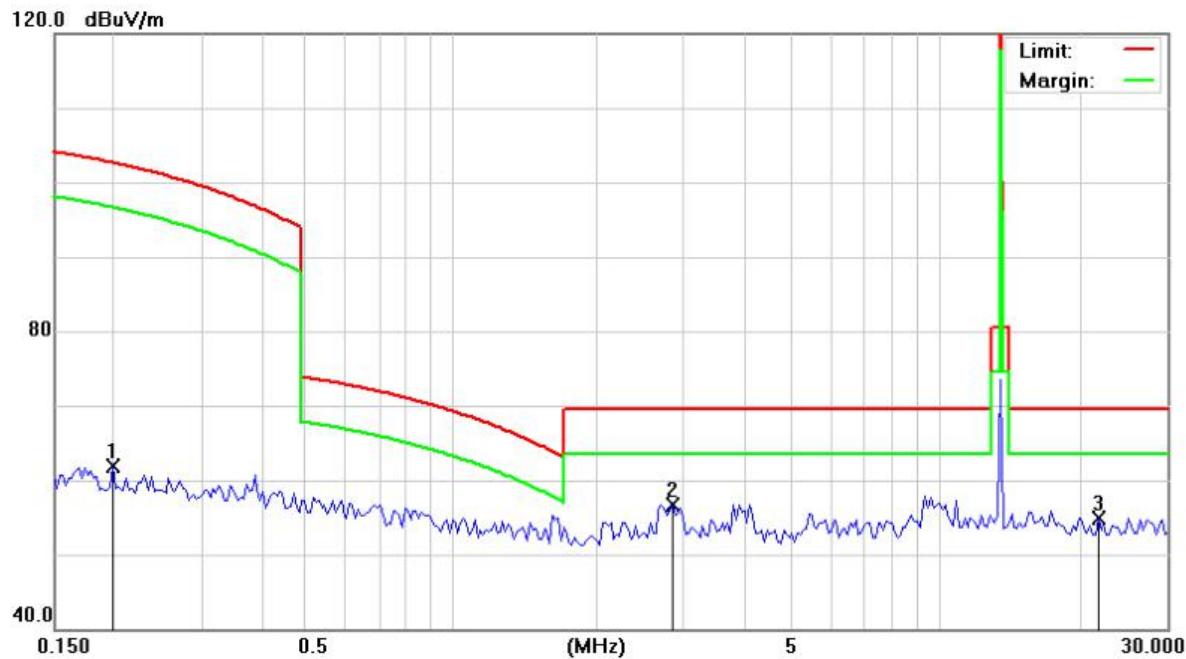**Spurious Emission below 30MHz (150KHz to 30MHz)**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		0.1981	57.20	4.70	61.90	102.6	-40.72	peak
2	*	2.8389	52.07	4.73	56.80	69.54	-12.74	peak
3		21.5430	50.09	4.91	55.00	69.54	-14.54	peak

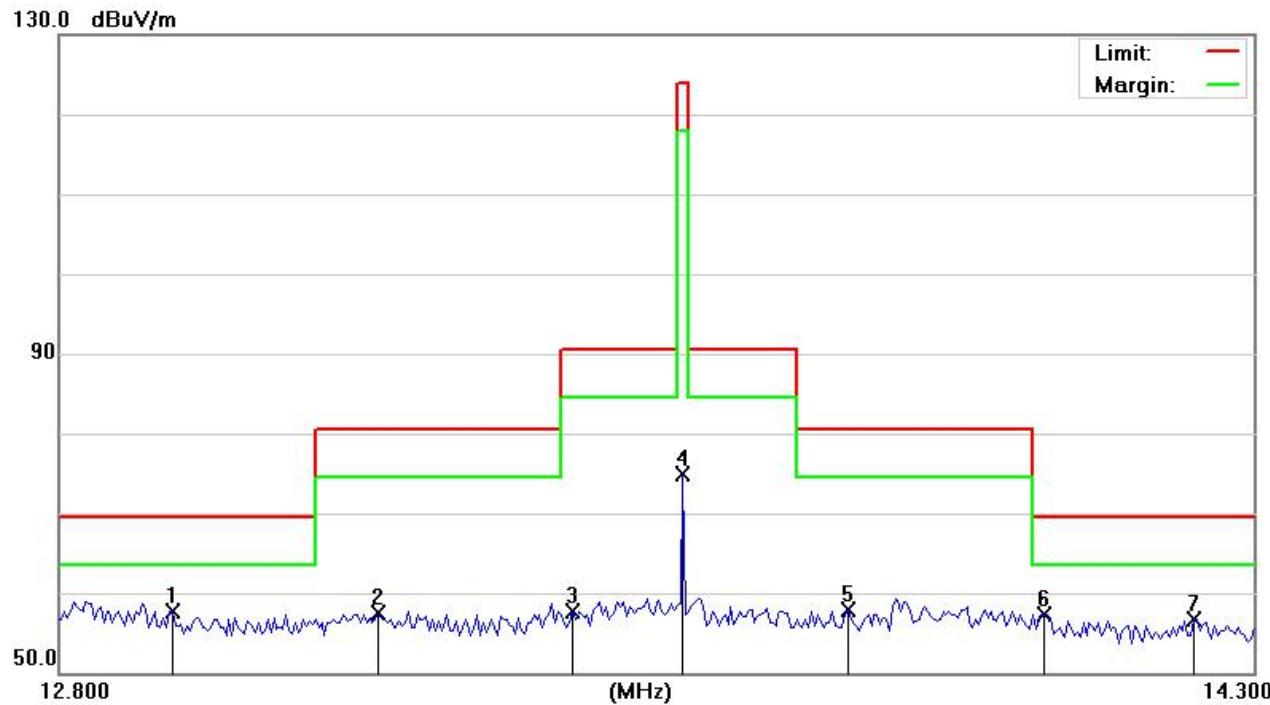


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	12.9354	52.87	4.83	57.70	69.54	-11.84	peak
2		13.1851	52.67	4.83	57.50	80.50	-23.00	peak
3		13.4246	52.77	4.83	57.60	90.50	-32.90	peak
4		13.5600	70.00	4.83	74.83	124.0	-49.17	peak
5		13.7712	53.06	4.84	57.90	80.50	-22.60	peak
6		14.0254	52.56	4.84	57.40	69.54	-12.14	peak
7		14.2210	51.86	4.84	56.70	69.54	-12.84	peak

## Spurious Emission above 30MHz (30MHz~1GHz)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	41.1319	19.98	9.82	29.80	40.00	-10.20	peak
2		94.5939	20.74	11.26	32.00	43.50	-11.50	peak
3		142.8240	20.26	10.34	30.60	43.50	-12.90	peak
4		419.8435	10.10	20.70	30.80	46.00	-15.20	peak
5		541.3721	11.41	22.89	34.30	46.00	-11.70	peak
6		710.4266	3.03	25.67	28.70	46.00	-17.30	peak

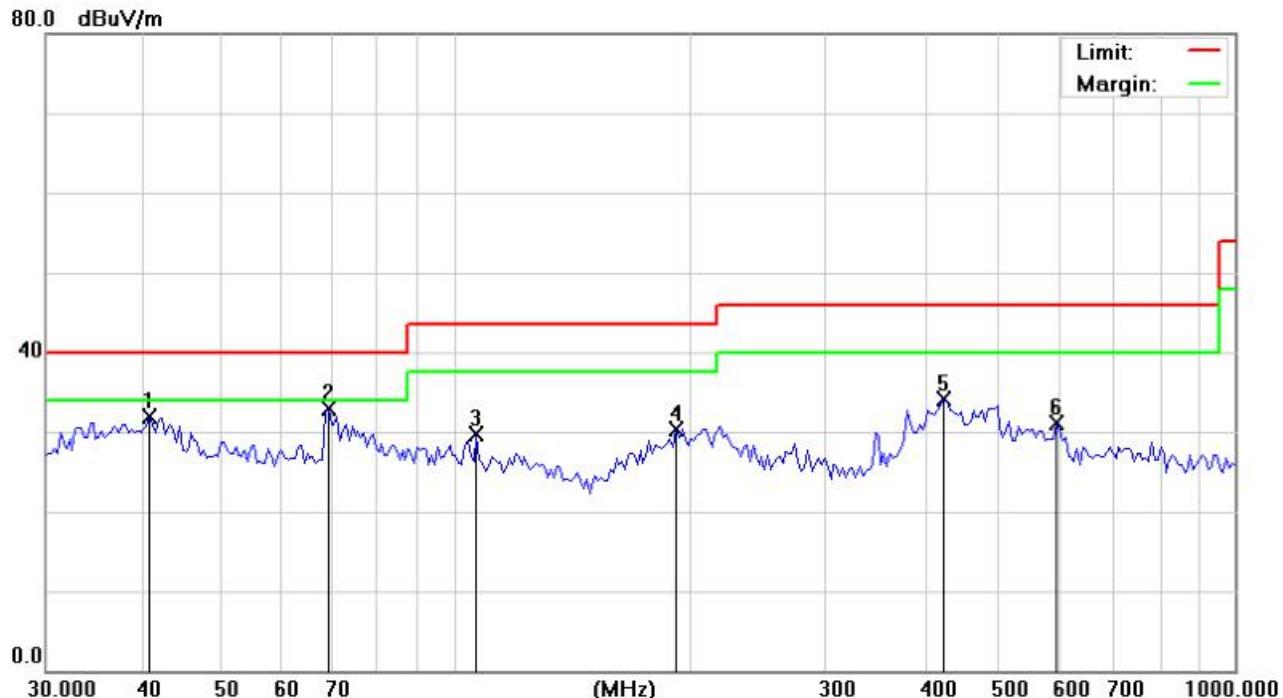

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB Detector
1		40.7730	22.12	9.88	32.00	40.00	-8.00 peak
2	*	68.9929	25.97	7.03	33.00	40.00	-7.00 peak
3		106.9461	18.03	11.67	29.70	43.50	-13.80 peak
4		192.4182	17.69	12.61	30.30	43.50	-13.20 peak
5		423.5403	13.32	20.78	34.10	46.00	-11.90 peak
6		590.9737	7.11	23.99	31.10	46.00	-14.90 peak

## 4.3 Frequency Tolerance

### Standard Applicable

According to 15.225(e), the frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure.

### Test Result

Temperature vs. Frequency Stability

Temperature (°C)	Power(V DC)	Measurement Frequency (MHz)	Frequency Error (%)	Limit (%)
-20	3.7	13.560362	0.000362	$\pm 0.01$
-10		13.560148	0.000148	$\pm 0.01$
0		13.560214	0.000214	$\pm 0.01$
10		13.560142	0.000142	$\pm 0.01$
20		13.560241	0.000241	$\pm 0.01$
30		13.560251	0.000251	$\pm 0.01$
40		13.560011	0.000011	$\pm 0.01$
50		13.560484	0.000484	$\pm 0.01$
20	3.15Vdc	13.560024	0.000024	$\pm 0.01$
20	4.26Vdc	13.560014	0.000014	$\pm 0.01$


## 4.4 20dB Bandwidth

### Limit

According to FCC Part15 C Section part 15.215(c):

Per 15.215 (C), Intentional radiators operating under the alternative provisions to the general emission limits, as contained in 815.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. In the case of intentional radiators operating under the provisions of subpart E, the emission bandwidth may span across multiple contiguous frequency bands identified in that subpart. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### Test Configuration

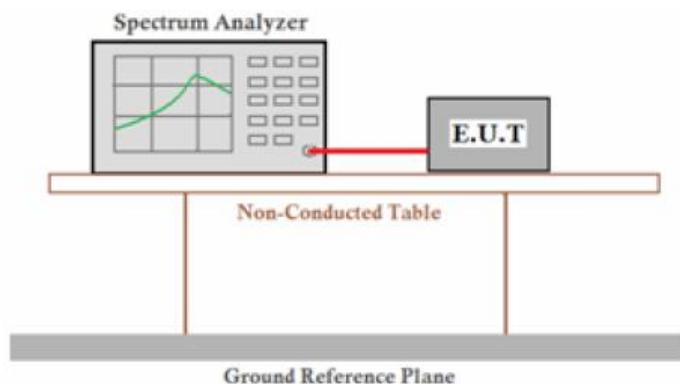

### Test Procedure

The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

According to the ANSI 63. 10-2013, the emission bandwidth test method as follows.

Set span = 10kHz, centered on a transmitting channel

RBW $\geq$ 1 % 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto


Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down of the emission.

**Test Results**

Mode	Frequency (MHz)	-20dB bandwidth (KHz)	Limit (kHz)	Result
ASK	13.56	5.036	N/A	Pass

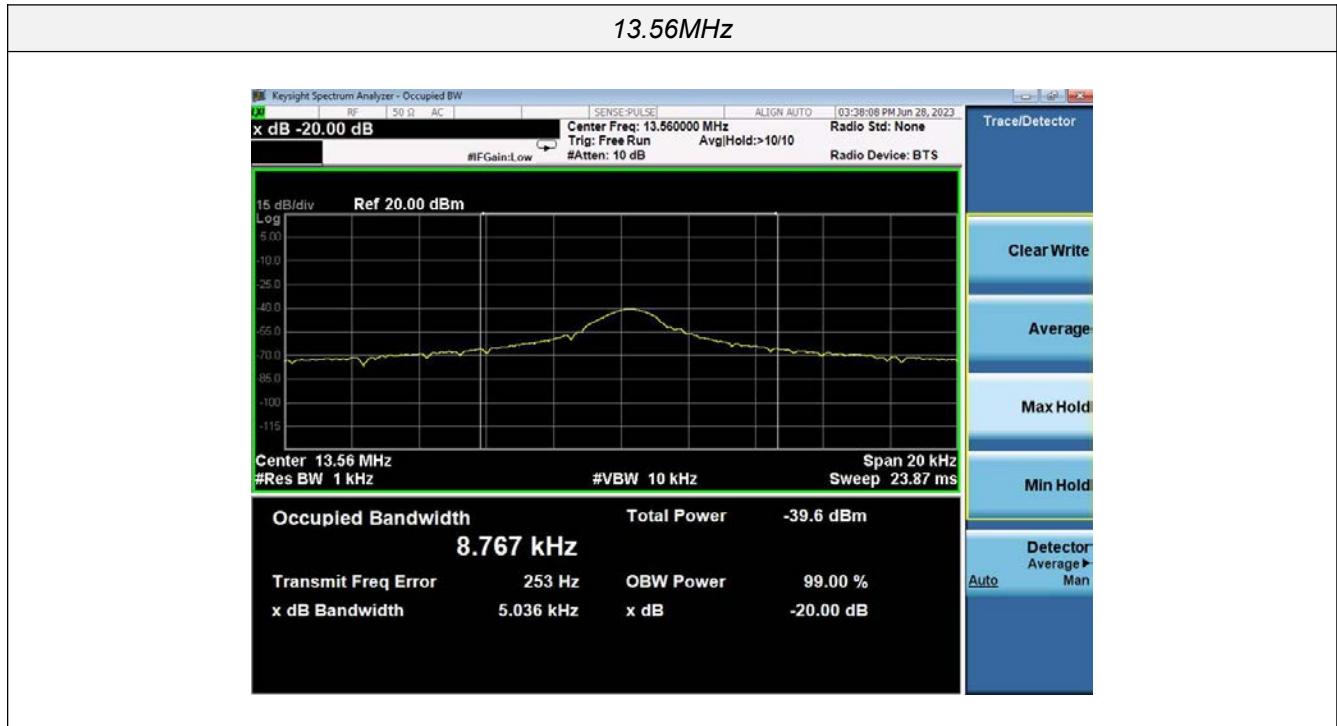**Test plot as follows:**

## **4.5 Antenna Requirement**

### **Standard Applicable**

According to FCC Part 15C 15.203

An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Refer to statement below for compliance.**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The antenna used in this product is a coil Antenna, The directional gains of antenna used for transmitting is 0 dBi.




Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, BSL Testing Co., Ltd. does not assume any responsibility.


## 5 Test Setup Photos of the EUT

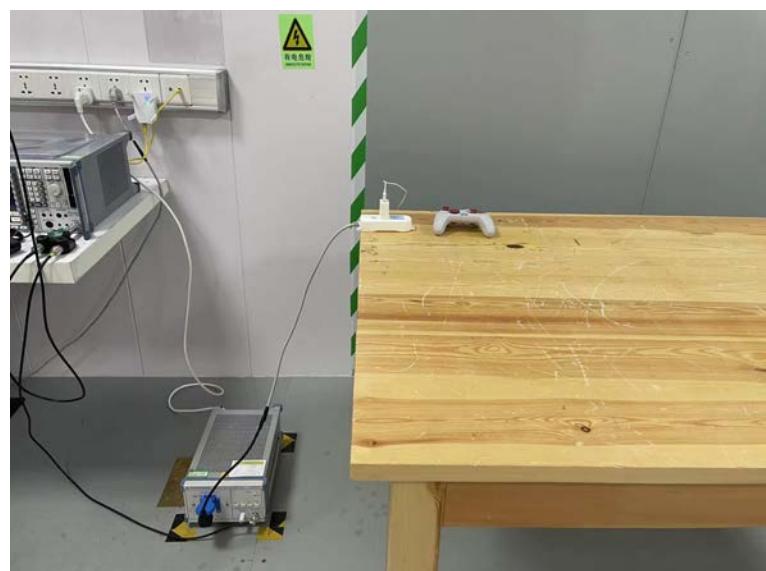

**6 Photos of the EUT**



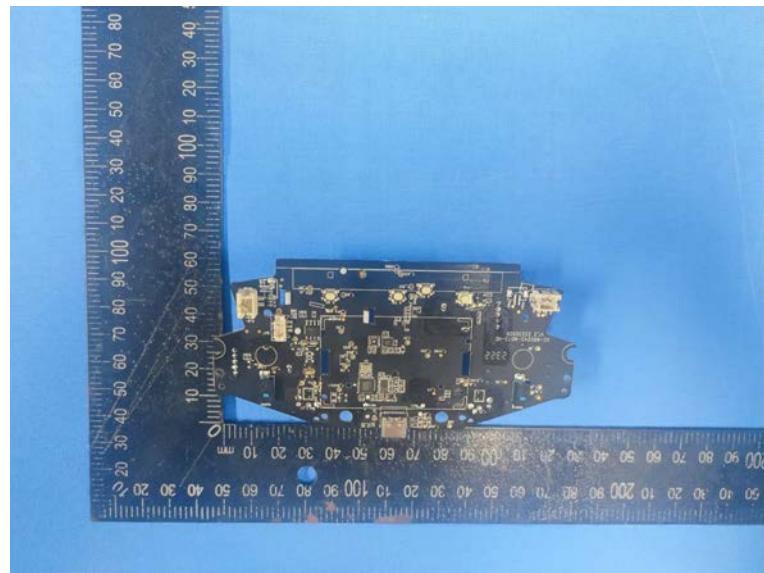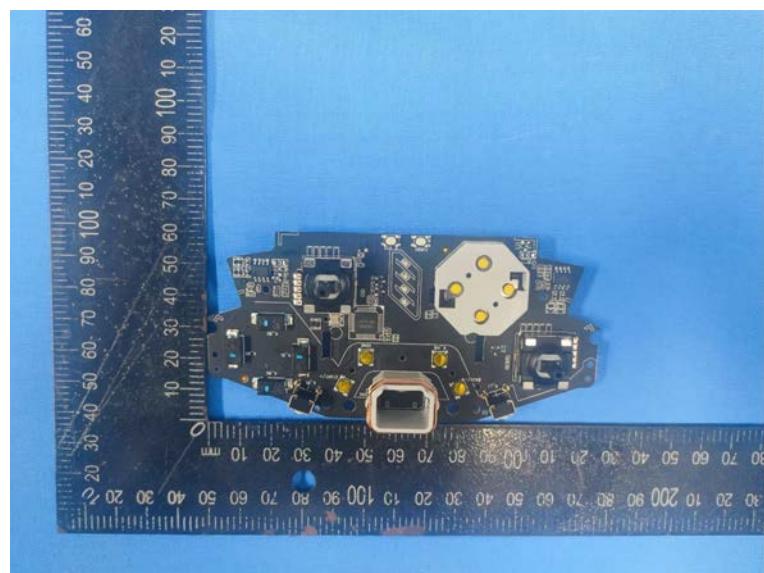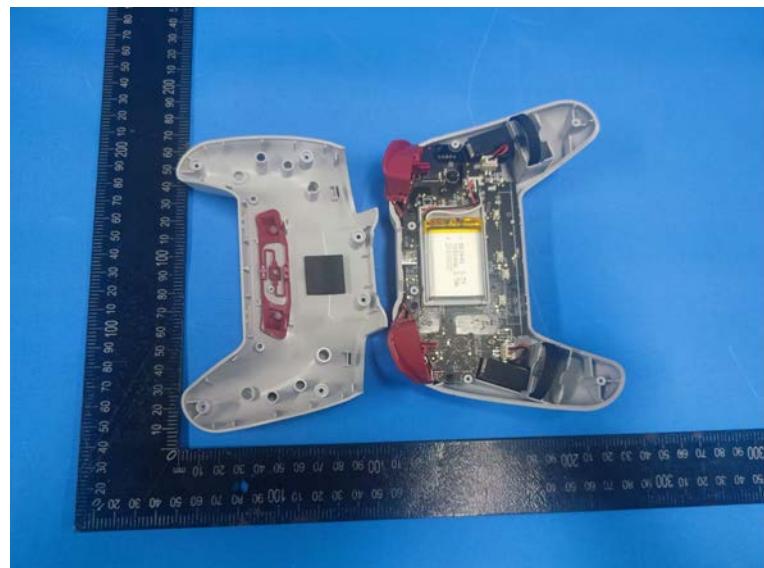

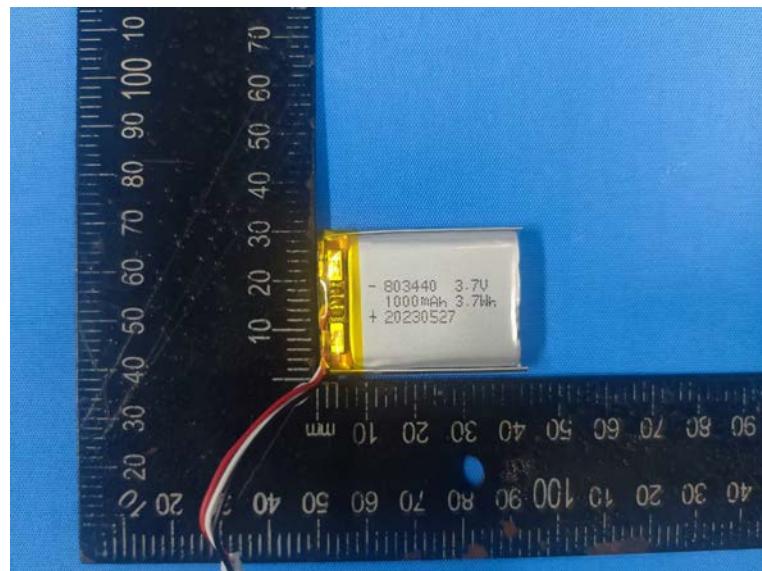

\*\*\*\*\* End of Report \*\*\*\*\*