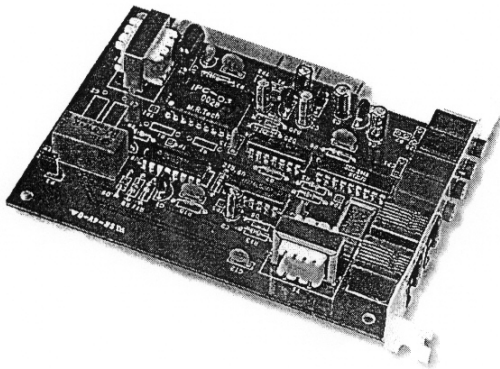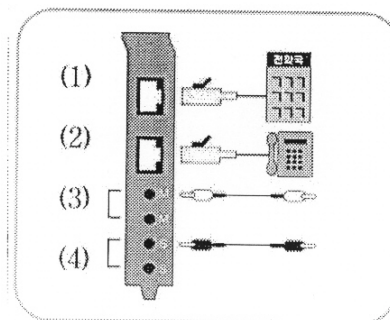# What InPhone Card is

"InPhone Card" enables you can utilize general phones-corded/cordless

phone-for Internet Voice Communications such as Internet Phone call and voice chatting as you use it for regular phone calls.
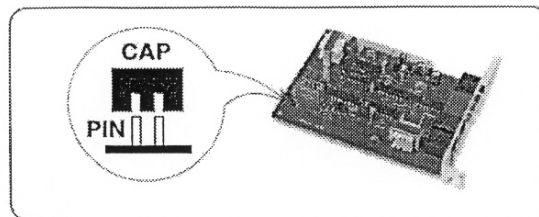
Package Components

InPhone Card

Sound Cable & Phone Line

Minimum System Requirements

Pentium 100MHz, MS Windows 95/95/NT,
Sound Card (Full Duplex),
InternetConnection(ADSL/ISDN/CABLE/LAN),
Internet Exploer4.0(Java VM5.0)
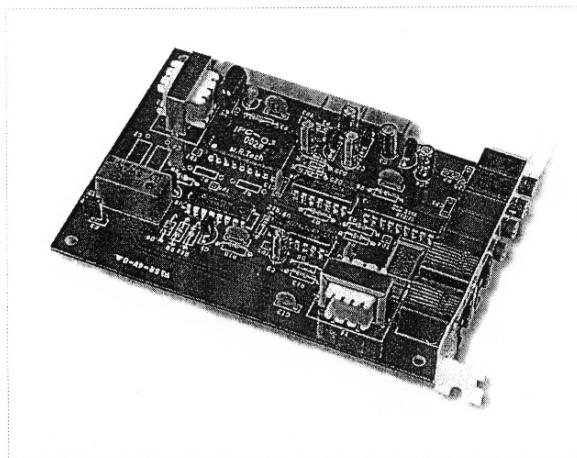Netscape Communicater 4.5

1. If you want to use InPhone card both for internet phone calls and regular phone calls, leave the cap as is factory setting shown in the figure. But if you want to use InPhone card for internet phone calls only, short the pins by using the cap.

2. Insert "InPhone Card" into a PCI slot of your PC.

3. Connet phone line(PSTN) and phone to your InPhone Card, and link mike & speaker ports of Sound Card of your PC to respective port of InPhone Card. It is not recommendable to connect a dialup modem line to InPhone Card.

4. Try Internet Phone calls.

How to operate!

1. When pressed *and#(transform key)consecutively, your phone connection will be transformed to the other connection from your present connection status.

2. When you get a phone call while you are on Internet phone, you will be able to hear a sound like DuDuDu from speaker of your handset, then press the transform key to respond to the phone call and then press the transform key again to get back to internet phone.

How to improve sound quality

1. InPhone Card would return your call receiver around 25dB level echo which may or may not bo heard or felt in general. The level of echo will slightly vary depending on type of your phone. To minimize the echo level, optimize speaker / mike volume level of your PC.

2. To make sure your PC is properly set, select Setting from the Start menu of Windows, and then select Control board, and then select Multimedia (or Entertainment), and finally select Audio, ①Click Playback and make sure microphone is checked((ᵛ)Mute),②Click Recording and make sure microphone is selected((ᵛ)Selection).

Internet Telephony Sites

www.dailpad.com	www.deltathree.com	www.mediaring.com
www.wowcall.com	www.telefree.co.kr	www.net2phone.com
www.qptel.co.kr	www.csclub.com	

M.R.TECH CO.,LTD.

#205, Han Bldg, 943-2 Dogok-Dong, Kangnam-Gu,

Seoul, Korea TEL:02)3463-4360~1 FAX:02)3463-4362