

RF Test Report

regarding

USA: CFR Title 47, Part 15.249 (Emissions)
Canada: ISSED RSS-210v11 (Emissions)

for

CONFIDENTIAL

HFA31

Category: 24.2 GHz Kick Sensor

Judgments:

Aligns with FCC 15.249, ISSED RSS-210v11

Testing Completed: January 14, 2025



Prepared for:

Vitesco Technologies GmbH

Siemensstrasse 12, Regensburg 93055 Germany

Phone: +49-9412031-3244, Fax: -

Contact: Stefan Lehmann, stefan.lehmann@vitesco.com

Data Rec./Rev. by:

John Nantz
Mr. John Nantz

Rpt. Auth. by:

Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Rpt. Prep./Rev. by:

John Nantz
Mr. John Nantz

Date of Issue:

January 15, 2025

Revision History

Rev. No.	Date	Details	Revised By
r0	January 15, 2025	Initial Release.	J. Nantz
r1	February 21, 2025	Remove EUT photos	J. Nantz
r2	February 25, 2025	Conf. all photos	J. Brunett

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	4
1.1 Laboratory Authorization	4
1.2 Report Retention	4
1.3 Subcontracted Testing	4
1.4 Test Data	4
1.5 Limitation of Results	4
1.6 Copyright	4
1.7 Endorsements	4
1.8 Test Location	5
1.9 Traceability and Equipment Used	5
2 Test Specifications and Procedures	6
2.1 Test Specification and General Procedures	6
3 Configuration and Identification of the Equipment Under Test	7
3.1 Description and Declarations	7
3.1.1 EUT Configuration	8
3.1.2 Modes of Operation	8
3.1.3 Variants	8
3.1.4 Test Samples	8
3.1.5 Functional Exerciser	8
3.1.6 Modifications Made	8
3.1.7 Production Intent	8
3.1.8 Declared Exemptions and Additional Product Notes	8
4 Emissions	9
4.1 General Test Procedures	9
4.1.1 Radiated Test Setup and Procedures	9
4.1.2 Power Supply Variation	11
4.2 Intentional Emissions	12
4.2.1 Fundamental Emission Pulsed Operation	12
4.2.2 Fundamental Emission Bandwidth	14
4.2.3 Fundamental Emission	15
4.3 Unintentional Emissions	16
4.3.1 Transmit Chain Radiated Spurious Emissions	16
5 Measurement Uncertainty and Accreditation Documents	17

List of Tables

1.8.0 Test Site List.	5
1.9.0 Equipment List.	5
3.1.0 EUT Declarations.	7
4.2.1 Pulsed Emission Characteristics (Duty Cycle).	12
4.2.2 Intentional Emission Bandwidth.	14
4.2.3 Example Fundamental Radiated Emissions.	15
4.3.1 Transmit Chain Spurious Emissions.	16
5.0.0 Measurement Uncertainty.	17

List of Figures

3.1.1 EUT Test Configuration Diagram.	8
4.1.1 Radiated Emissions Diagram of the EUT.	9
4.1.1 Radiated Emissions Test Setup Photograph(s).	10
4.2.1 Example Pulsed Emission Characteristics (Duty Cycle).	13
4.2.2 Example Intentional Emission Bandwidth.	14
5.0.0 Accreditation Documents	17

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until January 2035.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Test Data

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

1.5 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.6 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

1.7 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1.8.0 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1.8.0 Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSD

1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 1.9.0 . The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards. All equipment is evaluated on a cycle no greater than 12 months following laboratory validation procedures and is calibrated following manufacturer recommended intervals.

Table 1.9.0 Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
Spectrum Analyzer	R & S / FSW67	103233	RSFSW67	RS / Sept-2025
Spectrum Analyzer	R & S / FSV30	101660	RSFSV3001	RS / Apr-2025
Harmonic Mixer	VDI / SAX 108	A30316	MIX60TO9001	AHD / On-use
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2025
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2025
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2025
K-Band Horn	JEF / NRL Std.	001	HRNK01	AHD / On Use
Ka-Band Horn	JEF / NRL Std.	001	HRNKA001	AHD / On-Use
U-Band Horn	Cust. Micro. / HO19R	-	HRNU01	Cust.M. / On-Use
E-Band Horn	Flann / 26240-25-1030B	250901	HRNE01	Flann / On-Use
W-Band Horn	Cust. Micro. / HO10R	-	HRNW01	Cust.M. / On-Use

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The goal of Vitesco Technologies GmbH is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Vitesco Technologies GmbH HFA31 for compliance to:

Country/Region/Manu.	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.249
Canada	ISED Canada	ISED RSS-210v11

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
ANSI C63.10:2020	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
WR-ITP0102RA	"AHD Internal Document - Radiated Emissions Test Method"
WR-ITP0101LC	"AHD Internal Document - Conducted Emissions Test Method"

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The EUT is an automotive kick sensor radar used for vehicle door access. The EUT is approximately 13 x 5 x 2 cm (approx.) in dimension, and is depicted in Figure ???. It is powered by 13.4 VDC vehicle power system. In use, this device is permanently affixed in a motor vehicle. Table 3.1.0 outlines provider declared EUT specifications. FIGURE FILE IS MISSING!!

Table 3.1.0 EUT Declarations.

General Declarations	
Equipment Type:	24.2 GHz Kick Sensor
Country of Origin:	Not Declared
Nominal Supply:	13.4 VDC
Oper. Temp Range:	-40° C to +85° C
Frequency Range:	24.05 – 24.25 GHz
Antenna Dimension:	Not Declared
Antenna Type:	integral monopole antennas
Antenna Gain:	Not Declared
Number of Channels:	1
Channel Spacing:	Not Applicable
Alignment Range:	Not Declared
Type of Modulation:	CW Burst Radar
United States	
FCC ID Number:	2A6TC-HFA31
Classification:	DXX
Canada	
IC Number:	28616-HFA31
Classification:	Motion Sensor Device

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 3.1.1 .



Figure 3.1.1 EUT Test Configuration Diagram.

3.1.2 Modes of Operation

The EUT is capable of a low duty cycle SLEEP mode where it sends CW burst transmissions infrequently looking for motion. Once motion is detected, the EUT switches into ACTIVE mode where it transmits the same short CW bursts more frequently. Every CW burst transmission is a single 11us transmission simultaneously emanating from both integral transmit antennas. Both SLEEP and ACTIVE modes are detailed and tested herein.

3.1.3 Variants

There is only a single variant of the EUT, as tested.

3.1.4 Test Samples

Two samples were provided, one capable of sleep mode (SN: 3361) and one capable of active mode (SN: 3320) all of which were tested herein.

3.1.5 Functional Exerciser

Normal operating EUT functionality was verified prior to testing by observation of the emissions spectrum.

3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory.

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

The EUT is permanently installed in a transportation vehicle. As such, digital emissions are exempt from US and Canadian digital emissions regulations (per FCC 15.103(a) and IC correspondence on ICES-003). In the mm-wave band, narrow encoded pulses arise both as part of the communications encoding and as the signal chirps past the receiver tuned frequency. To avoid amplitude measurement error due to Pulse Desensitization, we measure peak emissions only when the radar is either placed into CW mode or when the signal “Dwells” at a single frequency for an extended period of time.

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 4.1.1 . All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

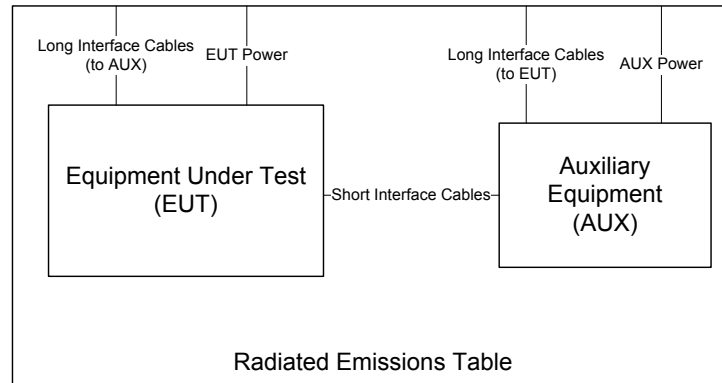


Figure 4.1.1 Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulation. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, 10cm diameter single-axis broadband probes meeting the requirements of ISSED RSS-102.NS.MEAS are employed. Measurements are repeated and summed over three axes, and the entire frequency range is measured with and without the EUT transmitting.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.1.1 .

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

Where regulations call for substitution method measurements, the EUT is replaced by a substitution antenna if field strength measurements indicate the emission is close to the regulatory limit. This antenna is co-polarized with the test antenna and tuned (when necessary) to the emission frequency, after which the test antenna height is again optimized. The substitution antenna's signal level is adjusted such that its emission is equal to the level measured from the EUT. The signal level applied to the substitution antenna is then recorded. Effective isotropic radiated power (EIRP) and effective radiated power (ERP) in dBm are formulated from

$$EIRP = P_T - G_A = ERP + 2.16, \quad (1)$$

where P_T is the power applied to substitution antenna in dBm, including correction for cable loss, and G_A is the substitution antenna gain, in dBi.

When microwave measurements are made at a range different than the regulatory distance or made at close-range to improve receiver sensitivity, the reading is corrected back to the regulatory distance. This is done using a 20 dB/decade field behavior as dictated by the test procedures. When measurements are made in the near-field, the near-field/far-field boundary (N/F) is reported. It is computed as

$$N/F = 2D^2/\lambda$$

where D is the maximum dimension of the transmitter or receive antenna, and λ is the wavelength at the measurement frequency. Typically for high frequency measurements the receive antenna is connected to test receiver / analyzer through an external mixer. In this case, cable loss, IF amplifier gain, and mixer conversion losses are corrected for in the data table, or directly in the analyzer.

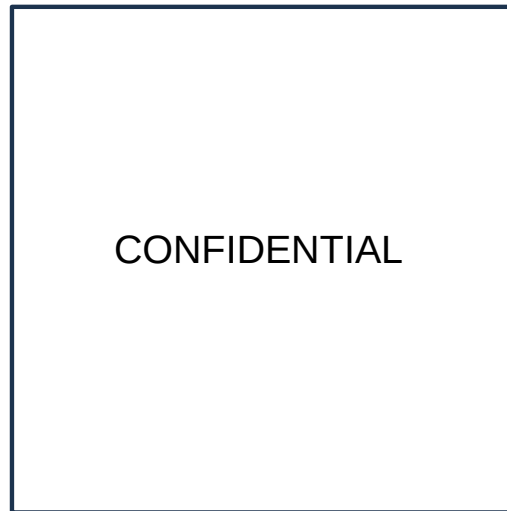


Figure 4.1.1 Radiated Emissions Test Setup Photograph(s).

4.1.2 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

4.2 Intentional Emissions


4.2.1 Fundamental Emission Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4.2.1 . Plots showing the measurements made to obtain these values are provided in Figure 4.2.1 .

Table 4.2.1 Pulsed Emission Characteristics (Duty Cycle).


		IF Bandwidth		Video Bandwidth		Test Date:		14-Jan-25	
		28 MHz		28 MHz		Test Engineer:		John Nantz	
						EUT:		HFA31	
						Meas. Distance:		1 m	
FCC/IC									
#	EUT Test Mode	Overall Transmission			Internal Frame Characteristics			Calculated Duty Cycle	
		Min. Repetition Rate (sec)	Max. No. of Frames	Total Transmission Length (sec)	Max. Frame Length (ms)	Min. Frame Period (ms)	Frame Encoding	(%)	(dB)
R1	No-Movement (SLEEP)	0.100			0.0113	103.5547	Max Tx when in sleep mode is 11.3 us on time every 100.13 ms.	0.01	-20.0
R2	Movement (ACTIVE)	-			0.0112	1.0390	Max Tx when motion is detected is 11.3 us on time every 1 ms.	1.08	-20.0
#	C1	C2	C3	C4	C5	C6	C7	C8	C9

SLEEP

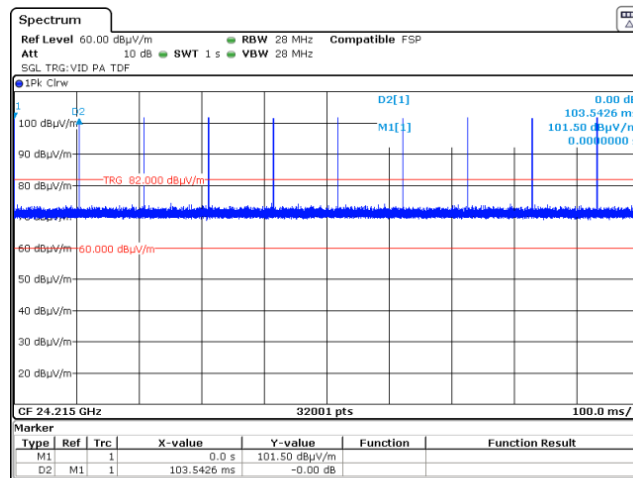


Date: 14 JAN 2025 17:52:22


ACTIVE

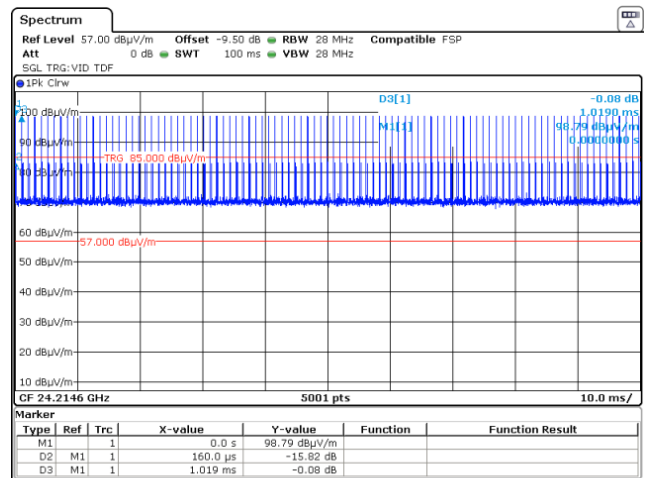


Date: 13 JAN 2025 16:38:35

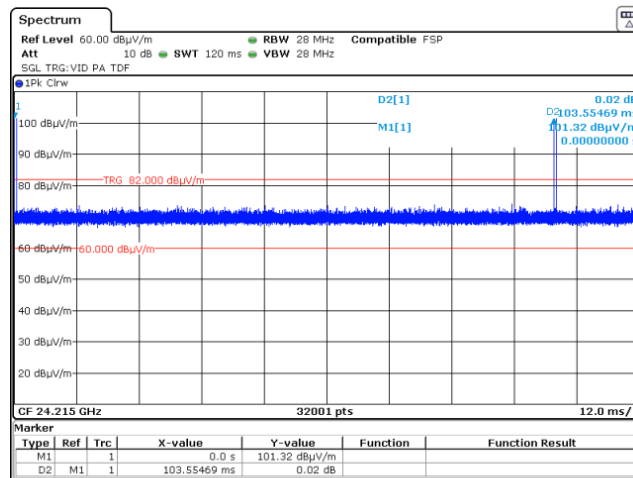


Date: 14 JAN 2025 17:48:20

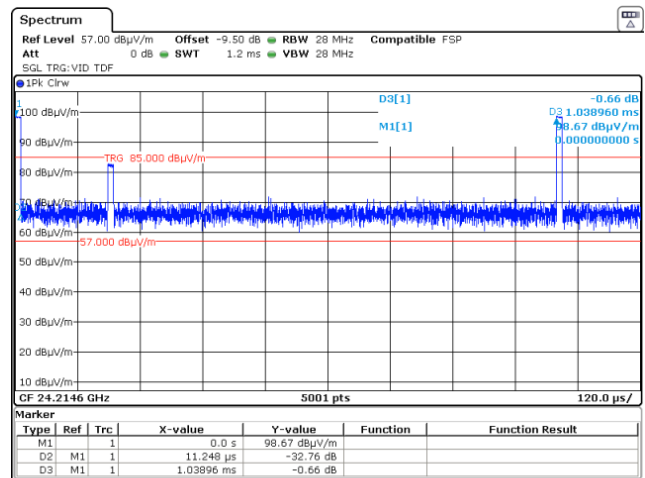

Date: 13 JAN 2025 16:37:07

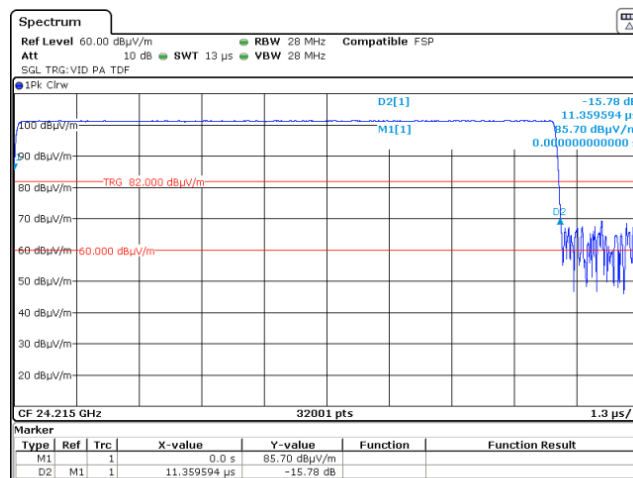

Date: 14 JAN 2025 17:51:19

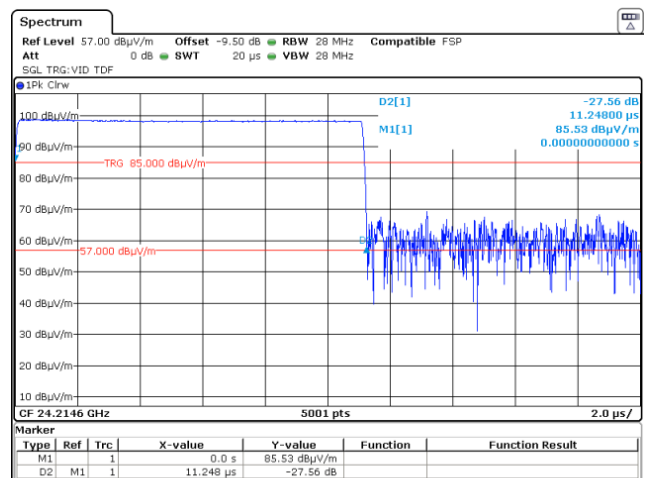

Date: 13 JAN 2025 16:36:05

Figure 4.2.1 Example Pulsed Emission Characteristics (Duty Cycle).

4.2.2 Fundamental Emission Bandwidth

Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available frame length and minimum frame spacing. Radiated emissions are recorded following the test procedures listed in Section 2.1. The 20 dB EBW is measured as the max-held peak-detected signal when the IF bandwidth is greater than or equal to 1% of the receiver span. The 99% emission bandwidth is also reported. The results of EBW testing are summarized in Table 4.2.2 . Plots showing measurements employed to obtain the emission bandwidth reported are provided in Figure 4.2.2 .

Table 4.2.2 Intentional Emission Bandwidth.

				Test Date:		14-Jan-25	
Detector				IF Bandwidth		Video Bandwidth	
Pk				300 kHz		3 MHz	
				Test Engineer:		J. Nantz	
				EUT:		HFA31	
				EUT Mode:		See Below	
				Meas. Distance:		1m	
FCC/IC							
#	Mode	Center Frequency (GHz)	99% OBW (MHz)	fL (MHz)	fL Limit (MHz)	fH (MHz)	fH Limit (MHz)
R1	ACTIVE	24.213	4.41	24211.09	24000	24215.50	24250
R2							
#	C1	C2	C3	C4	C5	C6	C7

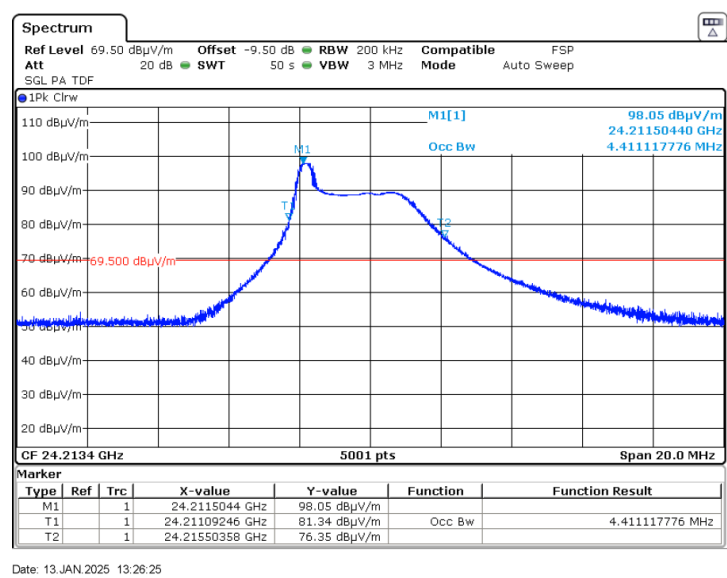


Figure 4.2.2 Example Intentional Emission Bandwidth.

4.2.3 Fundamental Emission

Following the test procedures listed in Section 2.1, field emissions measurements are made on the EUT for both Horizontal and Vertically polarized fields. Table 4.2.3 details the results of these measurements.

Table 4.2.3 Example Fundamental Radiated Emissions.

Frequency Range
f > 1 000 MHz

Det **IF Bandwidth** **Video Bandwidth**
Pk/Avg 1 MHz 28 MHz

Test Date: 14-Jan-25
Test Engineer: John Nantz
EUT: HFA31
Mode: Continuous Modulation
Meas. Distance: 3m

FCC/IC																				
#	Mode	Frequency Band		Test Antenna + Cable					Range Correction				E-Field @ Des.				EIRP		Pass By	Comments
		Start MHz	Stop MHz	Ant. Quality Number	Pol. H/V	Dim. cm	Ka dB/m	Kg dB	Meas. m	Des. m	N/F m	CF dB	Meas Pk dBuV/m	Calc. Avg	FCC/ISED Limit Pk dBuV/m	Avg	Computed Pk dBm	Avg dBm		
R1	CM	24214.0	24214.0	HRNK01	H/V	10.2	33.2	0.0	2.0	3.0	1.7	3.5	98.8	78.8	128.0	108.0	3.6		29.2	
R2																				
R3																				
R4																				
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20

(ROW) (COLUMN) NOTE:

R0 C9 MR is Measurement Range, which is reduced from DR to achieve necessary SNR.

R0 C10 DR is the regulatory Desired Range measurement distance.

R0 C11 N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C6) computed above 1 GHz.

R0 C12 CF is computed assuming a 20 dB/decade Far-field Decay Rate per ANSI-C63.10:2020 Test Procedures.

R0 C13 When E-field is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings.

R0 C17/C18 EIRP is computed from field strength at 3 meter distance. If emission is within 6 dB of regulatory limit, then substitution method measurement may be employed to determine exact EIRP.

4.3 Unintentional Emissions

4.3.1 Transmit Chain Radiated Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 4.3.1. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 4.3.1 Transmit Chain Spurious Emissions.

Frequency Range				Det	IF Bandwidth	Video Bandwidth	Test Date:			
25 MHz ≤ f ≤ 1 000 MHz				Pk/QPk	120 kHz	300 kHz	01/14/25			
f > 1 000 MHz				Pk	1 MHz	3 MHz	J. Nantz			
f > 1 000 MHz				Avg (RMS)	1 MHz	3 MHz	EUT:			
							Mode:			
							Continuous Modulation			
							Meas. Distance:			
							See Table.			

FREQ < 40 GHZ																						
#	Env.		Frequency Band		Antenna + Cable				Range Correction				Meas. E-Field @ DR		EIRP		E-Field Limit		Pass By	Comments		
	Temp. (C)	Volt. (V)	Start MHz	Stop MHz	Quality Number	Pol. H/V	Dim. cm	Ka dB/m	Kg dB	MR m	DR m	N/F m	CF dB	Pk dBuV/m	Qpk dBuV/m	Pk dBm	Avg dBm	Pk dBuV/m			Qpk dBuV/m	
R1	18	13.4	30.0	88.0	BICEMCO01	H/V	22.0	7.8	-0.5	3.0	3.0	0.0	0.0	38.4	27.1			40.0	12.9	max all, background		
R2	18	13.4	88.0	216.0	BICEMCO01	H/V	22.0	14.8	-0.9	3.0	3.0	0.1	0.0	41.7	32.5			43.5	11.0	max all, background		
R3	18	13.4	216.0	1000.0	LOGEMCO01	H/V	22.0	24.1	-3.1	3.0	3.0	0.3	0.0	40.3	31.0			46.0	15.0	max all, background		
R4	Env.		Frequency Band		Antenna + Cable				Range Correction				Meas. E-Field @ DR		EIRP		E-Field Limit		Pass By	Comments		
R5	Temp. (C)	Volt. (V)	Start MHz	Stop MHz	Quality Number	Pol. H/V	Dim. cm	Ka dB/m	Kg dB	MR m	DR m	N/F m	CF dB	Pk dBuV/m	Avg dBuV/m	Pk dBm	Avg dBm	Pk dBuV/m			Avg dBuV/m	
R6	18	13.4	1000.0	6000.0	HQR1TO18S01	H/V	22.0	24.1	-12.2	3.0	3.0	1.9	0.0	49.8	39.5	-45.4		74.0	54.0	14.5	max all, noise	
R7	18	13.4	4800.0	4800.0	HQR1TO18S01	H/V	22.0	32.9	-10.8	3.0	3.0	1.5	0.0	50.1	41.2	-45.1		74.0	54.0	12.8	max all	
R8	18	13.4	6000.0	18000.0	HQR1TO18S01	H/V	15.0	35.0	2.5	3.0	3.0	2.7	0.0	50.4	42.5	-44.8		74.0	54.0	11.5	max all	
R9	18	13.4	18000.0	24000.0	HRNK01	H/V	10.2	33.2	0.0	3.0	3.0	1.7	0.0	46.4	36.6	-48.8		74.0	54.0	17.4	max all, noise	
R10	18	13.4	24000.0	24050.0	HRNK01	H/V	10.2	33.2	0.0	3.0	3.0	1.7	0.0	52.4	37.1	-42.8		74.0	54.0	16.9	Low Bandedge, noise	
R11	18	13.4	24250.0	24250.0	HRNK01	H/V	10.2	33.2	0.0	3.0	3.0	1.7	0.0	53.2	39.8	-42.0		74.0	54.0	14.2	High Bandedge, noise	
R12	18	13.4	24250.0	26500.0	HRNK01	H/V	10.2	33.7	0.0	3.0	3.0	1.8	0.0	47.3	37.3	-47.9		74.0	54.0	16.7	max all, noise	
R13	18	13.4	26500.0	40000.0	HRNKA01	H/V	9.2	37.2	0.0	3.0	3.0	2.3	0.0	48.4	38.9	-46.8		74.0	54.0	15.1	max all, noise	
R15	FREQ >= 40 GHZ																					
R16	Env.		Frequency Band		Antenna + Cable				Range Correction				Meas. E-Field @ DR		EIRP*		E-Field Limit		Pass By	Comments		
R17	Temp. (C)	Volt. (V)	Start GHz	Stop GHz	Quality Number	Pol. H/V	Dim. cm	Ka dB/m	Kg dB	MR m	DR m	N/F m	CF dB	Pk dBuV/m	Avg dBuV/m	Pk dBm	Avg dBm	Pk dBuV/m			Avg dBuV/m	
R18	20	13.4	40.0	70.0	HRNU01	H/V	6.3	45.0	0.0	3.00	3.0	1.9	0.0	51.2	41.2	-44.0		74.0	54.0	12.8	max all, noise	
R19	20	13.4	48.43	48.43	HRNU01	H/V	6.3	42.3	0.0	3.00	3.0	1.3	0.0	63.2	43.2	-32.0		88.0	68.0	24.8	harmonic, 2nd	
R20	20	13.4	72.64	72.64	HRNE01	H/V	6.0	42.3	0.0	3.00	3.0	1.7	0.0	52.7	32.7	-42.5		88.0	68.0	35.3	harmonic, 3rd	
R21	20	13.4	70.0	110.0	HRNW01	H/V	6.0	47.7	0.0	0.60	3.0	2.6	-14.0	52.4	44.1	-42.8		74.0	54.0	9.9	max all, noise	
R22	#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21

(ROW)

(COLUMN)

NOTE:

R0

C10/C11/C13

CF is computed assuming a 20 dB/decade Decay Rate. DR is Regulatory Range Distance. MR is Measurement Distance.

R10-R23

C15

Peak values used for calculation.

R0

C16-C17

EIRP is computed from field strength at 3 meter distance. If emission is within 6 dB of regulatory limit, then substitution method measurement is employed to determine exact EIRP.

R0

C7

Dimension of antenna is taken to be larger of the test antenna and the DUT antenna; DUT antenna is 6cm in dimension.

R0

C14-C15

For harmonics, Avg is computed from Peak via Duty Cycle correction. For Spurious, Pk and Avg/QPk are both measured values.

5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 5.0.0 Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm 1.9 \text{ dB}$
Radiated Emm. Amplitude ($f < 30 \text{ MHz}$)	$\pm 3.1 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm 4.0 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm 5.2 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm 3.7 \text{ dB}$

[†]Ref: CISPR 16-4-2:2011+A1:2014



Figure 5.0.0 Accreditation Documents