



Page 140 of 181

Test Laboratory: AGC Lab Date: Jun.18,2022

LTE Band 2 Mid-Body-Back (1 RB#0)
DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=1.77; Frequency:1880MHz; Medium parameters used: f = 1800 MHz;  $\sigma = 1.34$  mho/m;  $\epsilon r = 41.96$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.2, Liquid temperature ( $^{\circ}$ ): 21.1

## **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE Band 2 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 2 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

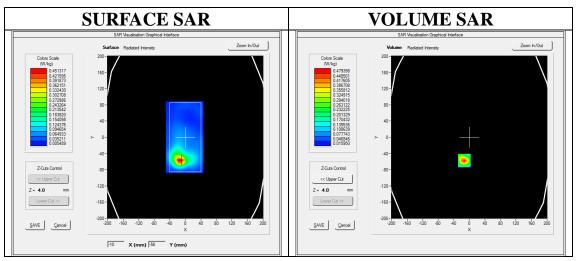



Maximum location: X=-13.00, Y=-57.00 SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.222220
SAR 1g (W/Kg)	0.445564





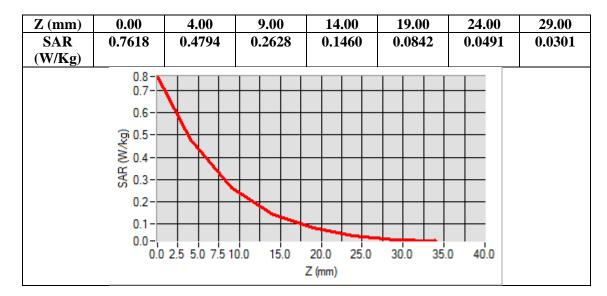

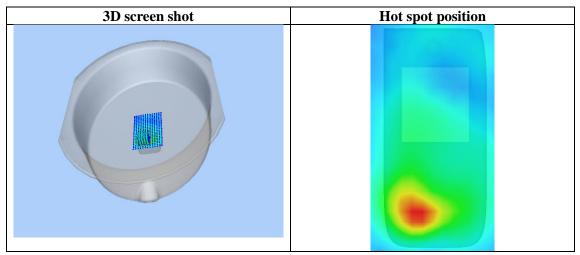



Page 142 of 181

Test Laboratory: AGC Lab Date: Jun.16,2022

LTE Band 4 Mid-Touch-Right (1 RB#0) DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=1.73; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.29$  mho/m;  $\epsilon r = 42.95$ ;  $\rho = 1000$  kg/m³;

Phantom section: Right Section

Ambient temperature ( $^{\circ}$ ): 21.2, Liquid temperature ( $^{\circ}$ ): 20.9

# **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE Band 4 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

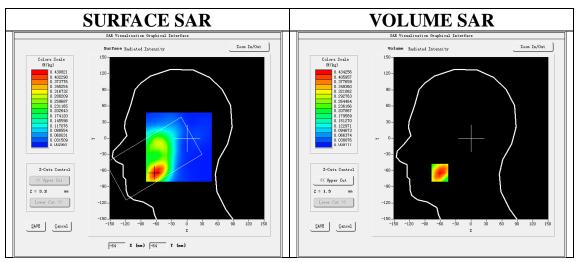



Maximum location: X=-61.00, Y=-64.00 SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.243754
SAR 1g (W/Kg)	0.416689





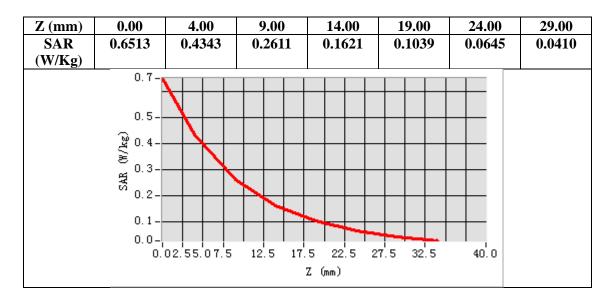

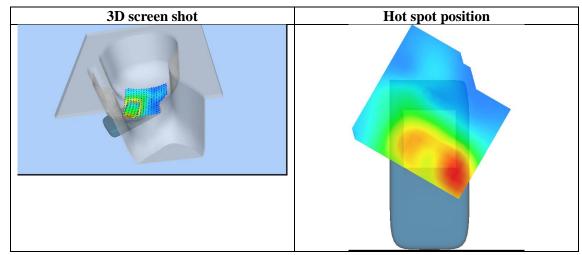



Page 144 of 181

Test Laboratory: AGC Lab Date: Jun.16,2022

LTE Band 4 High-Body-Back (1 RB#0) DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=1.73; Frequency:1732.5 MHz; Medium parameters used: f = 1800 MHz;  $\sigma = 1.31 \text{ mho/m}$ ;  $\epsilon = 42.15$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.2, Liquid temperature ( $^{\circ}$ ): 20.9

## **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE Band 4 High-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 High-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 4
Channels	High
Signal	OFDM (Crest factor: 1.0)

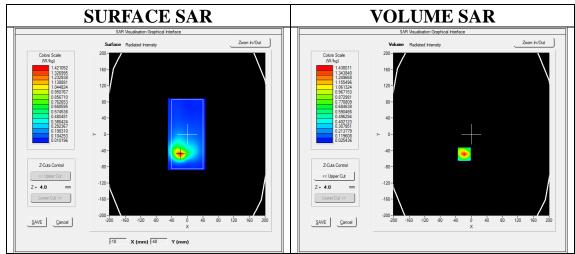



Maximum location: X=-18.00, Y=-49.00 SAR Peak: 2.21 W/kg

<b>SAR 10g (W/Kg)</b>	0.692540
SAR 1g (W/Kg)	1.333702





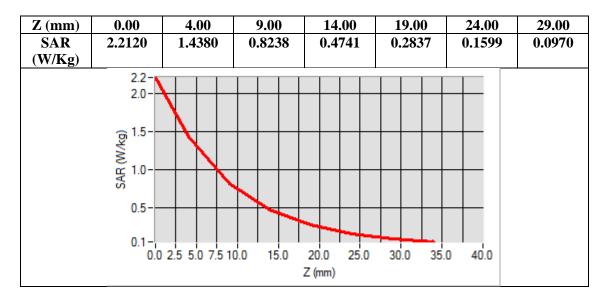

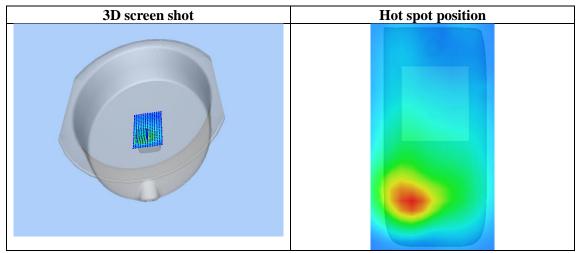



Page 146 of 181

Test Laboratory: AGC Lab Date: Jun.14,2022

LTE Band 5 Mid-Touch-Right (1 RB#0)
DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.42 Frequency: 836.5 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.93$  mho/m;  $\epsilon r = 39.64$ ;  $\rho = 1000$  kg/m³;

Phantom section: Right Section

Ambient temperature ( $^{\circ}$ C): 21.4, Liquid temperature ( $^{\circ}$ C): 21.3

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

• Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE Band 5 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

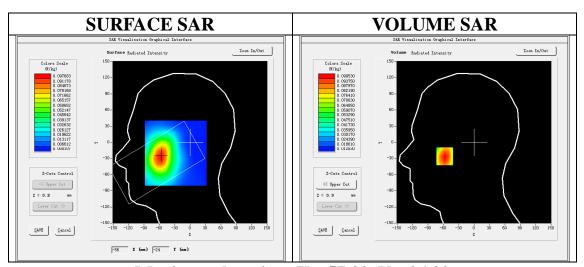



Maximum location: X=-57.00, Y=-26.00 SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.072925
SAR 1g (W/Kg)	0.096282





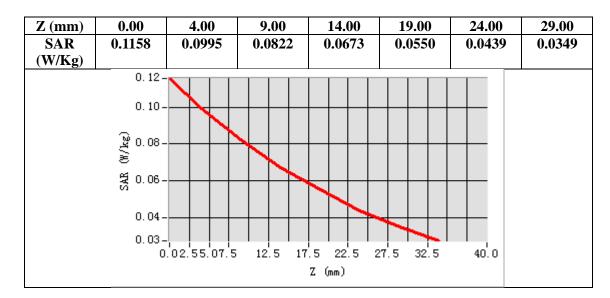

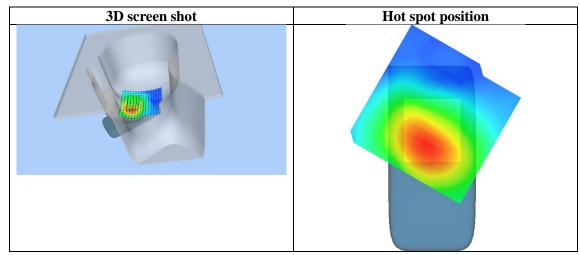



Page 148 of 181

Test Laboratory: AGC Lab Date: Jun.14,2022

LTE Band 5 Mid-Body-Back (1 RB#0)
DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=1.42 Frequency:836.5 MHz; Medium parameters used: f = 835 MHz;  $\sigma = 0.93$ mho/m;  $\epsilon r = 39.64$ ;  $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 21.4, Liquid temperature ( $^{\circ}$ C): 21.3

## **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE Band 5 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 5 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

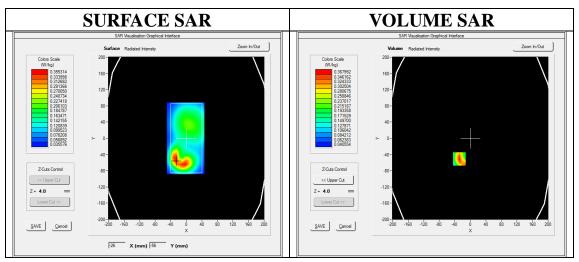



Maximum location: X=-28.00, Y=-51.00 SAR Peak: 0.56 W/kg

<b>SAR 10g (W/Kg)</b>	0.200979
SAR 1g (W/Kg)	0.344543





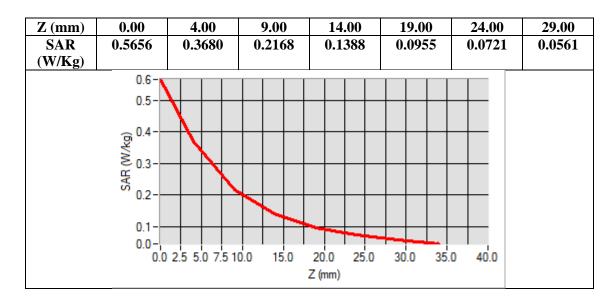

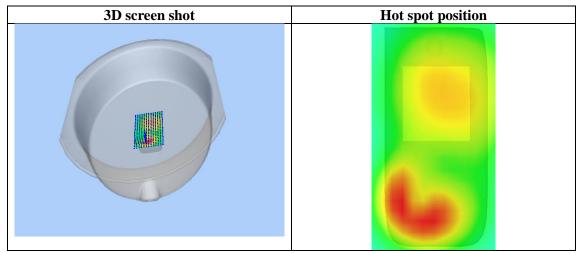



Page 150 of 181

Test Laboratory: AGC Lab Date: Jun.10,2022

LTE Band 7 Mid-Touch-Right (1RB#0)
DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=1.82 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.82 \text{ mho/m}$ ;  $\epsilon r = 40.15$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Right Section

Ambient temperature ( $^{\circ}$ C): 21.6, Liquid temperature ( $^{\circ}$ C): 21.4

## **SATIMO Configuration:**

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE BAND 7 Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, y=8mm Configuration/ LTE BAND 7 Mid-Touch-Right/Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

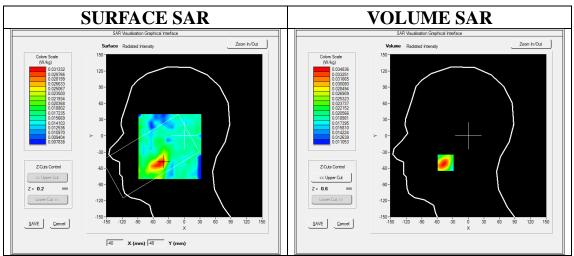



Maximum location: X=-44.00, Y=-50.00 SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.024584
SAR 1g (W/Kg)	0.034349





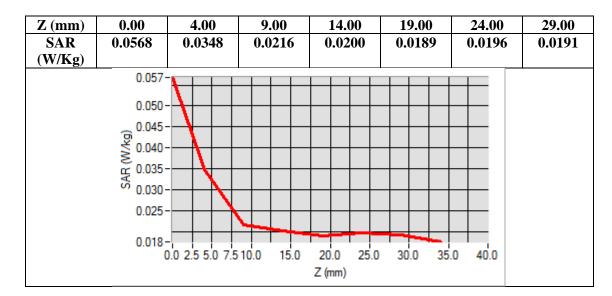

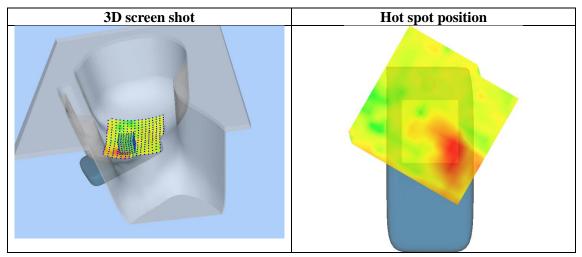



Page 152 of 181

Test Laboratory: AGC Lab Date: Jun.10,2022

LTE Band 7 Mid-Body-Back (1RB#0)
DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=1.82 Frequency: 2535MHz; Medium parameters used: f = 2600 MHz;  $\sigma = 1.82 mho/m$ ;  $\epsilon r = 40.15$ ;  $\rho = 1000 kg/m^3$ ;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.6, Liquid temperature ( $^{\circ}$ ): 21.4

#### **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE BAND 7 Mid-Body-Back / Area Scan: Measurement grid: dx=10mm, y=10mm Configuration/ LTE BAND 7 Mid-Body-Back / Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

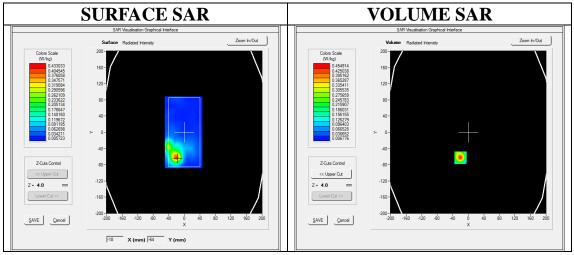


Maximum location: X=-20.00, Y=-63.00 SAR Peak: 0.82 W/kg


	0.100010
<b>SAR 10g (W/Kg)</b>	0.188342
8 \ 8/	
SAR 1g (W/Kg)	0.418126

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





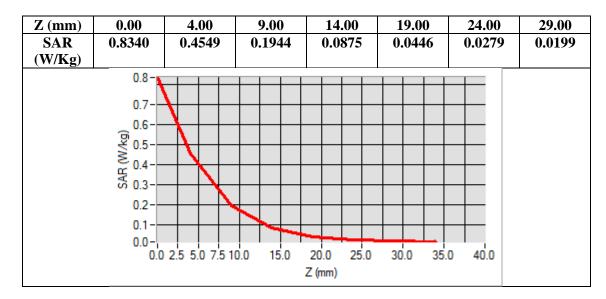

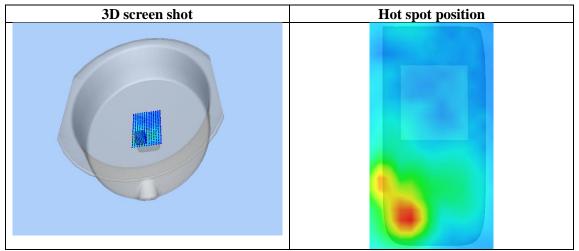



Page 154 of 181

Test Laboratory: AGC Lab Date: Jun. 15,2022

LTE Band 12 Mid-Touch-Right (1 RB#0) DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=1.39 Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.84$  mho/m;  $\epsilon r = 43.18$ ;  $\rho = 1000$  kg/m³;

Phantom section: Right Section

Ambient temperature ( $^{\circ}$ C): 21.6, Liquid temperature ( $^{\circ}$ C): 21.4

## **SATIMO Configuration:**

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE Band 12 Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

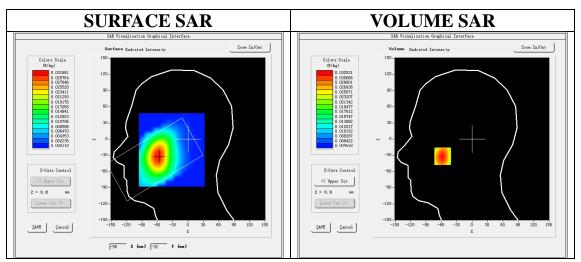



Maximum location: X=-57.00, Y=-32.00 SAR Peak: 0.04 W/kg

<b>SAR 10g (W/Kg)</b>	0.024490
SAR 1g (W/Kg)	0.031917





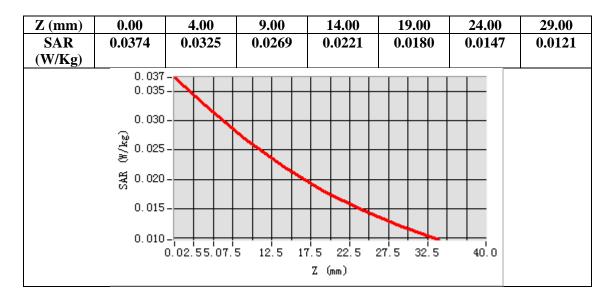

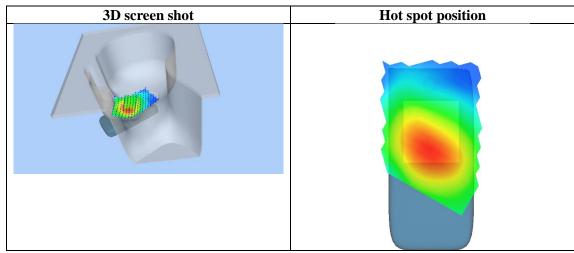



Page 156 of 181

Test Laboratory: AGC Lab Date: Jun. 15,2022

LTE Band 12 Mid-Edge 2(Right) (1 RB#0) DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=1.39; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.84$  mho/m;  $\epsilon = 43.18$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.6, Liquid temperature ( $^{\circ}$ ): 21.4

## **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE Band 12 Mid-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 12 Mid-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Edge 2(Right)
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

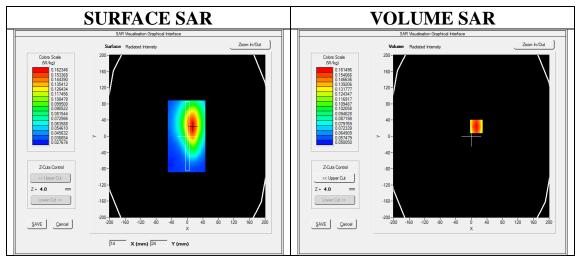


Maximum location: X=13.00, Y=24.00


SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.127847
SAR 1g (W/Kg)	0.166573





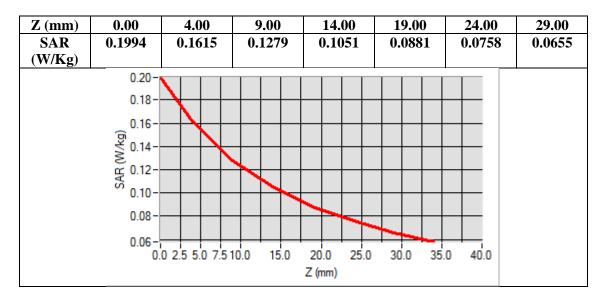

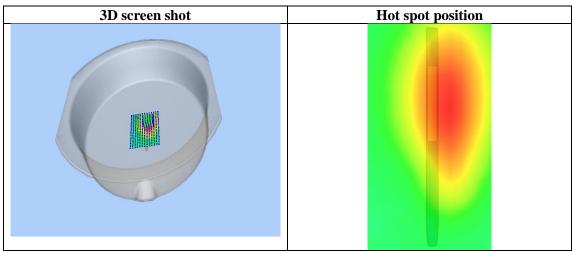



Page 158 of 181

**WIFI MODE** 

Test Laboratory: AGC Lab Date: Jun.9,2022

802.11b Mid-Tilt-Right

DUT: SMARTPHONE; Type: P60 PRO+

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=1.99; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz;  $\sigma = 1.79 \text{mho/m}$ ;  $\epsilon r = 38.75 \text{ p} = 1000 \text{ kg/m}^3$ ;

Phantom section: RightSection

Ambient temperature (°C):21.4, Liquid temperature (°C): 21.1

#### SATIMO Configuration:

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4\_02\_35


Configuration/802.11b Mid- Tilt- Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Tilt- Right /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

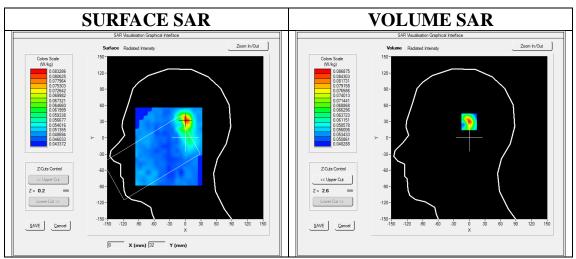



Maximum location: X=2.00, Y=32.00 SAR Peak: 0.12 W/kg

<b>SAR 10g (W/Kg)</b>	0.061652
SAR 1g (W/Kg)	0.081318





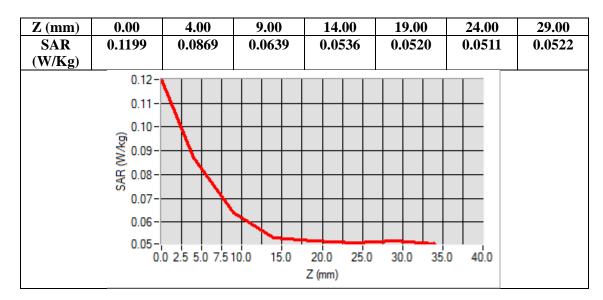

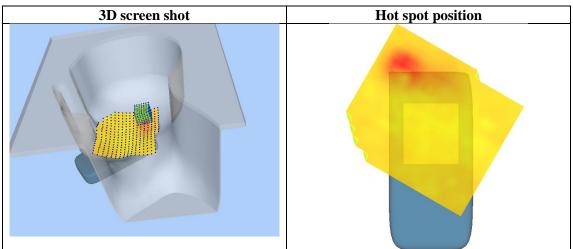



Page 160 of 181

Test Laboratory: AGC Lab Date: Jun.9,2022

802.11b Mid-Body-Worn- Back

DUT: SMARTPHONE; Type: P60 PRO+

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=1.99; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz;  $\sigma = 1.79 \text{mho/m}$ ;  $\epsilon = 38.75$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C):21.4, Liquid temperature (°C): 21.1

## **SATIMO Configuration:**

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4\_02\_35

Configuration/802.11b Mid- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11b Mid- Body- Back /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

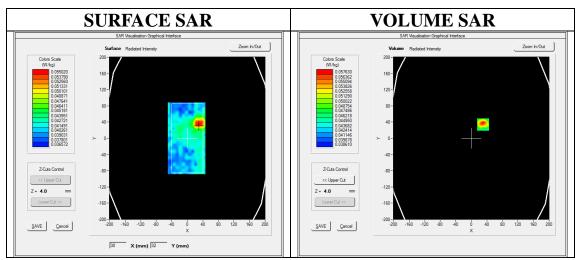


**Maximum location: X=30.00, Y=34.00** 


SAR Peak: 0.07 W/kg

<b>SAR 10g (W/Kg)</b>	0.047574
SAR 1g (W/Kg)	0.056314





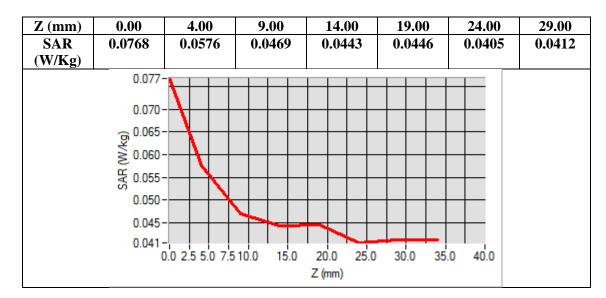

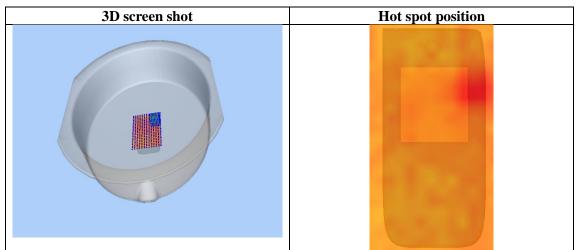



Page 162 of 181

5.2GHz 802.11a

Test Laboratory: AGC Lab Date: Jun.27,2022

802.11a CH40-Tilt-Right

DUT: SMARTPHONE; Type: P60 PRO+

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.28; Frequency: 5200MHz; Medium parameters used: f = 5200~MHz;  $\sigma = 4.73mho/m$ ;  $\epsilon = 35.02$ ;  $\rho = 1000~kg/m^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.2

#### **SATIMO Configuration:**

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368

• Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4\_02\_35

Configuration/802.11a CH40- Tilt-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11a CH40- Tilt-Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5200MHz
Channels	CH40
Signal	Crest factor: 1.0

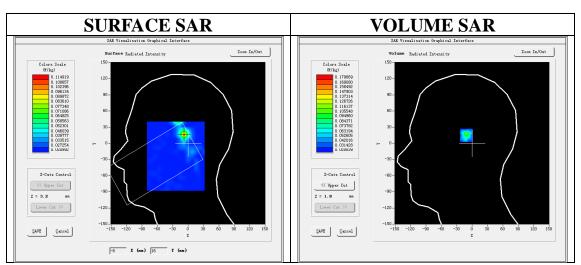

**Maximum location: X=-8.00, Y=16.00** 


SAR Peak: 0.38 W/kg

<b>SAR 10g (W/Kg)</b>	0.040051
SAR 1g (W/Kg)	0.102953





Z (m m) SA R (W/ Kg)	0.00 0.38 47	0.12 95	6.00 0.04 80	8.00 0.03 53	10.0 0 0.02 69	12.0 0 0.02 13	14.0 0 0.02 14	16.0 0 0.02 13	18.0 0 0.02 13	20.0 0 0.02 13	22.0 0 0.02 12	24.0 0 0.02 15
		0.33 0.33 0.29 0.20 0.19 0.00	5-0-5-0-	4 6	8	10 12 Z (	14 16 mm)	18 20	0 22 2	4 26		

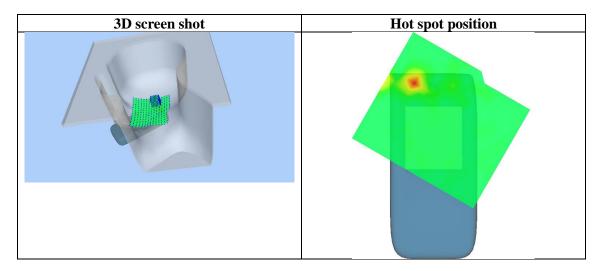



Page 164 of 181

Test Laboratory: AGC Lab

802.11a CH40- Edge 4(Left)

Date: Jun.27,2022

DUT: SMARTPHONE; Type: P60 PRO+

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=2.35; Frequency: 5210MHz; Medium parameters used: f = 5200 MHz;  $\sigma = 4.73mho/m$ ;  $\epsilon = 35.02$ ;  $\rho = 1000 kg/m^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.2

# **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4\_02\_35


Configuration/802.11a CH40- Edge 4(Left) /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH40- Edge 4(Left) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Edge 4(Left)
Band	5200MHz
Channels	CH40
Signal	Crest factor: 1.0

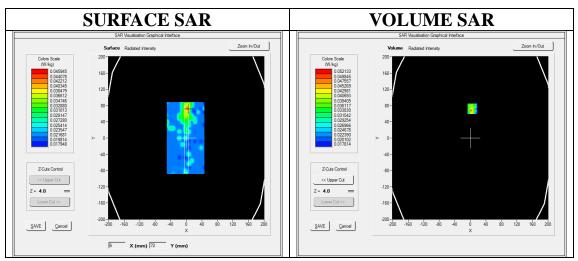


Maximum location: X=5.00, Y=72.00 SAR Peak: 0.15 W/kg

<b>SAR 10g (W/Kg)</b>	0.028818			
SAR 1g (W/Kg)	0.047934			





Z (m m) SA R (W/ Kg)	0.00 0.16 44	0.05 21	0.02 39	8.00 0.01 85	10.0 0 0.01 80	12.0 0 0.01 78	14.0 0 0.01 98	16.0 0 0.01 81	18.0 0 0.03 30	20.0 0 0.02 00	22.0 0 0.01 80	24.0 0 0.02 00
		0.16 0.14 0.10 0.08 0.08 0.04 0.02		4 6	8 1	0 12 Z (m	14 16 nm)	18 20	22 2	4 26		

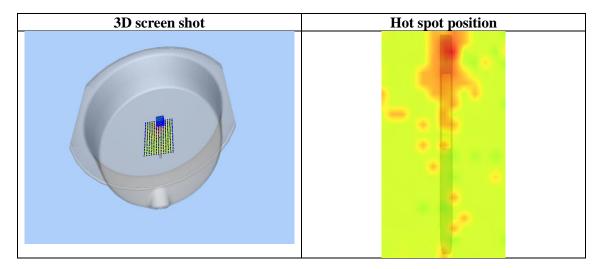



Page 166 of 181

5.8GHz 802.11a

Test Laboratory: AGC Lab Date: Jun.28,2022

802.11a CH157- Tilt-Right

DUT: SMARTPHONE; Type: P60 PRO+

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.42; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz;  $\sigma = 5.21 \text{mho/m}$ ;  $\epsilon = 37.15$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 22.4, Liquid temperature (°C): 21.7

#### **SATIMO Configuration:**

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: SAM twin phantom

Measurement SW: OpenSAR V4\_02\_35


Configuration/802.11a CH157- Tilt-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/802.11a CH157- Tilt -Right /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Right head
Device Position	Cheek
Band	5200MHz
Channels	CH40
Signal	Crest factor: 1.0

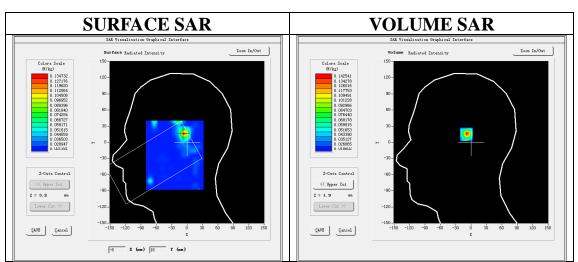


Maximum location: X=-6.00, Y=16.00 SAR Peak: 0.40 W/kg

<b>SAR 10g (W/Kg)</b>	0.050061
SAR 1g (W/Kg)	0.137752





Z (m m) SA R (W/ Kg)	0.00 0.40 21	4.00 0.14 25	6.00 0.06 67	8.00 0.04 06	10.0 0 0.02 90	12.0 0 0.02 78	14.0 0 0.02 20	16.0 0 0.02 20	18.0 0 0.02 13	20.0 0 0.02 18	22.0 0 0.02 18	24.0 0 0.02 17
		0.48 0.33 0.20 0.29 0.19 0.00	5-	4 6	8	10 12 Z (	14 16 nm)	18 20	0 22 2	4 26		

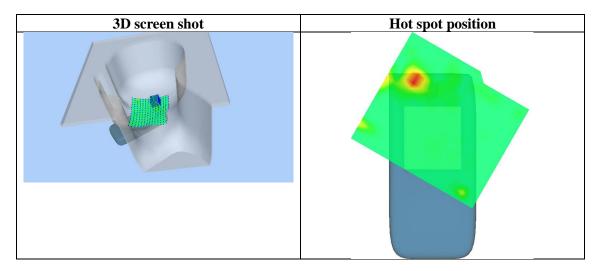



Page 168 of 181

Test Laboratory: AGC Lab

Date: Jun.28,2022

802.11a CH157-Edge1(Top)

DUT: SMARTPHONE; Type: P60 PRO+

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.42; Frequency: 5785MHz; Medium parameters used: f = 5800 MHz;  $\sigma = 5.21 \text{mho/m}$ ;  $\epsilon = 37.15$ ;  $\rho = 1000 \text{ kg/m}^3$ ;

Phantom section: Flat Section

Ambient temperature (°C): 22.4, Liquid temperature (°C): 21.7

## **SATIMO Configuration:**

Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

• Measurement SW: OpenSAR V4\_02\_35

Configuration/ 802.11a CH157- Edge1(Top) /Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ 802.11a CH157- Edge1(Top) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	ELLI
Device Position	Edge1(Top)
Band	5800MHz
Channels	Middle
Signal	Crest factor: 1.0

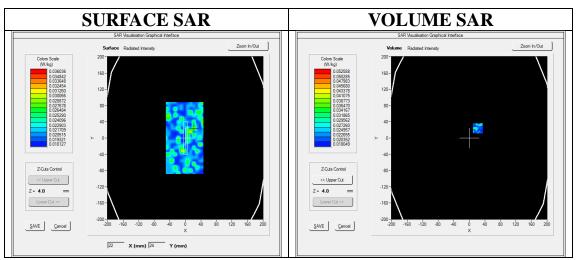

**Maximum location: X=22.00, Y=24.00** 


SAR Peak: 0.09 W/kg

<b>SAR 10g (W/Kg)</b>	0.023590			
SAR 1g (W/Kg)	0.026545			





Z (m m) SA R (W/ Kg)	0.00 0.04 44	0.03 71	6.00 0.02 79	8.00 0.02 43	10.0 0 0.02 03	12.0 0 0.02 00	14.0 0 0.02 04	16.0 0 0.02 02	18.0 0 0.02 05	20.0 0 0.02 40	22.0 0 0.03 36	24.0 0 0.03 43
8/		0.04 0.04 0.03 0.03 0.02 0.02	35-	4	6 8	10 12 Z (n	14 16 nm)	18 20	0 22 2	24 26		

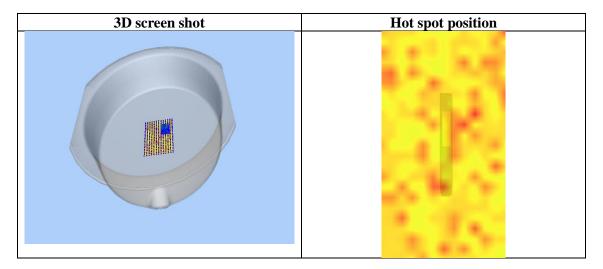



Page 170 of 181

**Repeated SAR** 

Test Laboratory: AGC Lab Date: Jun.16,2022

LTE Band 4 High-Body-Back (1 RB#0) DUT: SMARTPHONE; Type: P60 PRO+

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=1.73; Frequency:1732.5 MHz; Medium parameters used: f = 1800 MHz;  $\sigma = 1.31$  mho/m;  $\epsilon r = 42.15$   $\rho = 1000$  kg/m³;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 21.2, Liquid temperature ( $^{\circ}$ ): 20.9

#### **SATIMO Configuration:**

• Probe: SSE2; Calibrated: Apr. 13, 2022; Serial No.: SN 13/22 EPGO368


• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE Band 4 High-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 4 High-Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 4
Channels	High
Signal	OFDM (Crest factor: 1.0)

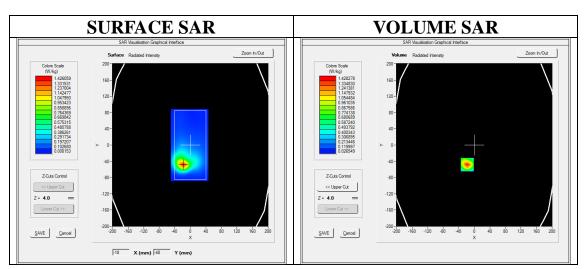


**Maximum location: X=-18.00, Y=-48.00** 


SAR Peak: 2.20 W/kg


SAR 10g (W/Kg)	0.687848
SAR 1g (W/Kg)	1.328584





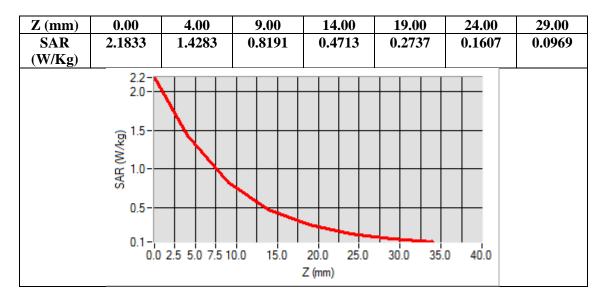

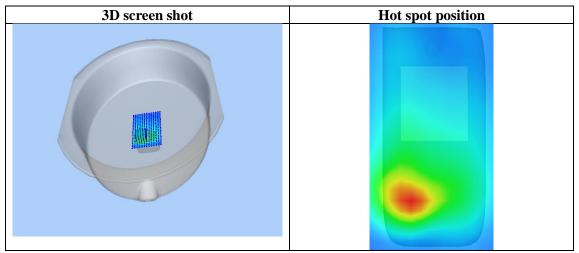






# APPENDIX C. TEST SETUP PHOTOGRAPHS

LEFT-CHEEK TOUCH



LEFT-TILT 15<sup>0</sup>





































Edge 1(Top) 10mm-Hotspot Mode

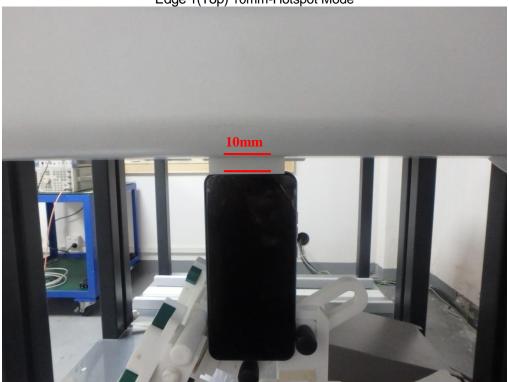

Edge 2(Right) 10mm-Hotspot Mode

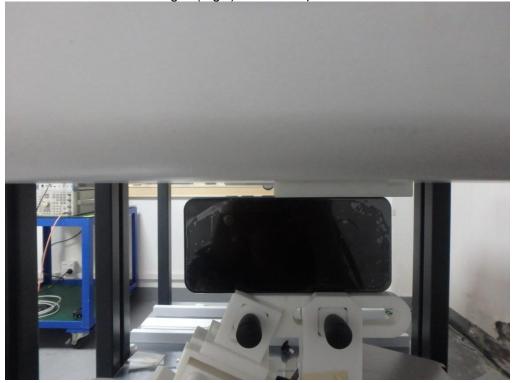

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






Edge 3(Bottom) 10mm-Hotspot Mode



Edge 4(Left) 10mm-Hotspot Mode




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.














DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN


Note: The position used in the measurement were according to IEEE 1528-2013

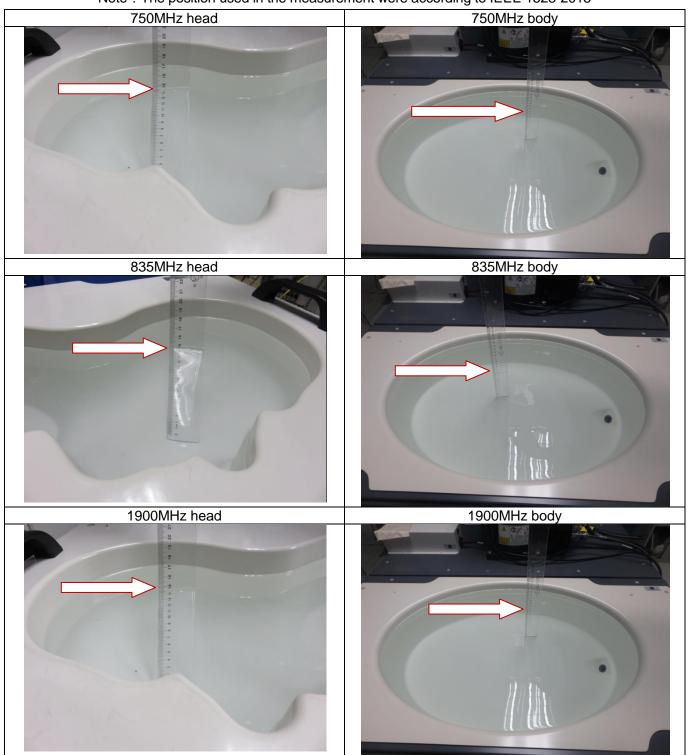






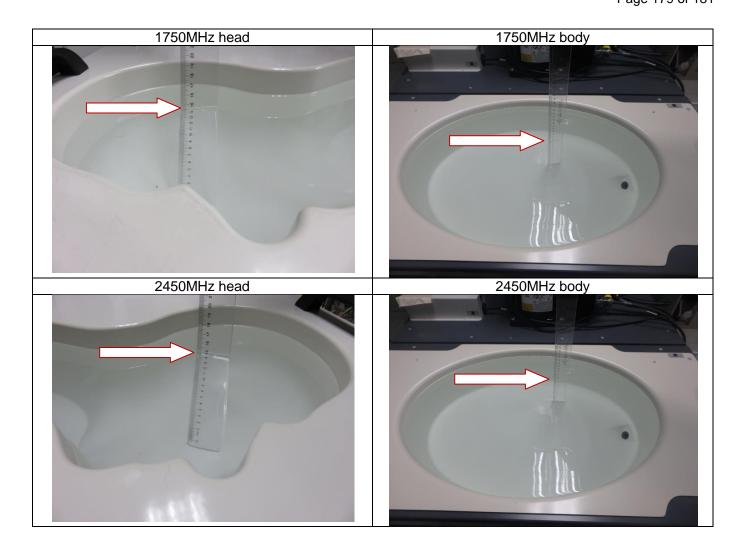





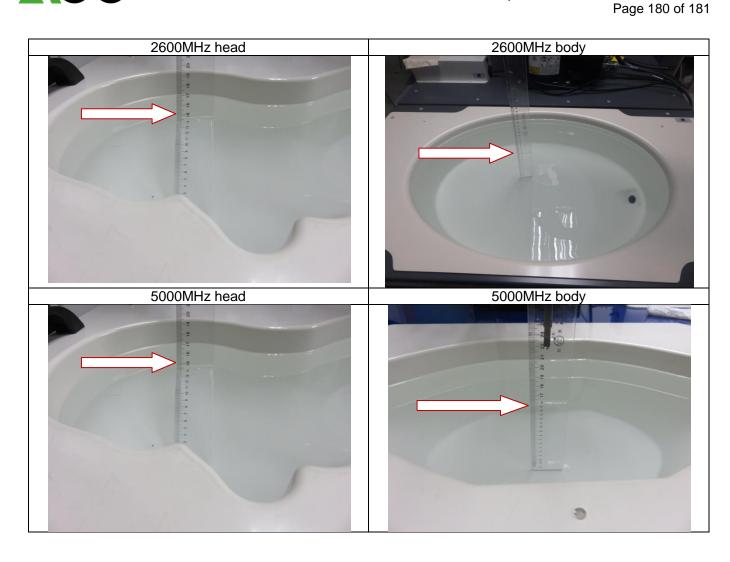



Page 181 of 181

# **APPENDIX D. CALIBRATION DATA**

Refer to Attached files.

# APPENDIX E. EUT PHOTOGRAPHS

Refer to the Report No.: AGC10211220501AP01.

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.