

Wireless test report – 461772-12TRFWL

Type of assessment:

Transmitters co-location

Applicant:

Tierra S.p.A.

Via Lombardore, 223 - 10040 Leini (TO), Italy

Product:

Telematic device for asset management with LTE/GPS module and Wi-Fi&BT module

Model: **CM110**

Model variant: **AM35XB**

FCC ID: **2A6VC-AM35**

IC: **28545-AM35**

Specifications:

- ◆ FCC 47 CFR Part 22 Subpart H (partial testing)
- ◆ FCC 47 CFR Part 24 Subpart E (partial testing)
- ◆ FCC 47 CFR Part 15 Subpart C §15.247 (partial testing)
- ◆ FCC 47 CFR Part 22, Subpart H (partial testing)
- ◆ FCC 47 CFR Part 24, Subpart E (partial testing)
- ◆ FCC 47 CFR Part 27, Subpart C (partial testing)
- ◆ RSS-247, Issue 2, Feb 2017, Section 5 (partial testing)
- ◆ R SS-130 Issue 2, February 2019 (partial testing)
- ◆ RSS-132 Issue 3, January 2013 (partial testing)
- ◆ RSS-133 Issue 6, A1 January 18, 2018 (partial testing)
- ◆ RSS-139 Issue 3, July 16, 2015 (partial testing)

Date of issue: April 27, 2022

D. Guarnone


Tested by



Signature

P. Barbieri

Reviewed by



Signature

This test report shall not be partially reproduced without the prior written consent of Nemko S.p.A. The phase of sampling of equipment under test is carried out by the customer. Results indicated in this test report refer exclusively to the tested samples and apply to the sample as received. This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.

Doc. n. TRF001; Rev. 0; Date: 2020-11-30

Test location(s)

Company name	Nemko Spa
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Website	www.nemko.com
Site number	FCC: 682159 (10 m semi anechoic chamber) ISED: 9109A (10 m semi anechoic chamber)

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Spa ISO/IEC 17025 accreditation.

Copyright notification

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Test methods.....	4
1.4 Statement of compliance	4
1.5 Exclusions.....	4
1.6 Test report revision history	4
Section 2. Summary of test results.....	5
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information.....	6
3.2 EUT information	6
3.3 Technical information	6
3.4 EUT setup diagram	6
3.5 Product description and theory of operation	7
3.6 EUT exercise details.....	8
Section 4. Engineering considerations.....	9
4.1 Modifications incorporated in the EUT.....	9
4.2 Technical judgment	9
4.3 Deviations from laboratory tests procedures	9
Section 5. Test conditions.....	10
5.1 Atmospheric conditions	10
5.2 Power supply range.....	10
Section 6. Measurement uncertainty.....	11
6.1 Uncertainty of measurement	11
Section 7. Test equipment	12
7.1 Test equipment list.....	12
Section 8. Testing data	13
8.1 FCC 15.209 Radiated emission limits; general requirements.....	13
Section 9. Block diagrams of test set-ups	67
9.1 Radiated emissions set-up for frequencies below 1 GHz.....	67
9.2 Radiated emissions set-up for frequencies above 1 GHz.....	68
Section 10. Photos.....	69
10.1 Photos of the test set-up.....	69
10.2 Photos of the EUT.....	70

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	Tierra Spa
Address	Via Lombardore 223 10040 Leini TO Italy

1.2 Test specifications

FCC 47 CFR Part 15, Subpart C, Clause 15.247	Operation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
FCC 47 CFR Part 22, Subpart H	Public Mobile Services
FCC 47 CFR Part 24, Subpart E	Broadband Personal Communications Services (PCS)
FCC 47 CFR Part 27, Subpart C	Miscellaneous wireless communications services
RSS-247, Issue 2, Feb 2017, Section 5	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
RSS-130 Issue 2, February 2019	Equipment Operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz
RSS-132 Issue 3, January 2013	Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
RSS-133 Issue 6, A1 Jan. 18, 2018	2 GHz Personal Communications Services
RSS-139 Issue 3, July 16, 2015	Advanced Wireless Services (AWS) equipment operating in the bands 1710-1780 MHz and 2110-2180 MHz

1.3 Test methods

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
-------------------	--

1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.5 Exclusions

As per quote, the purpose of this report is verification of transmitters colocation. Only inter-modulation products within restricted bands were assessed, other requirements were excluded from the scope of this report.

1.6 Test report revision history

Revision #	Date of issue	Details of changes made to test report
461772-12TRFWL	April 27, 2022	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.247(d)	Spurious emissions	Pass
§22.917(a)	Emission limitations for cellular equipment	Pass
§24.238(a)	Field strength of spurious radiation	Pass
§27.53	Radiated spurious emissions	Pass

2.2 ISED test results

Part	Test description	Verdict
RSS-247, 5.5	Transmitter Unwanted Emissions	Pass
RSS-130, 4.7	Transmitter Unwanted Emissions	Pass
RSS-132, 5.5	Transmitter Unwanted Emissions	Pass
RSS-133, 6.5	Transmitter Unwanted Emissions	Pass
RSS-139, 6.6	Radiated spurious emissions	Pass

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	March 07 2022
Nemko sample ID number	46177200001

3.2 EUT information

Product name	Telematic device for vehicle tracking purpose
Model	CM110
Serial number	1596-38000106

3.3 Technical information

Frequency band	WIFI: 2400–2483.5 MHz LTE BAND 2 (1800 MHz) LTE BAND 4 (1700 MHz) LTE BAND 12 (700 MHz) WCDMA BAND 2 (1800 MHz) WCDMA BAND 4 (1700 MHz) WCDMA BAND 5 (800 MHz)
EUT power requirements	12/24 Vdc
Antenna information	The EUT uses an integral antenna

3.4 EUT setup diagram

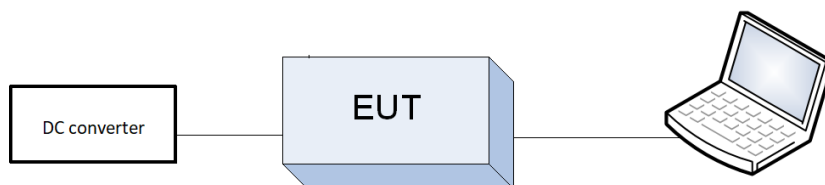


Figure 3.4-1: Setup diagram

3.5 Product description and theory of operation

The EUT is a Telematic device for vehicle tracking purpose, supplied by the vehicle battery. It's provided with a WIFI radio module Quectel EC21 for data exchange.

3.6 EUT exercise details

To set the EUT in continuous transmission the AT commands, program Docklighr and RF Connect (provided by the applicant) have been used.:

AT+QRFTEST="WCDMA BAND2",9400,"ON",80,1

AT+QRFTEST="WCDMA BAND4",1412,"ON",80,1

AT+QRFTEST="WCDMA BAND5",4182,"ON",80,1

AT+QRFTEST="LTE BAND2",18899,"ON",80,1

AT+QRFTEST="LTE BAND4",20175,"ON",80,1

AT+QRFTEST="LTE BAND12",23095,"ON",80,1

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

The EUT uses a Quectel EC21-A radio module and Quectel FC20 Wifi (2.4 GHz) + BT 4.2

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

In the laboratory, the following ambient conditions are respected for each test reported below:

Temperature	18 – 33 °C
Relative humidity	25 – 70 %
Air pressure	860 – 1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

The following instruments are used to monitor the environmental conditions:

Equipment	Manufacturer	Model no.	Asset no.	Cal date	Next cal.
Thermo-hygrometer data loggers	Testo	175-H2	20012380/305	12/2020	12/2022
Thermo-hygrometer data loggers	Testo	175-H2	38203337/703	12/2020	12/2022
Barometer	Castle	GPB 3300	072015	03/2022	03/2023

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002.

The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) – The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) – One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	0.009 MHz ÷ 30 MHz	1.1 dB	(1)
			30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
		Conducted spurious emissions	0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter– Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation – Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation – Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
	Radiated	Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)

NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k = 2$, which for a normal distribution corresponds to a coverage probability of approximately 95 %

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI receiver (20 Hz ÷ 8 GHz)	Rohde & Schwarz	ESU8	100202	08/2021	08/2022
EMI receiver (2 Hz ÷ 44 GHz)	Rohde & Schwarz	ESW44	101620	08/2021	08/2022
Spectrum Analyzer (2 Hz ÷ 43 GHz)	Rohde & Schwarz	FSW43	101767	01/2022	01/2023
Trilog Antenna (30 MHz ÷ 7 GHz)	Schwarzbeck	VULB 9162	9162-025	07/2021	07/2024
Bilog antenna (1 ÷ 18 GHz)	Schwarzbeck	STLP 9148	9148-123	07/2021	07/2024
Horn Antenna (4 ÷ 40 GHz)	RFSpin	DRH40	061106A40	04/2020	04/2023
Preamplifier (1 ÷ 18 GHz)	Schwarzbeck	BBV 9718C	00121	2022-03	2023-03
Preamplifier (18 ÷ 40 GHz)	Sage	STB-1834034030-KFKF-L1	18490-01	04/2021	04/2022
Controller	Maturo	FCU3.0	10041	NCR	NCR
Tilt antenna mast	Maturo	TAM4.0-E	10042	NCR	NCR
Turntable	Maturo	TT4.0-ST	2.527	NCR	NCR
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	09/2019	09/2023
Shielded room	Siemens	10m control room	1947	NCR	NCR

Notes: NCR – no calibration required, VOU – verify on use

Section 8. Testing data

8.1 FCC 15.209 Radiated emission limits; general requirements

8.1.1 Definitions and limits

FCC:

(f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device.

FCC §15.247:

(d) Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §22.917:

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC §24.238:

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC §27.53:

AWS emission limits

(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

RSS-130, Clause 4.7:

The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least $43 + 10 \log_{10} P$ (watts), dB.

However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

RSS-132, Clause 5.5:

In the first 1.0 MHz band immediately outside and adjacent to each of the sub-bands specified in Section 5.1, the power of emissions per any 1% of the occupied bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts).

(ii) After the first 1.0 MHz immediately outside and adjacent to each of the sub-bands, the power of emissions in any 100 kHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the occupied bandwidth, power integration over 100 kHz is required.

RSS-133, Clause 6.5:

(ii) After the first 1.0 MHz, the emission power in any 1 MHz bandwidth shall be attenuated (in dB) below the transmitter output power P (dBW) by at least $43 + 10 \log_{10} p$ (watts). If the measurement is performed using 1% of the emission bandwidth, power integration over 1.0 MHz is required.

RSS-139, Clause 6.6:

In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} P$ (watts) dB.

After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least $43 + 10 \log_{10} P$ (watts) dB.

RSS-247:

5.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 All emissions outside the allocated band shall not exceed -27 dBm/MHz e.i.r.p.

Table 8.1-1: FCC §15.209 – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.1-2: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.1.2 Test summary

Test start date	April 27 2022
Test engineer	D. Guarnone

8.1.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to 25.0 GHz.

EUT's LTE and WIFI transmitters were set to transmit continuously, different channel setting has been investigated as per provided by client's setup, only the worst-case is presented.

Radiated measurements were performed at a distance of 3 m for frequency range below 18 GHz, and 1 m for frequency range above 18 GHz. No inter-modulation products emissions were detected above 18 GHz within 6 dB below the limit.

Spectrum analyzer settings for frequencies below 30 MHz:

Detector mode	Quasi-Peak
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	100 ms


Spectrum analyser settings for radiated measurements within restricted bands 30 MHz to 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyzer settings for average radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Detector mode:	Peak
Trace mode:	Max Hold


8.1.4 Test data

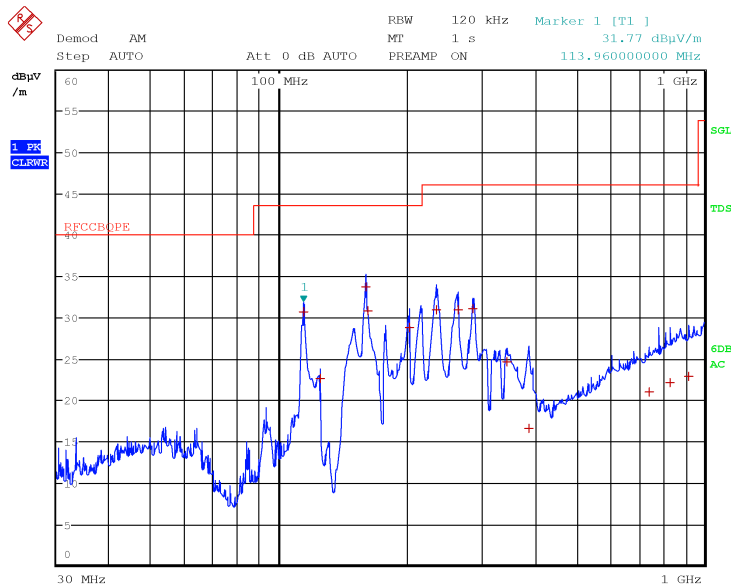

Date: 27.APR.2022 17:37:43

Figure 8.1-1: Radiated spurious emissions with LTE B2 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
113.9600	30.7	43.5	-12.8	QP
125.0400	22.6	43.5	-20.9	QP
159.8400	33.7	43.5	-9.8	QP
161.8800	30.9	43.5	-12.6	QP
202.2000	28.8	43.5	-14.7	QP
234.8800	31.0	46.0	-15.0	QP
263.2400	31.0	46.0	-15.0	QP
286.2400	31.1	46.0	-14.9	QP
343.2000	24.7	46.0	-21.3	QP
387.0000	16.6	46.0	-29.4	QP
741.0000	21.0	46.0	-25.0	QP
831.8800	22.1	46.0	-23.9	QP
918.5200	23.0	46.0	-23.0	QP

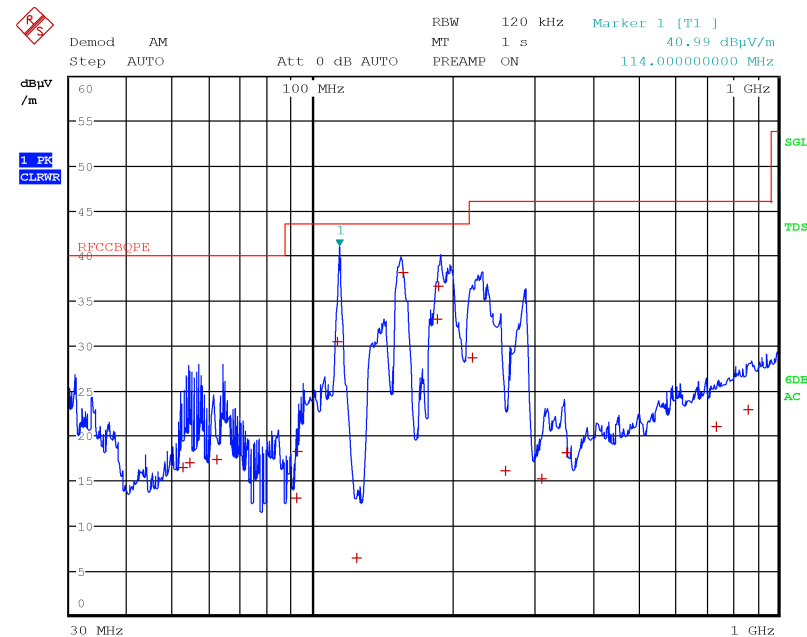

Date: 27.APR.2022 17:32:24

Figure 8.1-2: Radiated spurious emissions with LTE B2 at mid channel and WIFI at mid channel – antenna in vertical polarization

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
52.3600	16.5	40.0	-23.5	QP
54.4400	17.0	40.0	-23.0	QP
62.1200	17.4	40.0	-22.6	QP
92.1200	13.1	43.5	-30.4	QP
92.8400	18.3	43.5	-25.2	QP
113.0400	30.5	43.5	-13.0	QP
124.2400	6.4	43.5	-37.1	QP
156.3600	38.1	43.5	-5.4	QP
185.0000	33.0	43.5	-10.5	QP
186.2800	36.7	43.5	-6.8	QP
221.3200	28.8	46.0	-17.2	QP
258.9200	16.2	46.0	-29.8	QP
310.6000	15.3	46.0	-30.7	QP
351.7200	18.1	46.0	-27.9	QP
739.6400	21.1	46.0	-24.9	QP
862.6800	23.0	46.0	-23.0	QP


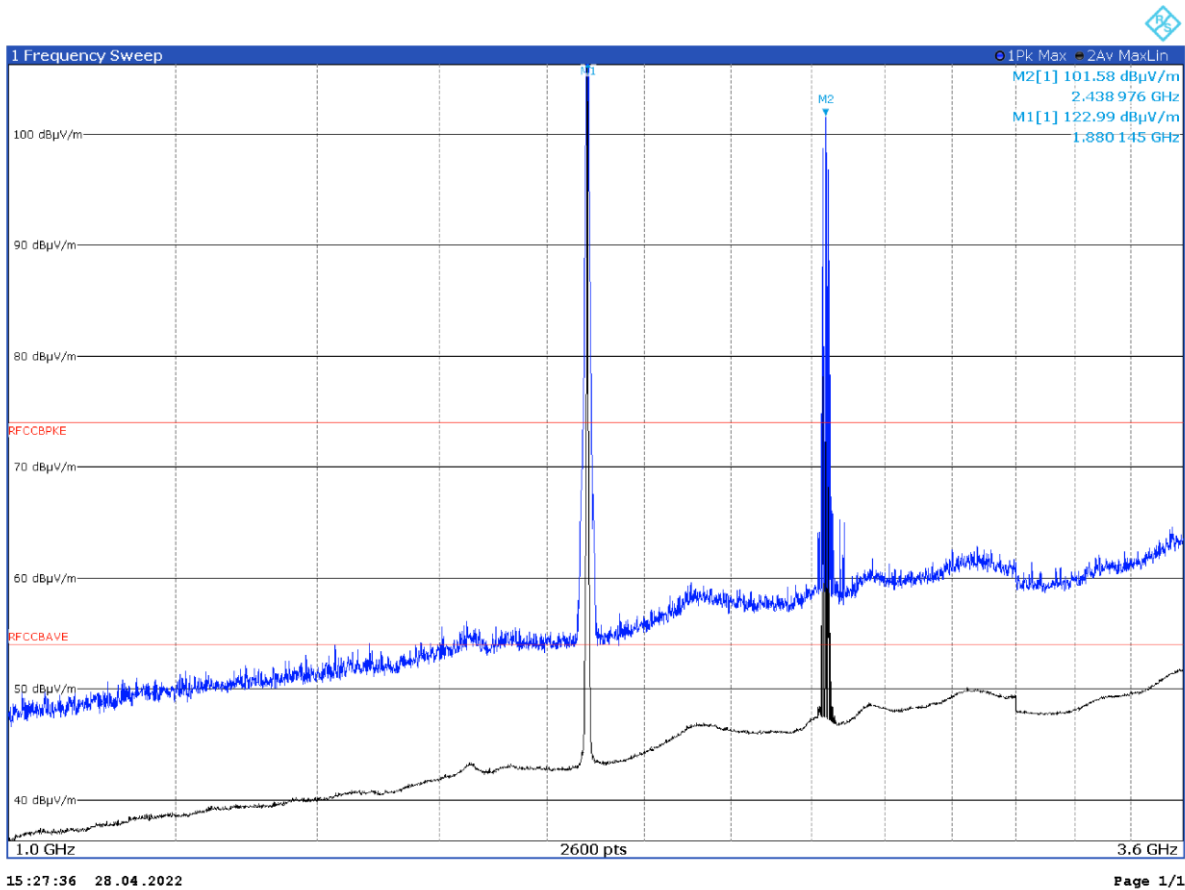


Figure 8.1-3: Radiated spurious emissions with LTE B2 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	--
Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.				

Limit exceeded by carriers

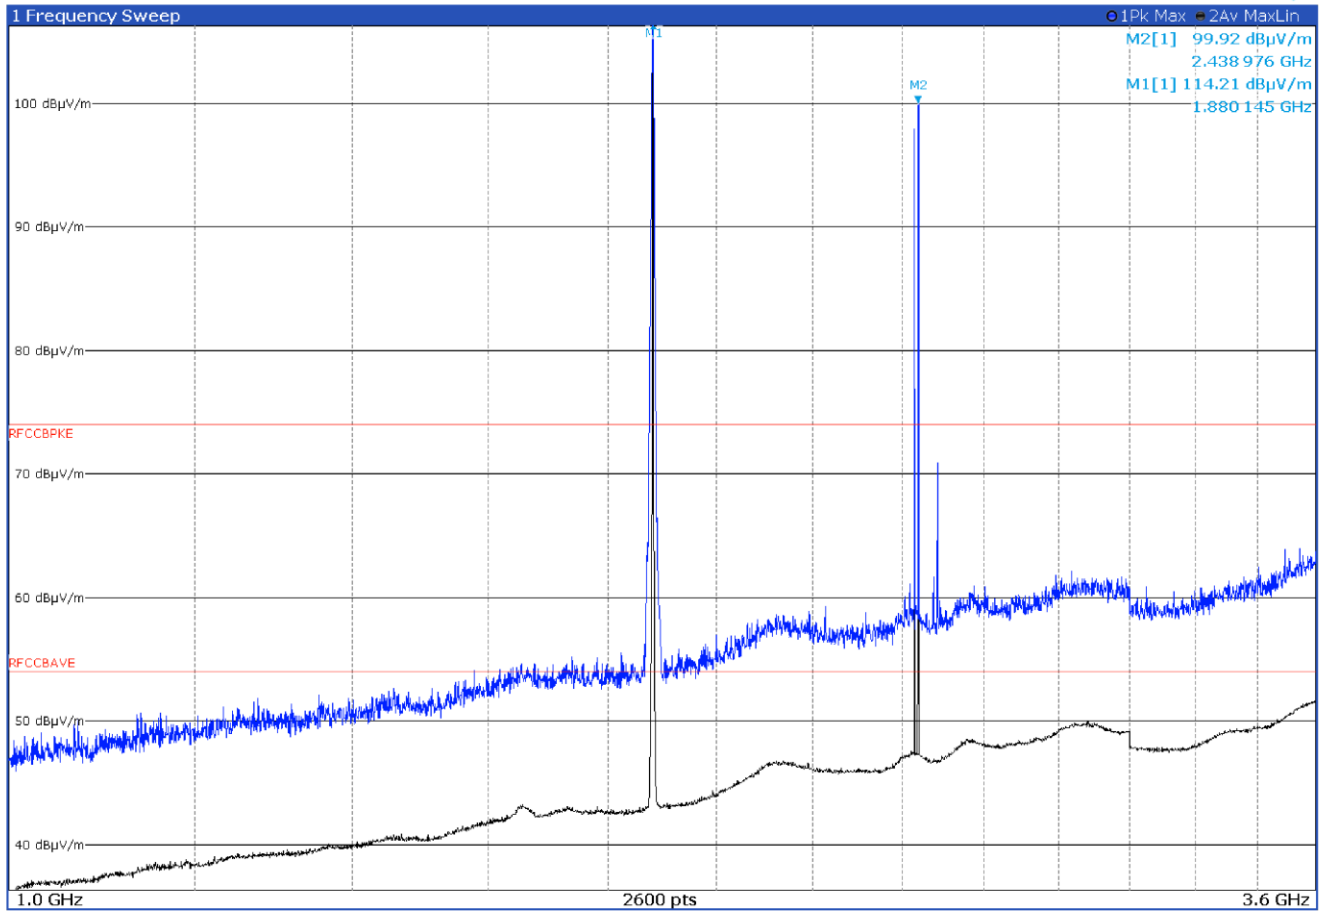

15:29:50 28.04.2022


Page 1/1

Figure 8.1-4: Radiated spurious emissions with LTE B2 at mid channel and WIFI at mid channel – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions.

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	Av
Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.				

Limit exceeded by carriers

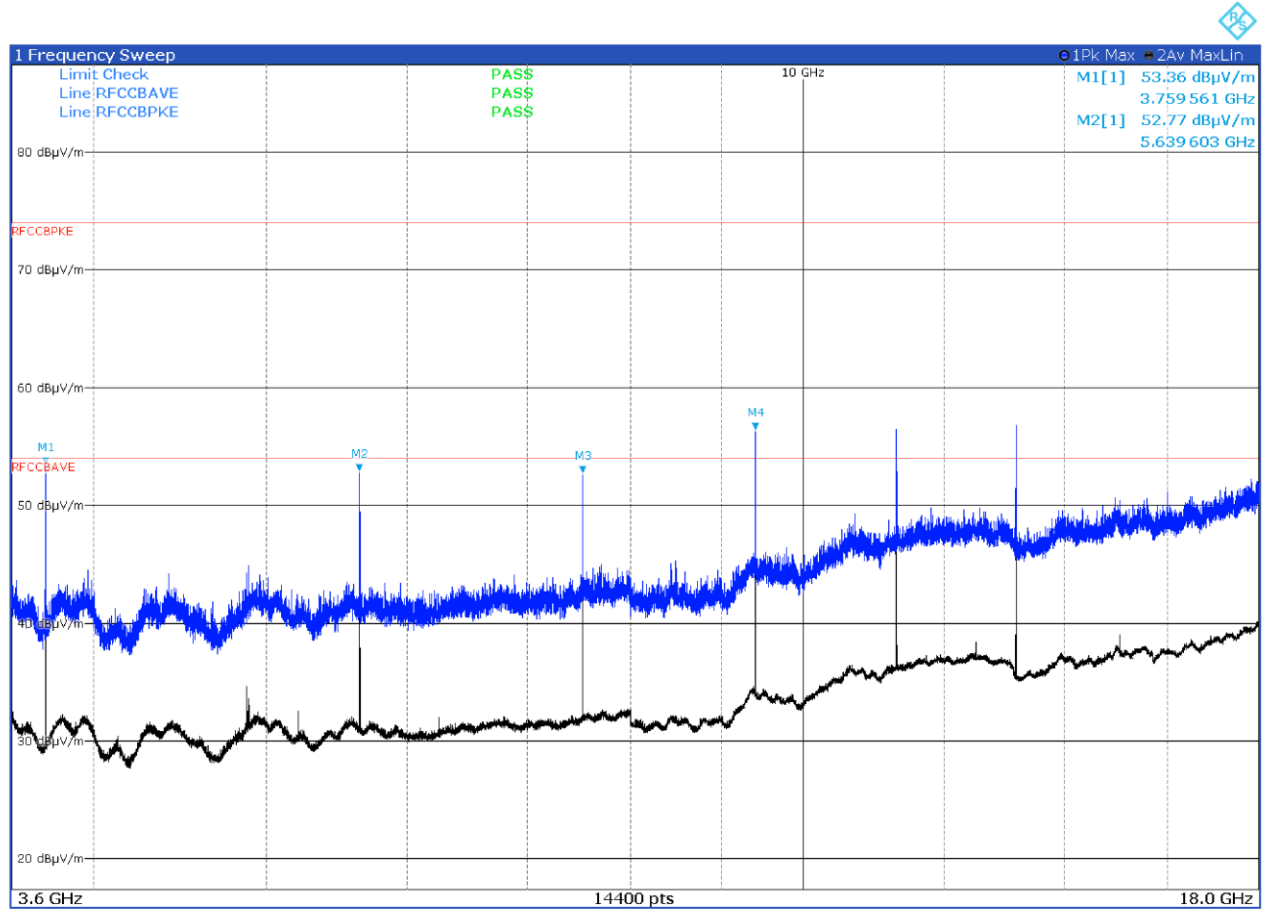

18:39:51 28.04.2022


Page 1/2

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		3.759 56 GHz	53.36 dBμV/m		
M2	1		5.639 6 GHz	52.77 dBμV/m		
M3	1		7.519 66 GHz	52.68 dBμV/m		
M4	1		9.399 18 GHz	56.33 dBμV/m		

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
3759.5	53.4	82.2	-28.8	Pk
5639.6	52.8	82.2	-29.4	Pk
7519.66	52.7	82.2	-29.5	Pk
9399.18	56.3	82.2	-25.9	Pk

The limit for LTE is -13 dBm. $\text{Limit (dBμV/m)} = \text{limit (dBm)} + 95.23 = 82.2 \text{ dBμV/m}$

Figure 8.1-5: Radiated spurious emissions with LTE B2 at mid channel and BLE at mid channel – antenna in vertical polarization

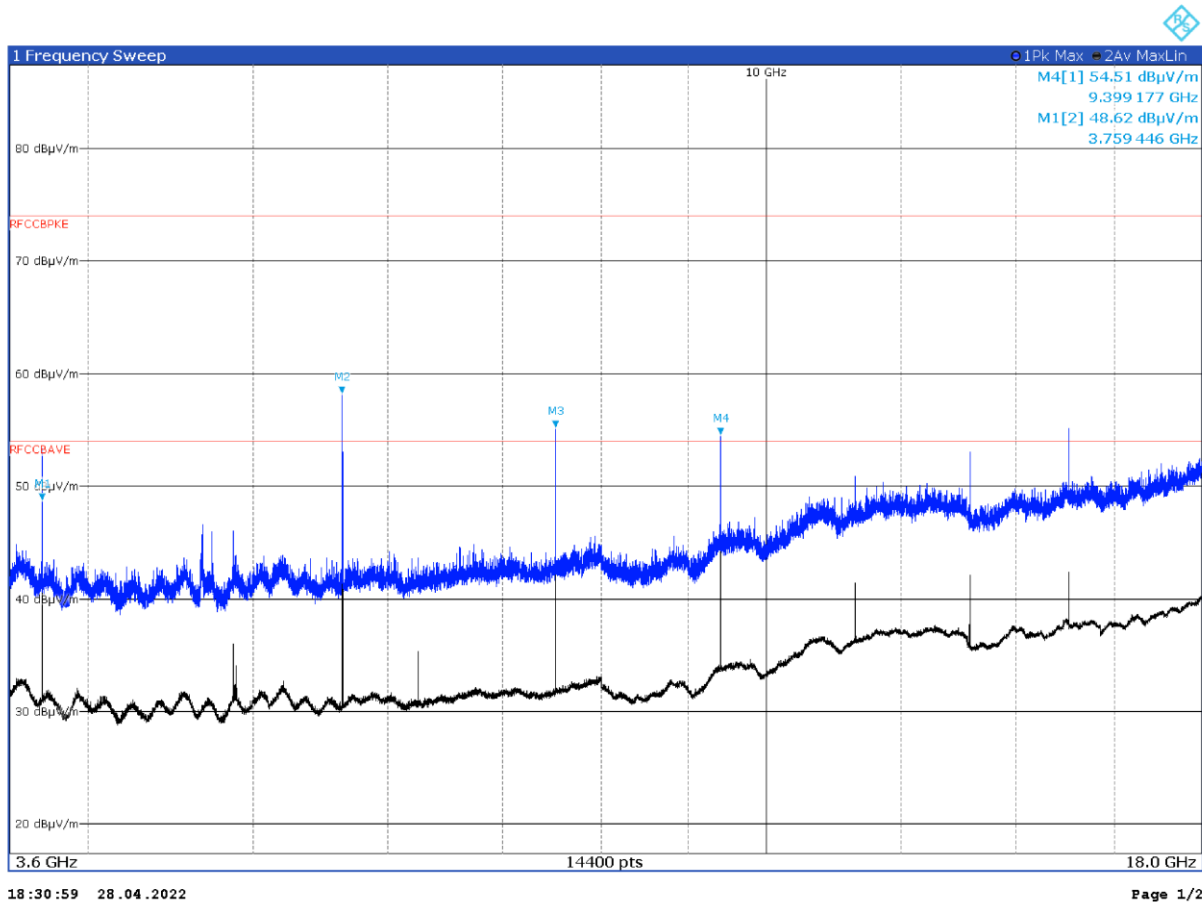

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		2	3.75945 GHz	48.62 dBμV/m		
M2		1	5.6396 GHz	58.16 dBμV/m		
M3		1	7.51966 GHz	55.10 dBμV/m		
M4		1	9.39918 GHz	54.51 dBμV/m		

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
3759.5	48.6	82.2	-33.6	Pk
5639.6	58.2	82.2	-24.0	Pk
7519.66	55.1	82.2	-27.1	Pk
9399.18	54.5	82.2	-27.7	Pk

Figure 8.1-6: Radiated spurious emissions with LTE B2 at mid channel and BLE at mid channel – antenna in horizontal polarization

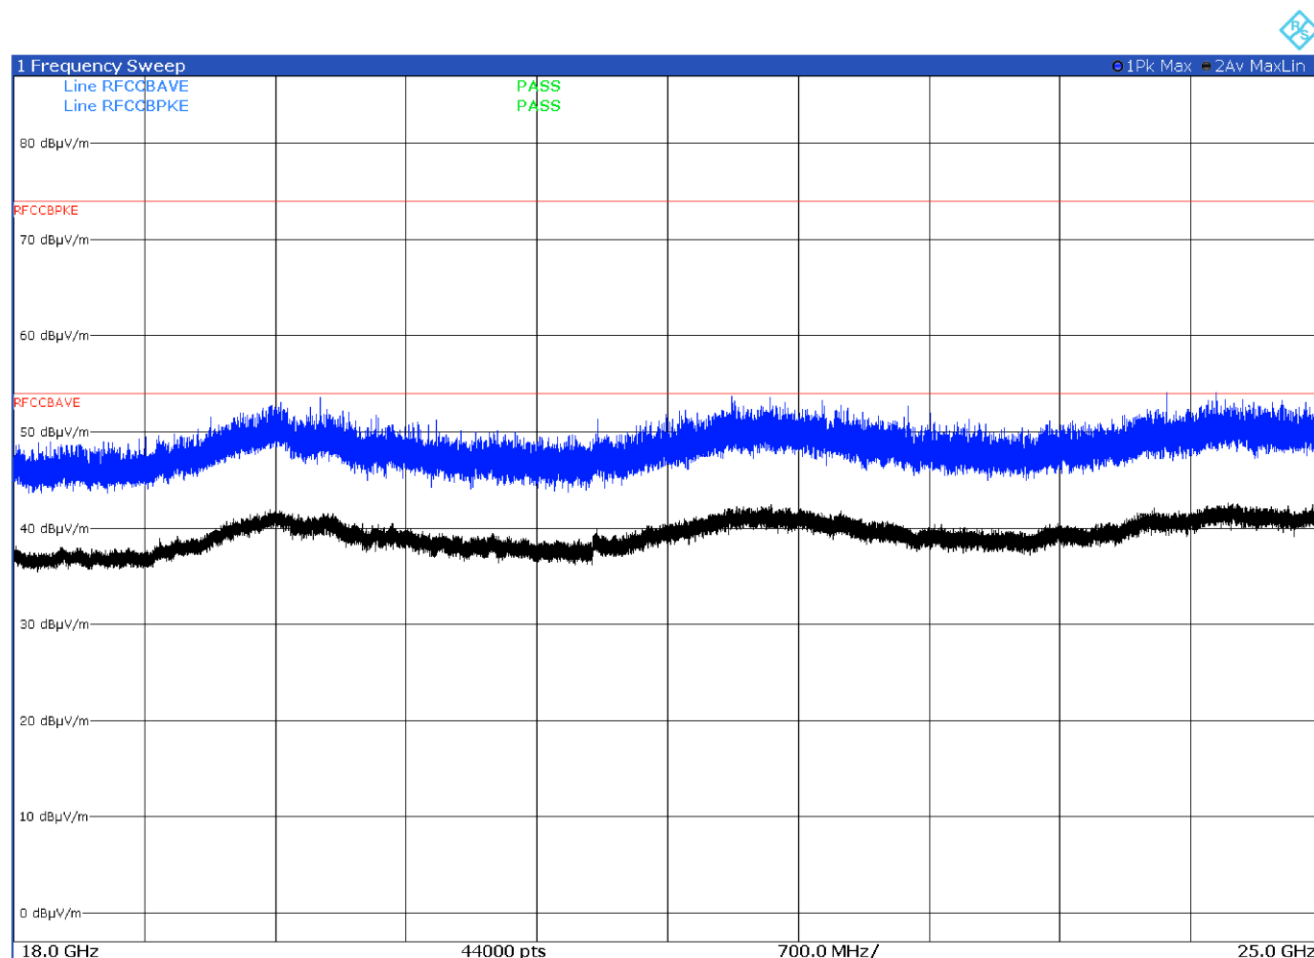


Figure 8.1-7: Radiated spurious emissions with LTE B2 at mid channel and BLE at mid channel – antenna in horizontal polarization

Peak level under the average limit – no additional measures need. No intermodulation emissions were detected


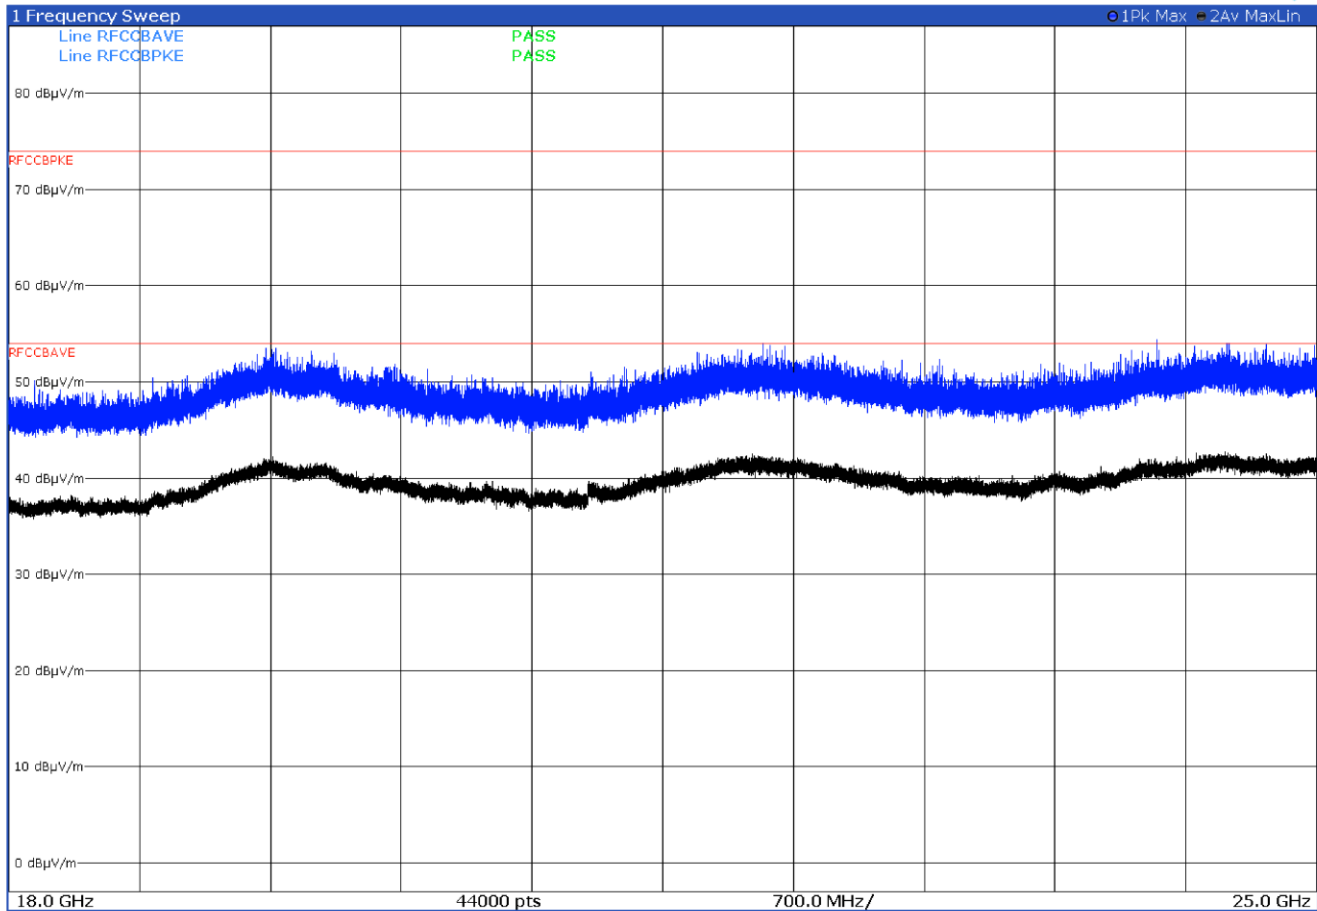


Figure 8.1-8: Radiated spurious emissions with LTE B2 at mid channel and BLE at mid channel – antenna in vertical polarization

Peak level under the average limit – no additional measures need. No intermodulation emissions were detected

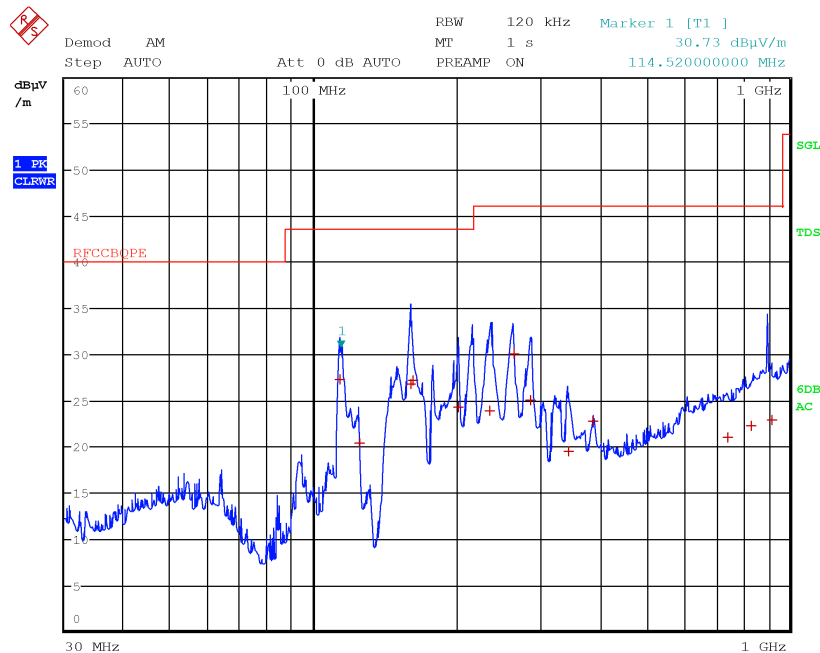


Date: 27.APR.2022 17:57:31

Figure 8.1-9: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
113.9600	27.3	43.5	-16.2	QP
125.0400	20.4	43.5	-23.1	QP
159.8400	26.9	43.5	-16.6	QP
161.8800	27.2	43.5	-16.3	QP
202.2000	24.3	43.5	-19.2	QP
234.8800	24.0	46.0	-22.0	QP
263.2400	30.1	46.0	-15.9	QP
286.2400	25.1	46.0	-20.9	QP
343.2000	19.5	46.0	-26.5	QP
387.0000	22.8	46.0	-23.2	QP
741.0000	21.0	46.0	-25.0	QP
831.8800	22.3	46.0	-23.7	QP

limit exceeded by carrier

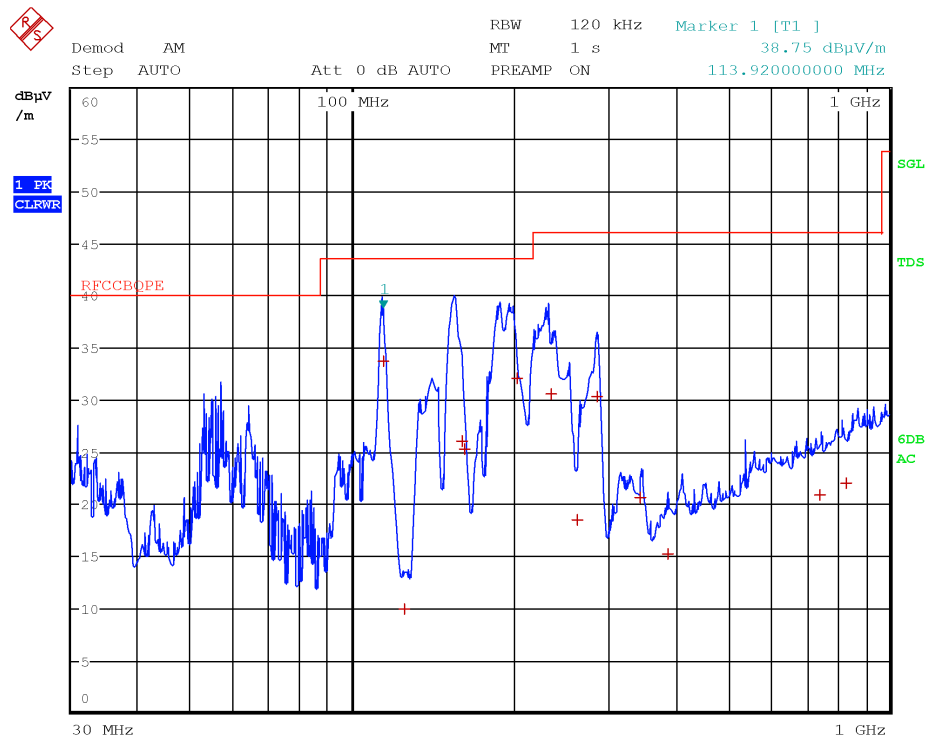

Date: 27.APR.2022 17:54:04

Figure 8.1-10: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel – antenna in vertical polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
113.9600	33.7	43.5	-9.8	QP
125.0400	10.0	43.5	-33.5	QP
159.8400	26.0	43.5	-17.5	QP
161.8800	25.4	43.5	-18.1	QP
202.2000	32.1	43.5	-11.4	QP
234.8800	30.6	46.0	-15.4	QP
263.2400	18.5	46.0	-27.5	QP
286.2400	30.3	46.0	-15.7	QP
343.2000	20.6	46.0	-25.4	QP
387.0000	15.2	46.0	-30.8	QP
741.0000	21.0	46.0	-25.0	QP
831.8800	22.1	46.0	-23.9	QP

limit exceeded by carrier

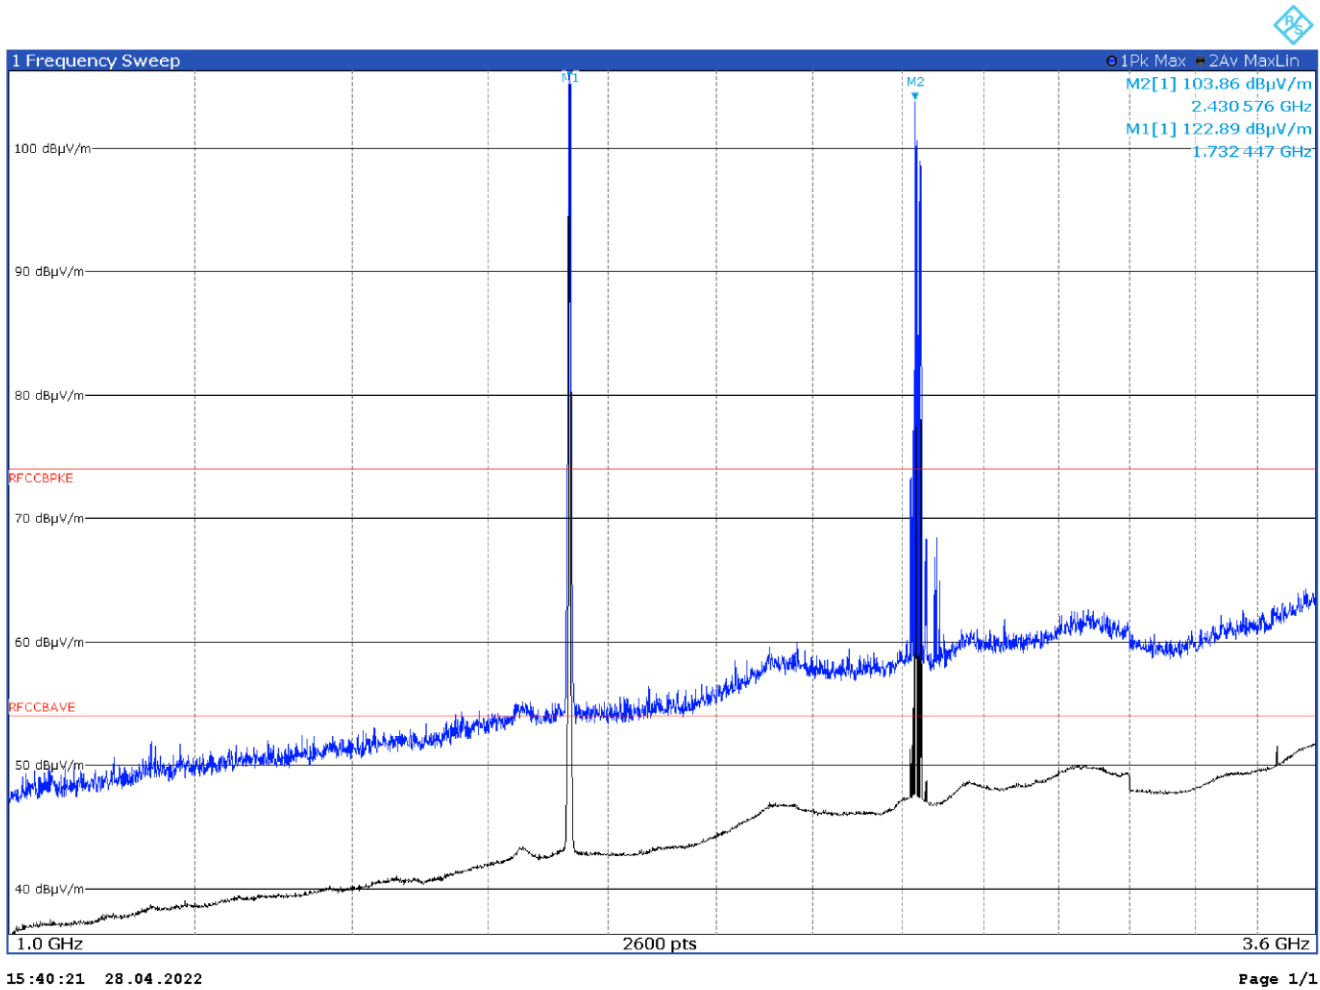


Figure 8.1-11: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
2439.7500	72.2	--	---	--
2440.0000	58.2	--	--	--

Limit exceeded by carrier


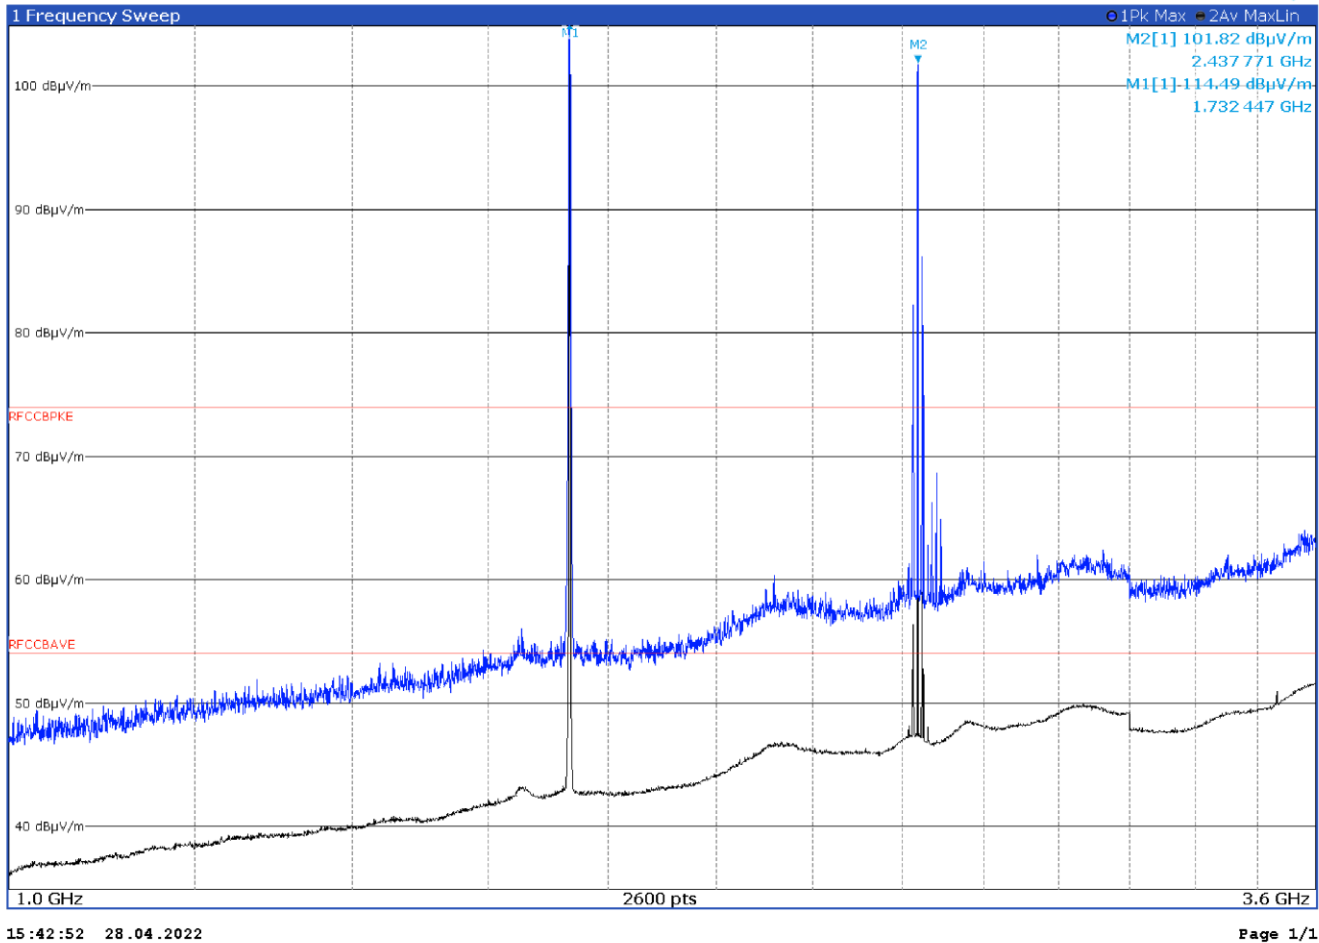


Figure 8.1-12: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel – antenna in vertical polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
2439.7500	68.5	--	--	--
2440.0000	54.1	--	--	--

Limit exceeded by carrier

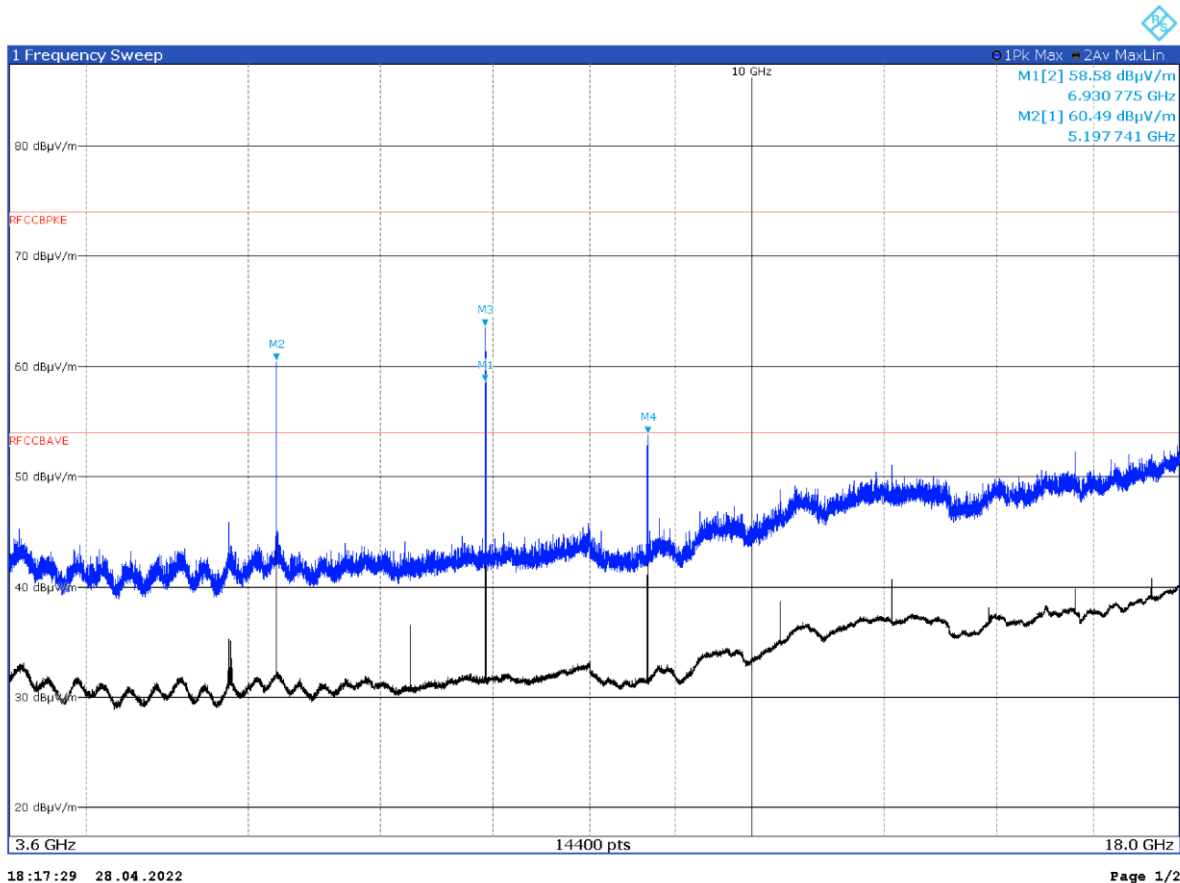


2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		2	6.930 77 GHz	58.58 dBµV/m		
M2		1	5.197 74 GHz	60.49 dBµV/m		
M3		1	6.930 49 GHz	63.56 dBµV/m		
M4		1	8.662 75 GHz	53.81 dBµV/m		

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector
5197.5	60.5	82.2	-21.7	Pk
6930	63.5	82.2	-18.7	Pk
8662.5	53.8	82.2	-28.4	Pk
8662.5	53.8	82.2	-28.4	Pk

***Figure 8.1-13: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel
– antenna in horizontal polarization***

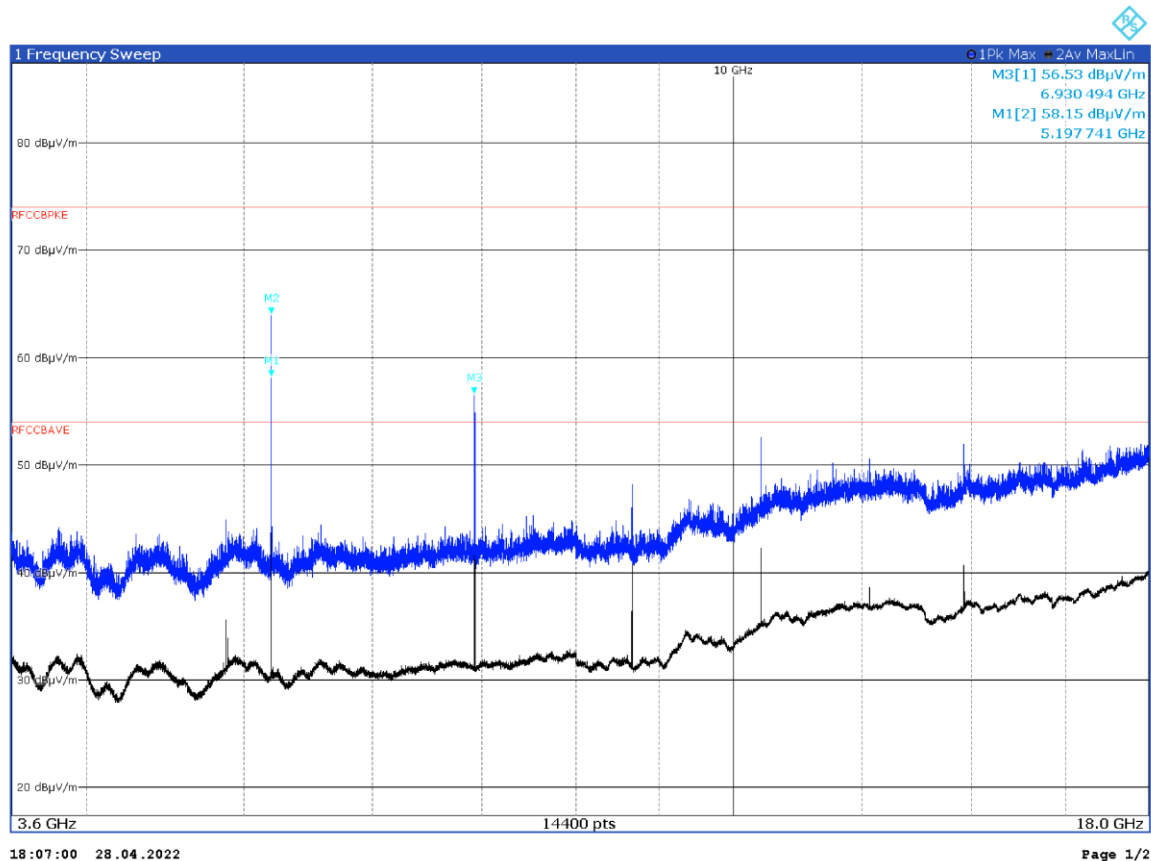

2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		2	5.197 74 GHz	58.15 dBμV/m		
M2		1	5.197 74 GHz	63.99 dBμV/m		
M3		1	6.930 49 GHz	56.53 dBμV/m		

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
5197.5	64.0	82.2	-18.2	Pk
6930	56.5	82.2	-25.7	Pk

Figure 8.1-14: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel – antenna in vertical polarization

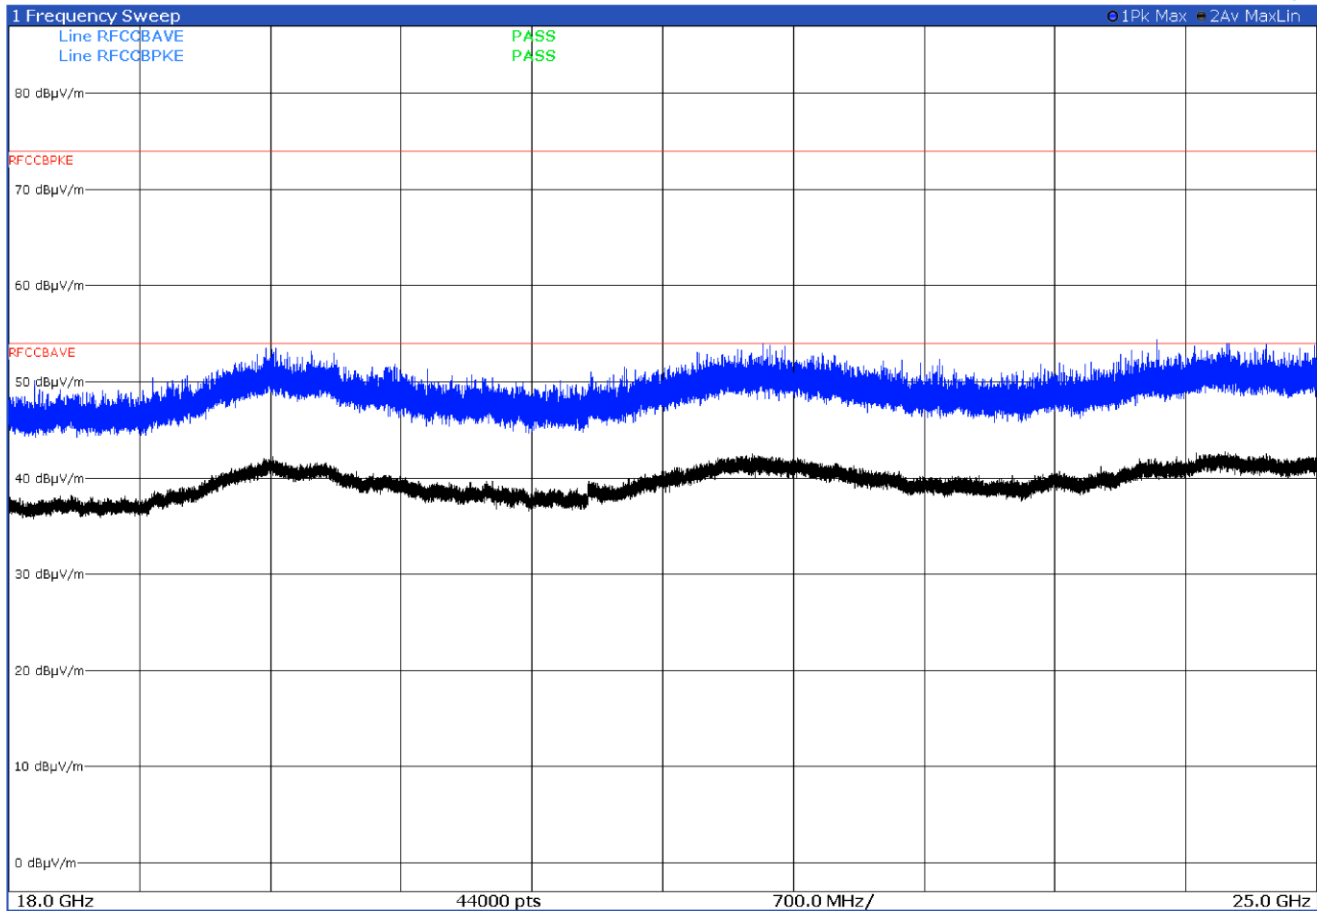


Figure 8.1-15: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Peak level under the average limit – no additional measures need. No intermodulation emissions were detected


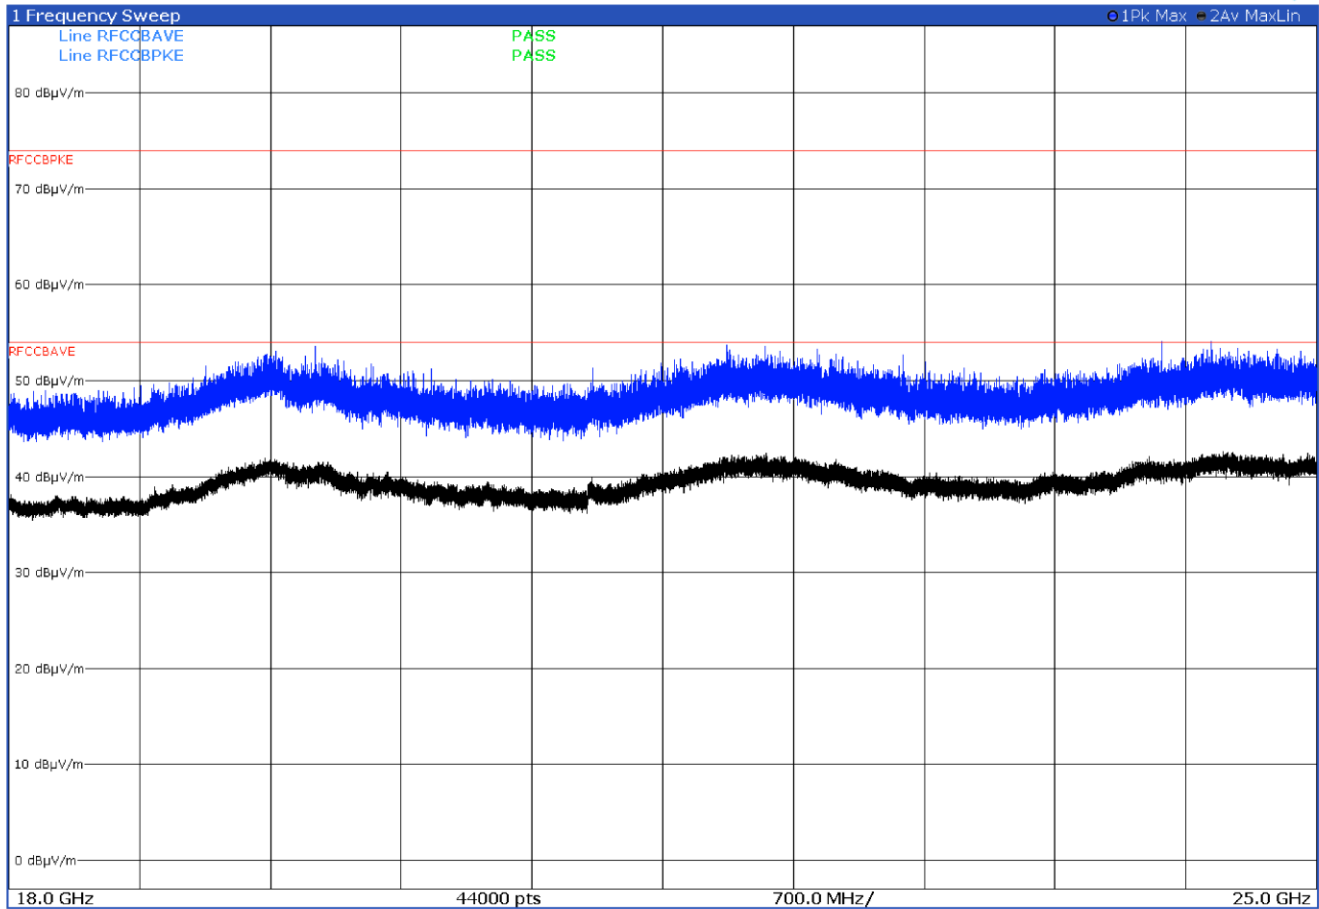


Figure 8.1-16: Radiated spurious emissions with LTE B4 at mid channel and WIFI at mid channel – antenna in vertical polarization


Peak level under the average limit – no additional measures need. No intermodulation emissions were detected

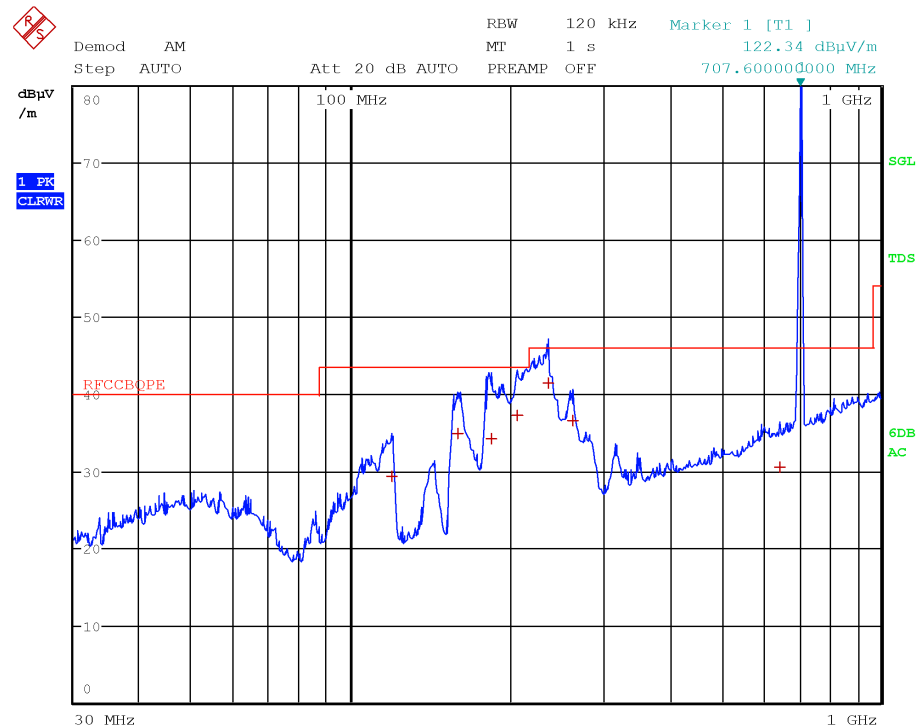

Date: 27.APR.2022 19:18:53

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
119.2800	29.4	43.5	-14.1	QP
158.9600	35.0	43.5	-8.5	QP
184.0000	34.3	43.5	-9.2	QP
206.2800	37.2	43.5	-6.3	QP
236.4400	41.5	46.0	-4.5	QP
262.2000	36.6	46.0	-9.4	QP
646.3600	30.5	46.0	-15.5	QP
707.6000	0.0	0.0	0.0	QP
815.1200	0.0	0.0	0.0	QP
943.6800	0.0	0.0	0.0	QP

Figure 8.1-17: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in horizontal polarization

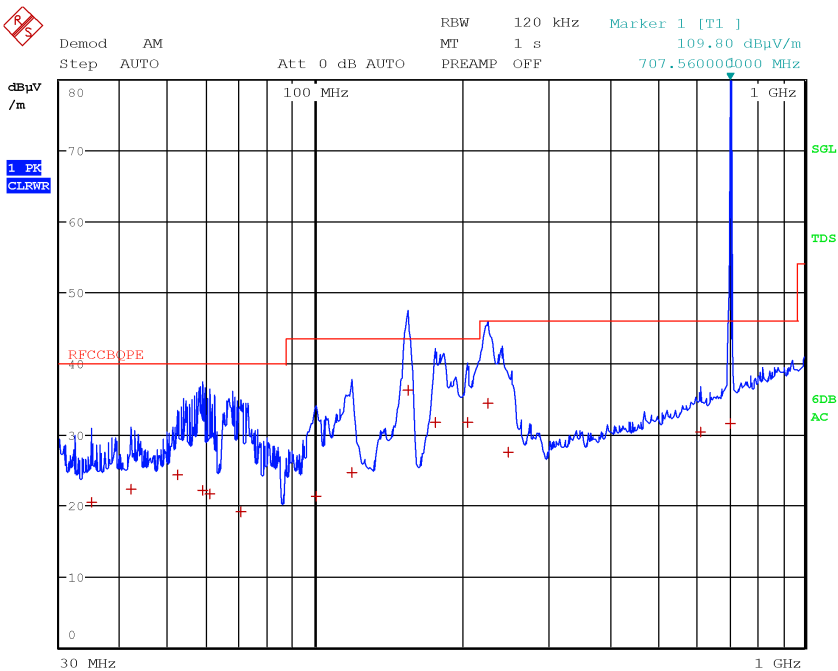

Date: 27.APR.2022 19:02:03

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
34.9600	20.5	40.0	-19.5	QP
41.9600	22.3	40.0	-17.7	QP
52.4000	24.3	40.0	-15.7	QP
58.7200	22.2	40.0	-17.8	QP
60.8400	21.6	40.0	-18.4	QP
70.6400	19.0	40.0	-21.0	QP
100.6400	21.4	43.5	-22.1	QP
118.8800	24.7	43.5	-18.8	QP
154.5200	36.2	43.5	-7.3	QP
176.1600	31.8	43.5	-11.7	QP
204.8000	31.8	43.5	-11.7	QP
225.0400	34.4	46.0	-11.6	QP
247.4400	27.5	46.0	-18.5	QP
612.8000	30.5	46.0	-15.5	QP
707.5600	31.5	46.0	-14.5	QP

Figure 8.1-18: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in vertical polarization

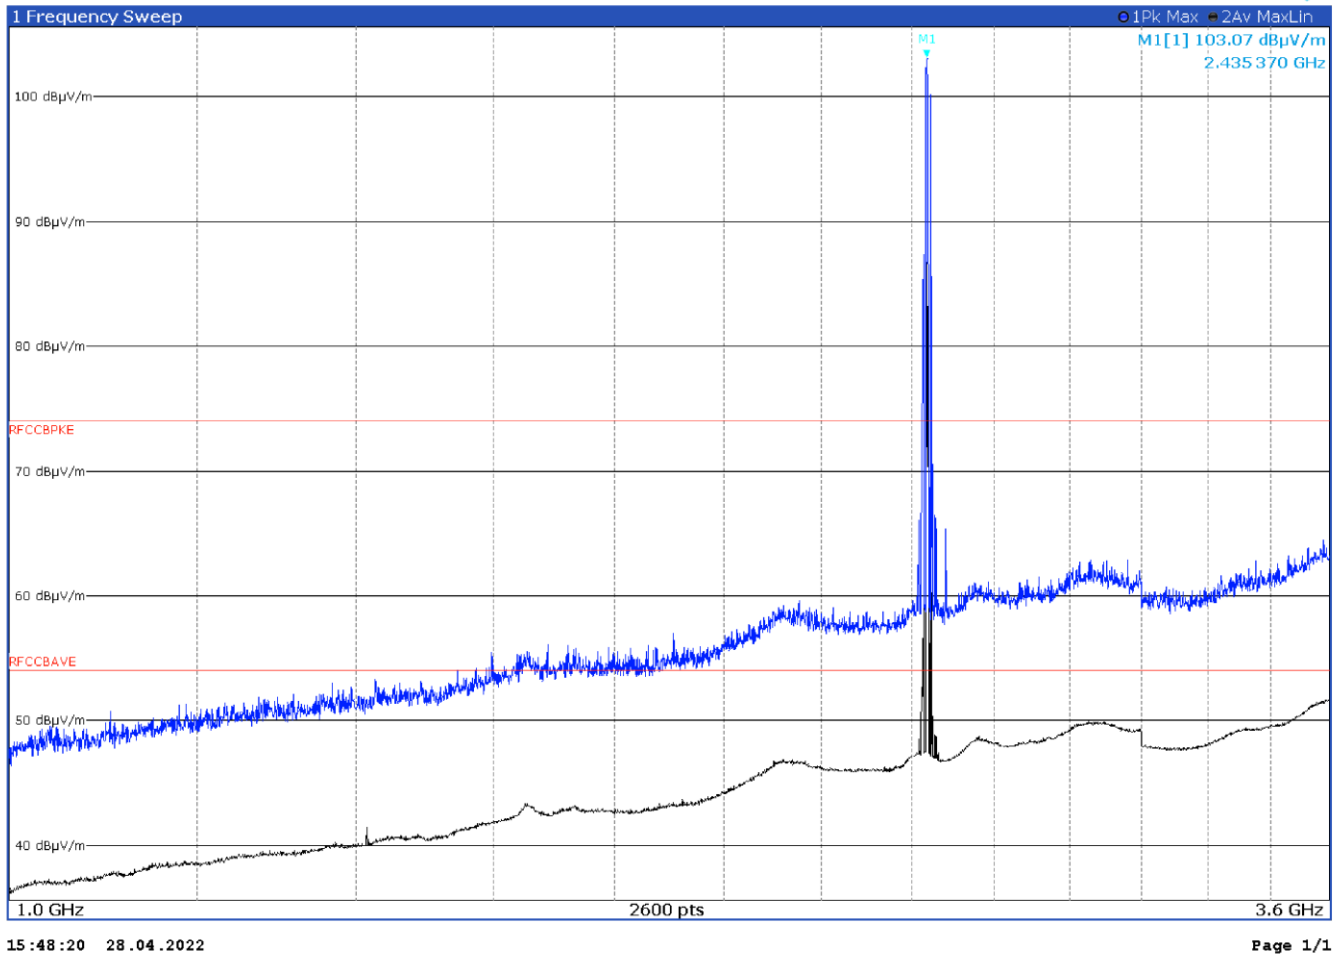


Figure 8.1-19: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	--

Limit exceeded by carrier


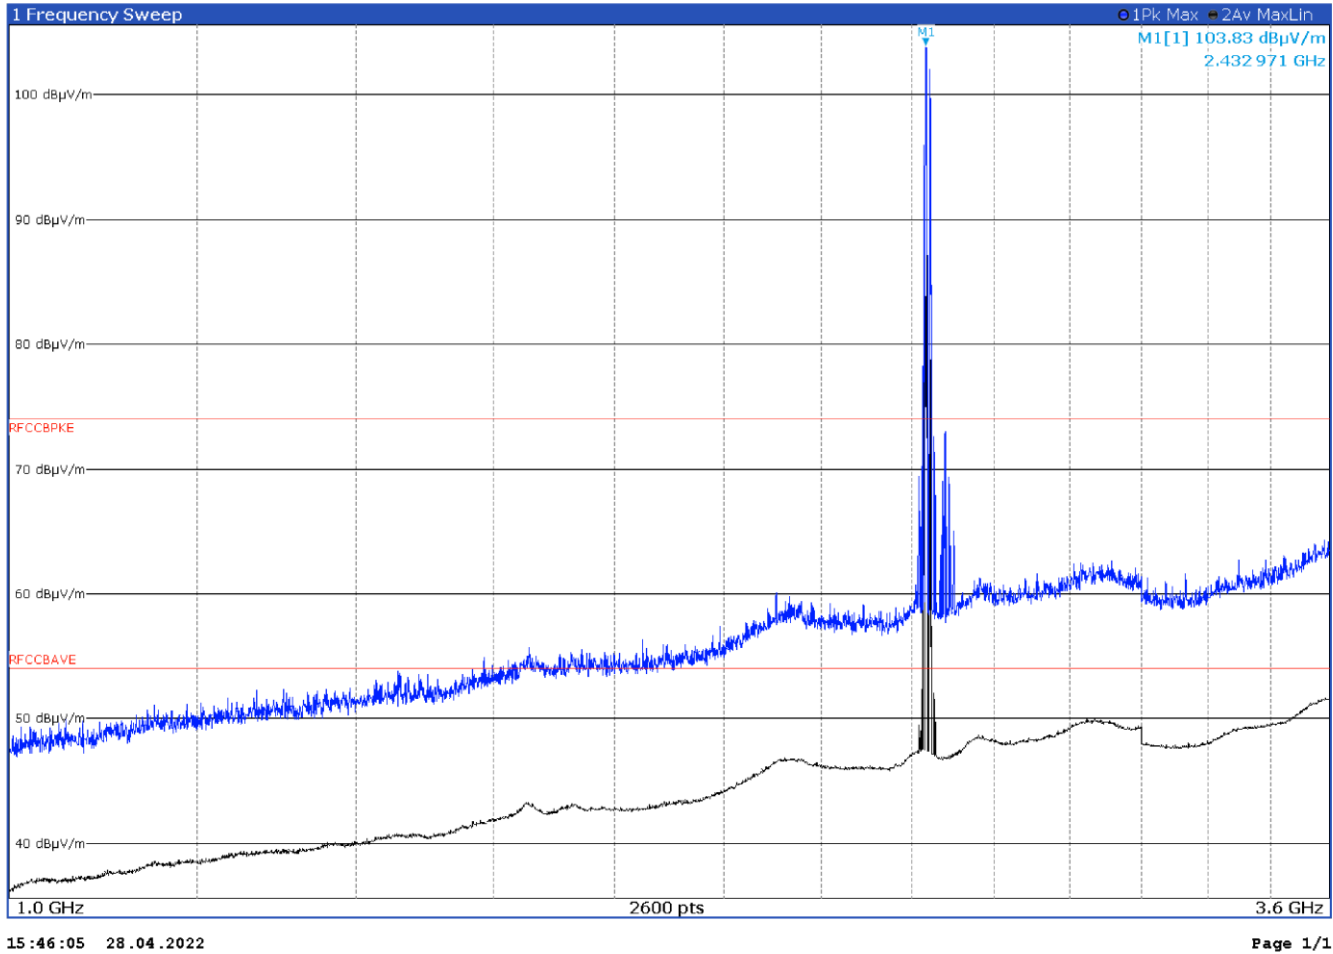


Figure 8.1-20: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in vertical polarization

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	--

Limit exceeded by carrier

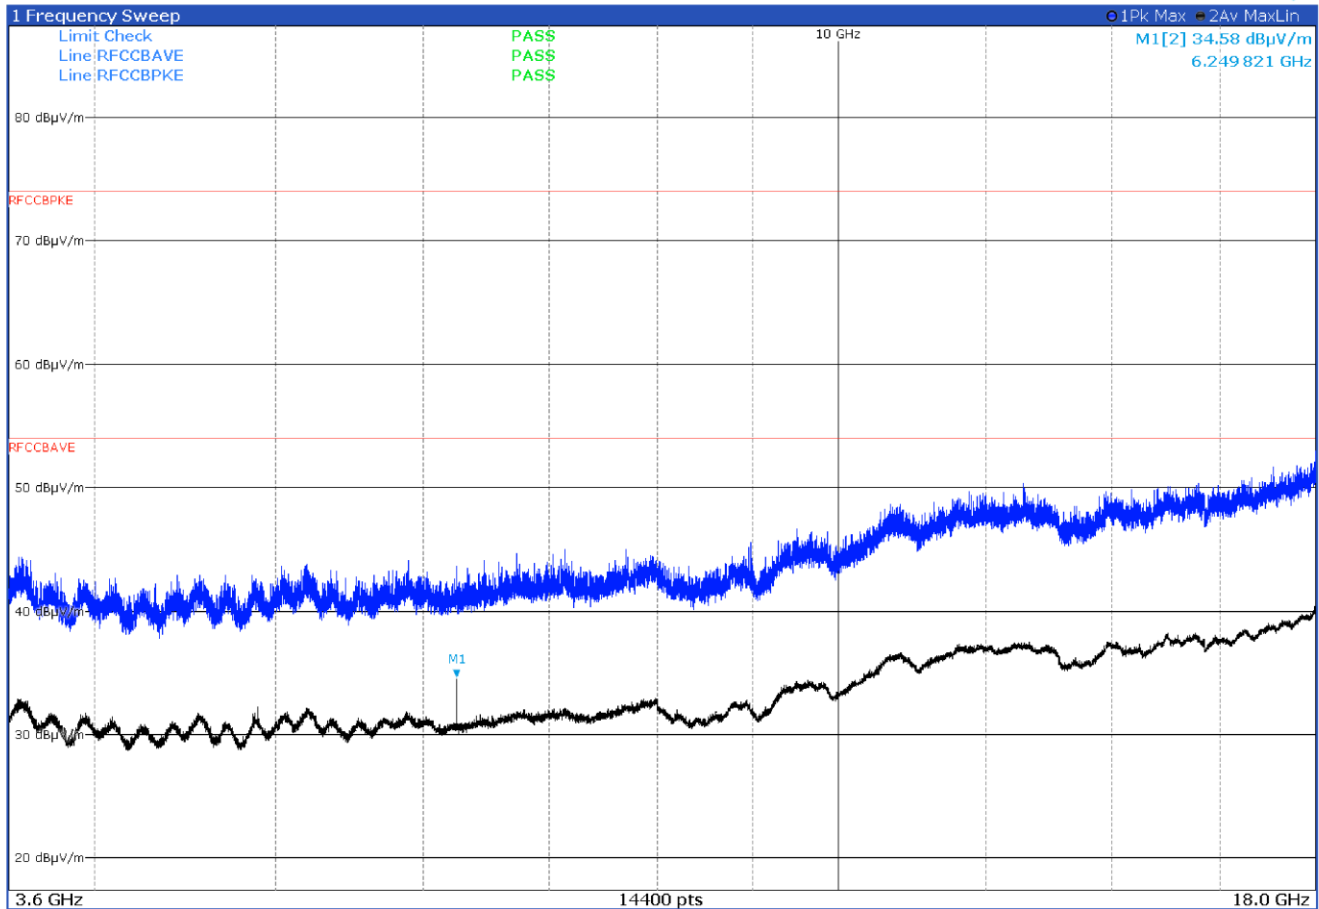


18:01:15 28.04.2022

Page 1/1

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	---	--	--	--

The limit for LTE is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m: limits for restricted band also fulfilled

Figure 8.1-21: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in horizontal polarization

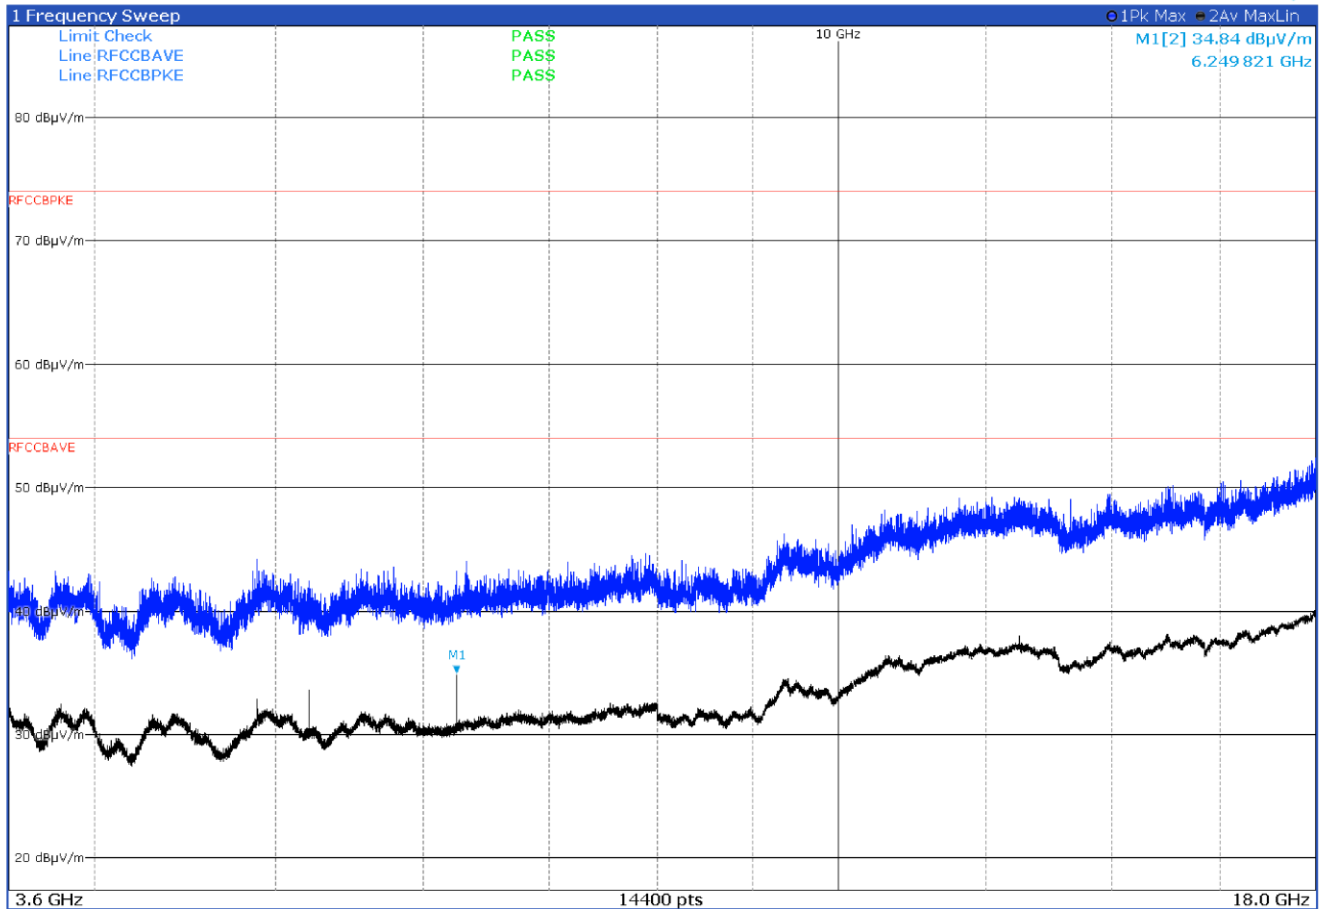

18:03:18 28.04.2022

Page 1/1

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	--

Figure 8.1-22: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in vertical polarization

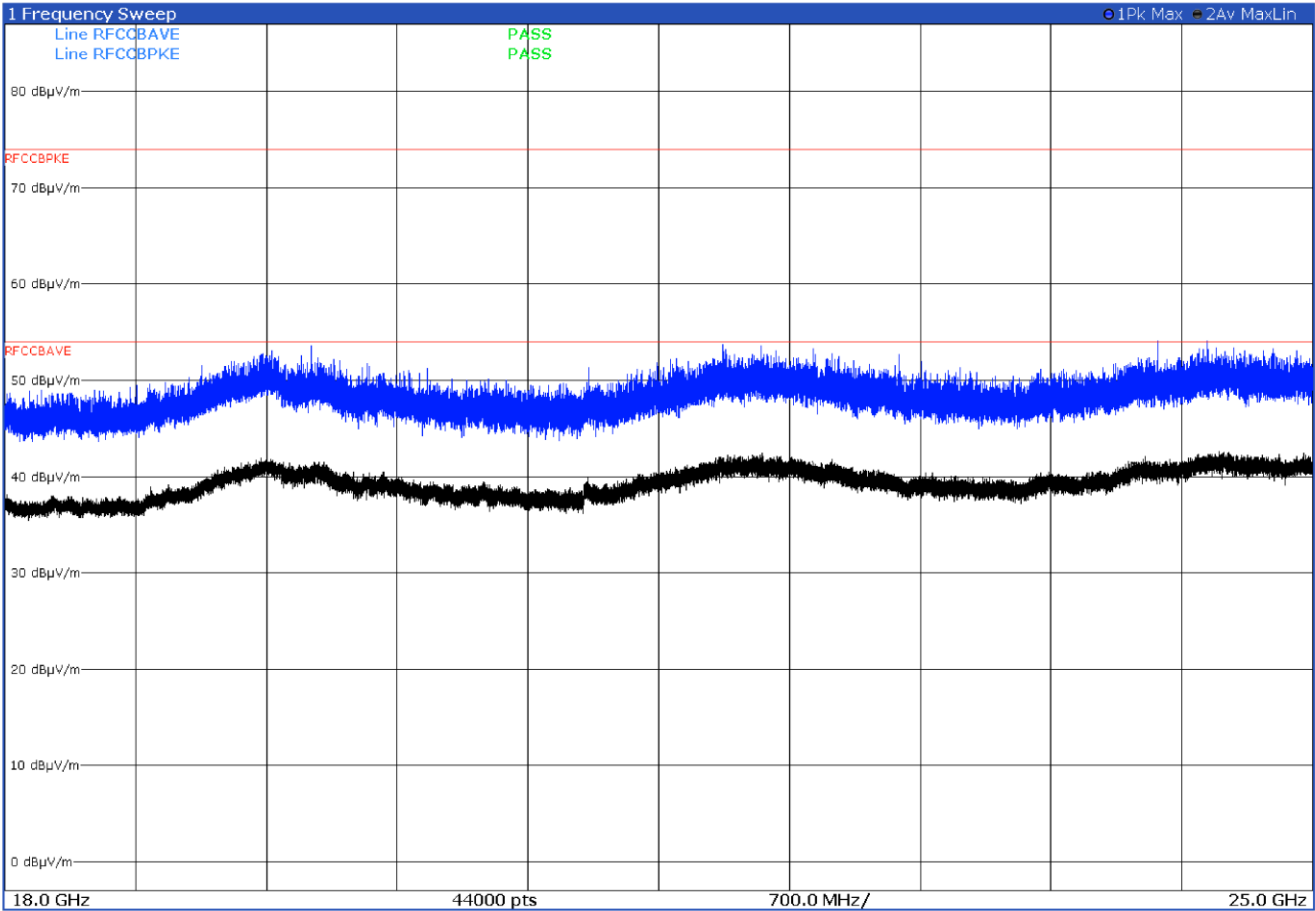


Figure 8.1-23: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in vertical polarization


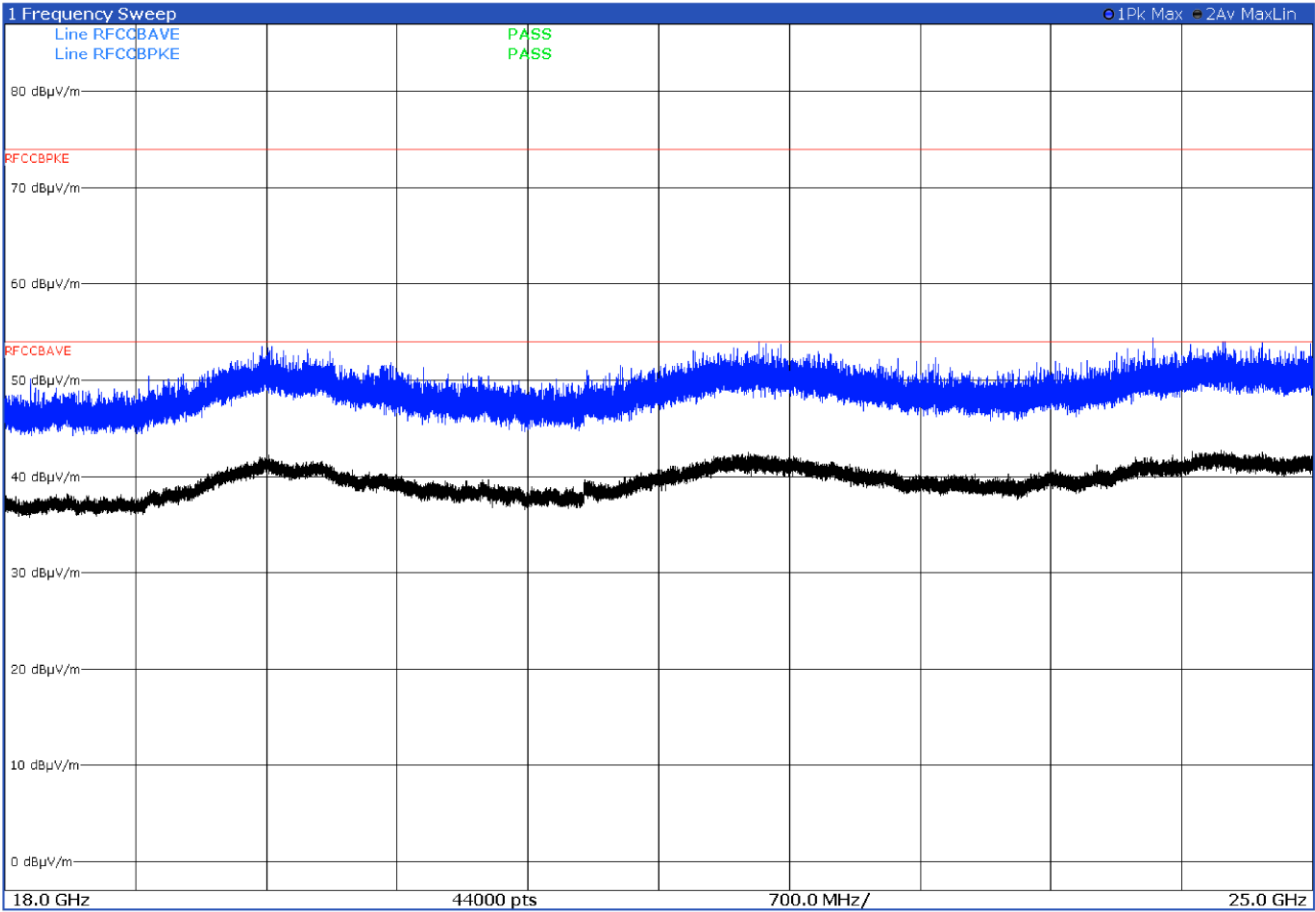



Figure 8.1-24: Radiated spurious emissions with LTE B12 at mid channel and WIFI at mid channel – antenna in horizontal polarization

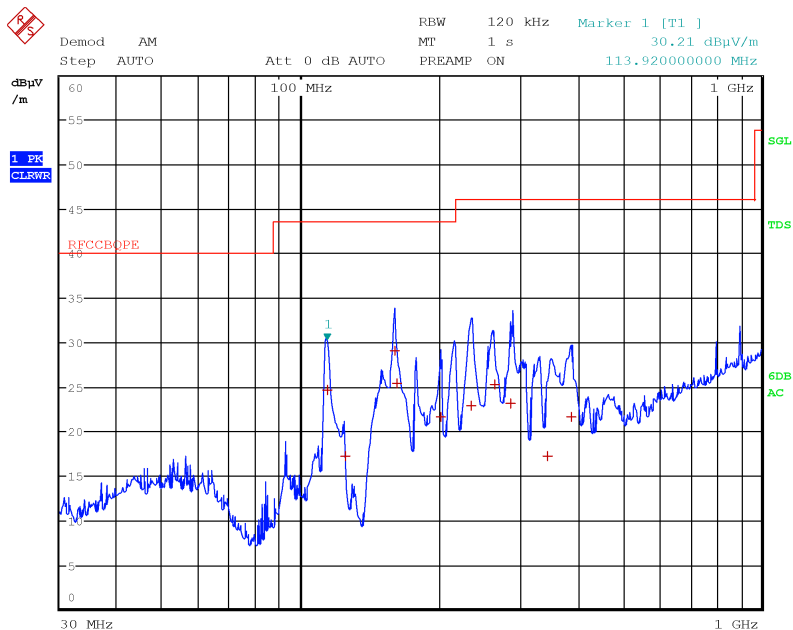

Date: 27.APR.2022 18:17:12

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
113.9600	24.6	43.5	-18.9	QP
125.0400	17.2	43.5	-26.3	QP
159.8400	29.1	43.5	-14.4	QP
161.8800	25.5	43.5	-18.0	QP
202.2000	21.7	43.5	-21.8	QP
234.8800	22.9	46.0	-23.1	QP
263.2400	25.3	46.0	-20.7	QP
286.2400	23.2	46.0	-22.8	QP
343.2000	17.2	46.0	-28.8	QP
387.0000	21.7	46.0	-24.3	QP

Figure 8.1-25: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in horizontal polarization

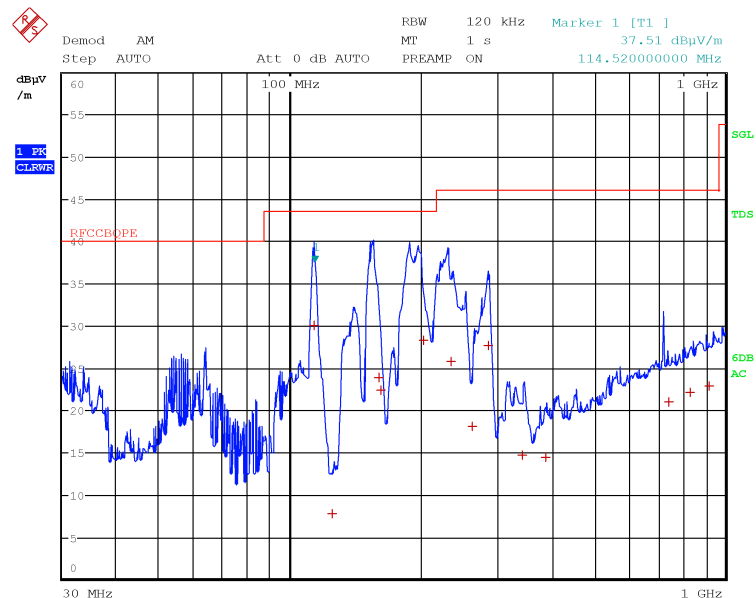

Date: 27.APR.2022 18:21:44

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
113.9600	30.2	43.5	-13.3	QP
125.0400	7.7	43.5	-35.8	QP
159.8400	23.9	43.5	-19.6	QP
161.8800	22.4	43.5	-21.1	QP
202.2000	28.3	43.5	-15.2	QP
234.8800	25.8	46.0	-20.2	QP
263.2400	18.1	46.0	-27.9	QP
286.2400	27.7	46.0	-18.3	QP
343.2000	14.7	46.0	-31.3	QP
387.0000	14.5	46.0	-31.5	QP
741.0000	21.0	46.0	-25.0	QP
831.8800	22.1	46.0	-23.9	QP
918.5200	22.9	46.0	-23.1	QP

Figure 8.1-26: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in vertical polarization


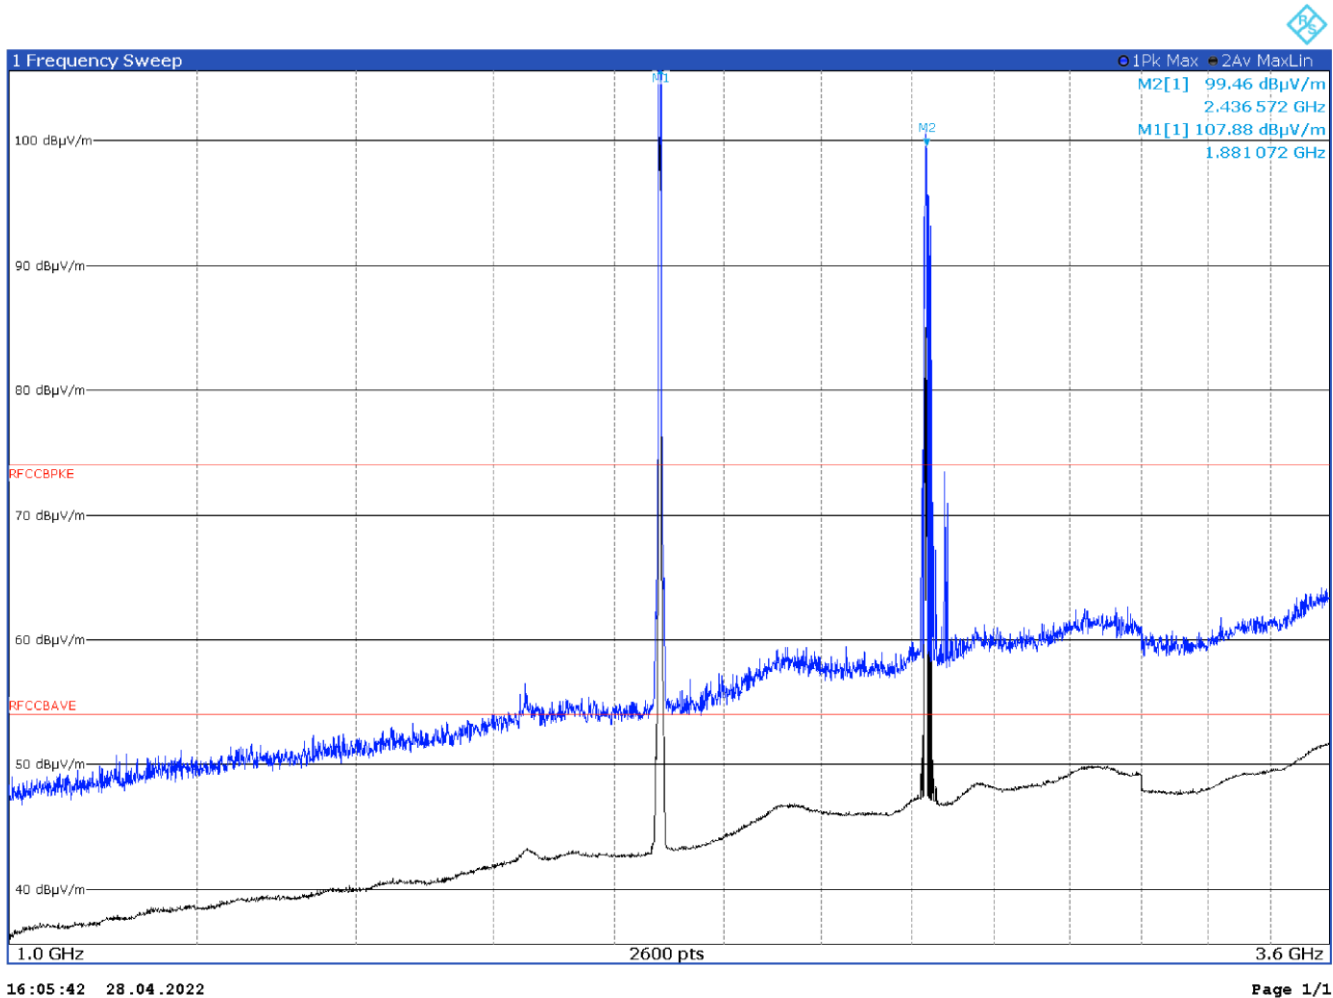


Figure 8.1-27: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in vertical polarization

Limit exceeded by carrier

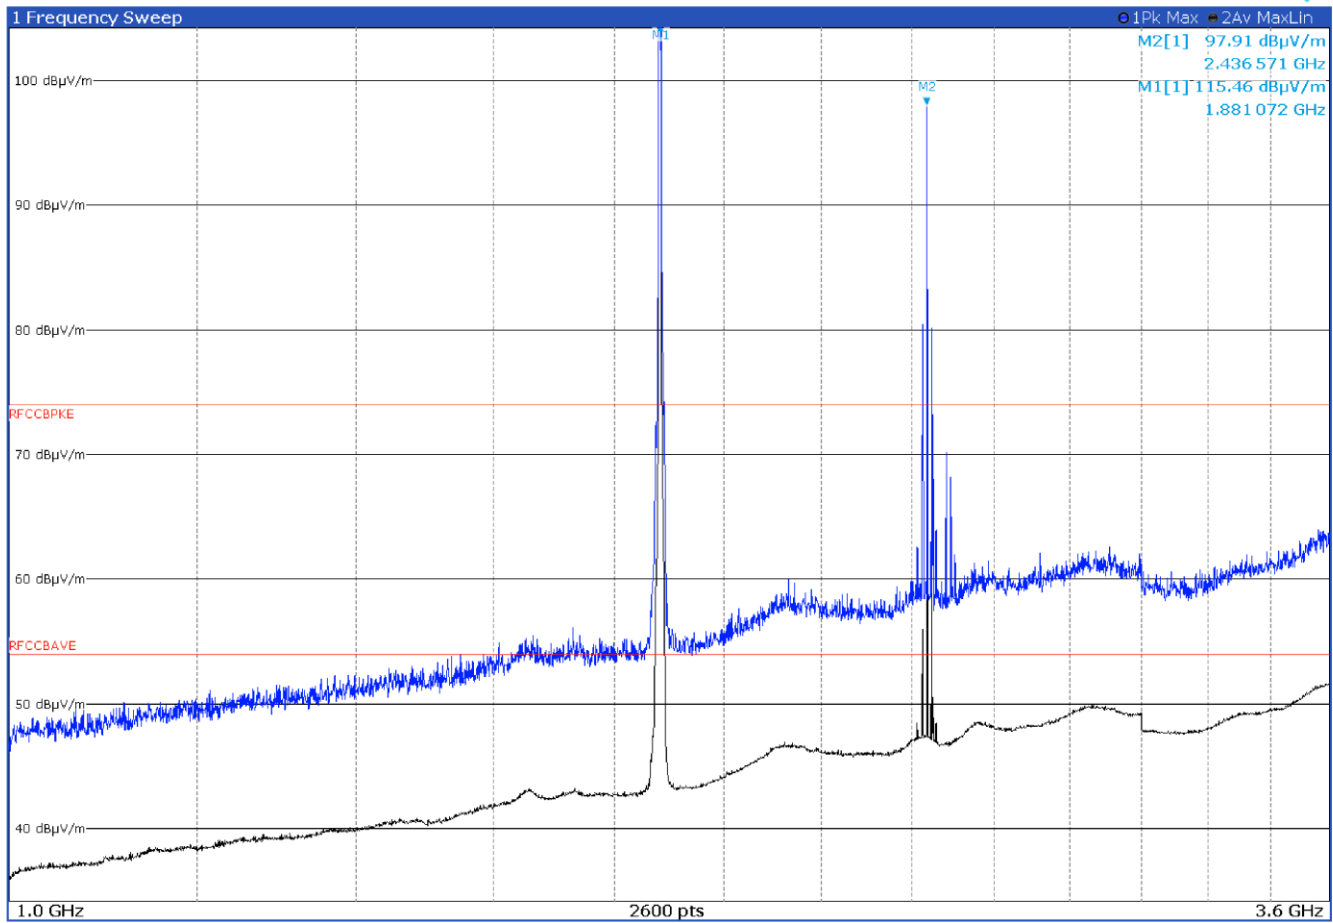


16:36:51 28.04.2022

Page 1/1

Figure 8.1-28: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Limit exceeded by carrier

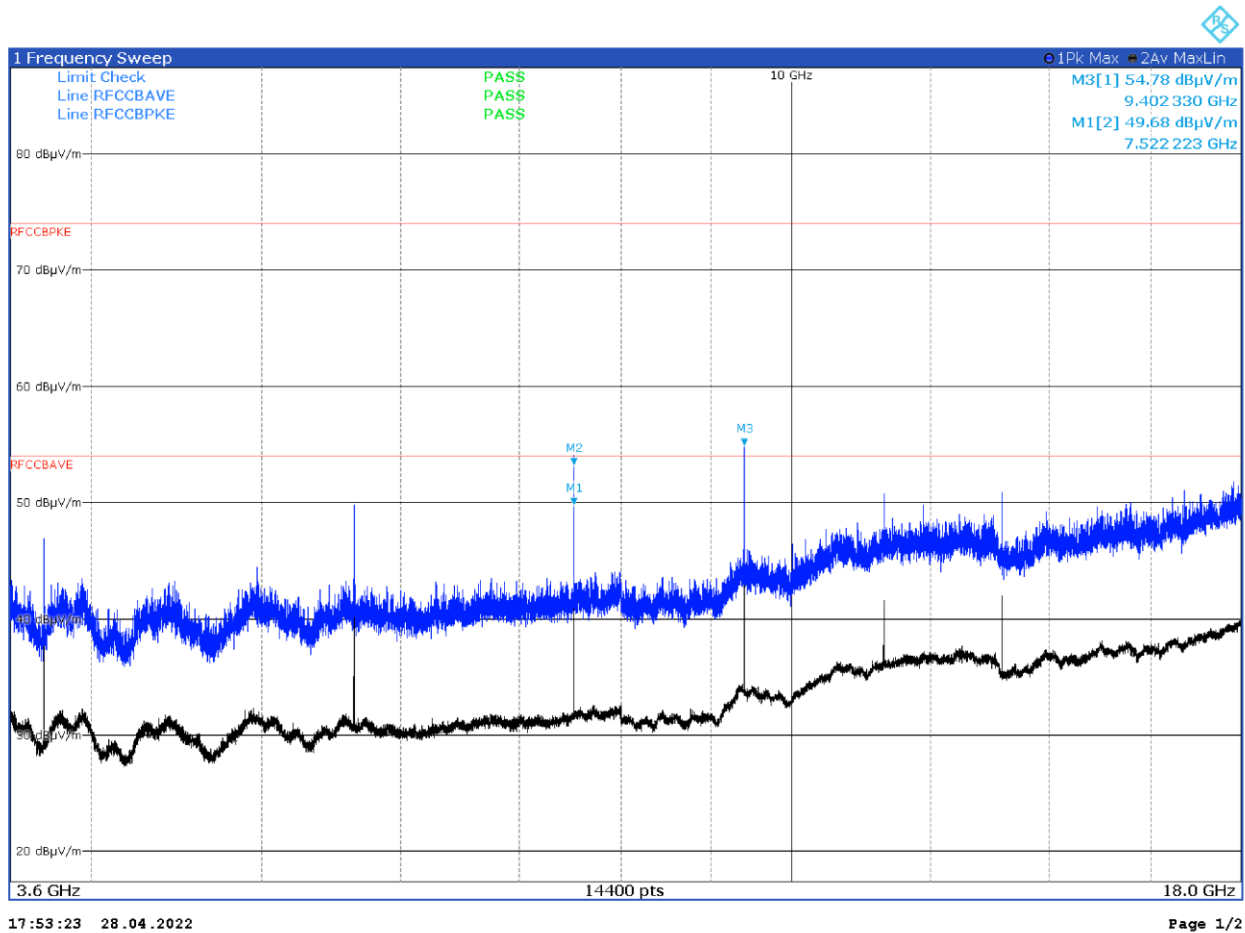


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
7522.2	53.1	82.2	-29.1	Pk
9402	54.8	82.2	-27.4	Pk

2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		2	7.52222 GHz	49.68 dBμV/m		
M2		1	7.52134 GHz	53.13 dBμV/m		
M3		1	9.40233 GHz	54.78 dBμV/m		

Figure 8.1-29: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in horizontal polarization

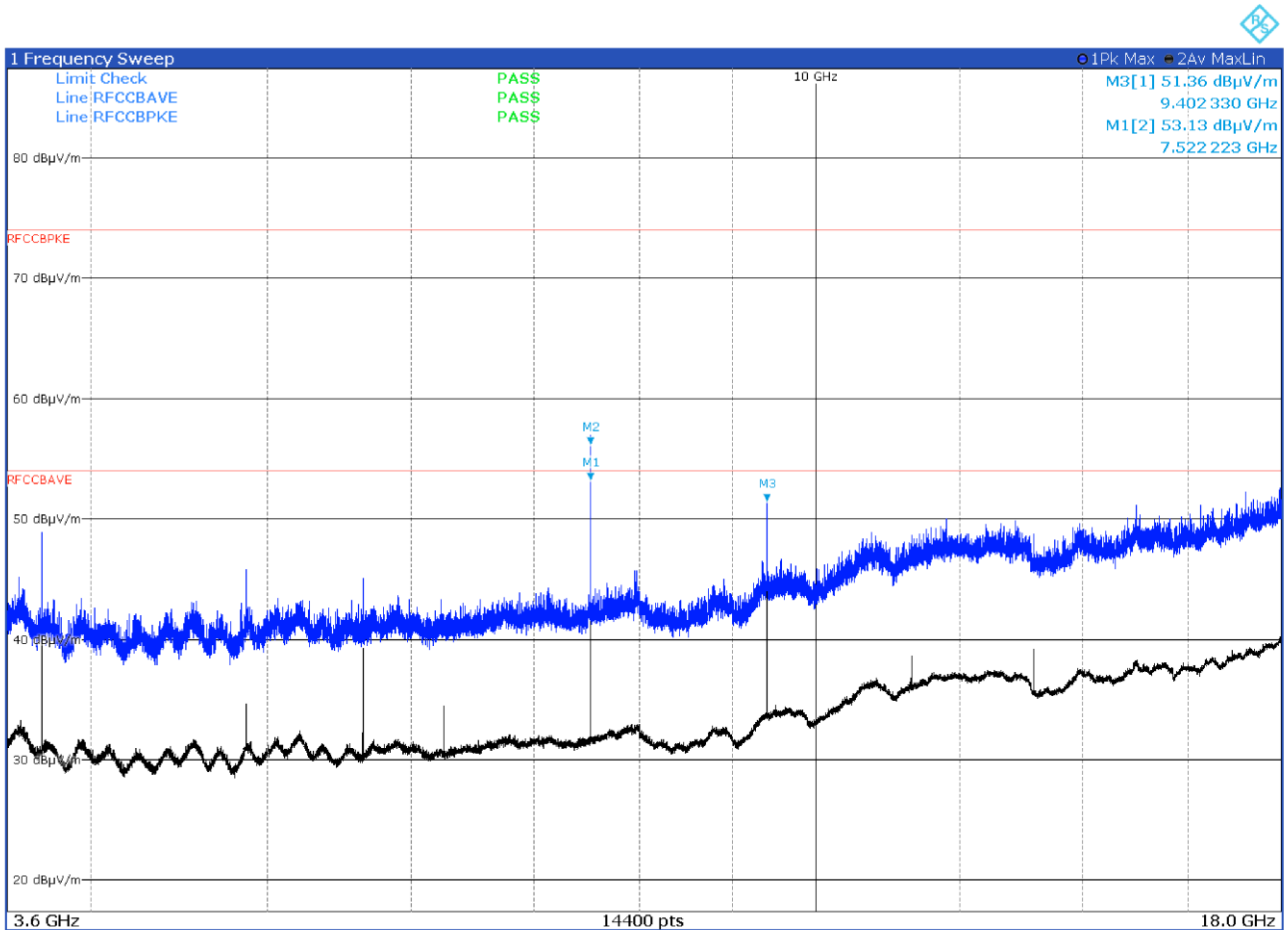

17:56:32 28.04.2022

Page 1/2

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
7522.2	56.1	82.2	-26.1	Pk
9402	51.4	82.2	-30.8	Pk

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		2	7.522 22 GHz	53.13 dBμV/m		
M2		1	7.521 34 GHz	56.05 dBμV/m		
M3		1	9.402 33 GHz	51.36 dBμV/m		

Figure 8.1-30: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in vertical polarization

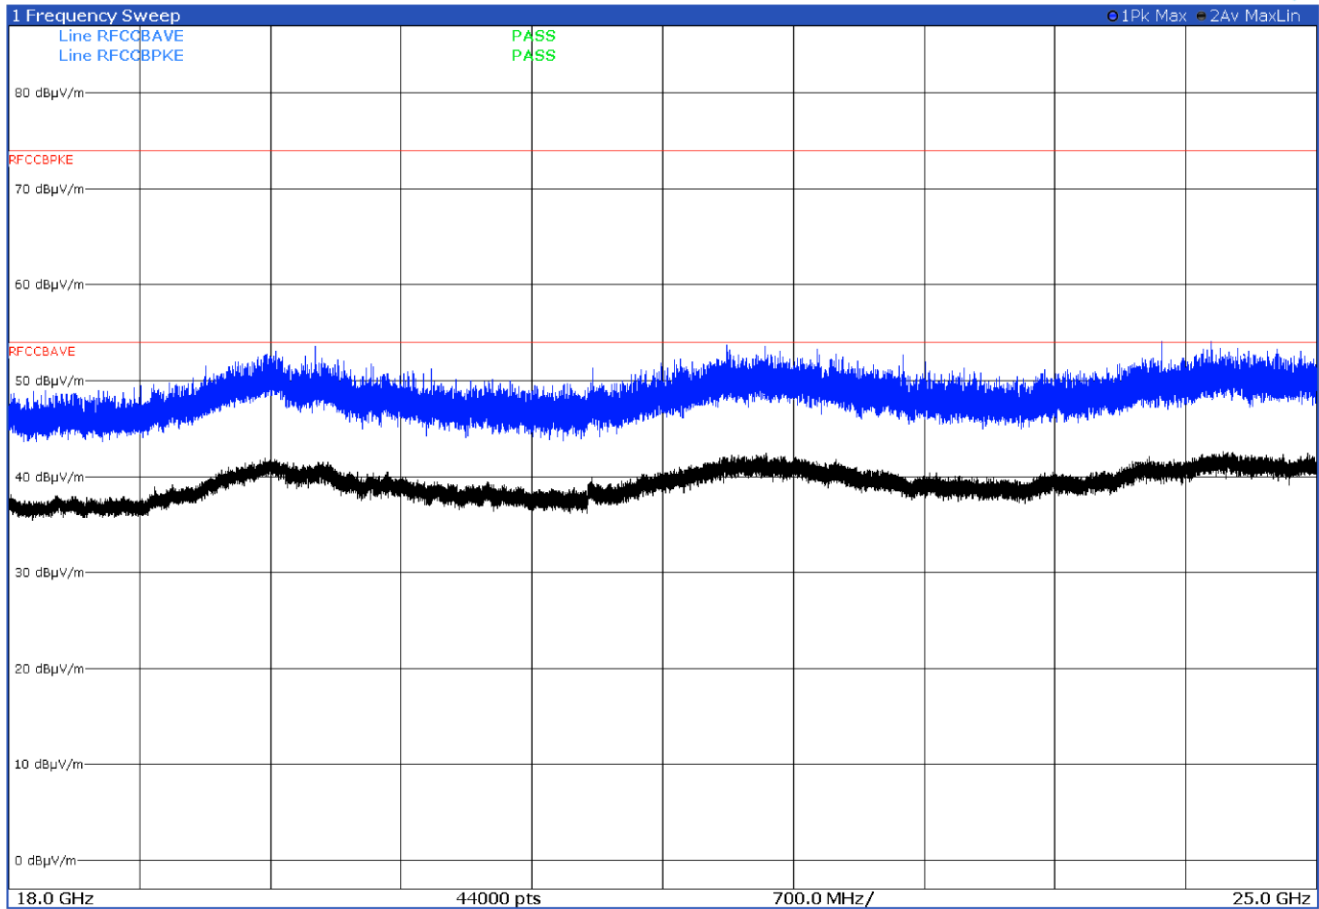


Figure 8.1-31: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in vertical polarization


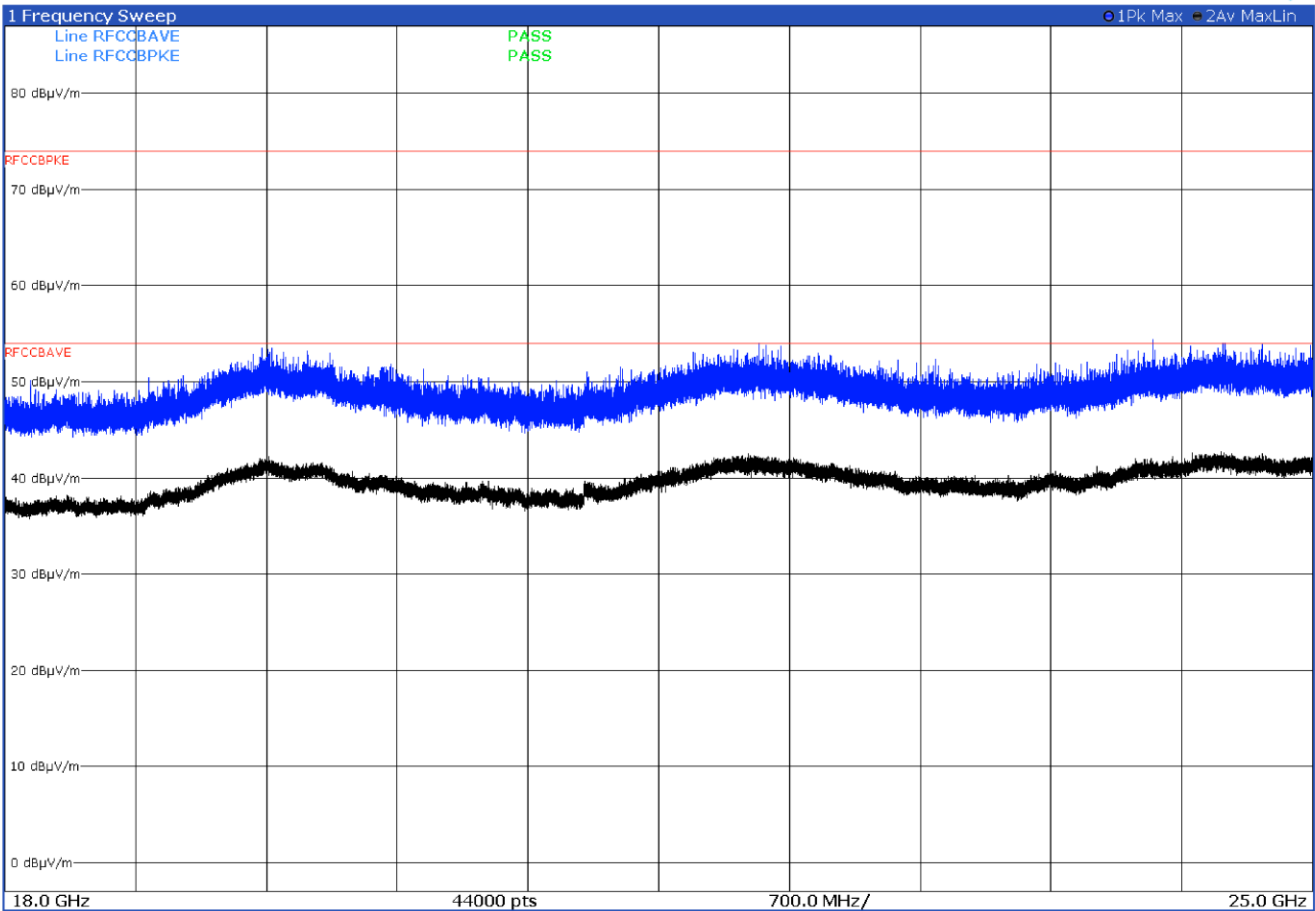



Figure 8.1-32: Radiated spurious emissions with WCDMA B2 at mid channel and WIFI at mid channel – antenna in horizontal polarization

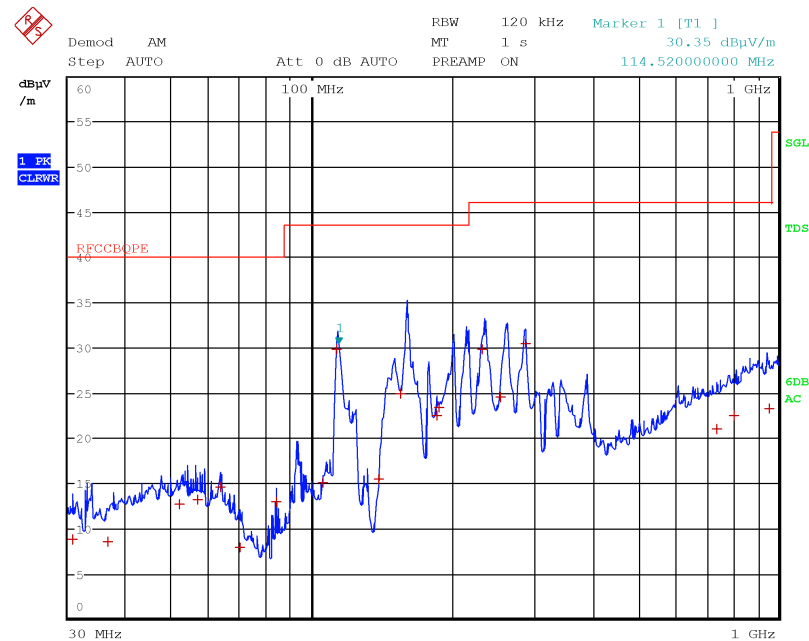

Date: 27.APR.2022 18:29:59

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
30.6800	8.7	40.0	-31.3	QP
36.5200	8.6	40.0	-31.4	QP
52.0400	12.7	40.0	-27.3	QP
56.9200	13.2	40.0	-26.8	QP
63.8400	14.6	40.0	-25.4	QP
70.0800	7.9	40.0	-32.1	QP
83.9600	13.0	40.0	-27.0	QP
105.4800	15.1	43.5	-28.4	QP
113.1600	29.8	43.5	-13.7	QP
139.5200	15.5	43.5	-28.0	QP
154.8000	24.9	43.5	-18.6	QP
185.3200	22.6	43.5	-20.9	QP
188.1200	23.5	43.5	-20.0	QP
231.8800	29.9	46.0	-16.1	QP
254.0400	24.5	46.0	-21.5	QP
286.7600	30.5	46.0	-15.5	QP
738.4400	21.0	46.0	-25.0	QP
799.9600	22.5	46.0	-23.5	QP
954.6800	23.4	46.0	-22.6	QP

Figure 8.1-33: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in horizontal polarization

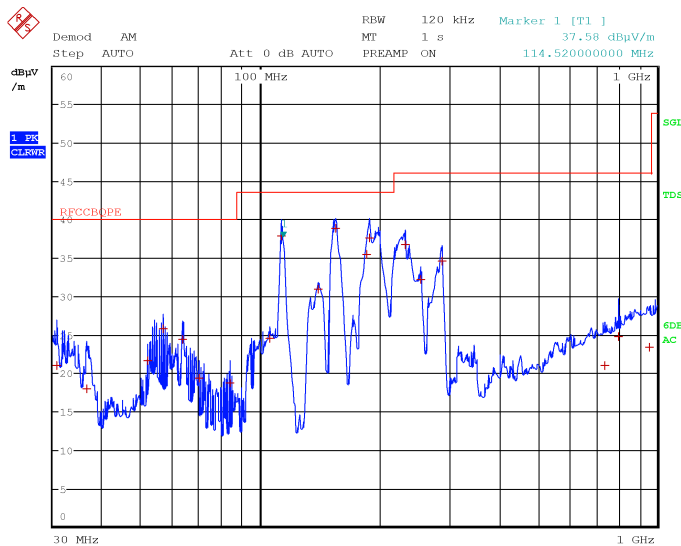

Date: 27.APR.2022 18:26:16

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
30.6800	21.0	40.0	-19.0	QP
36.5200	18.0	40.0	-22.0	QP
52.0400	21.7	40.0	-18.3	QP
56.9200	25.9	40.0	-14.1	QP
63.8400	24.4	40.0	-15.6	QP
70.0800	19.4	40.0	-20.6	QP
83.9600	18.7	40.0	-21.3	QP
105.4800	24.6	43.5	-18.9	QP
113.1600	37.9	43.5	-5.6	QP
139.5200	31.0	43.5	-12.5	QP
154.8000	38.9	43.5	-4.6	QP
185.3200	35.5	43.5	-8.0	QP
188.1200	37.7	43.5	-5.8	QP
231.8800	36.8	46.0	-9.2	QP
254.0400	32.2	46.0	-13.8	QP
286.7600	34.6	46.0	-11.4	QP
738.4400	21.0	46.0	-25.0	QP
799.9600	24.9	46.0	-21.1	QP
954.6800	23.4	46.0	-22.6	QP

Figure 8.1-34: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in vertical polarization

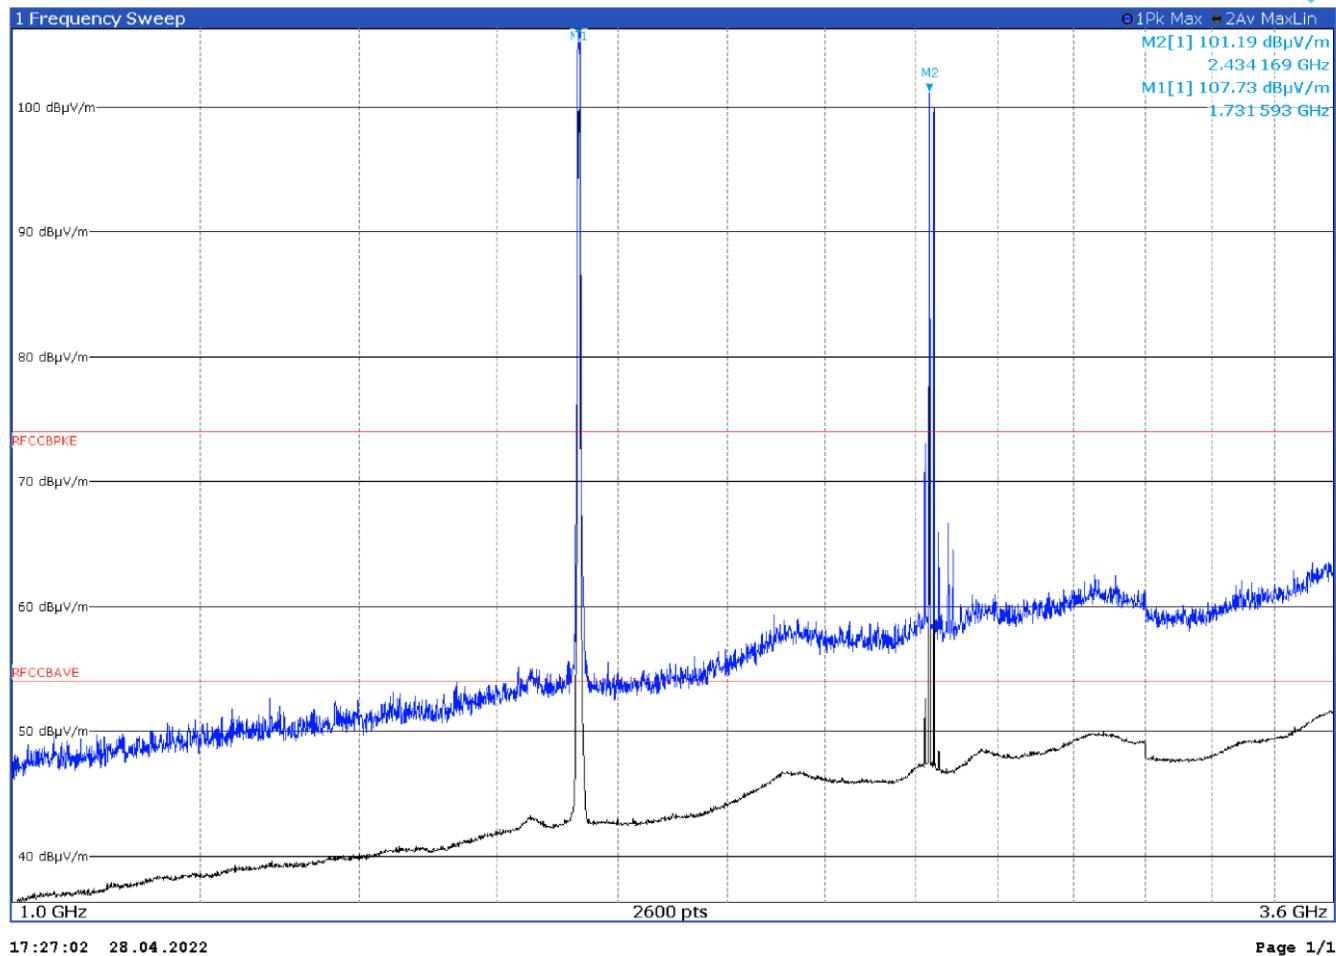


Figure 8.1-35: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in vertical polarization

Limit exceeded by carrier


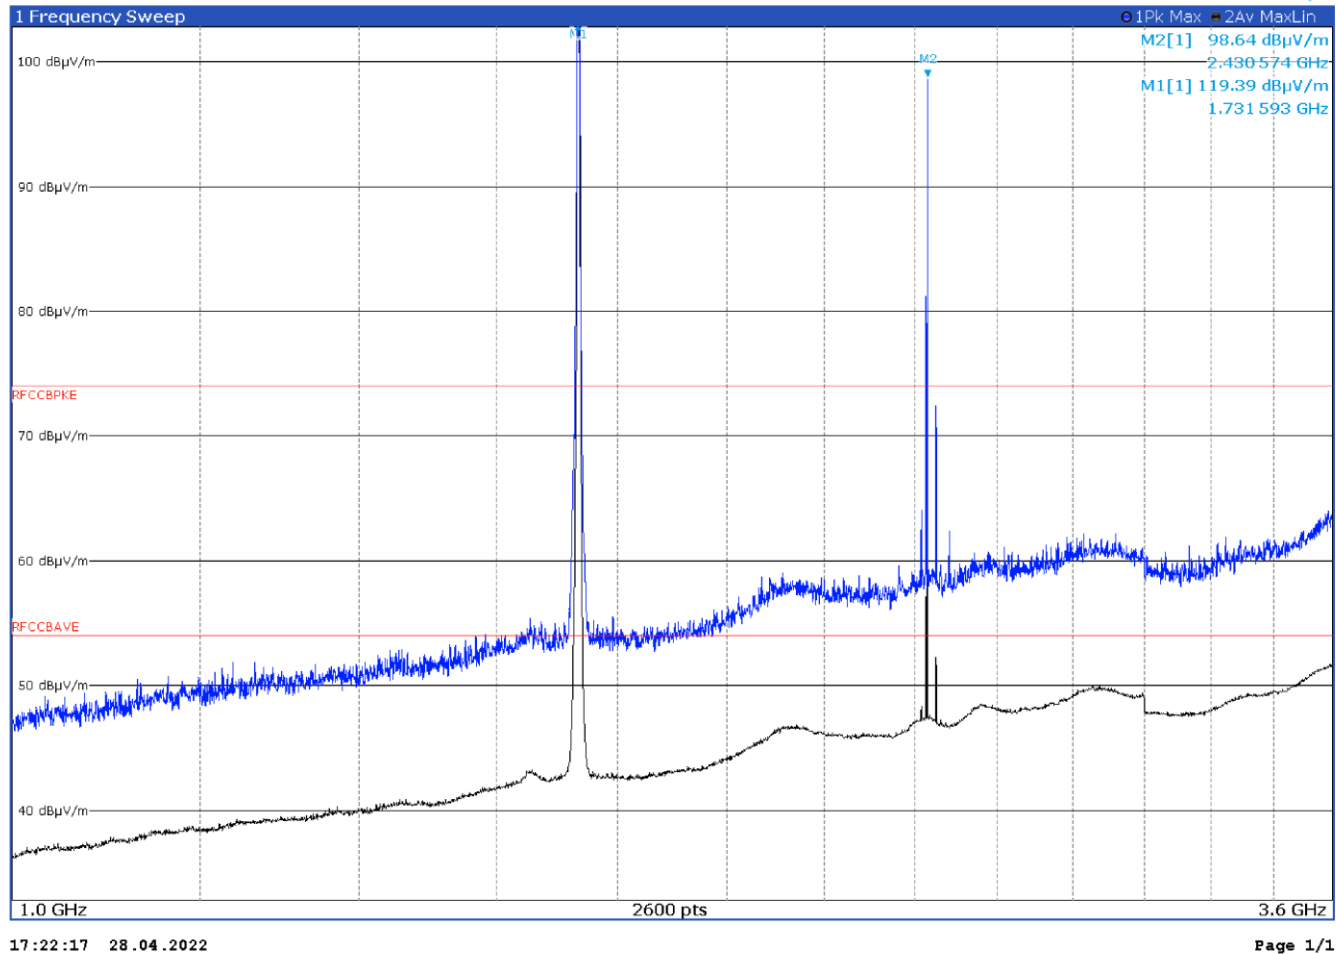


Figure 8.1-36: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Limit exceeded by carrier

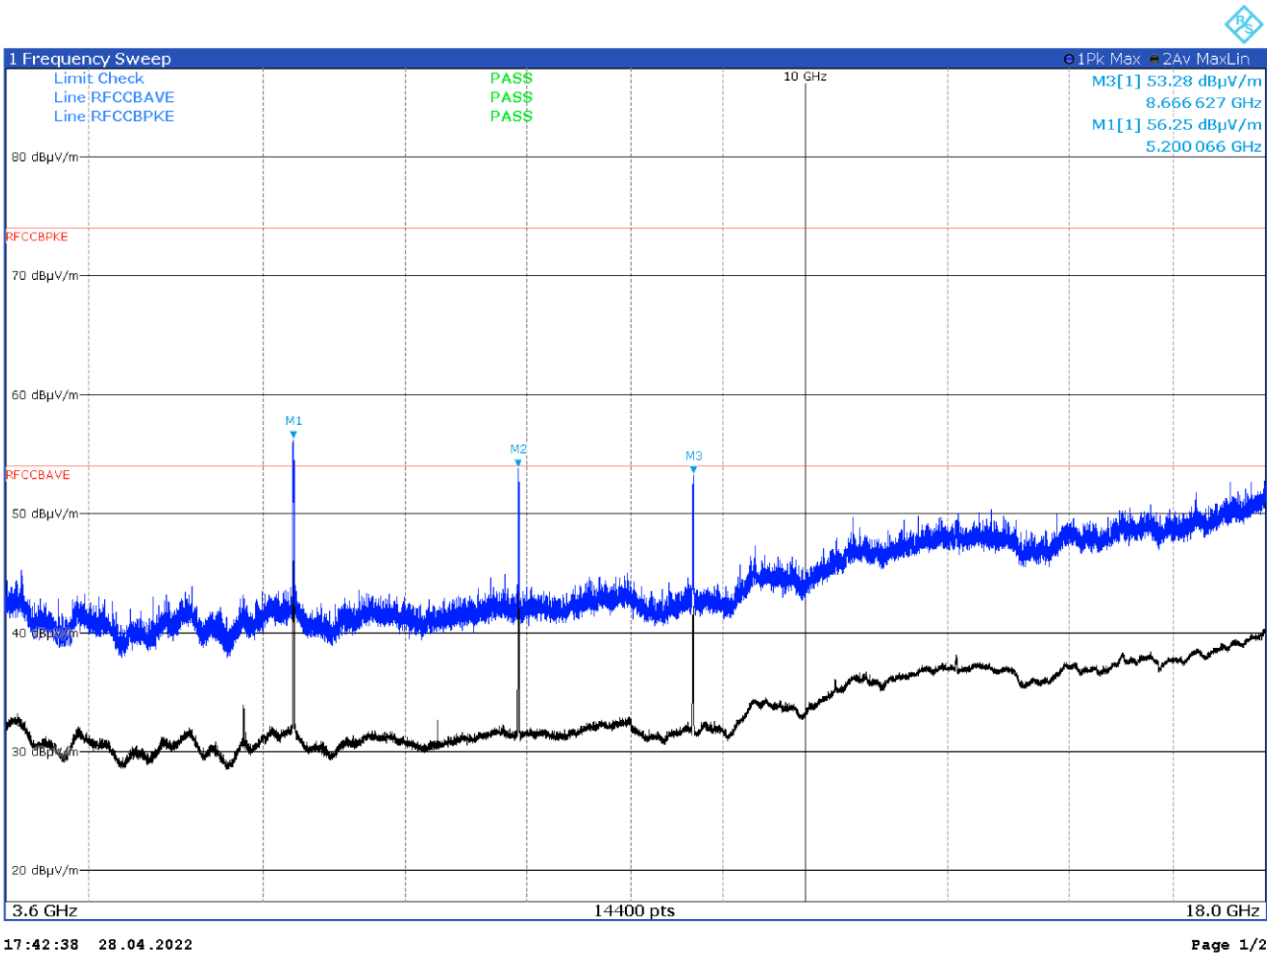


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
5200.07	56.3	82.2	-25.9	Pk
6925.85	53.9	82.2	-28.3	Pk
8666.63	53.3	82.2	-28.9	Pk

2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1	1		5.200 07 GHz	56.25 dBμV/m		
M2	1		6.925 85 GHz	53.83 dBμV/m		
M3	1		8.666 63 GHz	53.28 dBμV/m		

Figure 8.1-37: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in horizontal polarization

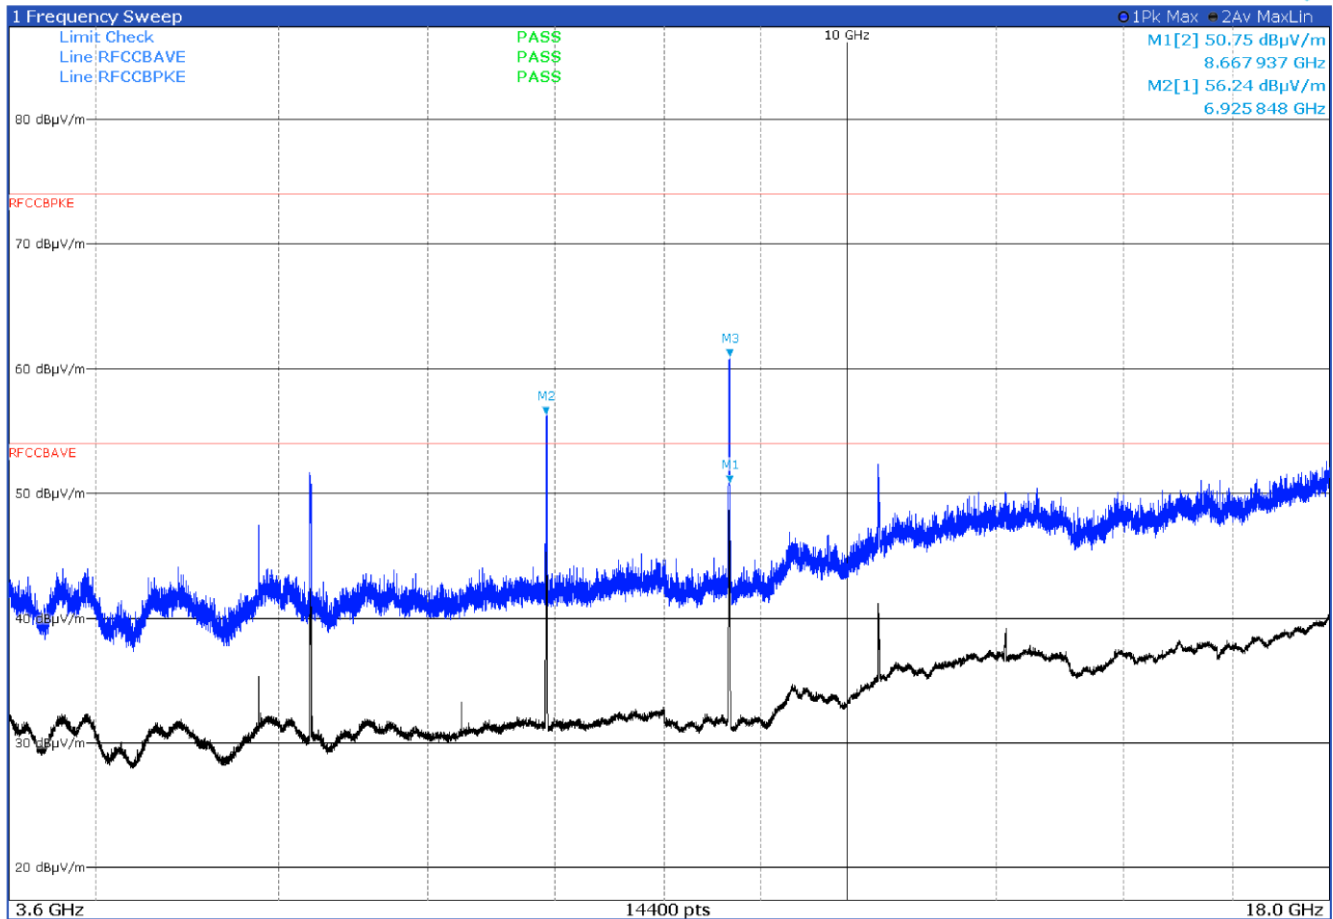

17:46:39 28.04.2022

Page 1/2

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
6925.85	56.2	82.2	-26.0	Pk
8666.63	61.0	82.2	-21.2	Pk



2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		2	8.667 94 GHz	50.75 dBμV/m		
M2		1	6.925 85 GHz	56.24 dBμV/m		
M3		1	8.666 63 GHz	60.88 dBμV/m		

Figure 8.1-38: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in vertical polarization

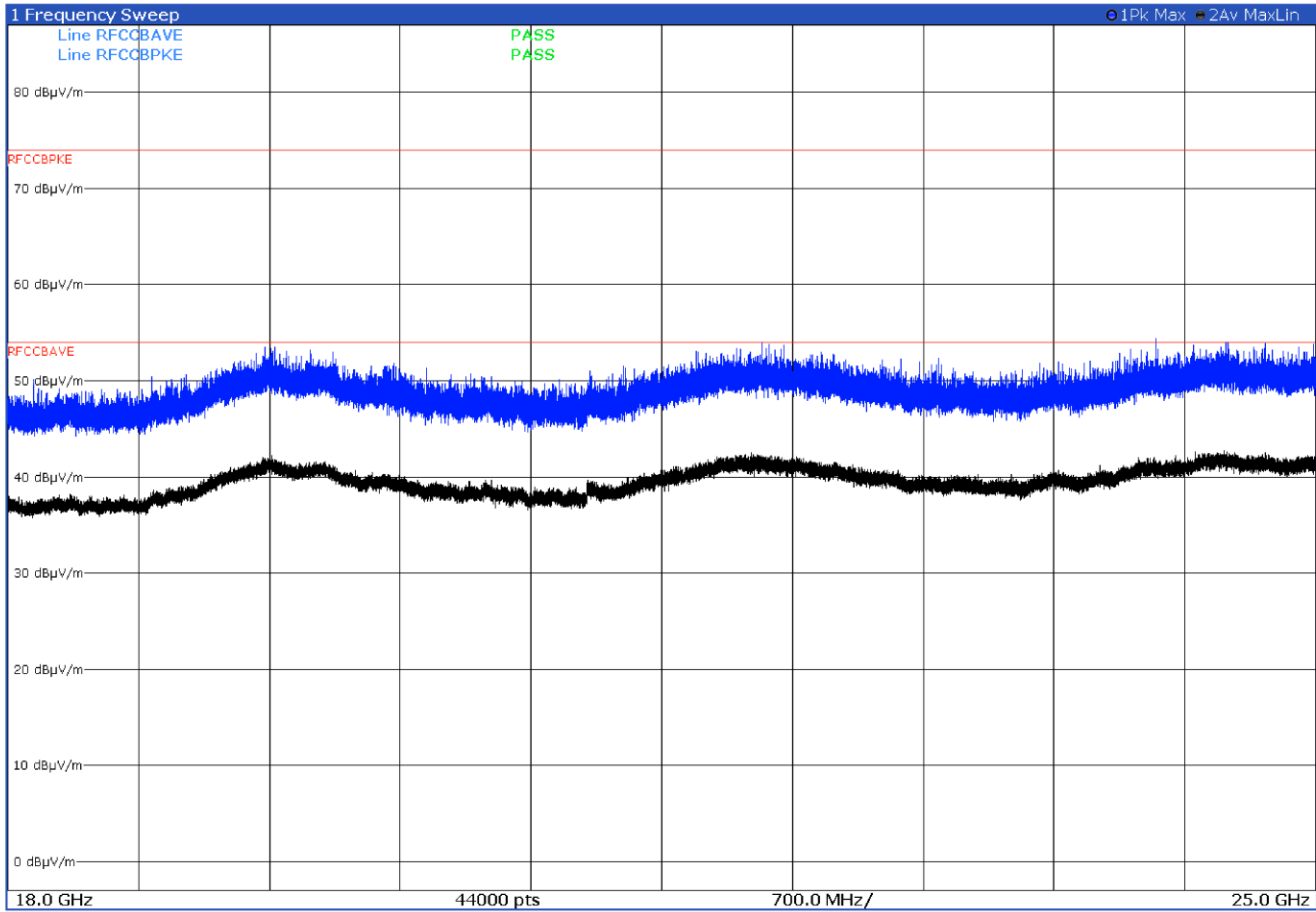


Figure 8.1-39: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in vertical polarization


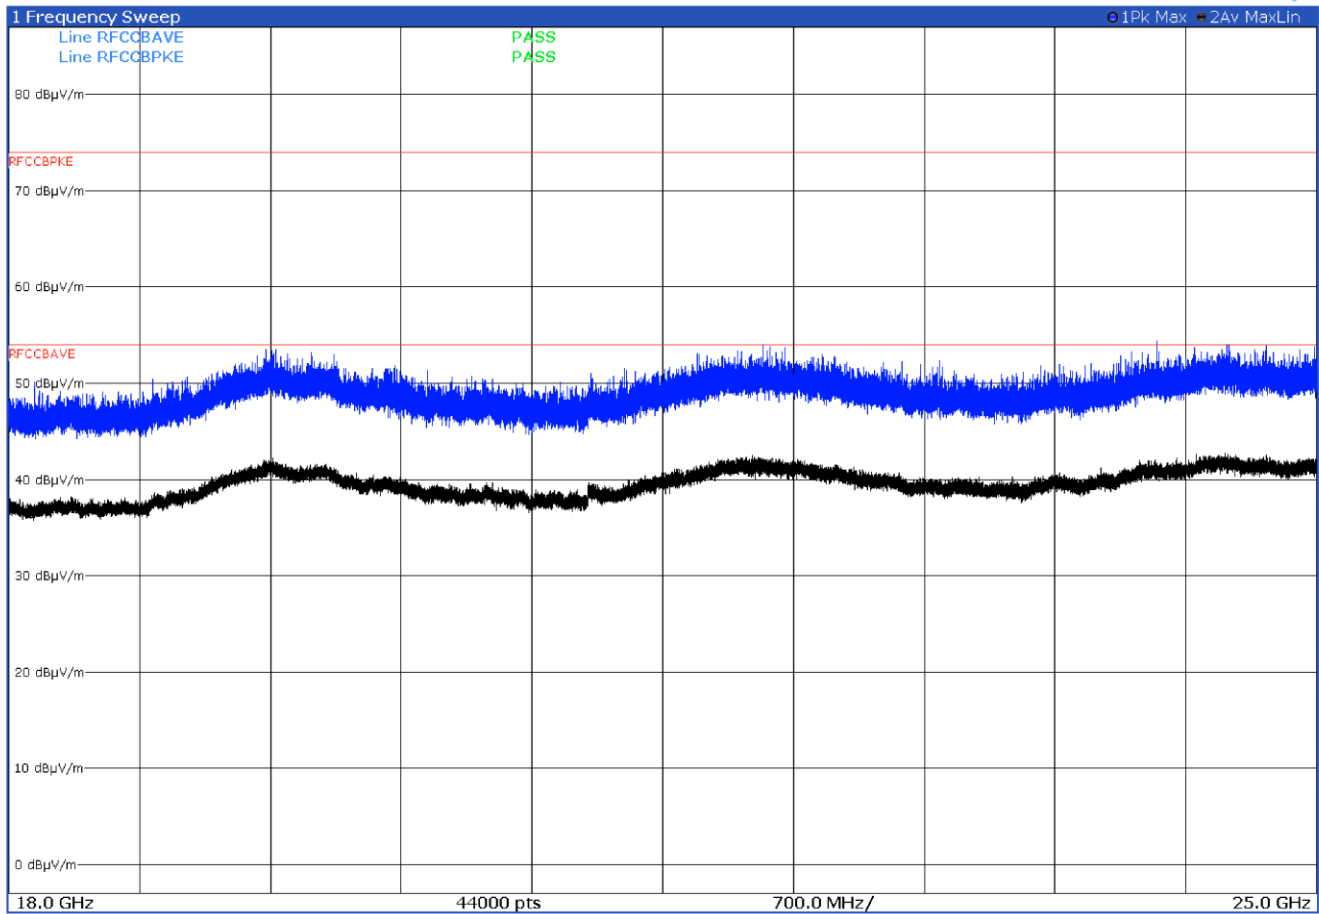



Figure 8.1-40: Radiated spurious emissions with WCDMA B4 at mid channel and WIFI at mid channel – antenna in horizontal polarization

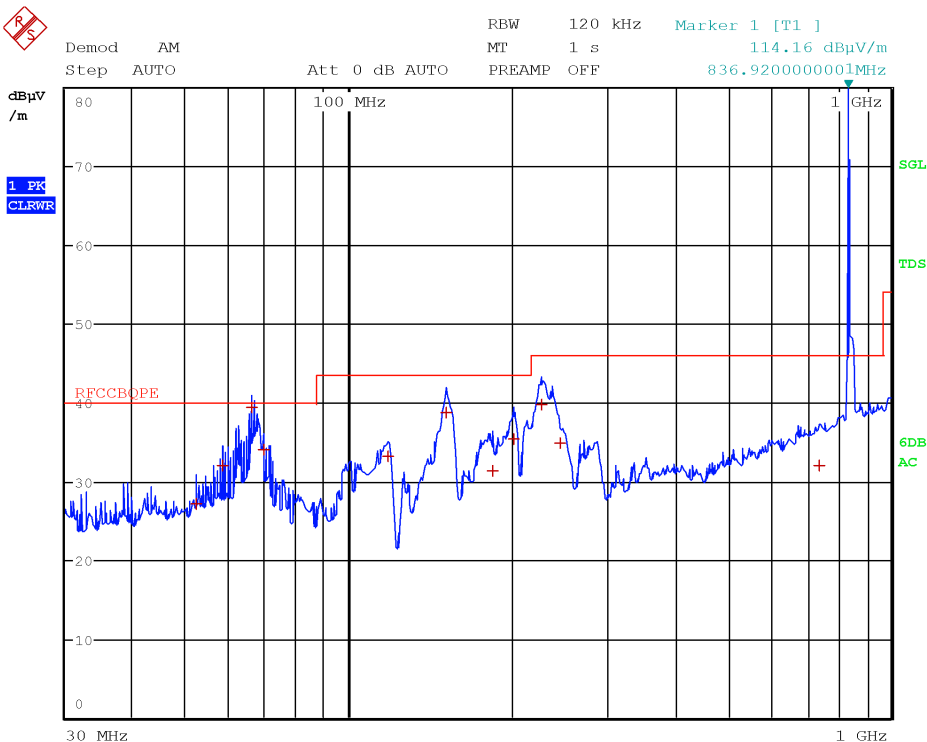

Date: 27.APR.2022 18:51:17

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
52.2800	27.2	40.0	-12.8	QP
58.5200	32.1	40.0	-7.9	QP
66.2000	39.4	40.0	-0.6	QP
69.6800	34.0	40.0	-6.0	QP
118.4800	33.3	43.5	-10.2	QP
151.1600	38.8	43.5	-4.7	QP
183.8400	31.4	43.5	-12.1	QP
202.0400	35.5	43.5	-8.0	QP
227.1600	39.8	46.0	-6.2	QP
246.0000	35.0	46.0	-11.0	QP
739.8000	32.1	46.0	-13.9	QP
836.8800	109.9	46.0	63.9	QP
956.4400	34.7	46.0	-11.3	QP


Figure 8.1-40: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in vertical polarization

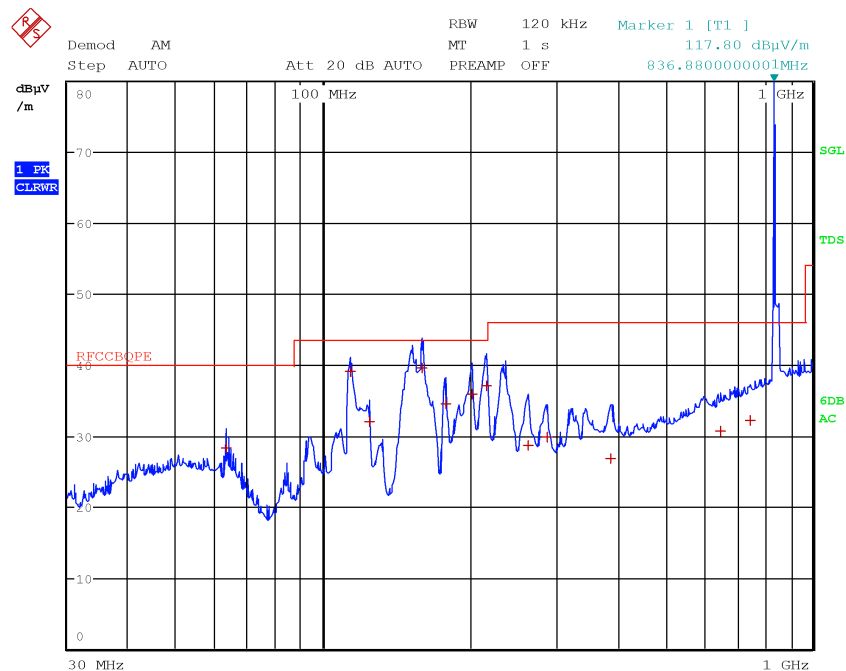

Date: 27.APR.2022 18:39:11

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
63.3200	28.4	40.0	-11.6	QP
113.4000	39.1	43.5	-4.4	QP
124.5200	32.0	43.5	-11.5	QP
159.2800	39.6	43.5	-3.9	QP
178.1200	34.6	43.5	-8.9	QP
201.6800	36.0	43.5	-7.5	QP
215.6000	37.1	43.5	-6.4	QP
262.8800	28.8	46.0	-17.2	QP
286.6000	29.9	46.0	-16.1	QP
386.7200	26.8	46.0	-19.2	QP
649.8800	30.7	46.0	-15.3	QP
745.4400	32.2	46.0	-13.8	QP

Figure 8.1-41: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in horizontal polarization

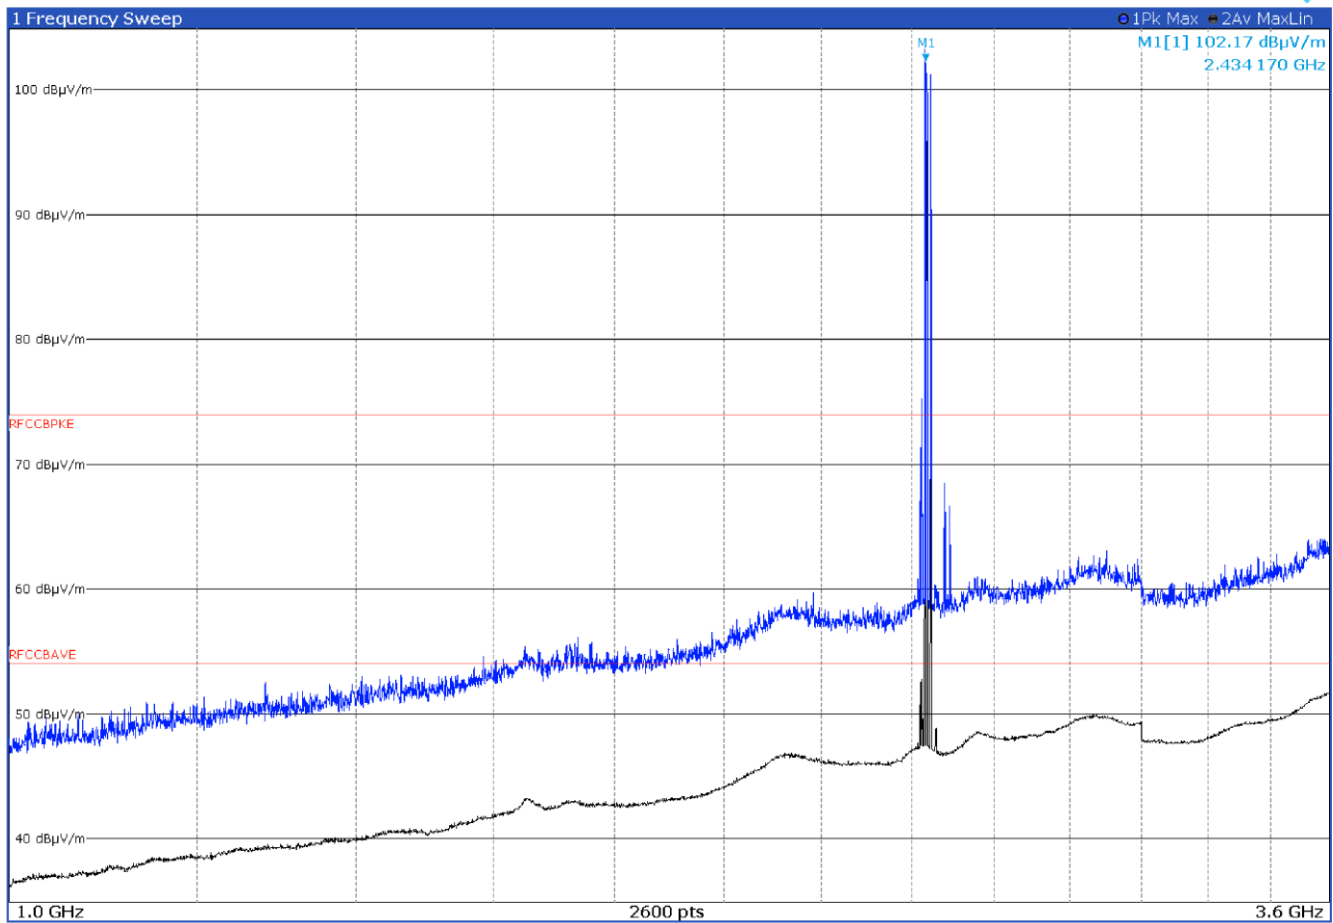

17:29:19 28.04.2022

Page 1/1

Figure 8.1-42: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in vertical polarization

Limit exceeded by carrier

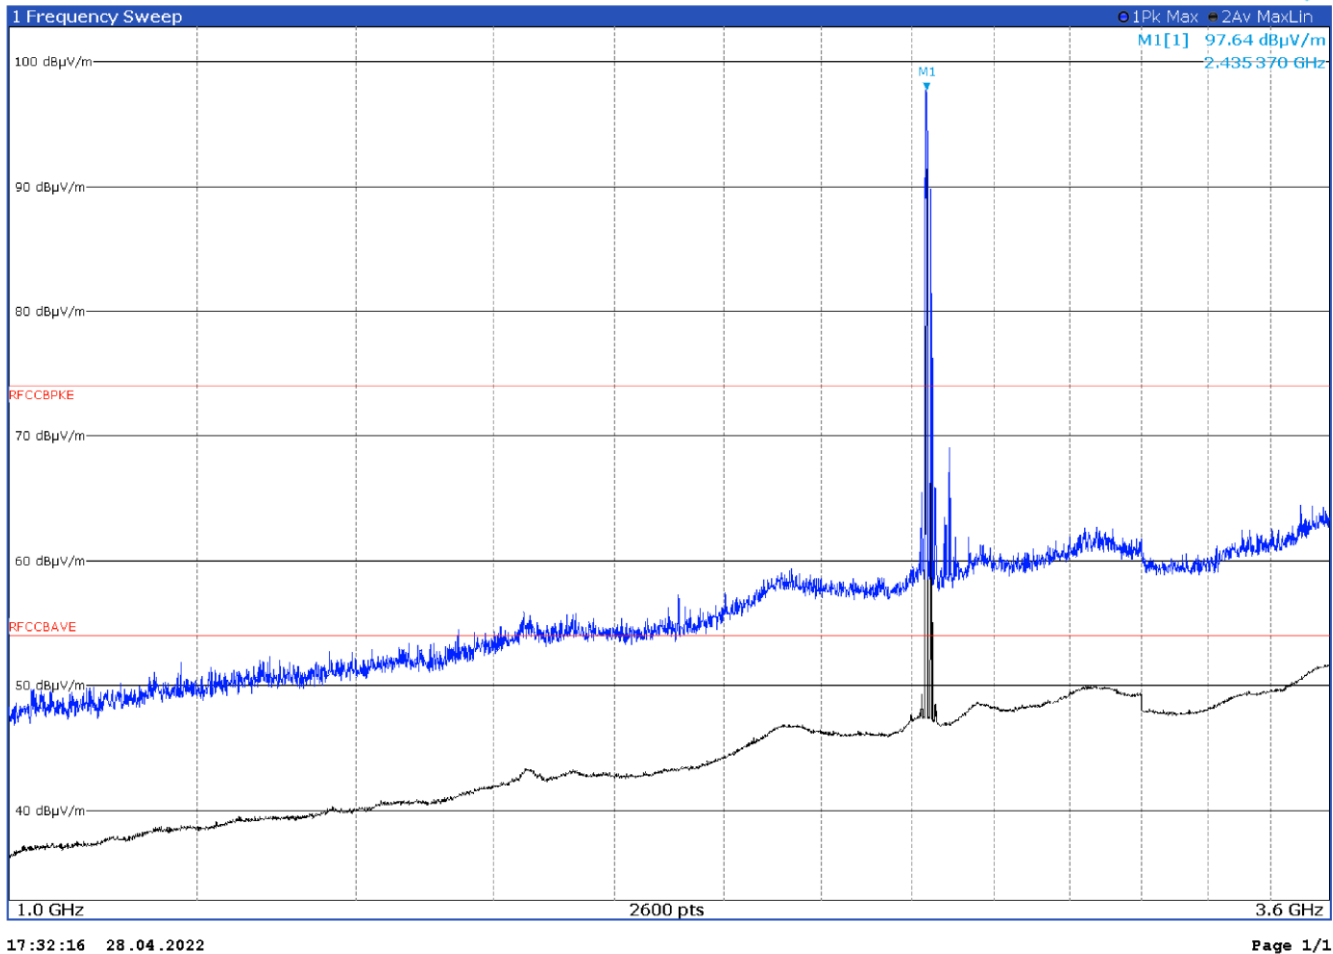


Figure 8.1-43: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Limit exceeded by carrier

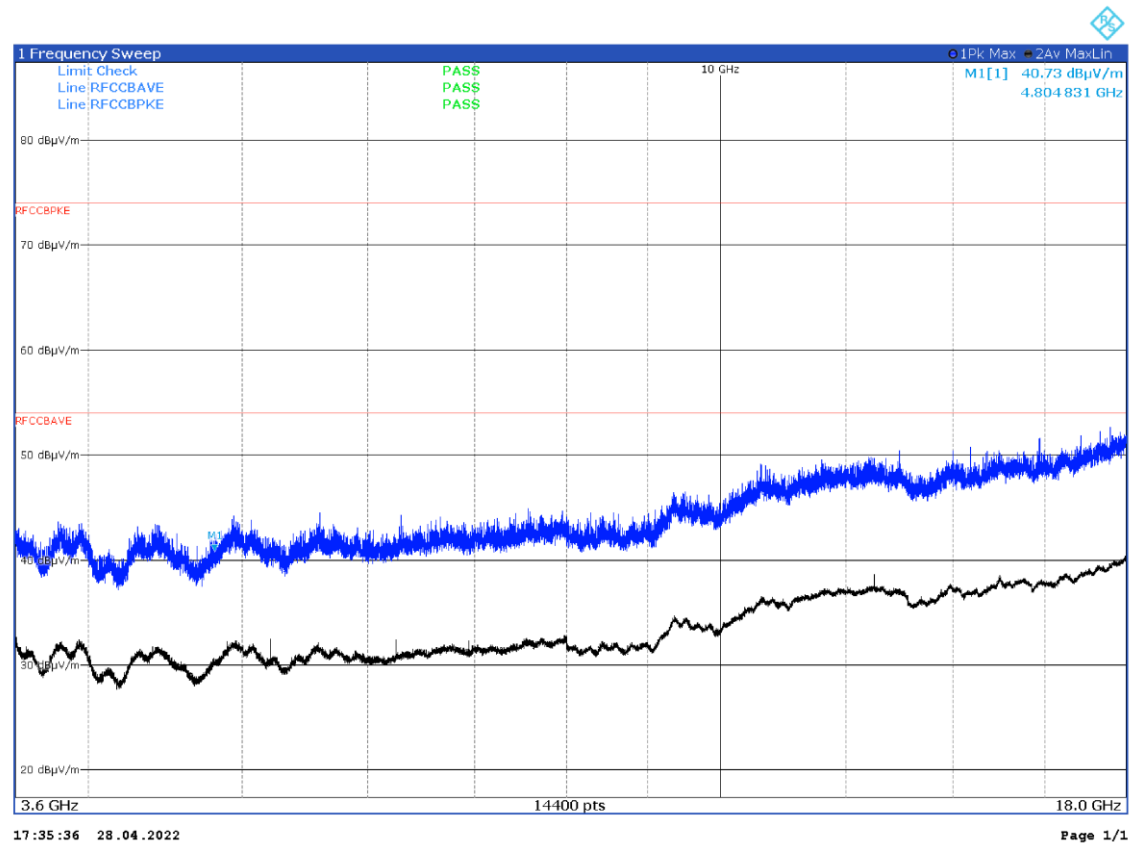


Figure 8.1-44: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in vertical polarization

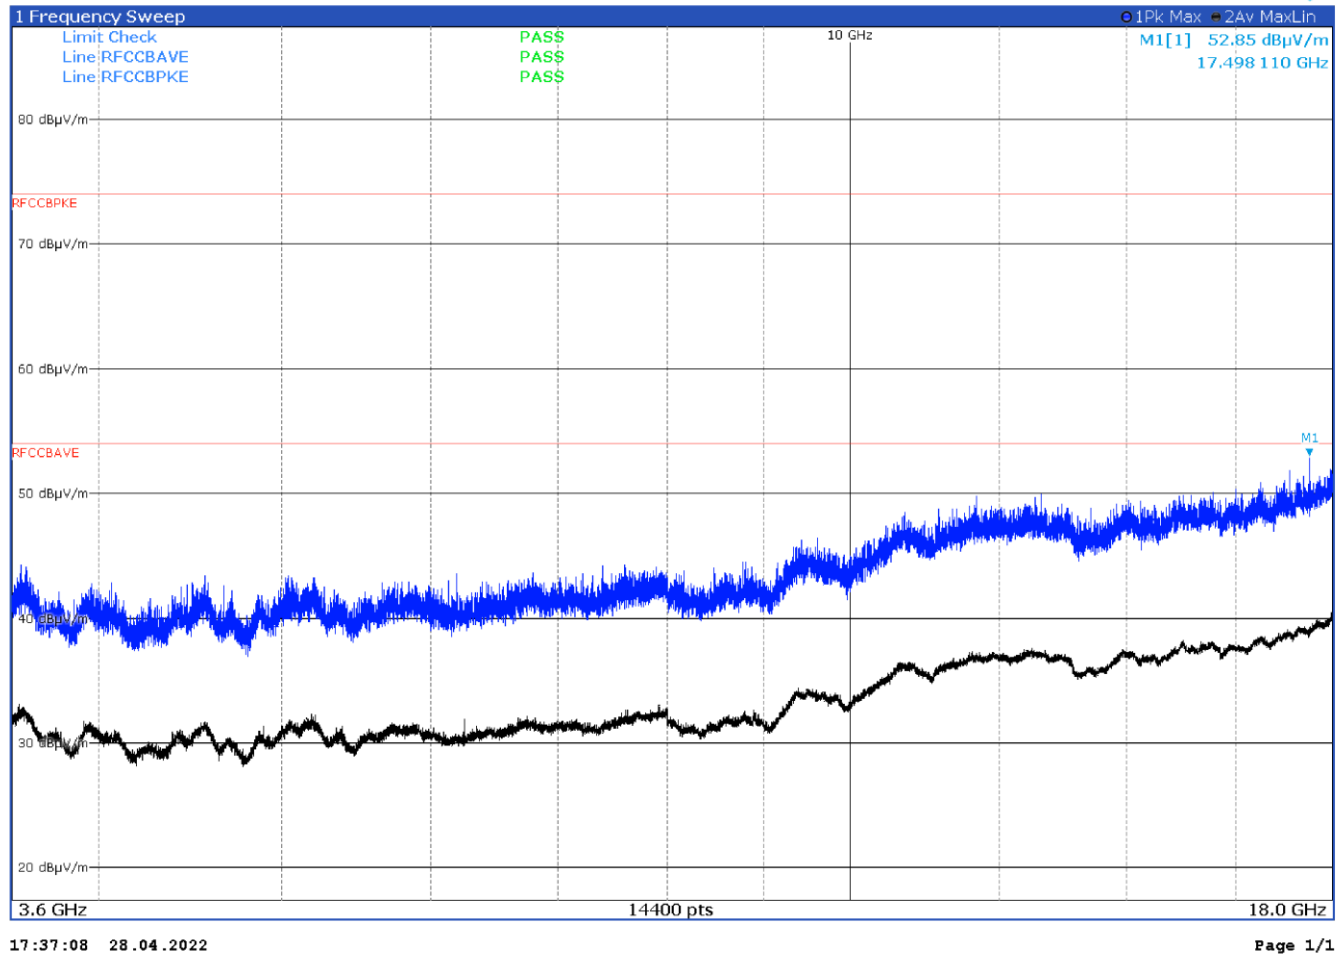


Figure 8.1-45: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in horizontal polarization

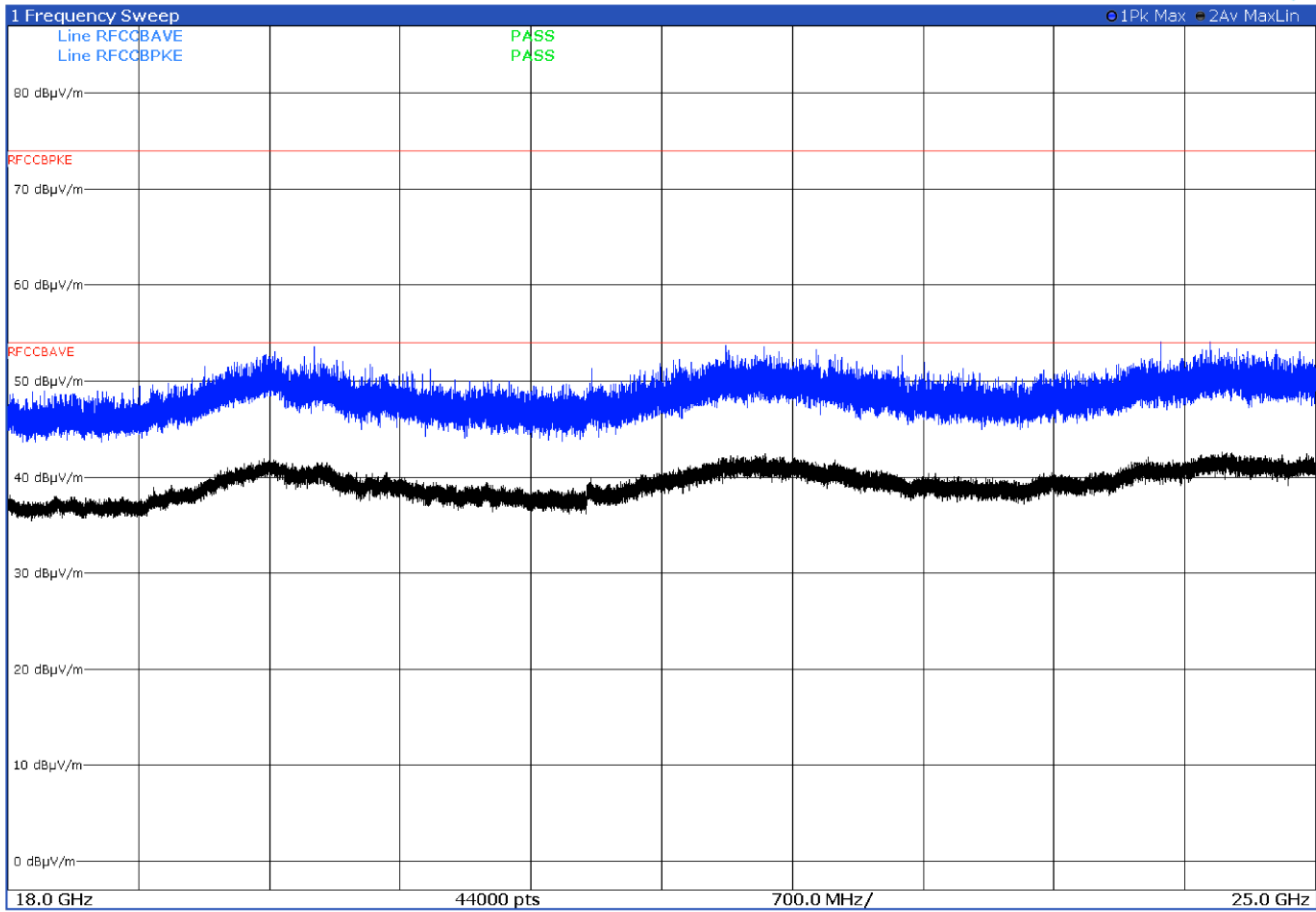


Figure 8.1-46: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in vertical polarization


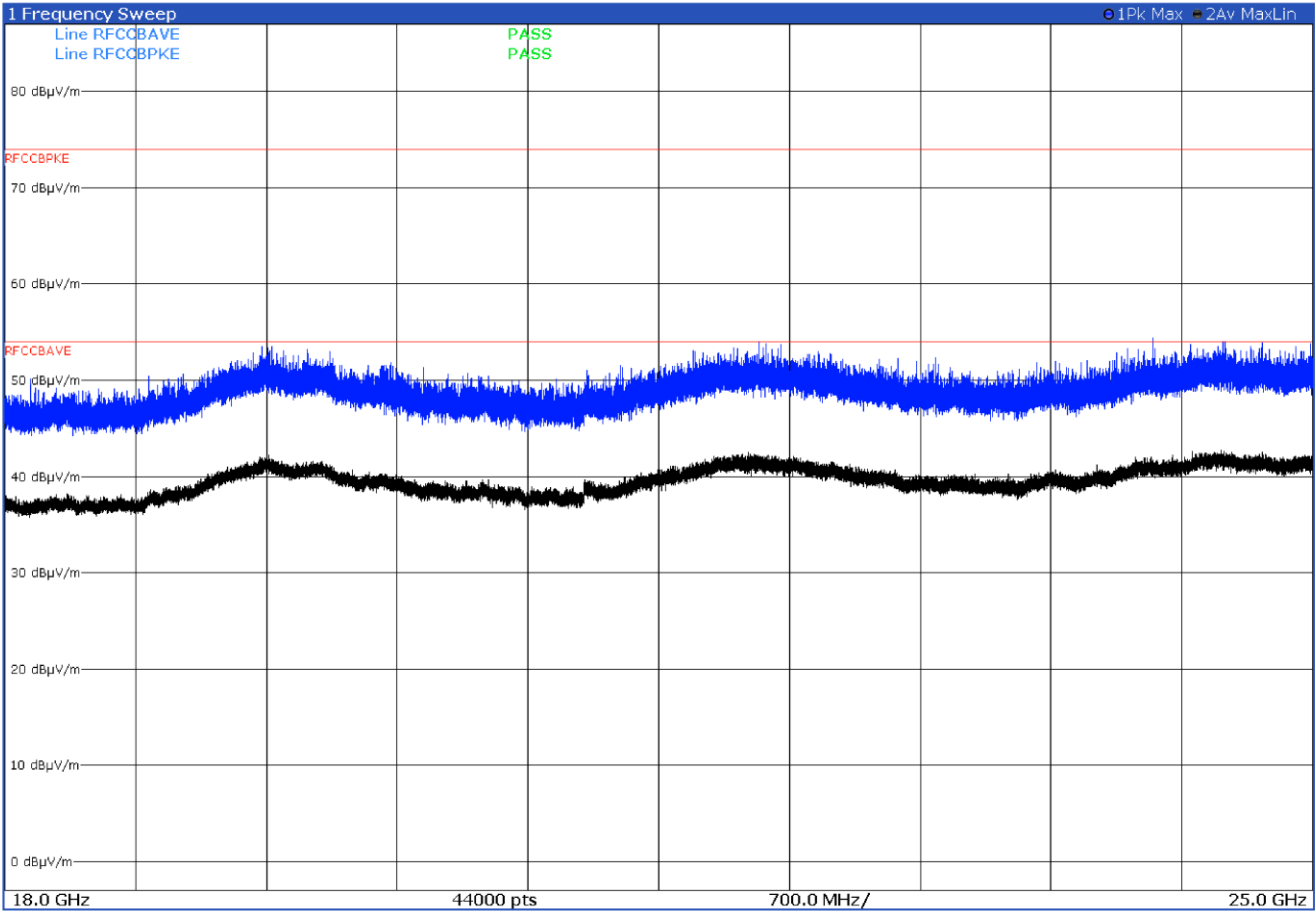



Figure 8.1-47: Radiated spurious emissions with WCDMA B5 at mid channel and WIFI at mid channel – antenna in horizontal polarization

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up for frequencies below 1 GHz

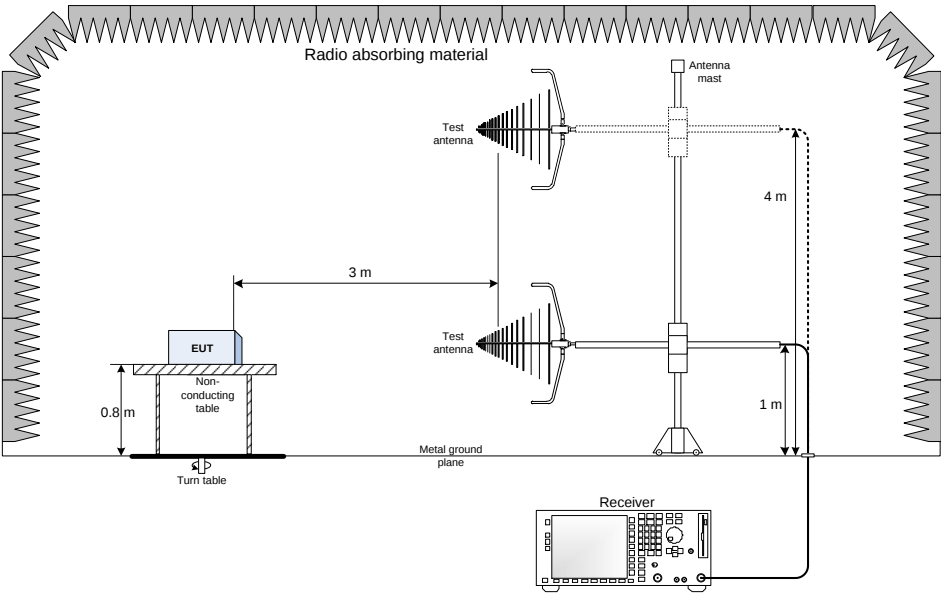

9.2 Radiated emissions set-up for frequencies above 1 GHz

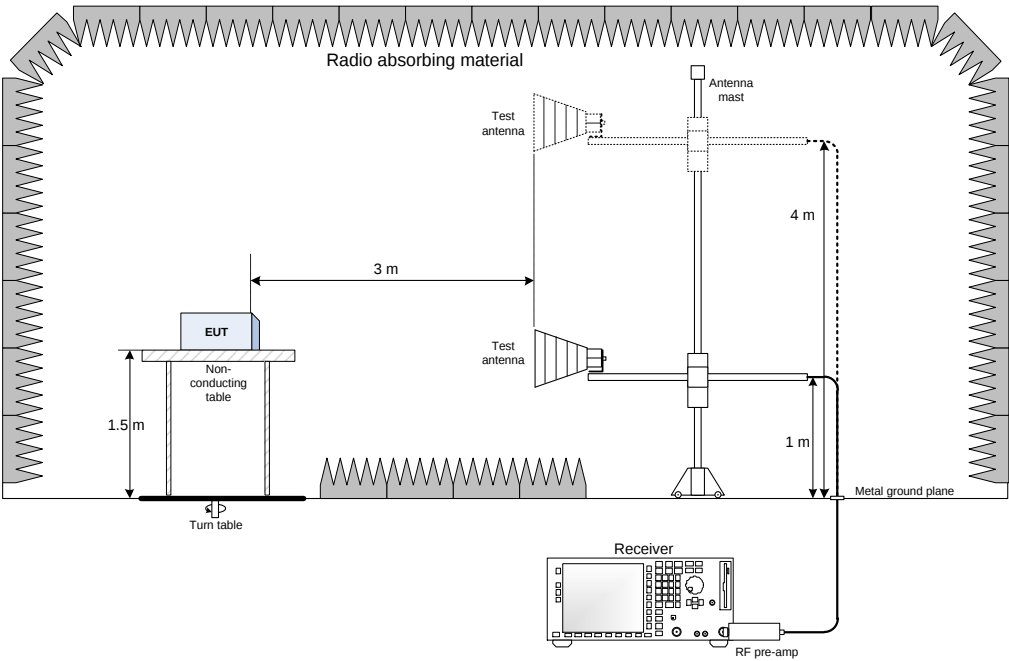


Section 10. Photos

10.1 Photos of the test set-up




Radiated emission below 1 GHz

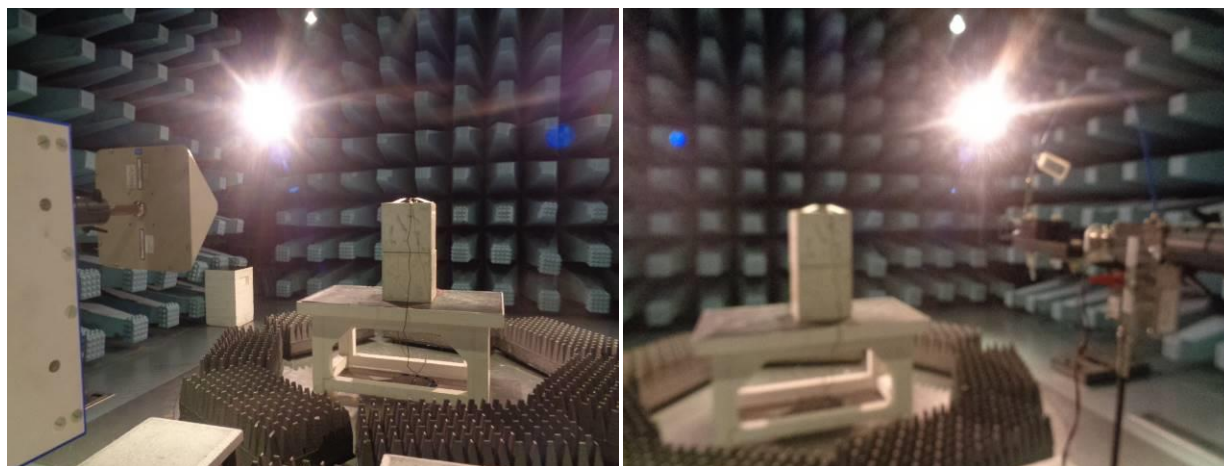

Radiated emission above 1 GHz

10.2 Photos of the EUT

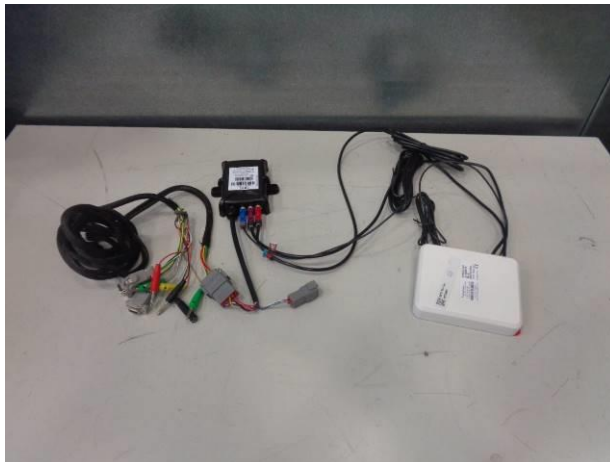

Top view photo




Bottom view photo




Connector view



Radio module

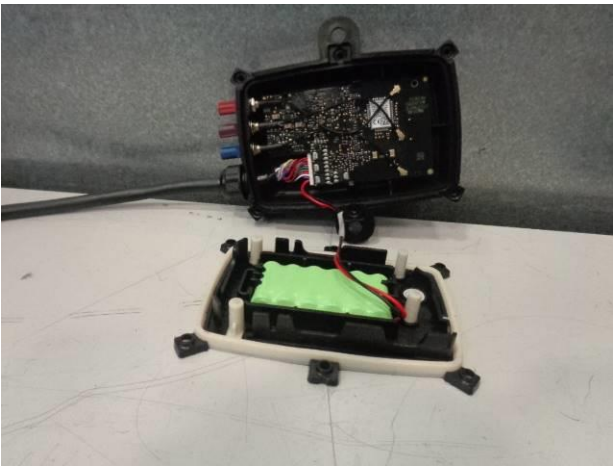

Internal view photo

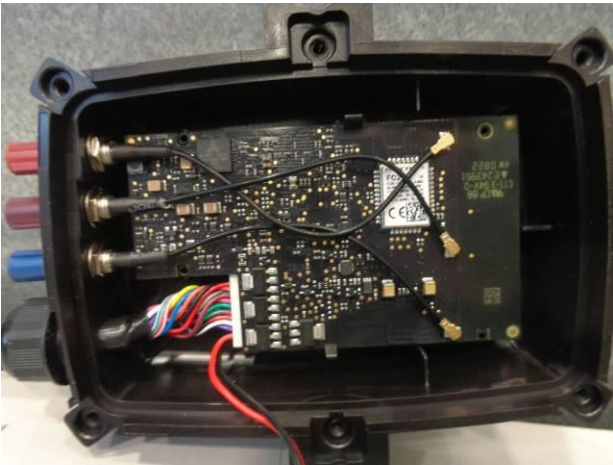

Internal view photo



Antennna



Antenna

(End of report)