



Report No.: PTC22030802301E-FC01



3DH5_Ant1_Low_2402_Peak



3DH5_Ant1_High_2480_AV



Report No.: PTC22030802301E-FC01



3DH5_Ant1_High_2480_Peak



3DH5_Ant1_Low_Hop_2402_Peak



3DH5_Ant1_High_Hop_2480_Peak




9 20 dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

9.1 Test Procedure

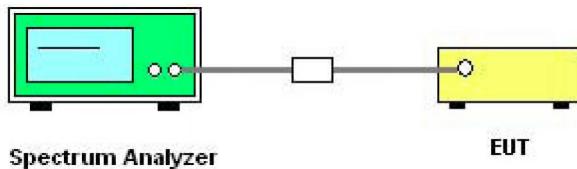

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW =100kHz, VBW = 100kHz

9.2 Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.957	2401.538	2402.495	---	---
		2441	0.957	2440.538	2441.495	---	---
		2480	0.954	2479.541	2480.495	---	---
2DH5	Ant1	2402	1.335	2401.340	2402.675	---	---
		2441	1.335	2440.340	2441.675	---	---
		2480	1.332	2479.337	2480.669	---	---
3DH5	Ant1	2402	1.320	2401.349	2402.669	---	---
		2441	1.305	2440.355	2441.660	---	---
		2480	1.305	2479.355	2480.660	---	---



Report No.: PTC22030802301E-FC01

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



Report No.: PTC22030802301E-FC01



2DH5_Ant1_2402



2DH5_Ant1_2441



Report No.: PTC22030802301E-FC01



2DH5_Ant1_2480



3DH5_Ant1_2402



Report No.: PTC22030802301E-FC01



3DH5_Ant1_2441



3DH5_Ant1_2480



Report No.: PTC22030802301E-FC01






10 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.

10.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the power meter
2. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	-4.17	≤20.97	PASS
		2441	-3.84	≤20.97	PASS
		2480	-4.12	≤20.97	PASS
2DH5	Ant1	2402	-1.74	≤20.97	PASS
		2441	-1.69	≤20.97	PASS
		2480	-1.97	≤20.97	PASS
3DH5	Ant1	2402	-1.13	≤20.97	PASS
		2441	-1.1	≤20.97	PASS
		2480	-1.39	≤20.97	PASS

11 Hopping Channel Separation

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode	: Hopping

11.1 Test Procedure

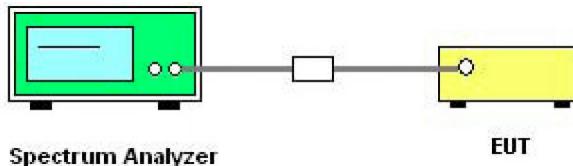

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW =100KHz, Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



11.2 Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	Hop	1	≥0.957	PASS
2DH5	Ant1	Hop	1.188	≥0.890	PASS
3DH5	Ant1	Hop	1.24	≥0.880	PASS






3DH5_Ant1_Hop



12 Number of Hopping Frequency

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode	: Hopping(GFSK)

12.1 Test Procedure

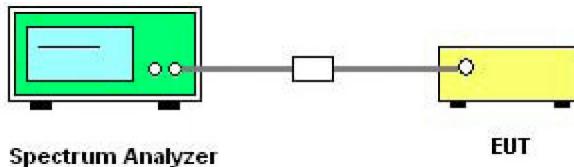


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

12.2 Test Result


Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS
DH5_Ant1_Hop					



Report No.: PTC22030802301E-FC01

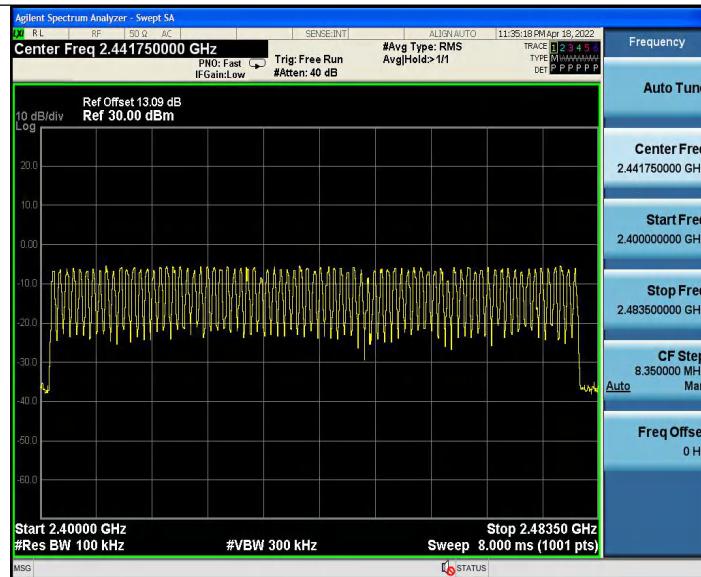


2DH5_Ant1_Hop

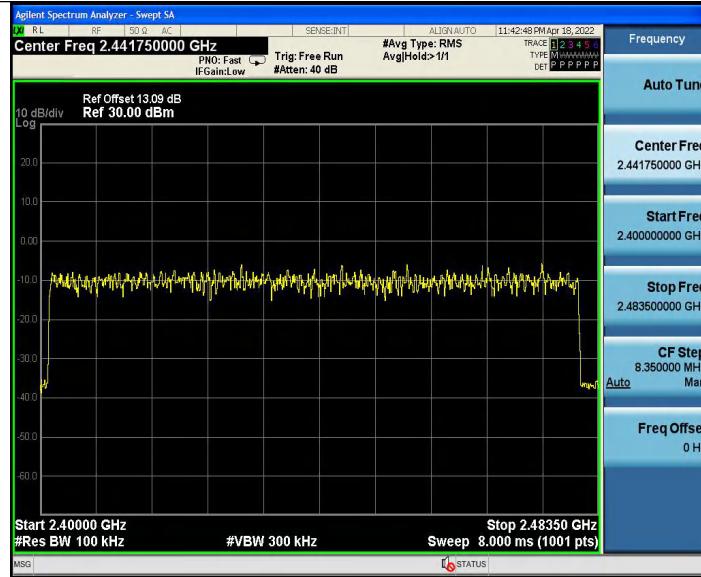

3DH5_Ant1_Hop




Report No.: PTC22030802301E-FC01

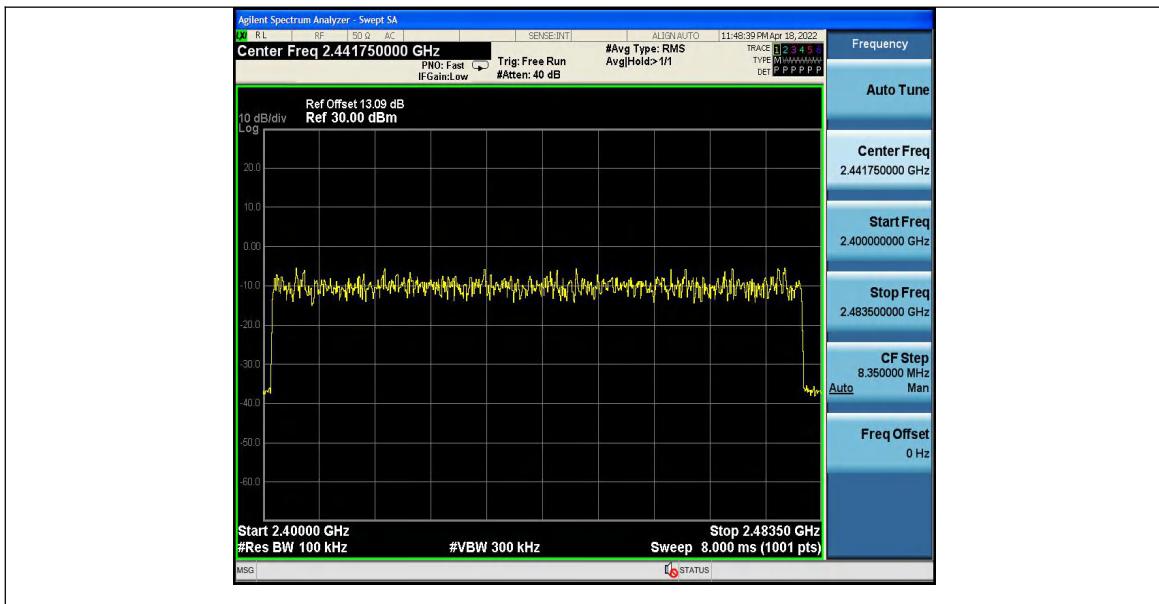

13 Dwell Time

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
Test Mode	:	

13.1 Test Procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	-1.88	320	-0.603	≤0.4	PASS
DH3	Ant1	Hop	-1.97	160	-0.315	≤0.4	PASS
DH5	Ant1	Hop	-1.96	106.67	-0.209	≤0.4	PASS
2DH1	Ant1	Hop	-1.39	320	-0.445	≤0.4	PASS
2DH3	Ant1	Hop	-1.34	160	-0.214	≤0.4	PASS
2DH5	Ant1	Hop	-1.11	106.67	-0.118	≤0.4	PASS
3DH1	Ant1	Hop	0.41	320	0.13	≤0.4	PASS
3DH3	Ant1	Hop	-1.70	160	-0.272	≤0.4	PASS
3DH5	Ant1	Hop	2.91	106.67	0.31	≤0.4	PASS



DH1_Ant1_Hop

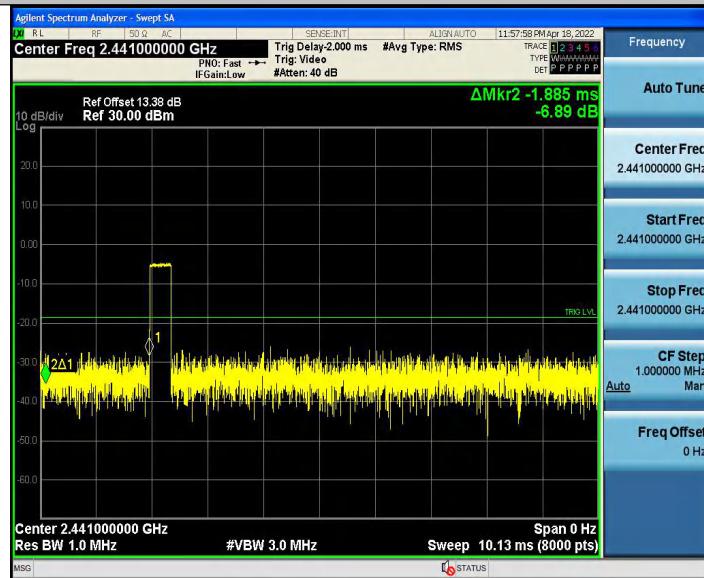


DH3_Ant1_Hop



DH5_Ant1_Hop




Report No.: PTC22030802301E-FC01

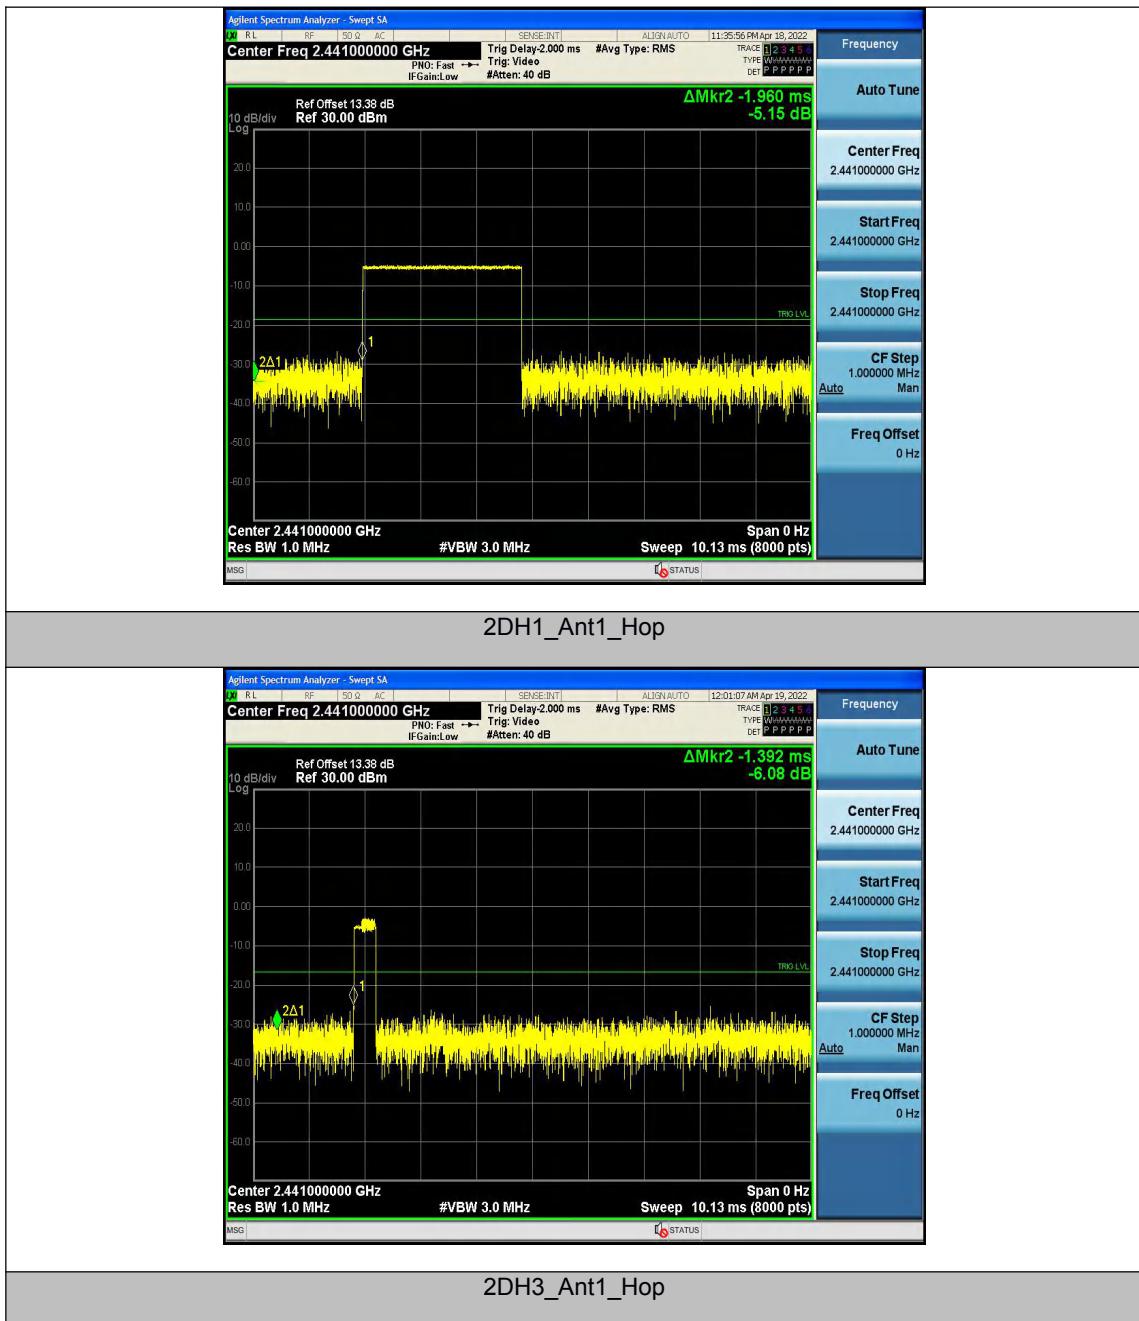



Report No.: PTC22030802301E-FC01

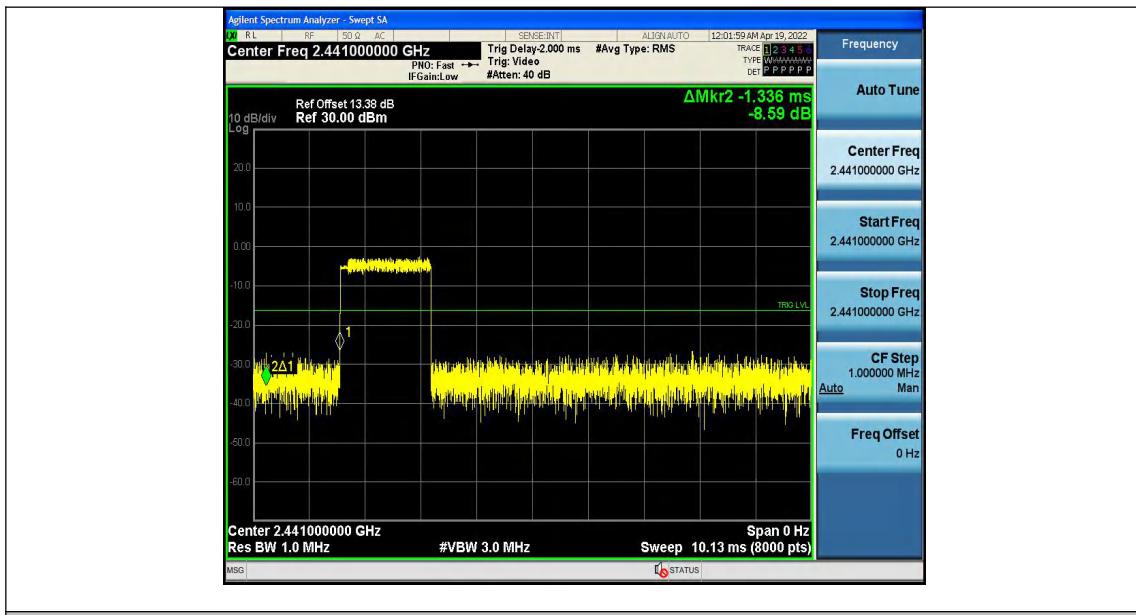


2DH5_Ant1_Hop



3DH1_Ant1_Hop




Report No.: PTC22030802301E-FC01

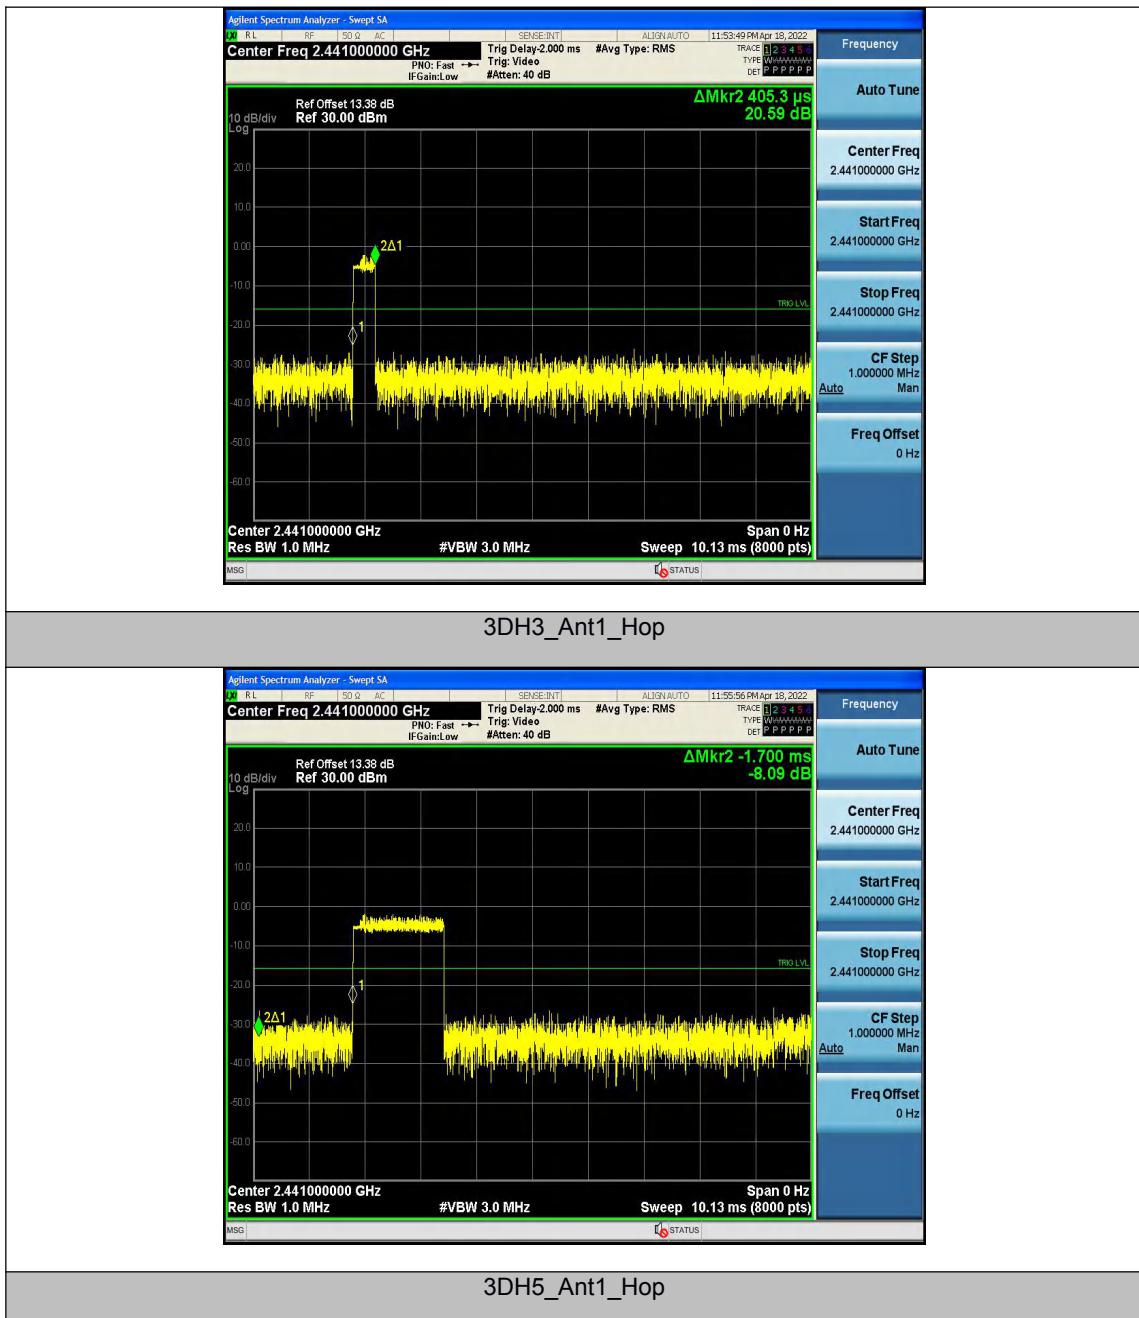



Report No.: PTC22030802301E-FC01

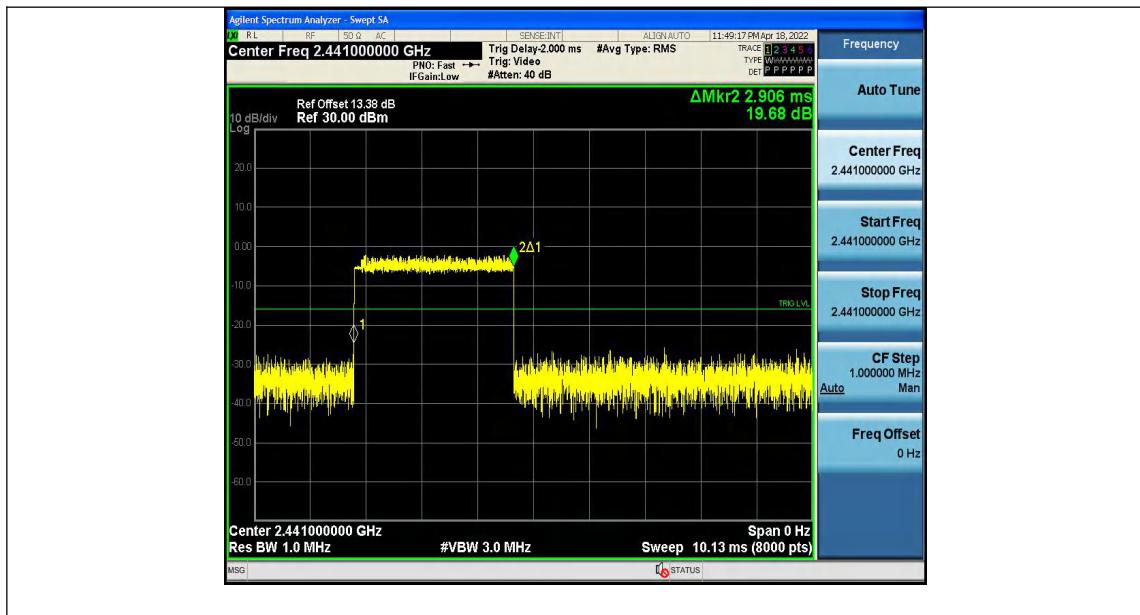



14 Antenna Requirement

14.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

14.2 Result


The EUT'S antenna, permanent attached antenna, is Internal PCB Antenna. The antenna's gain is 0dBi and meets the requirement.

15 TEST PHOTOS

Conducted Emissions



Radiated Spurious Emissions
Test Frequency From 30MHz-1000MHz

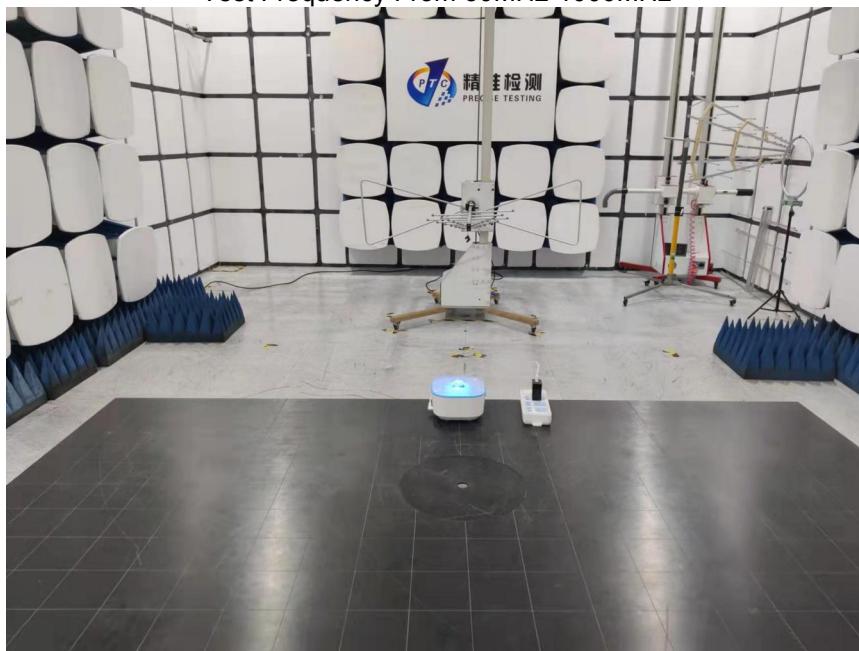

Test frequency above 1GHz





Report No.: PTC22030802301E-FC01

16 EUT PHOTOS

Please reference file "Exe photos" and "Int photos"

*****THE END REPORT*****