

User manual of W280K1

----wireless car rearview system



Thank you for choosing the wireless car rear view system, it will add joy to your life and improve the safety when backing a car. Before using the system, please read the manual carefully.

1. Use Methods:

- ◆ Mini camera
- ◆ Wireless transmitter and receiver
- ◆ Beautiful appearance
- ◆ 2.5" color LCD
- ◆ Monitor can be put in the platform at random.
- ◆ Wireless DVD can be put outside, USB, Mini SD card , wireless DVD is optional if your car with CD Plug.
- ◆ Easy for installing.


2. Technique Parameter

Model	RC818 (Receiver)	CM280 (Camera)
Power	DC12V	DC12V
Power consumption	200mA	100mA
Frequency	2.4G	2.4G
Horizontal Definition	960*240	380TV lines
View Angle		150°

Note

This product is forbidden for illegal use!

3. The entire sketch map

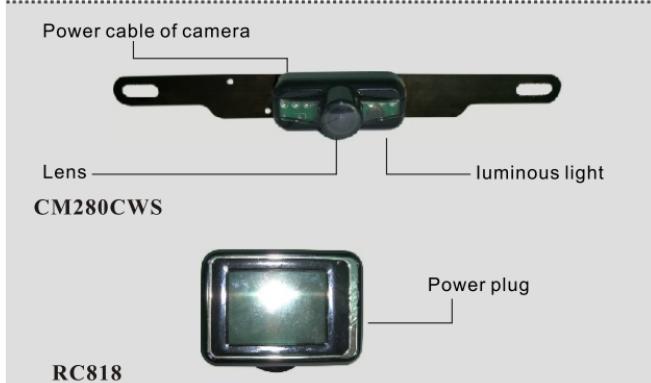

4. Installation and the expression map

Tools: pincers, screwdriver

1. Take off the license plate



2. Take off the inside part of later box



3. Open the cover of license plate light



4. Make the power cable of camera through the light hole of license plate, fix up the transmitter board on the surface of armor plate of the later cover



5. Fix up the camera on the rack of license plate (Make sure the cushion put as picture show)



6. Stretch the Power cable of camera to the place of backup light and connected to the power of it.



7. Revert to the original, finish the installation of camera



8. Plug the power of monitor on the car charge, rive off the pastern and put the monitor to the right place.



Car Rearview System

9. live picture when backing a car



FCC NOTE:

THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

5. Notice

- A. It is better to use a small wire to guide the power cable of camera through the iron interceded .
- B. On the step 6, we can add some lubricating oil to make it easier to pull
- C. Check if the luminous light works when backing the car, it doesn't work if failed connect to the power.
- D. If there is no signal or bad picture quality after installed the camera and LCD, please check if put the transmitter in the interceded, In that case, it may result to signal is shields or attenuation. It should be put in place which can go to the front part of the car

6. Accessories

- ◆ CM280CWS 1pcs
- ◆ RC818 1pcs
- ◆ 12V car charger 1pcs
- ◆ Bevel cushion and other fittings
- ◆ Instruction 1pcs