

MEASUREMENT REPORT
FCC PART 15 Subpart C (15.225) NFC**Applicant Name:**

BH EVS CO., LTD.
5, Magokjungang 8-ro 5-gil,
Gangseo-gu, Seoul,
07794 Republic of Korea

Date of Testing:

6/27/2025 – 8/5/2025

Test Report Issue Date:

8/29/2025

Test Site/Location:

Element lab., Columbia, MD, USA

Test Report Serial No.:

1M2504030038-03.2A6WX

FCC ID:**2A6WXWCGMA35A****APPLICANT:****BH EVS CO., LTD.****Application Type:**

Certification

Model:

WCGMA35A

EUT Type:

Wireless Charger

Frequency:

13.56MHz

FCC Classification:

Low Power Communications Device Transmitter (DXX)

FCC Rule Part(s):

Part 15 Subpart C (15.225)

Test Procedure(s):

ANSI C63.10-2020

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2020. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortiz
Executive Vice President



FCC ID: 2A6WXWCGMA35A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 1 of 24

T A B L E O F C O N T E N T S

1.0	Introduction	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TEST	5
3.1	Evaluation Procedure.....	5
3.2	Radiated Emissions	5
3.3	Environmental Conditions	5
4.0	ANTENNA REQUIREMENTS	6
5.0	MEASUREMENT UNCERTAINTY	7
6.0	TEST EQUIPMENT CALIBRATION DATA.....	8
7.0	TEST DATA	9
7.1	Summary	9
7.2	Occupied Bandwidth Measurement	10
7.3	Frequency Stability Test Data.....	12
7.4	In-Band Radiated Spurious Emission Measurements.....	15
7.5	Radiated Spurious Emission Measurements, Out-of-Band.....	18
8.0	CONCLUSION	24

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 2 of 24

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: 2A6WXWCGMA35A	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 3 of 24
Test Report S/N: 1M2504030038-03.2A6WX			V «VerNo» «VerDate»

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **BH EVS Wireless Charger FCC ID: 2A6WXWCGMA35A**. The EUT is designed to operate with a DC input voltage of 14 VDC. The test data contained in this report pertains only to the emissions due to the NFC transmitter of the EUT.

2.2 Device Capabilities

This device contains the following capabilities:

NFC, WPT

2.3 Test Configuration

The EUT was set to continuously transmit at 13.56MHz. This was performed using manufacturer software loaded on the phone to allow for continuous transmission. This device was tested in accordance with the guidance of ANSI C63.10-2020. See Sections 3.2 of this test report for a description of the radiated emissions test setup.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 4 of 24

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020) was used in the measurement of the EUT.

Deviation from measurement procedure..........**None**

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 5 of 24

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the EUT are **permanently attached**.
- This unit was tested while powered by an DC power source.

Conclusion:

The EUT complies with the requirement of §15.203.

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: 2A6WXWCGMA35A Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 6 of 24

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98

FCC ID: 2A6WXWCGMA35A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 7 of 24

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
	WL40-1	Conducted Cable Set (40GHz)	02/25/2025	Annual	02/25/2026	WL40-1
	MD 1M 18 40	EMC Cable and Switch System	02/25/2025	Annual	02/25/2026	MD 1M 18 40
	ETS-001	EMC Cable and Switch System	12/11/2025	Annual	12/11/2026	ETS-001
	ETS-002	EMC Cable and Switch System	12/11/2025	Annual	12/11/2026	ETS-002
	AP2-001	EMC Cable and Switch System	02/25/2025	Annual	02/25/2026	AP2-001
	NMLC-2	Line Conduted Emissons Cable (NM)	03/25/2025	Annual	03/25/2026	NMLC-2
Agilent	N9038A	MXE EMI Receiver	09/16/2024	Annual	09/16/2025	MY51210133
Agilent	9030A	PXA Signal Analyzer (44GHz)	10/16/2024	Annual	10/16/2025	MY49430494
Com-Power	AL-130R	Active Loop Antenna	02/22/2024	Biennial	02/22/2026	121085
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	03/25/2025	Annual	03/25/2026	101716
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	ENV216	Two-Line V-Network	01/31/2025	Annual	01/31/2026	101379
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	09/11/2024	Annual	09/11/2025	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: 2A6WXWCGMA35A	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 8 of 24

7.0 TEST DATA

7.1 Summary

Company Name: BH EVS CO., LTD.
 FCC ID: 2A6WXWCGMA35A
 FCC Classification: Low Power Communications Device Transmitter (DXX)
 Frequencies Examined: 13.56MHz

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		PASS	Section 7.2
15.225 (a)(b)(c)	RSS-210 [B.6]	In-Band Emissions	15.848 μ V/m @ 30m 13.553 – 13.567 MHz 334 μ V/m @ 30m 13.410 – 13.553 MHz 13.567 – 13.710 MHz 106 μ V/m @ 30m 13.110 – 13.410 MHz 13.710 – 14.010 MHz	RADIATED	PASS	Section 7.4
15.225 (d) 15.209	RSS-Gen [8.9]	Out-of-Band Emissions	Emissions outside of the specified band (13.110 – 14.010 MHz) must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.5
15.225 (e)	RSS-210 [B.6]	Frequency Stability Tolerance	$\pm 0.01\%$ of Operating Frequency	Temperature Chamber	PASS	Section 7.3

Table 7-1. Summary of Test Results

Note:

This unit was tested while powered by an DC power source.

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 9 of 24

7.2 Occupied Bandwidth Measurement

§2.1049; RSS-Gen (6.6)

Test Overview and Limit

The occupied bandwidth is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequency.

Test Procedure Used

ANSI C63.10-2020 – Section 6.9.3

Test Settings

1. Spectrum analyzer frequency is set to the nominal EUT channel center frequency.
2. RBW = 1 – 5% OBW
3. VBW \geq 3 x RBW
4. Reference level set to keep signal from exceeding maximum input mixer level for linear operation.
5. Detector = Peak
6. Trace mode = max hold
7. Sweep = auto couple
8. The trace was allowed to stabilize
9. Using the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Notes

None.

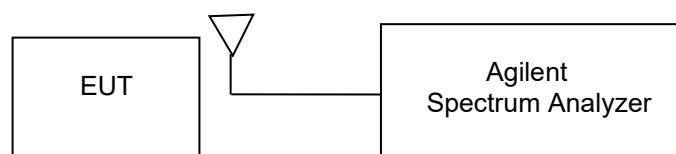


Figure 7-1. Test Instrument & Measurement Setup


FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 10 of 24

© 2025 ELEMENT

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

V «VerNo» «VerDate»

Frequency	Occupied Bandwidth
13.56MHz	240.00Hz

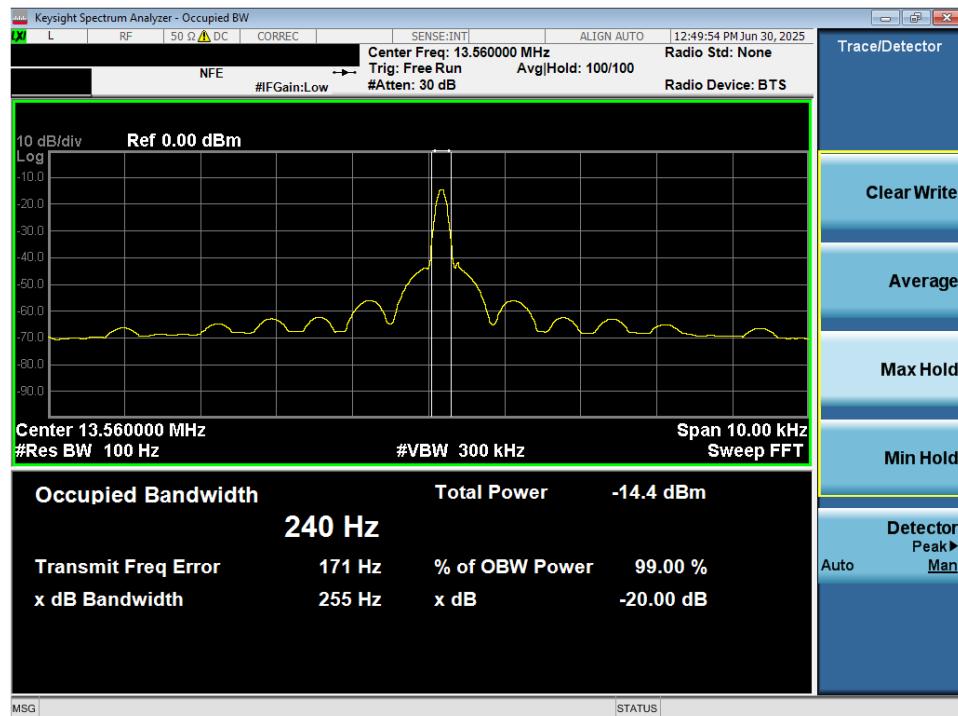Table 7-2. Occupied Bandwidth Measurement

Figure 7-2. Occupied Bandwidth Plot

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 11 of 24

7.3 Frequency Stability Test Data

§15.225; RSS-210 (B.6)

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.10-2020. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -20°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 15.225, the frequency stability of the transmitter shall be maintained within $\pm 0.01\%$ of the center frequency.

Test Procedure Used

ANSI C63.10-2020 – Section 6.8

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -20°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None.

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 12 of 24

© 2025 ELEMENT

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

V «VerNo» «VerDate»



Frequency Stability Test Data

§15.225; RSS-210 (B.6)

OPERATING FREQUENCY: 13,560,000 Hz
REFERENCE VOLTAGE: 14.00 VDC
DEVIATION LIMIT: ± 0.01 % = 1356Hz

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	14.00	+ 20 (Ref)	13,560,130	-130	-0.0009572
100 %		- 30	13,560,042	-42	-0.0003122
100 %		- 20	13,560,088	-88	-0.0006481
100 %		- 10	13,560,086	-86	-0.0006326
100 %		0	13,560,107	-107	-0.0007891
100 %		+ 10	13,560,075	-75	-0.0005531
100 %		+ 20	13,560,130	-130	-0.0009572
100 %		+ 30	13,560,121	-121	-0.0008923
100 %		+ 40	13,560,154	-154	-0.0011357
100 %		+ 50	13,560,091	-91	-0.0006747
85 %	11.90	+ 20	13,560,118	-118	-0.0008678
BATT. ENDPOINT	4.80	+ 20	13,560,105	-105	-0.0007771


Table 7-3. Frequency Stability Test Data

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 13 of 24

© 2025 ELEMENT

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

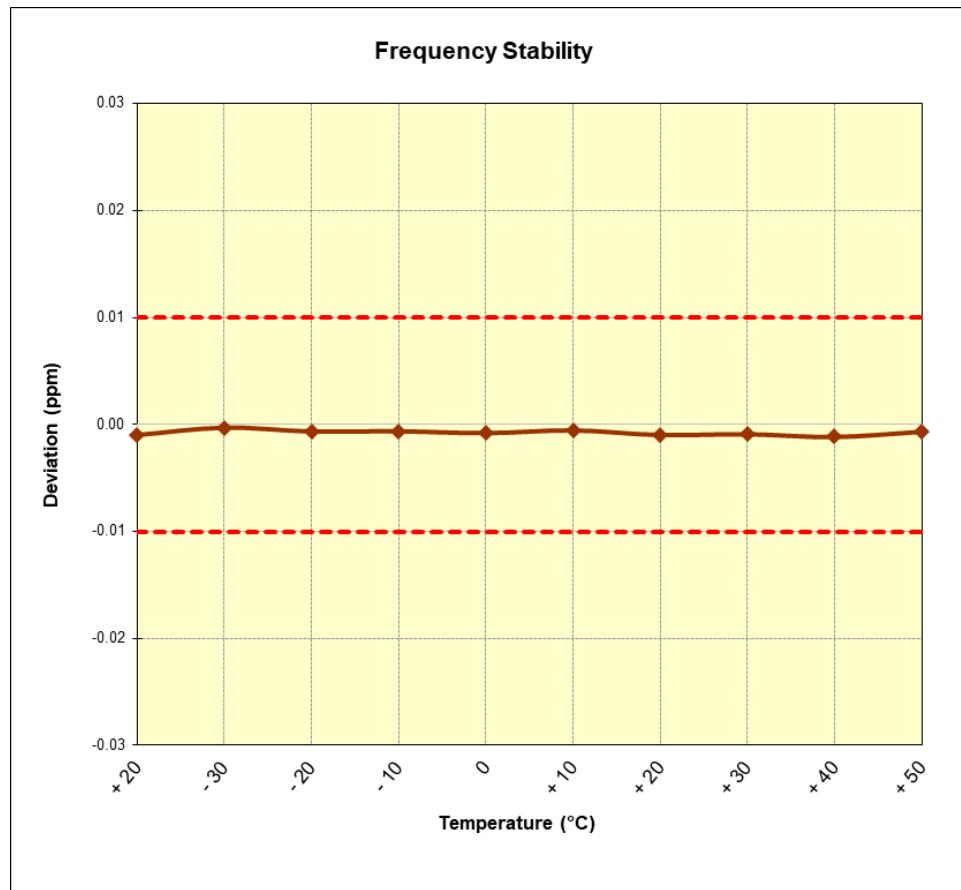V «VerNo» «VerDate»

Frequency Stability Test Data
§15.225; RSS-210 (B.6)

Figure 7-3. Frequency Stability Plot

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 14 of 24

7.4 In-Band Radiated Spurious Emission Measurements

§15.225(a)(b)(c); RSS-210 (B.6)

Test Overview and Limit

The EUT was tested from 13.110 – 14.010 MHz. All in-band radiated spurious emissions are measured with a spectrum analyzer connected to a loop antenna while the EUT is operating at appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All in-band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table 7-4.

Frequency [MHz]	Field Strength [μ V/m]	Measured Distance [Meters]
13.553-13.567 MHz	15,848	30
13.410-13.553 MHz and 13.567-13.710 MHz	334	30
13.110-13.410 MHz and 13.710-14.010 MHz	106	30

Table 7-4. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Section 6.4.7

Test Settings

1. RBW = 9kHz
2. VBW \geq 3 x RBW
3. Detector = peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: 2A6WXWCGMA35A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 15 of 24

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

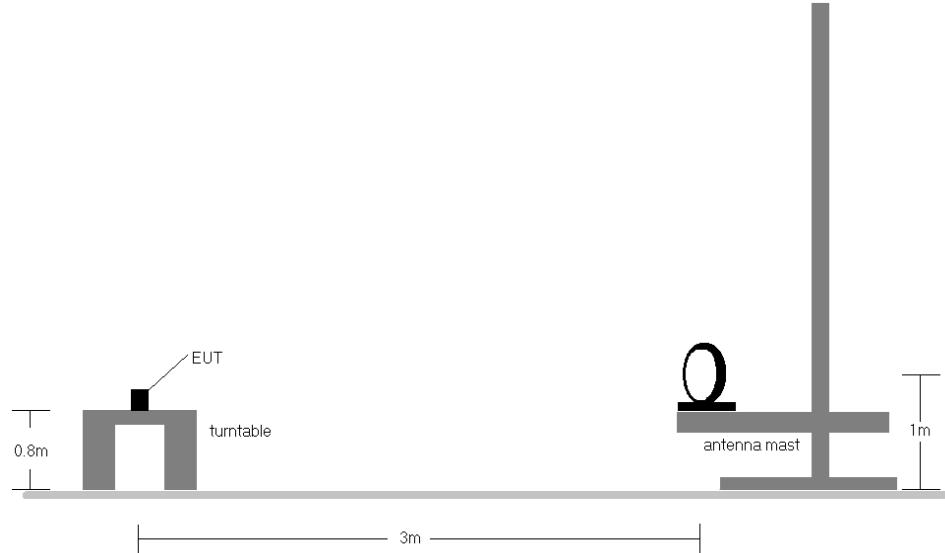


Figure 7-4. Radiated Test Setup

Test Notes:

1. All emissions lying in restricted bands specified in §15.225 and RSS-210 are below the limit shown in Table 7-4.
2. All measurements were performed using a loop antenna. The antenna was positioned in three orthogonal positions (X front, Y side, Z top) and the position with the highest emission level was recorded.
3. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
4. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)(2). Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40\text{dB}$.
5. The spectrum was investigated from 9kHz up to 30MHz using the loop antenna. Only the emissions shown in the table below were found to be significant.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculation

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}] = \text{Analyzer Level } [\text{dBm}] + 107 + \text{AFCL } [\text{dB/m}]$
- AFCL $[\text{dB/m}] = \text{Antenna Factor } [\text{dB/m}] + \text{Cable Loss } [\text{dB}]$
- Margin $[\text{dB}] = \text{Field Strength Level } [\text{dB}_{\mu\text{V/m}}] - \text{Limit } [\text{dB}_{\mu\text{V/m}}]$

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 16 of 24	
© 2025 ELEMENT				V «VerNo» «VerDate»



In-Band Radiated Spurious Emission Measurements

§15.225(a)(b)(c); RSS-210 (B.6)

Frequency: 13.56MHz

Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dB μ V/m]	30m Field Strength [dB μ V/m]	Limit [μ V/m]	Limit [dB μ V/m]	Margin [dB]
13.138	X	100	322	-84.65	22.05	44.40	4.40	106.00	40.51	-36.11
13.242	X	100	322	-74.07	22.14	55.07	15.07	106.00	40.51	-25.44
13.348	X	100	322	-68.34	21.87	60.53	20.53	106.00	40.51	-19.98
13.454	X	100	322	-69.64	22.03	59.39	19.39	334.00	50.47	-31.08
13.560	X	100	322	-57.68	21.91	71.23	31.23	15848.00	84.00	-52.77
13.667	X	100	322	-74.64	22.36	54.72	14.72	334.00	50.47	-35.76
13.772	X	100	322	-77.75	22.36	51.61	11.61	106.00	40.51	-28.90

Table 7-5. In-Band Radiated Measurements

FCC ID: 2A6WXWCGMA35A	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 17 of 24	

7.5 Radiated Spurious Emission Measurements, Out-of-Band

§15.209 §15.225(d); RSS-Gen (8.9)

Test Overview and Limit

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110 – 14.010 MHz.

All out-of-band emissions appearing in a restricted band as specified in Section 15.225 of the Title 47 CFR must not exceed the limits shown in Table 7-6 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-6. Radiated Limits – Out of band

Test Procedures Used

ANSI C63.10-2020 – Section 6.5.4

Test Settings

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 9kHz for emissions below 30MHz and 100kHz for emissions between 30MHz and 1GHz
3. VBW \geq 3 x RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 18 of 24

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

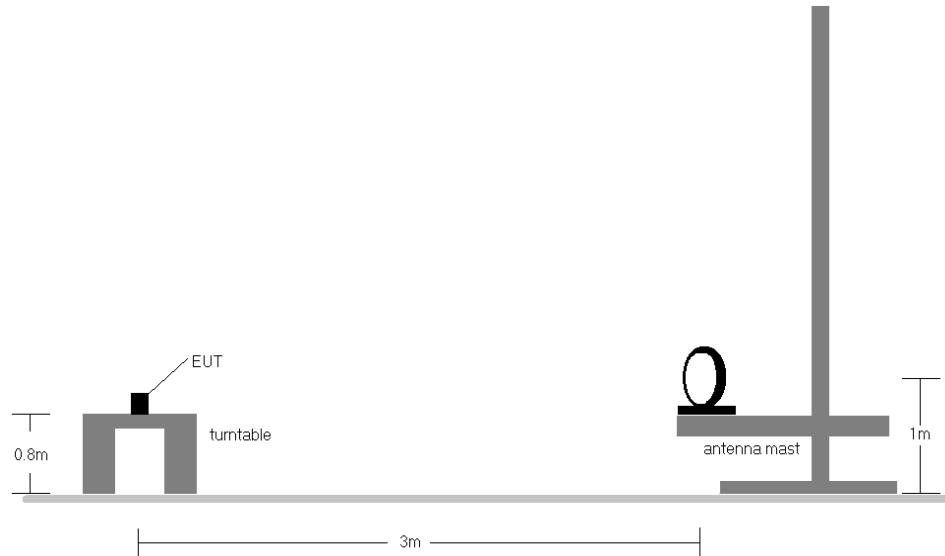


Figure 7-5. Radiated Test Setup < 30MHz

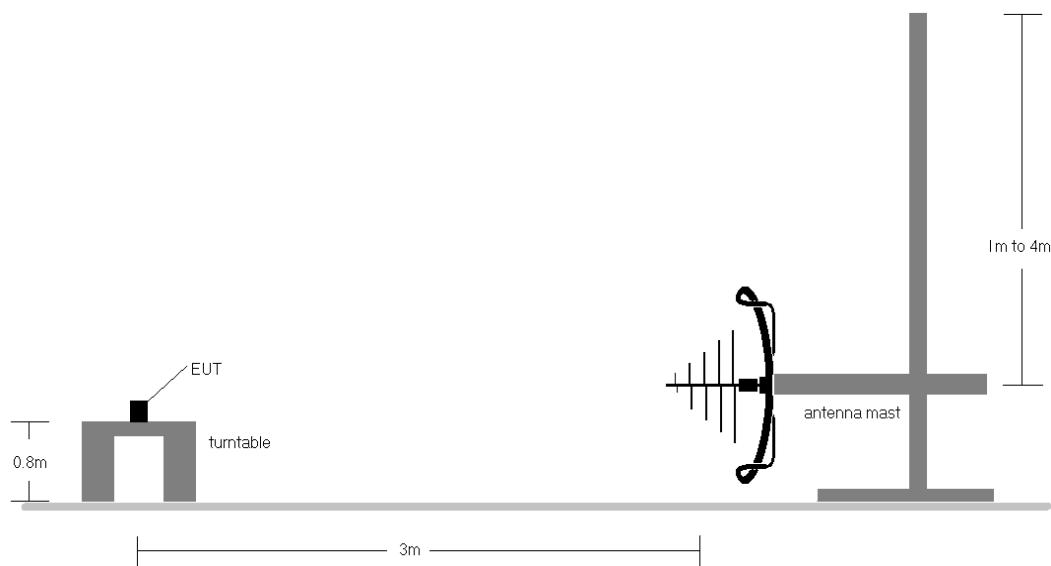


Figure 7-6. Radiated Test Setup > 30MHz

FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 19 of 24

Test Notes:

1. A loop antenna was used to investigate emissions below 30MHz.
2. Both Vertical and Horizontal polarities of the receive antenna were evaluated with the worst case emissions being reported. Below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
4. The spectrum is measured from 9kHz to the 10th harmonic and the worst-case emissions are reported.
5. No spurious emissions levels were found to be greater than the level of the fundamental.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.


Sample Calculation

- Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [$\text{dB}_{\mu\text{V/m}}$] – Limit [$\text{dB}_{\mu\text{V/m}}$]


FCC ID: 2A6WXWCGMA35A		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger		Page 20 of 24

Radiated Spurious Emission Measurements, Out-of-Band

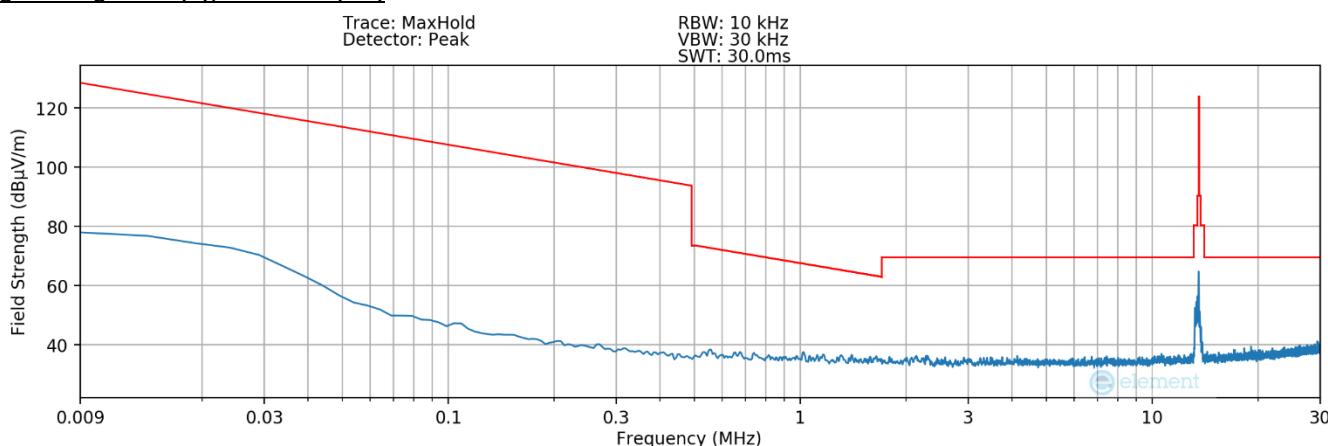
§15.209 §15.225(d); RSS-Gen (8.9)



Plot 7-1. Radiated Spurious Plot 9kHz – 30MHz (Pol. X)

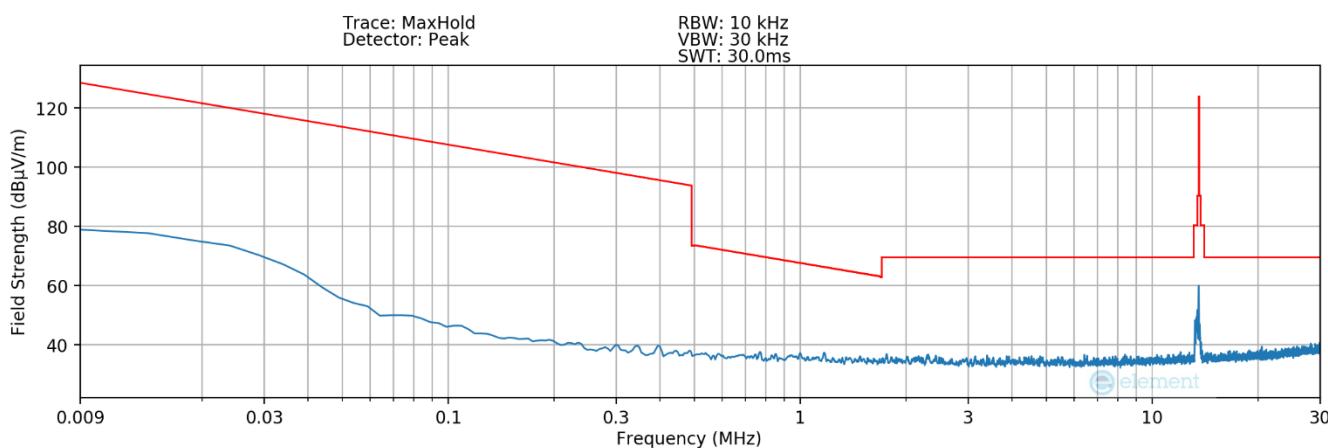


Plot 7-2. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y)

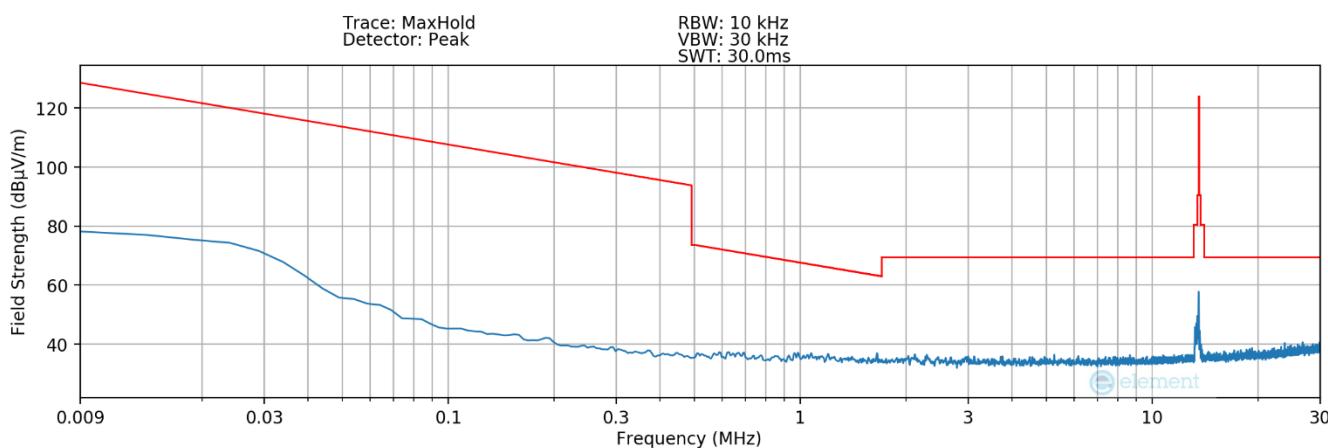

Plot 7-3. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z)

FCC ID: 2A6WXWCGMA35A	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 21 of 24

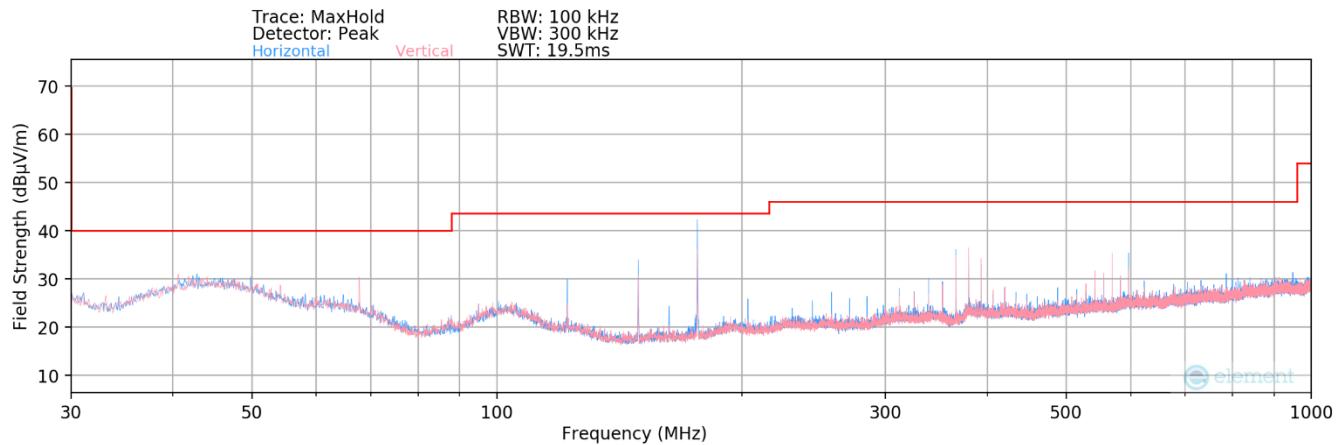

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: 2A6WXWCGMA35A Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 22 of 24



Radiated Spurious Emission Measurements, Out-of-Band

§15.209 §15.225(d); RSS-Gen (8.9)

Tx Frequency 13.56MHz

Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
27.12	H	100	-	-91.79	24.37	39.58	69.54	-29.96
40.68	H	-	-	-73.94	-12.48	20.58	40.00	-19.42
54.24	H	-	-	-77.58	-11.46	17.96	40.00	-22.04
67.80	H	-	-	-77.33	-15.07	14.60	40.00	-25.40
81.36	H	-	-	-81.60	-18.42	6.98	40.00	-33.02
94.92	H	186	109	-74.49	-14.44	18.07	43.52	-25.45
108.48	H	-	-	-78.40	-13.80	14.80	43.52	-28.72
122.04	H	186	78	-61.86	-15.78	29.36	43.52	-14.16
135.60	H	201	92	-74.20	-17.02	15.78	43.52	-27.74
149.16	H	204	85	-58.22	-17.15	31.63	43.52	-11.90
162.72	H	199	84	-71.09	-17.15	18.76	43.52	-24.77
176.28	H	184	80	-47.41	-17.15	42.44	43.52	-1.09
189.84	H	200	94	-77.96	-14.23	14.81	43.52	-28.71
203.40	H	199	105	-72.95	-14.03	20.02	43.52	-23.50
366.12	H	214	106	-65.94	-9.88	31.18	46.02	-14.84
569.52	H	209	121	-70.31	-5.67	31.02	46.02	-15.00
596.64	H	184	114	-73.45	-4.62	28.93	46.02	-17.09

Table 7-7. Radiated Measurements

FCC ID: 2A6WXWCGMA35A	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 23 of 24	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **BH EVS Wireless Charger FCC ID: 2A6WXWCGMA35A** has been tested to show compliance with Part 15 Subpart C (15.225) of the FCC Rules and RSS-210 of the ISED Rules.

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: 2A6WXWCGMA35A Test Report S/N: 1M2504030038-03.2A6WX	Test Dates: 6/27/2025 – 8/5/2025	EUT Type: Wireless Charger	Page 24 of 24