

AB5365B

Audio Player Microcontroller

Versions: 0.0.1

2020/08/15

Declaration

Copyright © 2019, www.bluetrum.com.

All Rights Reserved. No Unauthorized Distribution.

Bluetrum reserves the right to make changes without further notice to any products herein to improve reliability, function or design.

For further information on the technology, product and business term, please contact Bluetrum Company.

For sales or technical support, please send email to the address:

Sales: sales@bluetrum.com

Technical: project@bluetrum.com

Revision History

Date	Version	Comments	Revised by
2020-08-15	0.0.1	First draft	Leo

Table of Contents

TABLE OF CONTENTS.....	3
1 PRODUCT FEATURES.....	4
2 PACKAGE DEFINITION.....	5
2.1 PIN ASSIGNMENT.....	5
2.2 PIN DESCRIPTIONS.....	5
3 CHARACTERISTICS.....	9
3.1 PMU PARAMETERS.....	9
3.2 IO PARAMETERS.....	9
3.3 AUDIO DAC PARAMETERS.....	10
3.4 AUDIO ADC PARAMETERS.....	10
3.5 BT PARAMETERS.....	10
3.6 CURRENT PARAMETERS.....	11
4 PACKAGE INFORMATION.....	12

1 Product Features

CPU and Flexible IO

- ✚ 32bit High performance CPU with DSP instruction
- ✚ Program memory: internal 4M bit flash
- ✚ Flexible GPIO pins with Programmable pull-up and pull-down resistors;
- ✚ Support GPIO wakeup or interrupt;

Bluetooth Radio

- ✚ Compliant to Bluetooth 5.0;
- ✚ TX output power +2dBm in typical;
- ✚ RX Sensitivity with -90.5dBm @Basic Rate;

FM Tuner

- ✚ Support frequency band 76~108MHz;
- ✚ Auto search tuning;
- ✚ Programmable de-emphasis(50/75uS);
- ✚ Receive signal strength indicator (RSSI);

Audio Interface

- ✚ Audio codec with 16bit DAC and 16bit ADC;
- ✚ Support flexible audio EQ adjust;
- ✚ Support Sample rate 8, 11.025, 12, 16, 22.05, 32, 44.1 and 48KHz;
- ✚ 2 channel Analog MUX;
- ✚ One channel MIC amplifier input;
- ✚ High performance audio ADC with 90dB SNR;

- ✚ High performance audio DAC with 96dB SNR, with headphone amplifier output;

Peripheral and Interfaces

- ✚ Three 32-bit timers;
- ✚ Three multi-function 32-bit timers, support Capture and PWM mode;
- ✚ WatchDog;
- ✚ Three full-duplex UART;
- ✚ SPI;
- ✚ IR controller;
- ✚ SD Card Host controller;
- ✚ Full speed USB 2.0 HOST/DEVICE controller;
- ✚ Sixteen Channels 10-bit SARADC;
- ✚ Build in PMU, such as LDO;

Package

- ✚ SSOP24L;

Temperature

- ✚ Operating temperature: -40℃ to +85℃;
- ✚ Storage temperature: -65℃ to +150℃ ;

2 Package Definition

2.1 Pin Assignment

1	VCMBUF	DACL	24
2	VDDDAC	DACR	23
3	AGND	MICL/PF2	22
4	FM_ANT	PA5	21
5	PE7	PA6	20
6	PE6	PA7	19
7	PE0/MUTE	USB_DP/PB3	18
8	VUSB/PB5	USB_DM/PB4	17
9	VDDIO	BT_OSCO	16
10	VBAT	BT_OSCI	15
11	DGND	BT_ANT	14
12	VDDBT	PWRKEY	13

Figure 2- 1 Pin assignment for SSOP24L

2.2 Pin Descriptions

Table 2- 1 SSOP24L pin description

Pin No.	Name	Type	Function
1	VCMBUF	A	VCM buffer output
2	VDDDAC	PWR	DAC power
3	AGND	GND	DAC Ground
4	FM_ANT	A	FMRX ANT
5	PE7	I/O	ADC9 AUXR2 SDDAT0-G3

			SPI1DO-G4 TX0-G4 HSTRX-G4 PWM2-T4-G1 TMR4CAP-G1/IR-G8 IISMCLK-G2 PE7
6	PE6	I/O	ADC8 AUXL2 SDCLK-G3 SPI1CLK-G4 RX0-G4 HSTRX-G9 FMOSC-G6 PWM1-T4-G1 TMR3CAP-G7/IR-G7 IISLRCLK-G2 PE6
7	PE0/MUTE	I/O	SPI0DI-G3 TX0-G5(RX) PWM0-T3-G4 TMR3CAP_G5/IR_G5 IISDO/DAT-G2 PE0
8	VUSB/PB5	I/O	TX0-G8(RX) TX1-G3(RX) TX2-G3(RX) HSTRX-G11 PWM2-T3-G2 PB5
9	VDDIO	PWR	VDDIO power output
10	VBAT	PWR	VBAT power input
11	DGND	GND	Digital Ground
12	VDDBT	PWR	BT power
13	PWRKEY	A	Power key input
14	BT_ANT	A	BT ANT
15	BT_OSCI	A	26M OSC input
16	BT_OSCO	A	26M OSC output
17	USB_DM/PB4	I/O	ADC6 USB DM SDDAT0-G4/ SDDAT0-G6 SPI0CLK-G3 RX0-G3 HSTRX-G8

			PWM1-T3-G2 PB4
18	USB_DP/PB3	I/O	ADC5 USB DP SDDAT0-G5/ SDCMD-G6 SPI0DO-G3 TX0-G3 HSTRX-G3 PWM0-T3-G2 PB3
19	PA7	I/O	ADC2 AUXR0 SDDAT0-G1 SPI1DO-G2 TX0-G1(RX) TX1-G1(RX) HSTRX-G1 PWM2-T5-G1 IISDI-G1 PA7
20	PA6	I/O	ADC1 AUXL0 SDCLK-G1/ SDCLK-G4/ SDCLK-G5/ SDCLK-G6 SPI1CLK-G2 RX0-G1 RX1-G1 HSTRX-G6 FMOSC-G2 PWM1-T5-G1 TMR3CAP-G2/IR-G2 IISDO/DAT-G1 PA6
21	PA5	I/O	ADC0 SDCMD-G1/SDCMD-G4/SDCMD-G5 SPI1DI-G2 FMOSC-G1 PWM0-T5-G1 TMR3CAP-G1/IR-G1 IISCLK-G1 PA5
22	MICL/PF2	I/O	ADC10 MICL SPI1DO-G5 TX0-G7(RX) PWM0-T3-G3 TMR5CAP-G1/IR-G9

			PF2
23	DACR	A	DACR
24	DACL	A	DACL

Note: I/O: Digital input/output; I : Digital input; A : Analog Pin; PWR: Power Pin; GND: Ground.

3 Characteristics

3.1 PMU Parameters

Table 3- 1 PMU voltage input Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VUSB	VUSB Voltage input	3.0	5.0	5.5	V	
VBAT	Voltage input	3.0	3.7	5.0	V	

Table 3- 2 3.3V LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDIO	3.3V LDO voltage output	-	3.3	-	V	Light Loading condition
Δ VVDDIO	Output Mismatch 1-sigma	-	56	-	mV	VDDIO=3.3v
ILOAD	Maximum output current	-	-	150	mA	@VBAT=3.6v
ISC	Short Circuit Current Limit	-	-	300	mA	@VBAT=3.8v

Table 3- 3 1.6V LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDBT	1.6V LDO voltage output	-	1.6	-	V	Light Loading condition
Δ VVDDBT	Output Mismatch 1-sigma	-	27	-	mV	VDDBT=1.6v
ILOAD	Maximum output current	-	-	100	mA	@VBAT=3.0v
ISC	Short Circuit Current Limit	-	-	200	mA	@VBAT=3.8v

Table 3- 4 1.2V LDO Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
VDDCORE	1.2V LDO voltage output	-	1.2	-	V	Light Loading condition
Δ VVDDCORE	Output Mismatch 1-sigma	-	20	-	mV	VDDCORE=1.2v
ILOAD	Maximum output current	-	-	80	mA	@VBAT=3.6v
ISC	Short Circuit Current Limit	-	-	120	mA	@VBAT=3.8v

3.2 IO Parameters

Table 3- 5 I/O Parameters

GPIO—Electrical Characteristics							
Symbol	Description	Related GPIO	Min	Typical	Max	Units	Conditions
V _{IL}	Low-level input voltage		-0.3		1.27	V	VDDIO=3.3V
V _{IH}	High-level input voltage		2.03		3.6	V	VDDIO=3.3V
Driver Ability 1	Output Driver Ability 1			32		mA	VDDIO=3.3V
Driver Ability 0	Output Driver Ability 0			8		mA	VDDIO=3.3V
R _{PUP0}	Internal pull-up resistor 0		8	10	12	K Ω	
R _{PUP1}	Internal pull-up resistor 1		0.24	0.3	0.36	K Ω	
R _{PUP2}	Internal pull-up resistor 2		160	200	240	K Ω	
R _{PDN0}	Internal pull-down resistor 0		8	10	12	K Ω	
R _{PDN1}	Internal pull-down resistor 1		0.24	0.3	0.36	K Ω	
R _{PDN2}	Internal pull-down resistor 2		160	200	240	K Ω	

3.3 Audio DAC Parameters

Table 3- 6 Audio DAC Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
SNR		-	96	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Output -3dBV Fin=1KHz
THD+N		-	-86	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Output -3dBV with 10K loading Fin=1KHz
Output Range	Maximum output voltage	-	2.6		V _{peak-peak}	32ohm Loading

3.4 Audio ADC Parameters

Table 3- 7 Audio ADC Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
SNR		-	90	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Input sine amplitude, 850mV RMS Fin=1KHz
THD+N		-	-87	-	dB	VCM cap=1uF VDDDAC cap=1uF with A-wt filter Input sine amplitude, 850mV RMS Fin=1KHz.
Input Range	Input sine wave peak amplitude	0		VCM	V	From aux input, aux 0db gain, VCM represent VCM voltage.

3.5 BT Parameters

Table 3- 8 BT Parameters



Characteristics	Min	Typical	Max	Unit	Conditions
Maximum Transmit Power	-	-	7	dBm	
RMS DEVM	-	5.5	-	%	Maximum TX power 2-DH5 packet
Peak DEVM	-	12.5		%	
EDR Relative Transmit Power		-0.2		dB	
Sensitivity @ Basic Rate		-90.5		dBm	BER=0.1%, using DH5 packet
Sensitivity @ EDR		-89.5		dBm	BER=0.01%, using 2-DH5 packet

3.6 Current Parameters

Table 3- 9 Current Parameters

Sym	Characteristics	Min	Typ	Max	Unit	Conditions
IRTC	RTC mode current	-	4	-	uA	4.2V input, room temp.
Sleep	Sleep current	-	500	2000	uA	3.3V input, room temp

4 Package Information

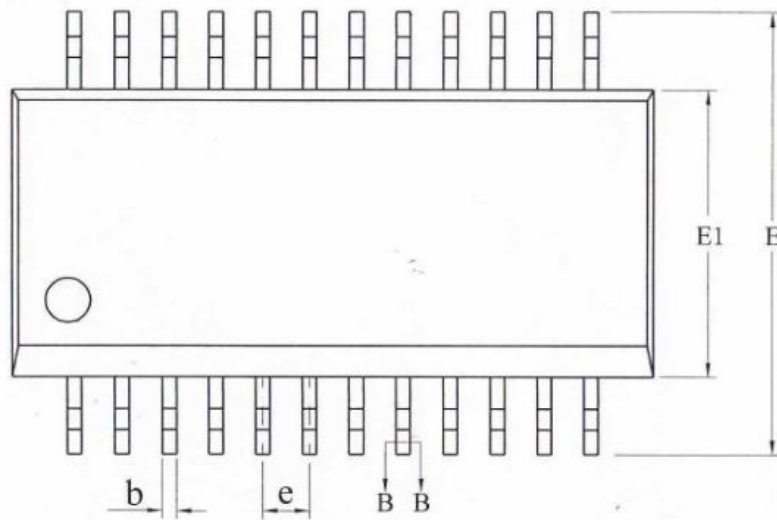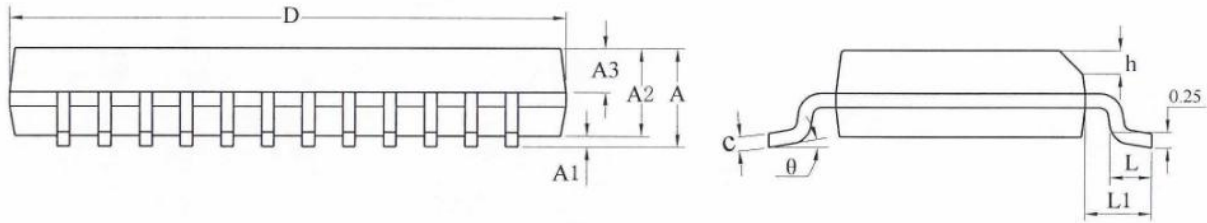

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	—	—	1.75
A1	0.10	0.15	0.25
A2	1.30	1.40	1.50
A3	0.60	0.65	0.70
b	0.23	—	0.31
b1	0.22	0.25	0.28
c	0.20	—	0.24
c1	0.19	0.20	0.21
D	8.55	8.65	8.75
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	0.635BSC		
h	0.30	—	0.50
L	0.50	—	0.80
L1	1.05REF		
θ	0	—	8°