
## Acknowledgment Letter

customer name:			New China Airlines				
Custome	r Part Number	:	E	.ID.30065006			
Our comp	pany's model:		G41.	5*8*0.8-6.5UH	-30MM		
datelanded:			Dec. 27, 2024				
supplie	r:		Donggua	n Jierestech	Technology Co., Ltd.		
	draw  Lu Lin  The customer acknown		Review		Approve		
			Deng Xianggui acknowledges:		La Ru-Shen		
					党と		
	Qualified	Unqu	alified		acknowledge		
	Note						
	Tel:						
		6+136327					
	Add: No. 96, Lan Jinxiangda Science				Building L, 3rd Floor,		

customer	Customer	Our company's model	Version	Date	
name	Part Number	our company's moder	version		
New China	E.ID.30065006	G41.5*8*0.8-6.5UH-30MM	40	Dec. 27, 2024	
Airlines	E.ID.30065006	G41.5 6 U.8-6.5UH-3UIVIIVI	A0	Dec. 27, 2024	

## 一、Planar structure diagram: Unit: MM

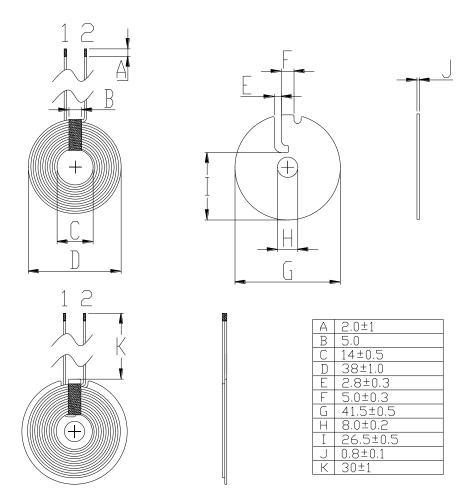

## 二、Product Parameter:

Foot position	Path	Circle Number	Note
1 - 2	0.08*80P	12T	Hot air line

- 三、technical requirements:
- 1. Fix the ends of the wires securely to prevent any loosening or breakage of the wires.
- 2. According to the customer's requirements, cut off the electrical long wire ends, tin them, and ensure that the tin coating depth is uniformly 2  $\pm 1$ MM. 3. Apply appropriate white glue on the magnetic plate, attach the coil, and during the process, keep the product surface clean and tidy.
- 4. The hard magnetic sheet used has round holes and is undamaged.
- 5. Additional processing (as per customer requirements): None

## 四、electrical parameter:

1. Inductance value, Q value:

PIN 
$$1-2 = 6.5 \text{uH} \pm 10\%$$

The above inductance values are based on the Quanhua 1062A instrument, using a standard of 10KHZ/0.3Vrms or an equivalent instrument.

五、bill of materials:

<u>ш, п</u> .	ili oi materiais:		T	1	1
No.	Name	materials	supplier	Note	
1	Hot air line	0.08*80P	Uyghur-Han or ed	uivalent	
2	magnetic sheet	G41.5*8*0.8 Hard substrate	Tiantong or e	quivalent	
3	tin	High-temperature environmental protection	Thousand Island	s or equiva	alent
4	white glues	BY882	Baoyue or equ	ivalent	
5	Double-sided adhesive tape	Diameter 38	Honghui or eq	uivalent	
6	high-temperature adhesive tape	5MM			