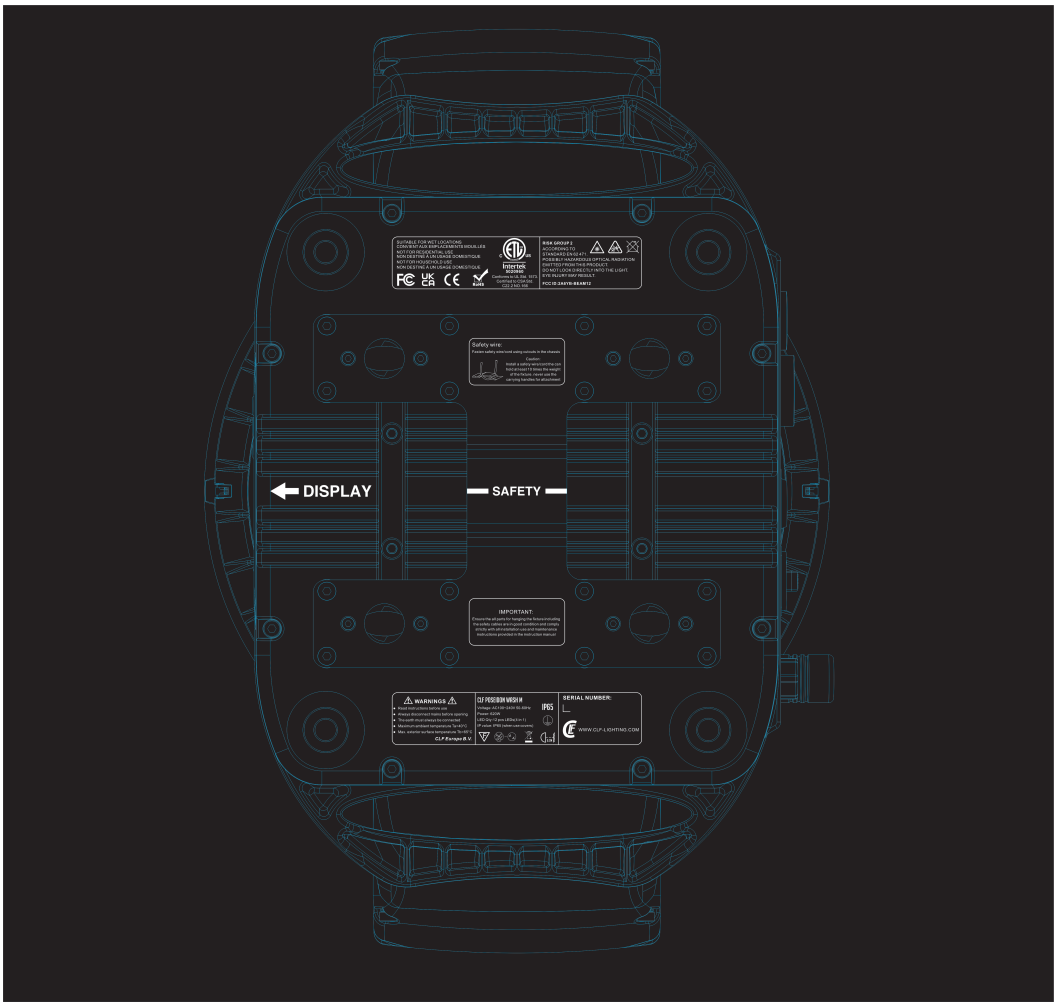
SUITABLE FOR WET LOCATIONS
SUITABLE POUR EMPLACEMENTS MOUILLES
NOT FOR RESIDENTIAL USE
NON ADAPTE A UN USAGE DOMESTIQUE
NOT FOR HOUSEHOLD USE
NON ADAPTE A UN USAGE DOMESTIQUE
Intertek
Conforms to UL 8750, 1573
Certified to CSA C22.2 No. 250.0, 250.13 No. 250.4
RISK GROUP 2
ACCORDING TO
IEC62471:2006 AND IEC TR 62778:2014
POTENTIAL HAZARD FROM OPTICAL RADIATION
EMITTED FROM THIS PRODUCT.
DO NOT LOOK DIRECTLY INTO THE LIGHT.
TYPE RG2 PER IEC TR 62778:2014
FCC ID: 2AKTR-BEAM12
Safety wire:
Fasten safety wire/cord using ratchets in the chassis.
Caution:
Install a safety wire/cord the fixture if mount it times the weight of the fixture. Hand use the carrying handles for attachment.
DISPLAY
SAFETY
IMPORTANT:
Ensure the all parts for hanging the fixture including hardware, safety wire/cord, and carrying handle are in fully with specifications and all maintenance instructions provided in the instruction manual.
WARNINGS
Read the installation instructions
Always disconnect mains before opening
Do not with drum always be connected
Maximum ambient temperature Ta:40°C
Max. exterior surface temperature Tc:40°C
CLF Europe B.V.
CLF PRECISION WASH M
Voltage: 100-240V 50/60 AC 60Hz
Power: 600W
LED City: 17 pcs 40Bin (w-1)
IP rated: IP65 (water-overcoming)
IP65
SERIAL NUMBER:
L
WWW.CLF-LIGHTING.COM