

FCC RADIO TEST REPORT

Applicant..... : Soulaca INC

Address..... : 36 S 18TH AVE STE A, BRIGHTON, CO, US, 80601

Manufacturer..... : SHINEWORLD INNOVATIONS LIMITED

Address..... : #1502, BUILDING A4, R&D CENTER, SONGSHAN LAKE INTELLIGENT VALLEY, LIAOBU, DONGGUAN, GUANGDONG, 523425, CHINA

Factory..... : SHINEWORLD INNOVATIONS LIMITED

Address..... : #1502, BUILDING A4, R&D CENTER, SONGSHAN LAKE INTELLIGENT VALLEY, LIAOBU, DONGGUAN, GUANGDONG, 523425, CHINA

Product Name..... : BATHROOM LED TV

Brand Name..... : Soulaca

Model No. : SS215U22, SS270U22, SS320U22, M106, M156, M19, M22, M27, M32, M42, M55 (For model difference refer to section 2.1)

FCC ID..... : 2A658-SLC1

Measurement Standard..... : 47 CFR FCC Part 15, Subpart C (Section 15.247)

Receipt Date of Samples.... : May 24, 2022

Date of Tested..... : May 24, 2022 to June 24, 2022

Date of Report..... : July 18, 2022

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Rose Hu / Project Engineer



Approved by

Lori Fan / Authorized Signatory

Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT	5
3. Test Channels and Modes Detail	8
4. Configuration of EUT	8
5. Modification of EUT	8
6. Description of Support Device.....	9
7. Test Facility and Location	10
8. Applicable Standards and References.....	10
9. Deviations and Abnormalities from Standard Conditions	11
10. Test Conditions	11
11. Measurement Uncertainty	12
12. Sample Calculations	13
13. Test Items and Results	14
13.1 Conducted Emissions Measurement	14
13.2 Maximum Conducted Output Power Measurement.....	18
13.3 6dB Bandwidth Measurement.....	20
13.4 Power Spectral Density Measurement	24
13.5 Band Edge and Conducted Spurious Emissions Measurement.....	28
13.6 Radiated Spurious Emissions and Restricted Bands Measurement.....	33
13.7 Antenna Requirement	40
14. Test Equipment List.....	41

Revision History

[illegible]

1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.207 (a)	AC Power Conducted Emission	PASS	---
§15.247(b)(3)	Maximum Conducted Output Power	PASS	---
§15.247(a)(2)	6dB Bandwidth	PASS	---
§15.247(e)	Power Spectral Density	PASS	---
§15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	---
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	PASS	---
§15.203	Antenna Requirement	PASS	---

2. General Description of EUT

Product Information	
Product name:	BATHROOM LED TV
Main Model Name:	M22
Additional Model Name:	SS215U22, SS270U22, SS320U22, M106, M156, M19, M27, M32, M42, M55
Model Difference:	These models have the same circuit schematic, construction, PCB Layout and critical components. Their difference is model number only due to trading purpose.
S/N:	2205-2247
Brand Name	Soulaca
Hardware version:	V01
Software version:	V01
Rating:	AC 100-230V 50/60Hz
Classification:	Class B
Typical arrangement:	Table-top
I/O Port:	HDMI IN port*3, USB port*2, Tuner port*2, AV port*1, Earphone port*1, RJ45 port*1
Accessories Information	
Adapter:	N/A
Cable:	AC Port: 1.55m unshielded.
Other:	IR Remote control
Additional Information	
Note:	According to the model difference, all tests were performed on model M22.
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification	
Frequency Range:	2412-2462MHz for IEEE 802.11b/g/n(HT20) 2422-2452MHz for IEEE 802.11n(HT40)
Modulation Technology:	DSSS, OFDM
Modulation Type:	CCK, DQPSK, DBPSK, 64-QAM, 16-QAM, QPSK, BPSK
Number of Channel:	11 for IEEE 802.11b/g/n(HT20) 7 for IEEE 802.11n(HT40)
Channel Space:	5MHz
Antenna Type:	Integral antenna*2
Antenna Gain:	2dBi (Declared by the manufacturer)

Channel List			
IEEE 802.11b/ g/ n(HT20)		IEEE 802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	---	---
2	2417	---	---
3	2422	3	2422
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457	----	----
11	2462	----	----


3. Test Channels and Modes Detail

Mode		Channel	Frequency (MHz)	Specification	Remark
1	TX	1	2412	IEEE 802.11b/ g/ n(HT20)	SISO, MIMO
		3	2422	IEEE 802.11n(HT40)	SISO, MIMO
		6	2437	IEEE 802.11b/ g/ n(HT20)/ n(HT40)	SISO, MIMO
		9	2452	IEEE 802.11n(HT40)	SISO, MIMO
		11	2462	IEEE 802.11b/ g/ n(HT20)	SISO, MIMO
2.	Normal Mode	---	---	---	

Note:

1. TX mode means that the EUT was programmed to be in continuously transmitting mode.
2. SISO mode applies to 802.11b/g mode only, and both SISO and MIMO applies 802.11n modes.

4. Configuration of EUT

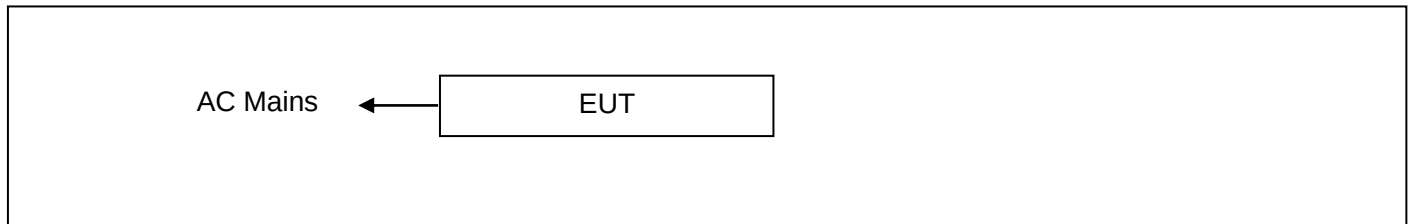

5. Modification of EUT

No modifications are made to the EUT during all test items.

6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
1.	Laptop	DELL	VOSTRO 3400	H3K2XA01	Power Cord: 1.8m Unshielded, with core	Provided by the Lab
2.	Adapter	DELL	HA45NM 140	N/A	AC Line: 1.13m unshielded DC Line: 1.15m unshielded with a core	I/P: AC 100-240V 50-60Hz, 1.3A O/P: DC 19.5V 2.31A 45W Provided by the Lab
3.	Test fixture	---	---	---	---	Provided by the manufacturer

Software	Power Setting	
RTLBAPP	IEEE 802.11b	55,75
	IEEE 802.11g	20,35
	IEEE 802.11n(HT20)	20,35
	IEEE 802.11n(HT40)	20,35

7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 Listed by CNAS, August 13, 2018 The Certificate Registration Number is L5795. The Certificate is valid until August 13, 2024 The Laboratory has been assessed and proved to be in compliance with ISO17025 Listed by A2LA, November 01, 2017 The Certificate Registration Number is 4429.01 The Certificate is valid until December 31, 2023 Listed by FCC, November 06, 2017 Test Firm Registration Number is 907417 Listed by Industry Canada, June 08, 2017 The Certificate Registration Number is 46405-9743A
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China

8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Test Standards:

47 CFR Part 15, Subpart C, 15.247

ANSI C63.10-2013

References Test Guidance:

DTS KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	AC Power Conducted Emission	2	AC 120V 60Hz	Sean	See note 1
2.	Max. Conducted Output Power	1	AC 120V 60Hz	Sean	See note 1
3.	6dB Bandwidth	1	AC 120V 60Hz	Sean	See note 1
4.	Power Spectral Density	1	AC 120V 60Hz	Sean	See note 1
5.	Band Edge and Conducted Spurious Emissions	1	AC 120V 60Hz	Sean	See note 1
6.	Radiated Spurious Emissions and Restricted Bands	1, 2	AC 120V 60Hz	Sean	See note 1
7.	Antenna Requirement	---	---	---	See note 1

Note:

1. The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35 °C, 30~70%, 86~106kPa.

11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.52 dB	---
2.	Radiated Emission Test	9KHz ~ 30MHz	±2.60 dB	---
		30MHz ~ 1GHz	±5.04 dB	---
		1GHz ~ 18GHz	±5.23 dB	---
		18GHz ~ 40GHz	±5.14 dB	---
3.	RF Conducted Test	10Hz ~ 40GHz	±1.06 dB	---
4.	Occupied Channel Bandwidth	---	±1.42 x10 ⁻⁴ % MHz	---

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBUV)	Correct Factor (dB)	Measurement (dBUV)	Limit (dBUV)	Over (dB)	Detector
0.1500	49.00	10.60	59.60	66.00	-6.40	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation Measurement = Reading + Corrector Factor Limit = Limit stated in standard Margin = Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBUV)	Correct Factor (dB/m)	Measurement (dBUV/m)	Limit (dBUV/m)	Over (dB)	Detector
110.5100	41.82	-7.62	34.20	43.50	-9.30	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier Measurement = Reading + Corrector Factor Limit = Limit stated in standard Over = Margin, which calculated by Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

13. Test Items and Results

13.1 Conducted Emissions Measurement


LIMITS

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note: 1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.
2. The lower limit shall apply at the transition frequencies.
3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

BLOCK DIAGRAM OF TEST SETUP

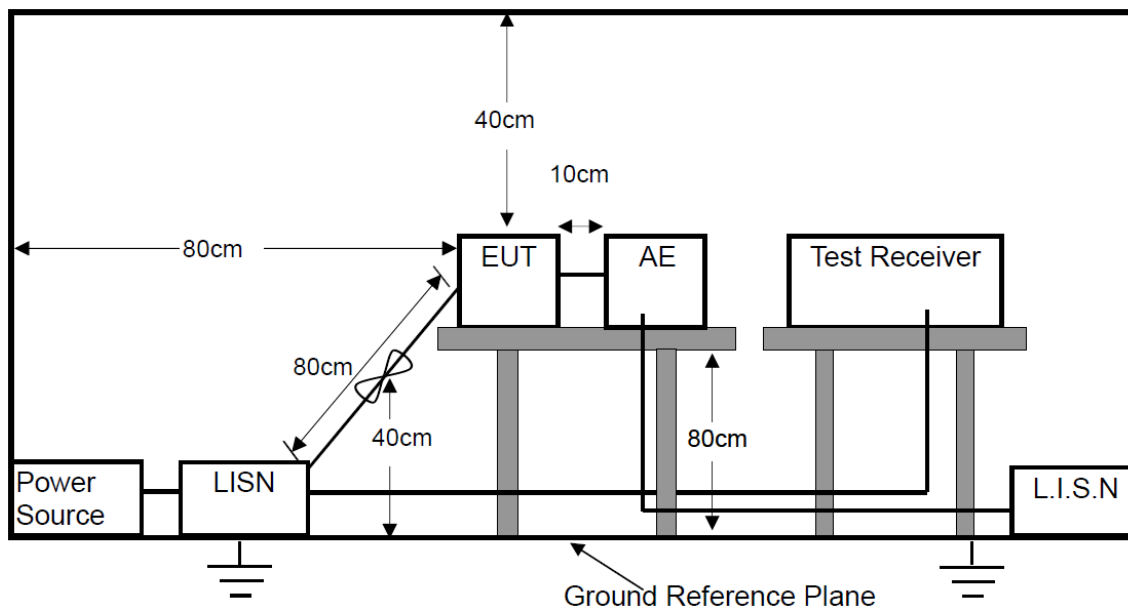

TEST PROCEDURES

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

TEST RESULTS

PASS


Please refer to the following pages.

M/N: M22	Testing Voltage: AC 120V 60Hz
Phase: L1	Detector: QP & AVG
Test Mode: 2	

Conducted Emission Measurement

Date: 2022/5/31

Time: 16:16:49

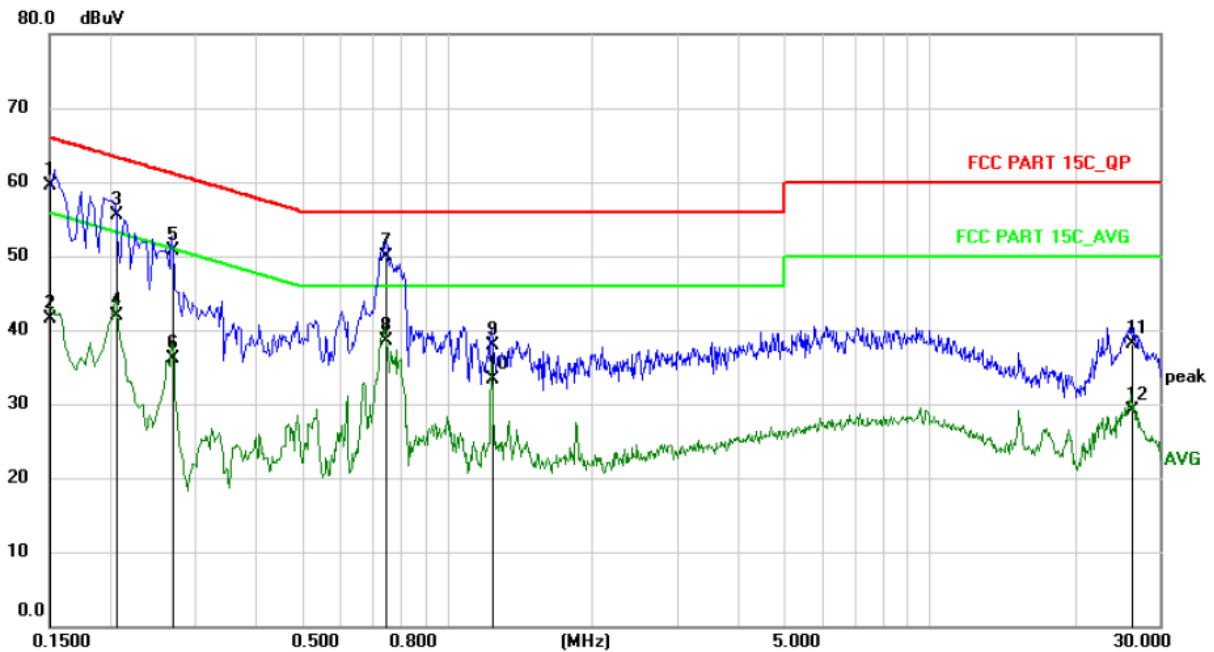


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1500	49.00	10.60	59.60	66.00	-6.40	QP	
2	0.1500	31.00	10.60	41.60	56.00	-14.40	AVG	
3	0.2060	44.90	10.60	55.50	63.37	-7.87	QP	
4	0.2060	31.40	10.60	42.00	53.37	-11.37	AVG	
5	0.2700	40.10	10.60	50.70	61.12	-10.42	QP	
6	0.2700	25.60	10.60	36.20	51.12	-14.92	AVG	
7 *	0.7460	39.24	10.66	49.90	56.00	-6.10	QP	
8	0.7460	27.84	10.66	38.50	46.00	-7.50	AVG	
9	1.2380	27.30	10.70	38.00	56.00	-18.00	QP	
10	1.2380	22.70	10.70	33.40	46.00	-12.60	AVG	
11	26.1900	27.41	10.79	38.20	60.00	-21.80	QP	
12	26.1900	18.41	10.79	29.20	50.00	-20.80	AVG	

M/N: M22	Testing Voltage: AC 120V 60Hz
Phase: N	Detector: QP & AVG
Test Mode: 2	

Conducted Emission Measurement

Date: 2022/5/31

Time: 16:21:20

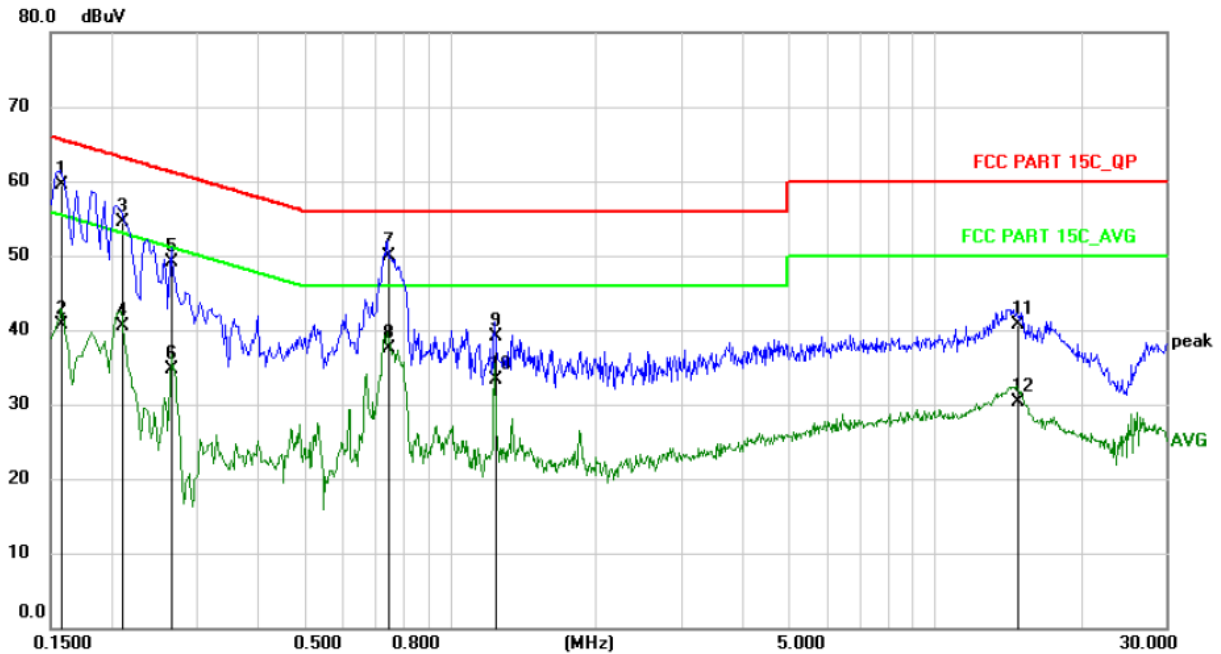

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1580	48.90	10.60	59.50	65.57	-6.07	QP	
2	0.1580	30.20	10.60	40.80	55.57	-14.77	AVG	
3	0.2100	44.00	10.60	54.60	63.21	-8.61	QP	
4	0.2100	29.90	10.60	40.50	53.21	-12.71	AVG	
5	0.2660	38.50	10.60	49.10	61.24	-12.14	QP	
6	0.2660	24.10	10.60	34.70	51.24	-16.54	AVG	
7 *	0.7460	39.34	10.66	50.00	56.00	-6.00	QP	
8	0.7460	26.94	10.66	37.60	46.00	-8.40	AVG	
9	1.2380	28.40	10.70	39.10	56.00	-16.90	QP	
10	1.2380	22.70	10.70	33.40	46.00	-12.60	AVG	
11	14.7859	29.95	10.75	40.70	60.00	-19.30	QP	
12	14.7859	19.65	10.75	30.40	50.00	-19.60	AVG	

13.2 Maximum Conducted Output Power Measurement


LIMITS

For system using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1 Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

ANSI C63.10 - 2013, Section 11.9.1.3

ANSI C63.10 - 2013, Section 11.9.2.3.2

TEST RESULTS

PASS

Please refer to the following table.

Channel	Frequency (MHz)	Data Rate (Mbps)	Peak Output Power (dBm)			Limit (dBm)	Result
IEEE 802.11b							
1	2412	1	13.282			≤30	PASS
6	2437	1	11.892			≤30	PASS
11	2462	1	12.252			≤30	PASS
IEEE 802.11g							
1	2412	6	12.139			≤30	PASS
6	2437	6	10.572			≤30	PASS
11	2462	6	10.806			≤30	PASS
IEEE 802.11n(HT20)							
--	--	--	ANT_1 (SISO)	ANT_2 (SISO)	Ant_1+ANT_2 (MIMO)	--	--
1	2412	MCS0	12.439	12.058	15.263	≤30	PASS
6	2437	MCS0	10.660	11.785	14.269	≤30	PASS
11	2462	MCS0	10.837	10.999	13.929	≤30	PASS
IEEE 802.11n(HT40)							
3	2422	MCS0	11.320	11.949	14.656	≤30	PASS
6	2437	MCS0	10.720	11.657	14.224	≤30	PASS
9	2452	MCS0	10.353	11.287	13.855	≤30	PASS

Note:


- For IEEE 802.11b/g mode, both of antennas have considered during pre-test, but only the worst case (ANT_1) was recorded.
- For IEEE 802.11n mode, EUT working in both SISO and MIMO mode.
- Directional Gain = $2\text{dBi} + 10\log(2) = 5.01\text{ dBi} < 6\text{ dBi}$, Therefore the limit doesn't change.

13.3 6dB Bandwidth Measurement

LIMITS

The minimum 6dB bandwidth shall be at least 500 kHz

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to DTS KDB 558074 D01 15.247 Meas Guidance v05r02:

- a. Set the RBW = 100KHz.
- b. Set the VBW $\geq 3 \times$ RBW
- c. Set the Detector = peak.
- d. Set the Sweep time = auto couple.
- e. Set the Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

PASS


Please refer to the following tables.

Channel	Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b						
1	2412	1	10.16	---	>0.5	PASS
6	2437	1	10.16	---	>0.5	PASS
11	2462	1	10.15	---	>0.5	PASS
IEEE 802.11g						
1	2412	6	16.46	---	>0.5	PASS
6	2437	6	16.45	---	>0.5	PASS
11	2462	6	16.42	---	>0.5	PASS
IEEE 802.11n(HT20)						
1	2412	MCS0	17.65	---	>0.5	PASS
6	2437	MCS0	17.64	---	>0.5	PASS
11	2462	MCS0	17.63	---	>0.5	PASS
IEEE 802.11n(HT40)						
3	2422	MCS0	36.41	---	>0.5	PASS
6	2437	MCS0	36.42	---	>0.5	PASS
9	2452	MCS0	36.47	---	>0.5	PASS


Note: Both of antennas have considered during pre-test, but only the worst case (ANT_1) was recorded.

Test Plots of 6dB Bandwidth


IEEE 802.11b - 2412MHz

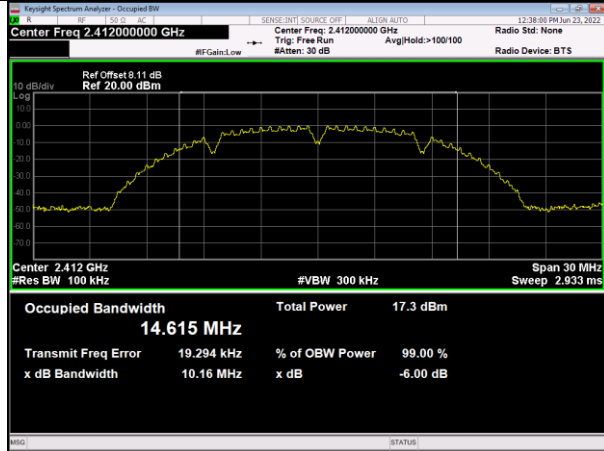


IEEE 802.11b - 2437MHz

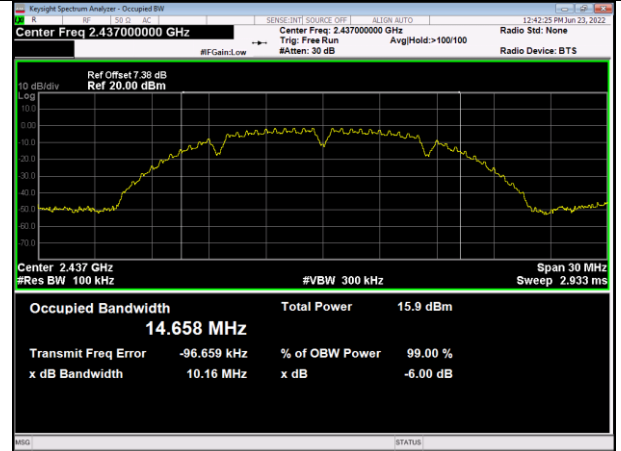


IEEE 802.11b - 2462MHz

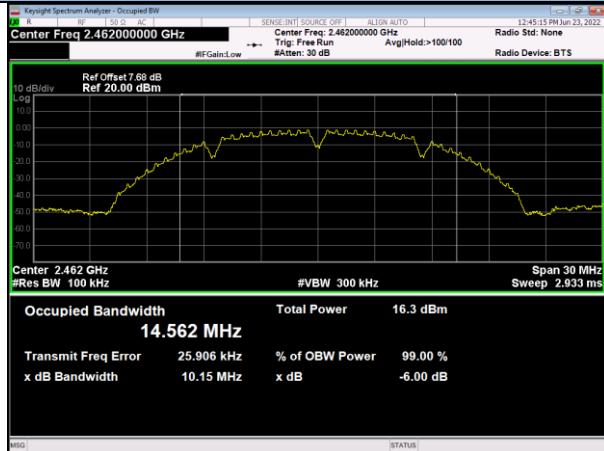


IEEE 802.11g - 2412MHz

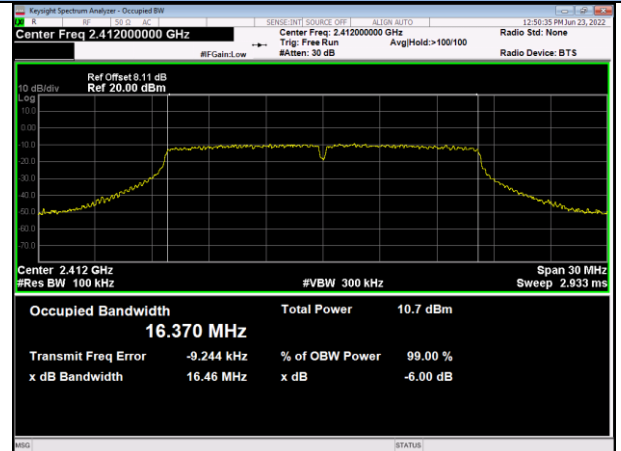


IEEE 802.11g - 2437MHz

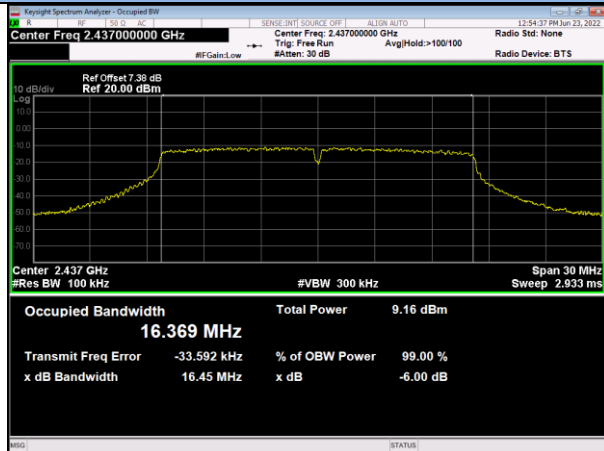

IEEE 802.11g - 2462MHz

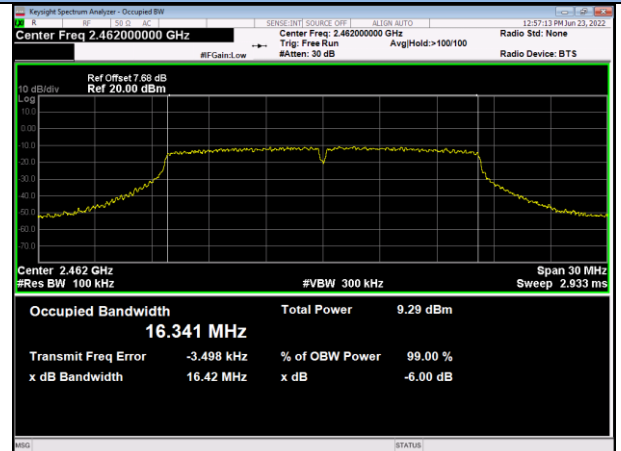

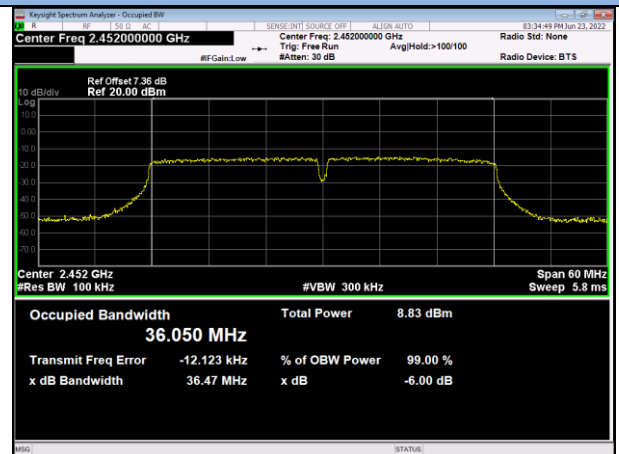


13.4 Power Spectral Density Measurement

LIMITS

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC DTS KDB 558074 D01 15.247 Meas Guidance v05r02:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100\text{KHz}$
- Set the VBW $\geq 3 \times \text{RBW}$.
- Set the Detector = peak.
- Set the Sweep time = auto couple.
- Set the Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST RESULTS

PASS

Please refer to the following table.


Channel	Frequency (MHz)	Data Rate (Mbps)	PSD dBm / 3kHz			Limit dBm / 3kHz	Result
IEEE 802.11b							
1	2412	1	-20.206			8	PASS
6	2437	1	-21.556			8	PASS
11	2462	1	-21.178			8	PASS
IEEE 802.11g							
1	2412	6	-23.722			8	PASS
6	2437	6	-25.065			8	PASS
11	2462	6	-24.814			8	PASS
IEEE 802.11n(HT20)							
--	--	--	ANT_1 (SISO)	ANT_2 (SISO)	Ant_1+ANT_2 (MIMO)	--	--
1	2412	MCS0	-22.954	-23.065	-19.999	8	PASS
6	2437	MCS0	-24.440	-23.499	-20.934	8	PASS
11	2462	MCS0	-23.789	-23.968	-20.867	8	PASS
IEEE 802.11n(HT40)							
3	2422	MCS0	-25.371	-24.414	-21.856	8	PASS
6	2437	MCS0	-25.918	-23.994	-21.840	8	PASS
9	2452	MCS0	-26.465	-25.470	-22.929	8	PASS

Note: 1. For IEEE 802.11b/g mode, both of antennas have considered during pre-test, but only the worst case (ANT_1) was recorded.


Note: 2. For 802.11n(HT20) 802.11n(HT40), both SISO and MIMO modes have been considered and tested.

Test Plots of Power Spectral Density


IEEE 802.11b - 2412MHz

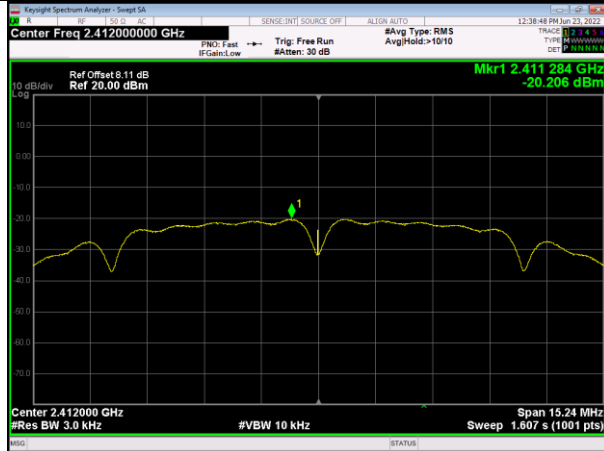


IEEE 802.11b - 2437MHz

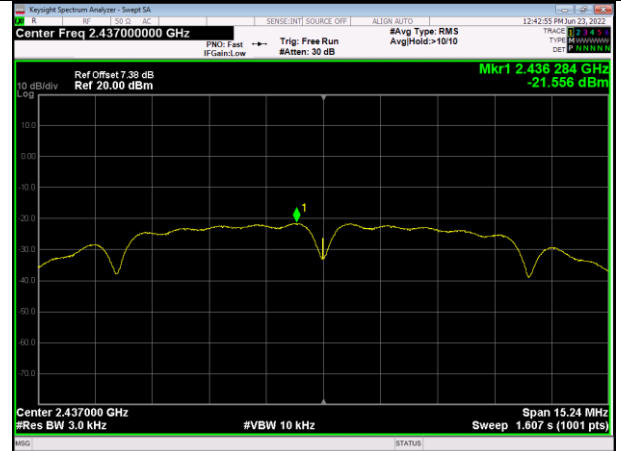


IEEE 802.11b - 2462MHz

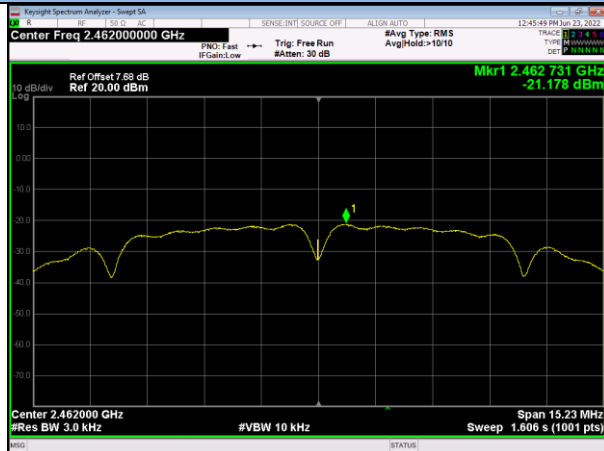


IEEE 802.11g - 2412MHz

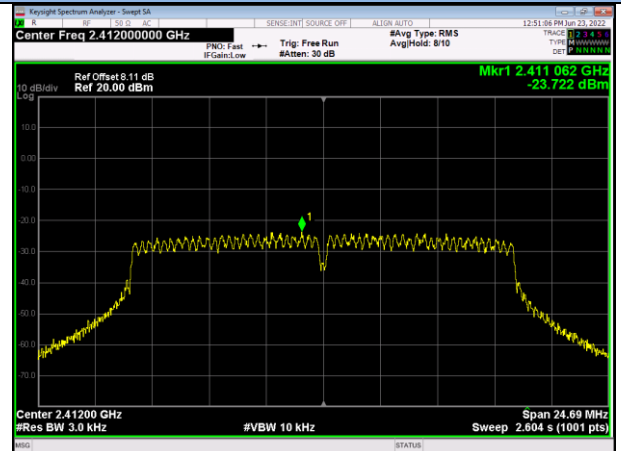

IEEE 802.11g - 2437MHz

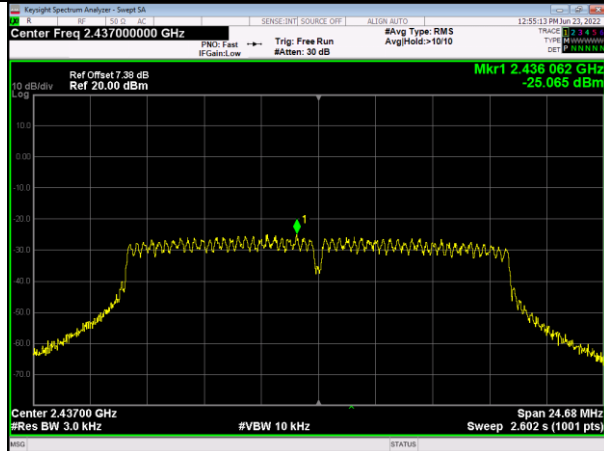


IEEE 802.11g - 2462MHz

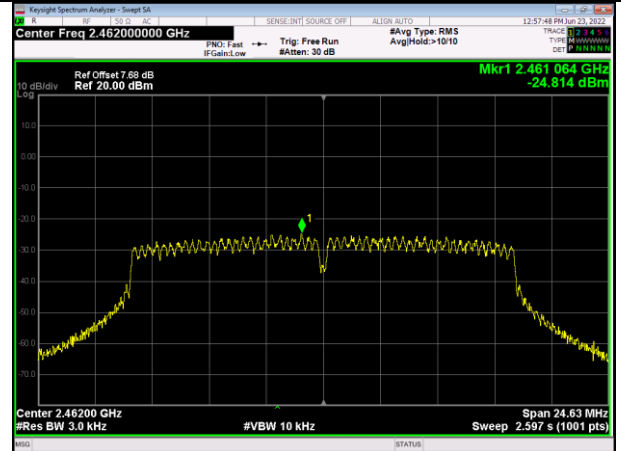


Test Plots of Power Spectral Density


IEEE 802.11n(HT20) - 2412MHz

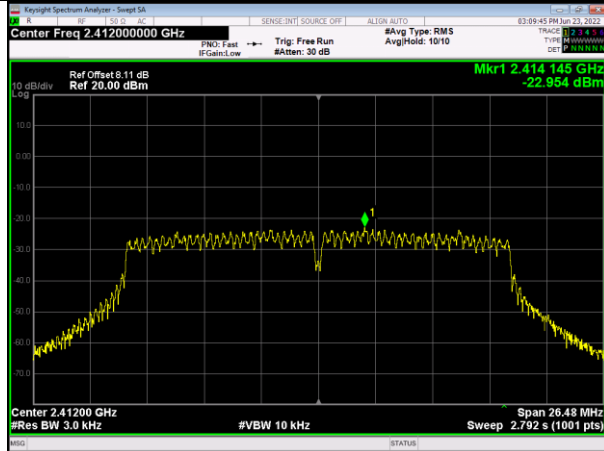


IEEE 802.11n(HT20) - 2437MHz

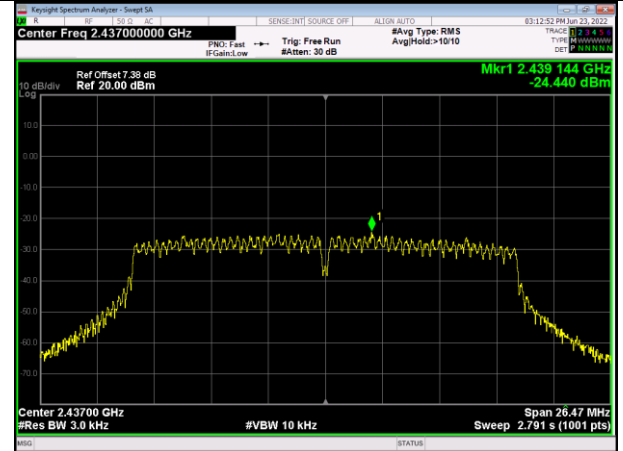


IEEE 802.11n(HT20) - 2462MHz

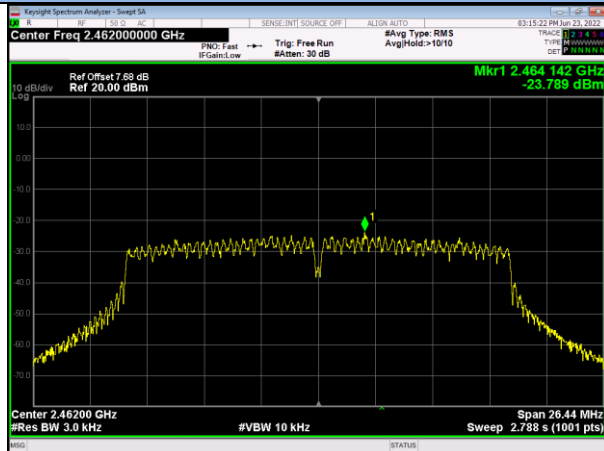


IEEE 802.11n(HT40) - 2422MHz

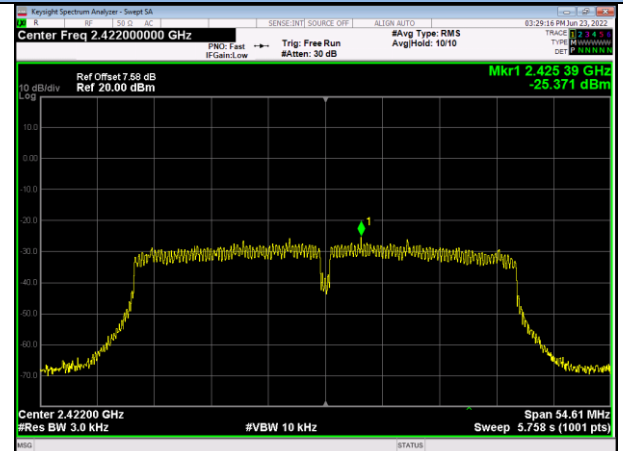

IEEE 802.11n(HT40) - 2437MHz

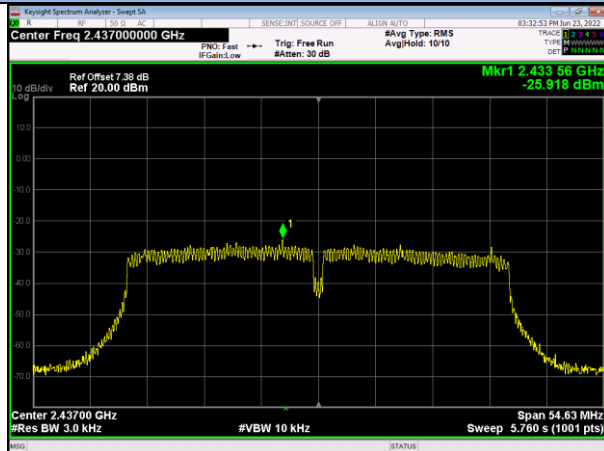

IEEE 802.11n(HT40) - 2452MHz

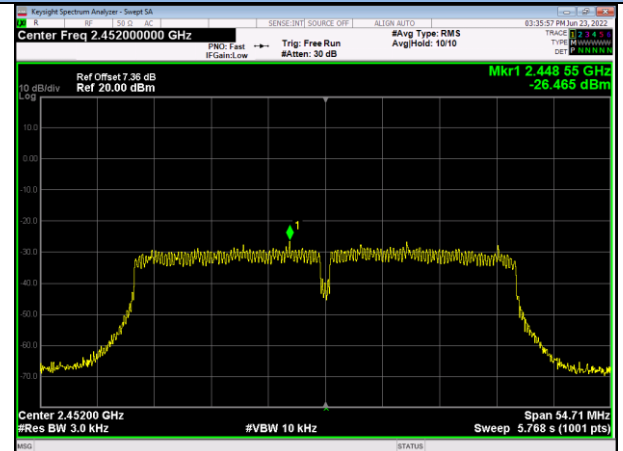


13.5 Band Edge and Conducted Spurious Emissions Measurement

LIMITS

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

BLOCK DIAGRAM OF TEST SETUP



TEST PROCEDURES

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to ANSI C63.10-2013, Section 11.11

Measurement Procedure REF

- a. Set the RBW = 100 kHz.
- b. Set the VBW $\geq$ 300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep time = auto couple.
- e. Trace mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement Procedure OOB

- a. Set RBW = 100 kHz.
- b. Set VBW $\geq$ 300 kHz.
- c. Set the Detector = peak.
- d. Set the Sweep = auto couple.
- e. Set the Trace Mode = max hold.
- f. Allow trace to fully stabilize.
- g. Use the peak marker function to determine the maximum amplitude level.

TEST RESULTS


PASS

Please refer to the following test plots of the worst case.


Note: both of antennas have considered during pre-test, but only the worst case (ANT_1) was recorded.

Band Edge


IEEE 802.11b / Low Channel

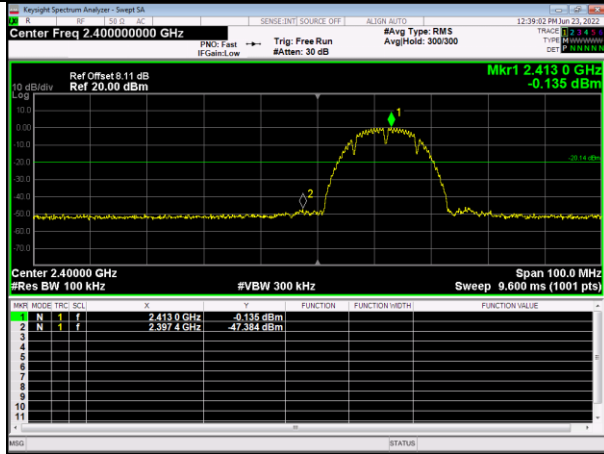


IEEE 802.11b / High Channel

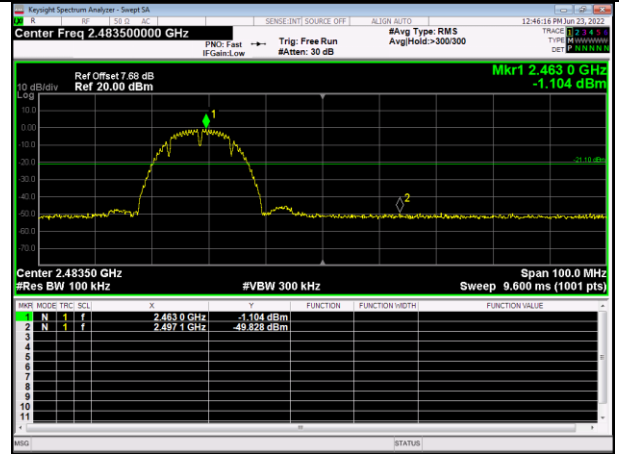

IEEE 802.11g / Low Channel

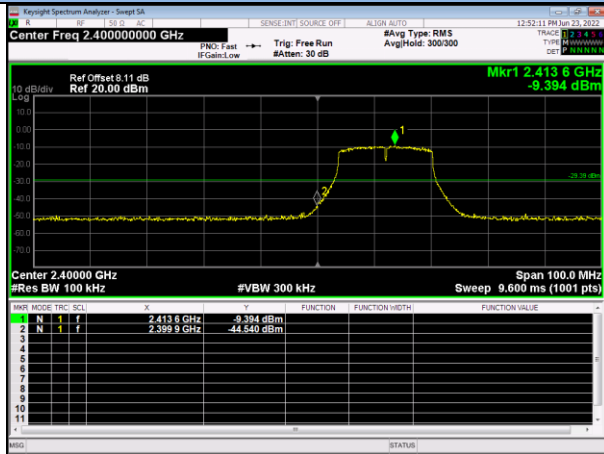


IEEE 802.11g / High Channel

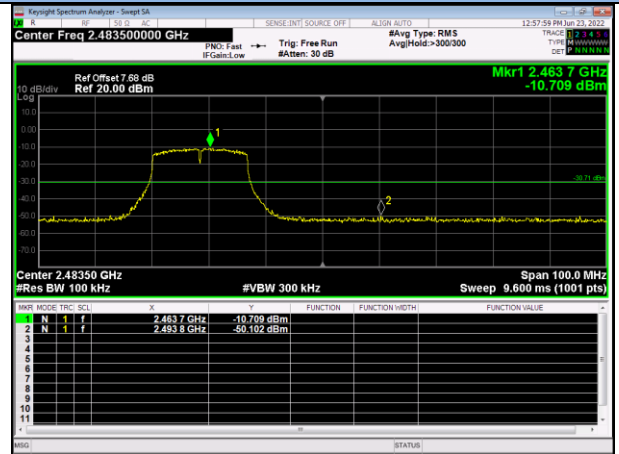


Band Edge


IEEE 802.11n(HT20) / Low Channel

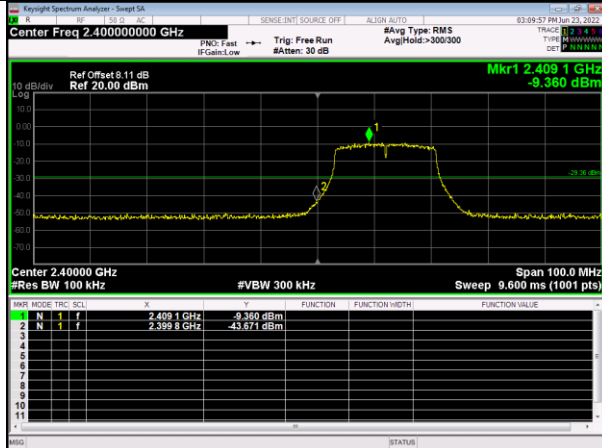


IEEE 802.11n(HT20) / High Channel

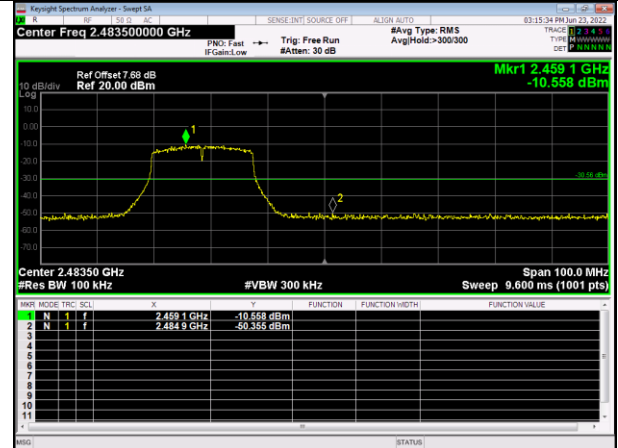

IEEE 802.11n(HT40) / Low Channel

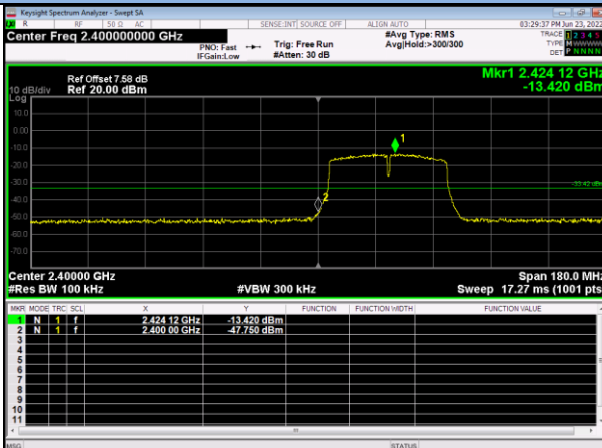


IEEE 802.11n(HT40) / High Channel

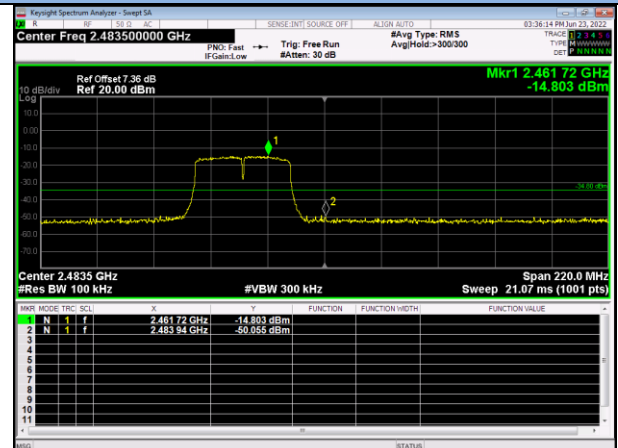


Conducted Spurious Emissions – IEEE 802.11n(HT20) (The Worst Case)


Low Channel / 30MHz~25GHz

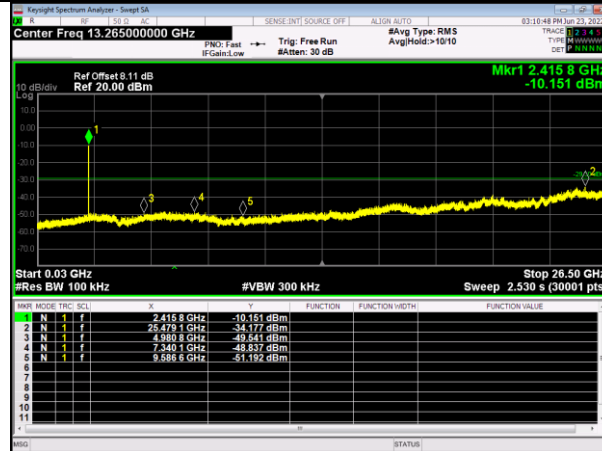

Middle Channel / 30MHz~25GHz

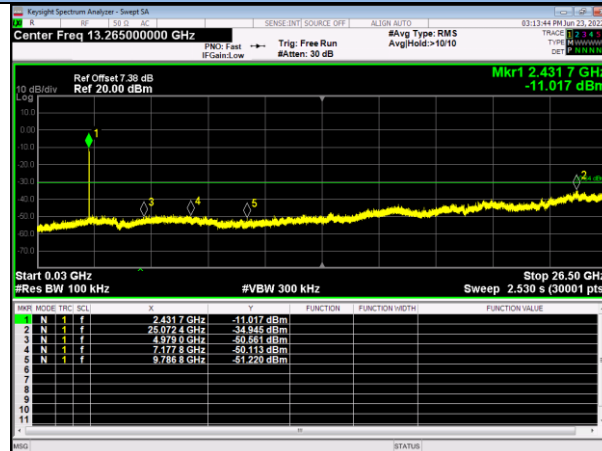

High Channel / 30MHz~25GHz

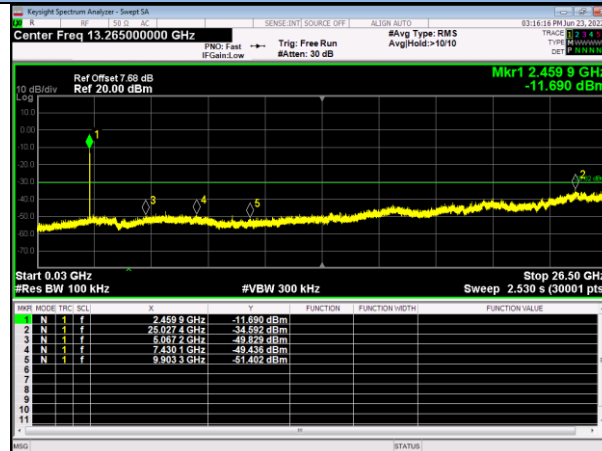

13.6 Radiated Spurious Emissions and Restricted Bands Measurement


LIMITS

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500


- Remark:
- (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

BLOCK DIAGRAM OF TEST SETUP


For Radiated Emission below 30MHz

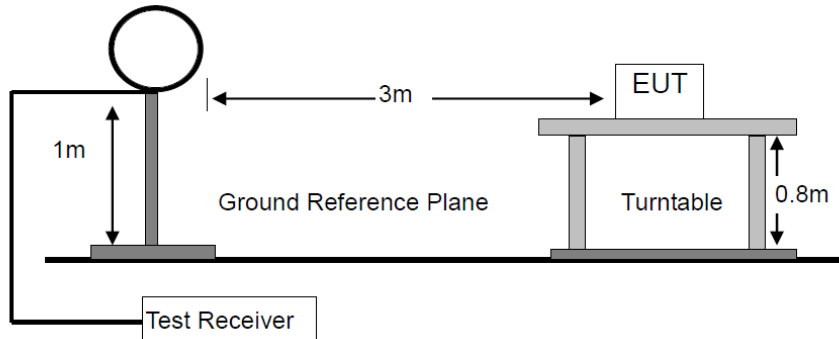

For Radiated Emission 30-1000MHz

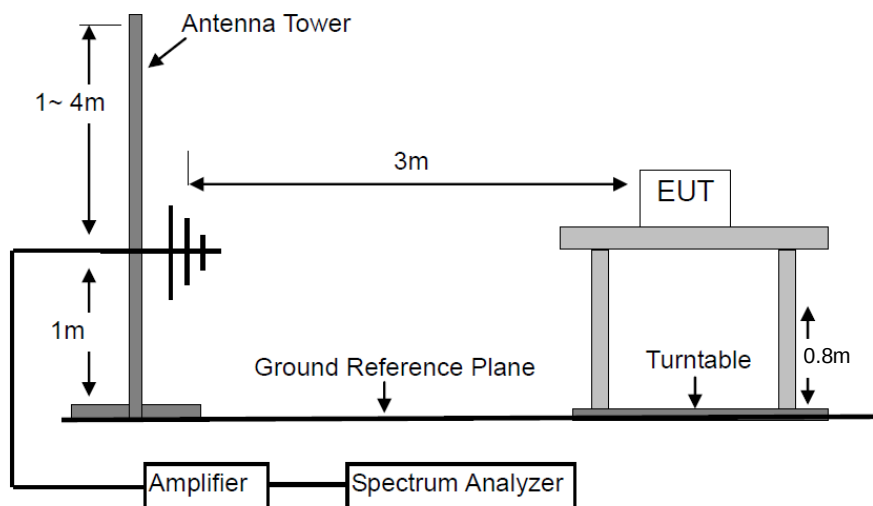

For Radiated Emission Above 1000MHz.

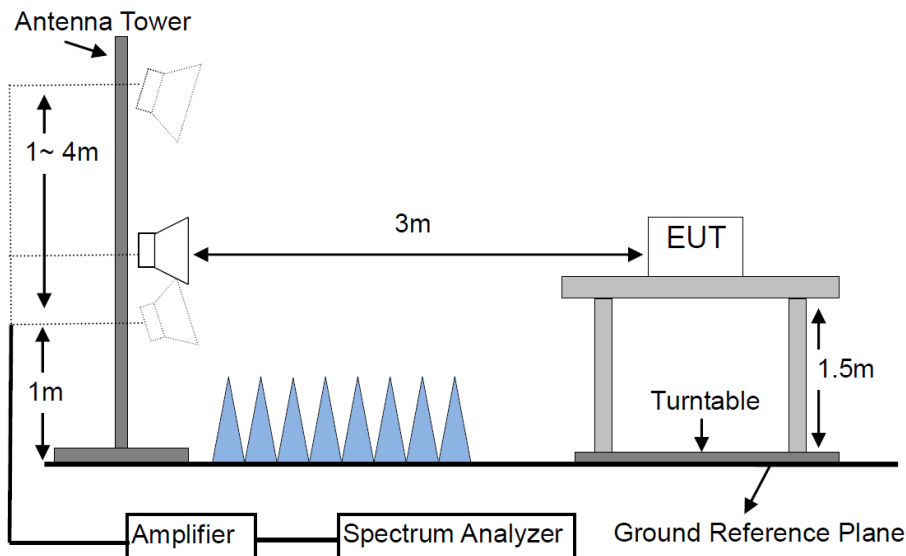

TEST PROCEDURES

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

TEST RESULTS

PASS


Please refer to the following pages of the worst case.

M/N: M22	Testing Voltage: AC 120V 60Hz
Polarization: Horizontal	Detector: QP
Test Mode: 1 (IEEE 802.11n(HT20) Low channel) -SISO	Distance: 3m

Radiated Emission Measurement

Date: 2022/6/23

Time: 9:58:23

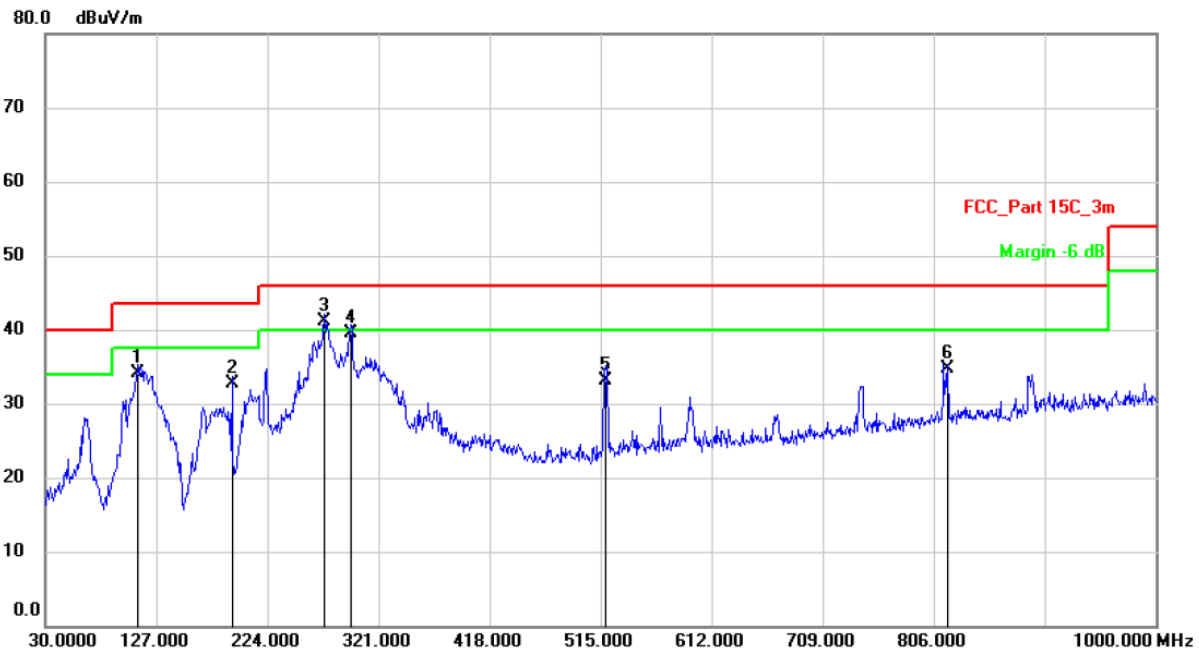

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		110.5100	41.82	-7.62	34.20	43.50	-9.30	QP	
2		192.9600	40.75	-8.05	32.70	43.50	-10.80	QP	
3	*	273.4700	47.16	-5.96	41.20	46.00	-4.80	QP	
4		296.7500	45.19	-5.59	39.60	46.00	-6.40	QP	
5		519.8500	34.63	-1.43	33.20	46.00	-12.80	QP	
6		817.6400	30.52	4.28	34.80	46.00	-11.20	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.


M/N: M22	Testing Voltage: AC 120V 60Hz
Polarization: Vertical	Detector: QP
Test Mode: 1 (IEEE 802.11n(HT20) Low channel) -SISO	Distance: 3m

Radiated Emission Measurement

Date: 2022/6/23

Time: 10:05:13

80.0 dBuV/m

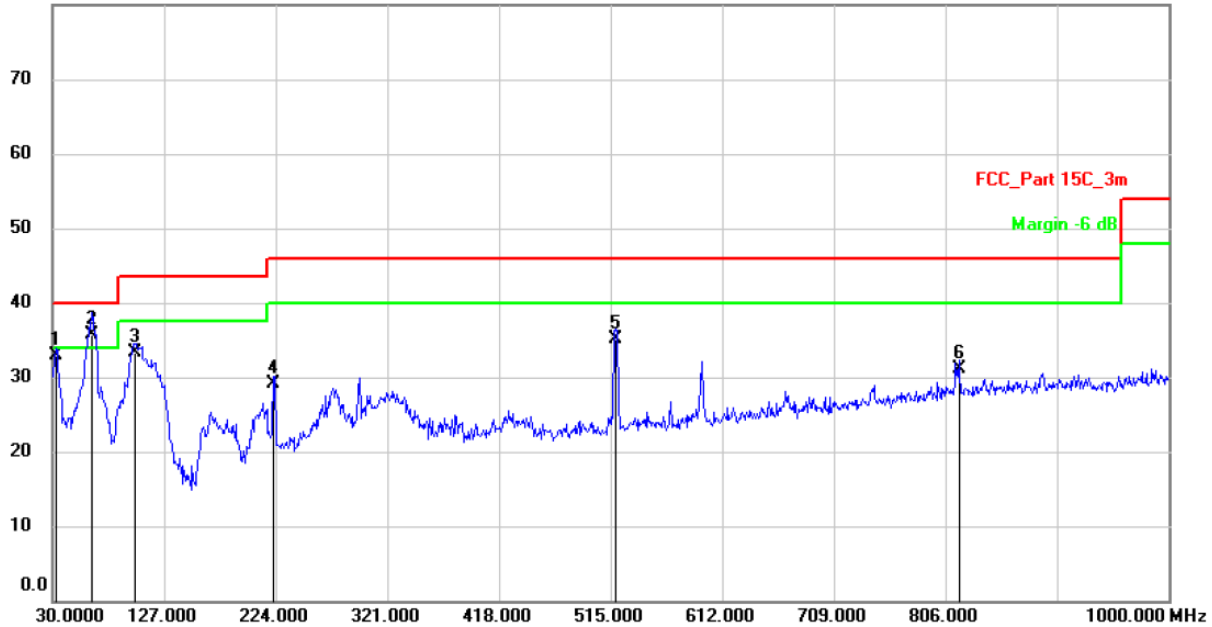

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		32.9100	42.39	-9.49	32.90	40.00	-7.10	QP	
2	*	63.9500	44.76	-9.06	35.70	40.00	-4.30	QP	
3		101.7800	42.12	-8.72	33.40	43.50	-10.10	QP	
4		222.0600	37.51	-8.31	29.20	46.00	-16.80	QP	
5		518.8800	37.56	-2.46	35.10	46.00	-10.90	QP	
6		817.6400	26.92	4.28	31.20	46.00	-14.80	QP	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Modulation: TX (IEEE 802.11n(HT20) –SISO the worst case)				Test Result: PASS			Test frequency range: 1-25GHz			
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV/m)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4824	V	46.51	34.66	6.38	52.89	41.04	74.00	54.00	-21.11	-12.96
7236	V	46.36	32.26	10.48	56.84	42.74	74.00	54.00	-17.16	-11.26

4824	H	50.21	43.09	6.38	56.59	49.47	74.00	54.00	-17.41	-4.53
7236	H	45.89	32.28	10.48	56.37	42.76	74.00	54.00	-17.63	-11.24

Operation Mode: TX Mode (Mid)										
4874	V	45.78	38.29	6.56	52.34	44.85	74.00	54.00	-21.66	-9.15
7311	V	45.78	31.63	10.53	56.31	42.16	74.00	54.00	-17.69	-11.84

4874	H	47.86	40.36	6.56	54.42	46.92	74.00	54.00	-19.58	-7.08
7311	H	46.02	31.69	10.53	56.55	42.22	74.00	54.00	-17.45	-11.78

Operation Mode: TX Mode (High)										
4924	V	43.43	34.68	6.76	50.19	41.44	74.00	54.00	-23.81	-12.56
7386	V	44.54	31.32	10.57	55.11	41.89	74.00	54.00	-18.89	-12.11

4924	H	47.04	38.84	6.76	53.80	45.60	74.00	54.00	-20.20	-8.40
7386	H	45.21	31.56	10.57	55.78	42.13	74.00	54.00	-18.22	-11.87

Spurious Emission in restricted band:										
2390.000	V	57.96	39.61	0.09	58.05	39.70	74.00	54.00	-15.95	-14.30
2390.000	H	59.96	45.37	0.09	60.05	45.46	74.00	54.00	-13.95	-8.54
2483.500	V	49.83	35.91	0.34	50.17	36.25	74.00	54.00	-23.83	-17.75
2483.500	H	51.81	38.24	0.34	52.15	38.58	74.00	54.00	-21.85	-15.42

Remark: 1. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits.
2. Others emissions are attenuated 20dB below the limits, so it does not record in report.
3. Both SISO and MIMO modes have been considered and tested.

13.7 Antenna Requirement

STANDARD APPLICABLE

According to of FCC part 15C section 15.203 and 15.247:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

ANTENNA CONNECTED CONSTRUCTION

The EUT is an integral antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 2dBi, therefore, the antenna is considered to meet the requirement.

14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2022	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2022	2 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2022	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2022	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2022	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 23, 2022	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 13, 2022	1 Year
8.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2022	2 Year
9.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2022	1 Year
10.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2022	1 Year
11.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2022	2 Year
12.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 13, 2022	1 Year
13.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2022	1 Year
14.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar.13, 2022	1 Year
15.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
16.	Test Software	EZ	EZ EMC, NTC-3A1.1	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---