

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 1 of 68

Applicant : PETKIT Network Technology (Shanghai) Co., Ltd.
Address of Applicant : Room 4139, Building 2, 588 Zixing Road, Minhang District, Shanghai

Product Name : PETKIT PURA MAX 2 SELF-CLEANING CAT LITTER BOX
Brand Name : PETKIT
Model Name : P9902
Sample Acquisition Method : Sent by Client

Sample No. : E24090019-01#02
E24090019-01#05

FCC ID : 2A72N-P9902


Standards : FCC CFR47 Part 15.247, Subpart C

Date of Receipt : 2024-09-10
Date of Test : 2024-10-09~ 2024-10-28
Date of Issue : 2024-10-29

Remark:

This report details the results of the testing carried out on one sample, the results contained in this report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Prepared by:



(Erik Yang)

Reviewed by:



(Jennifer Zhou)

Approved by:



(Authorized signatory: Echo Mu)

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 2 of 68

Contents

1	GENERAL INFORMATION	3
1.1	TESTING LABORATORY	3
1.2	DETAILS OF APPLICATION	3
1.3	DETAILS OF EUT	3
1.4	TEST METHODOLOGY	4
1.5	TEST SUMMARY	5
2	TEST CONDITION	6
2.1	ENVIRONMENTAL CONDITIONS	6
2.2	EQUIPMENT LIST	6
2.3	MEASUREMENT UNCERTAINTY	7
3	TEST SET-UP AND OPERATION MODES	8
3.1	DETAILS OF TEST MODE	8
3.2	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
3.3	SUPPORT SOFTWARE	9
3.4	TEST SETUP DIAGRAM	9
4	TEST RESULTS	11
4.1	TRANSMITTER REQUIREMENT & TEST SUITES	11
4.1.1	<i>Antenna Requirement</i>	11
4.1.2	<i>Maximum conducted (average) output power</i>	12
4.1.3	<i>6dB Bandwidth</i>	13
4.1.4	<i>Maximum conducted output power spectral density</i>	20
4.1.5	<i>Conducted Spurious Emission & Authorized-band band-edge</i>	27
4.1.6	<i>Radiated Emission</i>	50
4.1.7	<i>Band Edge (Restricted-band band-edge)</i>	51
4.2	MAINS EMISSIONS	52
4.2.1	<i>Conducted Emission on AC Mains</i>	52
5	APPENDIXES	55
5.1	PHOTOGRAPHS OF THE SAMPLE	55
5.2	SET-UP FOR CONDUCTED EMISSIONS	67
5.3	SET-UP FOR CONDUCTED RF TEST AT ANTENNA PORT	67
5.4	SET-UP FOR SPURIOUS EMISSIONS BELOW 1GHZ	68
5.5	SET-UP FOR SPURIOUS EMISSIONS ABOVE 1GHZ	68

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 3 of 68

1 General Information

1.1 Testing Laboratory

Company Name	ICAS Testing Technology Service (Shanghai) Co., Ltd
Address	No.1298, Pingan Road, Minhang District, Shanghai, China
Telephone	0086 21-51682999
Fax	0086 21-54711112
Homepage	www.icasiso.com

1.2 Details of Application

Applicant Company Name	PETKIT Network Technology (Shanghai) Co., Ltd.
Address	Room 4139, Building 2, 588 Zixing Road, Minhang District, Shanghai
Contact Person	TingHe
Telephone	+86 13916991059
Email	ting.he@petkit.com
Manufacturer Company Name	Dongguan Zhihang Electronic Technology Co., LTD.
Address	Room 701, Building 15, No.1, Pushi Road I, Qiaotou Town, Dongguan City,Guangdong Province, China.
Factory Company Name	Dongguan Zhihang Electronic Technology Co., LTD.
Address	Room 701, Building 15, No.1, Pushi Road I, Qiaotou Town, Dongguan City,Guangdong Province, China.

1.3 Details of EUT

Product Name	PETKIT PURA MAX 2 SELF-CLEANING CAT LITTER BOX
Brand Name	PETKIT
Test Model Name	P9902
FCC ID	2A72N-P9902
Mode of Operation	WLAN 802.11b/g/n(HT20/40)
Max RF Output Power	IEEE 802.11b: 16.92dBm IEEE 802.11g: 15.32dBm IEEE 802.11n(20): 13.85dBm IEEE 802.11n(40): 11.83dBm
Frequency Range	IEEE 802.11b/g/n(HT20): 2412MHz ~ 2462MHz IEEE 802.11n(40): 2422MHz ~ 2452MHz
Channel Separation	5 MHz
Number of channels	802.11b/g/n(20M): 11 Channels 802.11n(40M): 7 Channels
Modulation Type	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n(20M/40M): OFDM(64QAM, 16QAM, QPSK, BPSK)

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 4 of 68

Antenna Type	PCB Antenna
Antenna Gain	3.71dBi
Extreme Temperature Range	0°C~ +40°C
Test Voltage	DC 12V 2A by Adapter (Model:TEKA-TD120200US)
Hardware Version	V2.3
Software Version	1.614
RF power setting in TEST SW	802.11b: ESP_RF_test_tool_v3.6_Manual_Power level setting_ Attenuation 12×0.25dB 802.11g: ESP_RF_test_tool_v3.6_Manual_Power level setting_ Attenuation 4×0.25dB 802.11n(HT20): ESP_RF_test_tool_v3.6_Manual_Power level setting_ Attenuation 12×0.25dB 802.11n(HT40): ESP_RF_test_tool_v3.6_Manual_Power level setting_ Attenuation 18×0.25dB

Note:

1. The above information was declared by the manufacture.
2. For more details, please refer to the User's manual of the EUT.

Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2.412GHz	5	2.432GHz	9	2.452GHz
2	2.417GHz	6	2.437GHz	10	2.457GHz
3	2.422GHz	7	2.442GHz	11	2.462GHz
4	2.427GHz	8	2.447GHz		

Note: For 20MHz bandwidth system use Channel 1 to Channel 11

For 40MHz bandwidth system use Channel 3 to Channel 9

1.4 Test Methodology

47 CFR Part 15, Subpart C	Telecommunication-Radio Frequency Devices-Intentional Radiators
KDB Publication 558074 D01 v05r02	15.247 Meas Guidance.
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Note(s):

All test items were verified and recorded according to the standards and without any addition/deviation/exclusion during the test.

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 5 of 68

1.5 Test Summary

Test Item	FCC Rules	Result
Antenna Requirement	FCC Part 15.247(b)(4), Part 15.203	PASS
Maximum conducted (average) output power	FCC Part 15.247(b)(3)	PASS
6dB Bandwidth	FCC Part 15.247(a)(2)	PASS
Maximum conducted output power spectral density	FCC Part 15.247(e)	PASS
Conducted Spurious Emission & Authorized-band band-edge	FCC Part 15.247(d)	PASS
Radiated Emission	FCC Part 15.247(d), 15.205, 15.209	PASS
Band Edge (Restricted-band band-edge)	FCC Part 15.247(d), 15.205, 15.209	PASS
Conducted Emission on AC Mains	FCC Part 15.207(a)	PASS

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 6 of 68

2 Test Condition

2.1 Environmental conditions

Temperature (°C)	18-25
Humidity (%RH)	40-65
Barometric Pressure (mbar)	960-1060

2.2 Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020B	MY59260184	2024-06-26	2025-06-25
Spectrum Analyzer	Rohde & Schwarz	FSV40N	101450	2024-06-04	2025-06-03
Signal Generator	Rohde & Schwarz	SMR27	100184	2024-06-26	2025-06-25
EMI Test Receiver	Rohde & Schwarz	ESPI3	100173	2024-06-05	2025-06-04
EMI Test Receiver	Rohde & Schwarz	ESR 7	101911	2024-06-04	2025-06-03
V-network	SCHWARZBECK	NSLK 8127	8127-902	2024-06-05	2025-06-04
Attenuator	SCHWARZBECK	VTSD 9561-FN	/	2024-06-05	2025-06-04
Broadband Antenna	SCHWARZBECK	VULB9163	9163-1037	2023-03-22	2025-03-21
Horn Antenna-18G	SCHWARZBECK	BBHA9120D	9120D-1775	2023-06-13	2025-06-12
Loop Antenna	SCHWARZBECK	FMZB 1513	/	2023-06-09	2025-06-08
Horn Antenna-40G	YINGLIAN	LB-180400-KF	N/A	2023-06-18	2025-06-17
Broadband Preamplifier	SCHWARZBECK	BBV 9718	346	2024-06-04	2025-06-03
EMC chamber 9*6*6(L*W*H)	CHANGNING	966	N/A	2023-06-09	2025-06-08
Shielded Enclosure 8*5*4(L*W*H)	CHANGNING	854	N/A	2023-06-09	2025-06-08
Test Software	BL	BL410_E	Version:2.1.1.436	N/A	N/A
Test Software	BL	BL410_R	Version:2.1.1.409	N/A	N/A

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 7 of 68

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI. The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95.45%.

Parameter		Uncertainty
Antenna Port Conducted Emission		$\pm 1.04\text{dB}$
Radiated Emission	< 1GHz	$\pm 5.00\text{dB}$
	> 1GHz	$\pm 5.46\text{dB}$
Conducted Emission on AC Mains	150kHz-30MHz	$\pm 3.36\text{dB}$
Occupied Channel Bandwidth		$\pm 39.26\text{KHz}$
Maximum Conducted Output Power		$\pm 1.06\text{dB}$
Maximum Conducted Output Power Spectral Density		$\pm 1.12\text{dB}$

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 8 of 68

3 Test Set-up and Operation Modes

3.1 Details of Test Mode

Using test software (ESP_RF_test_tool_v3.6_Manual) was control EUT work in continuous transmitter and receiver mode. Select test channel as below:

For 802.11b/g/n (HT20)

Channel	Frequency
The lowest channel (CH1)	2412MHz
The middle channel (CH6)	2437MHz
The highest channel (CH11)	2462MHz

For 802.11n(HT40)

Channel	Frequency
The lowest channel (CH3)	2422MHz
The middle channel (CH6)	2437MHz
The highest channel (CH9)	2452MHz

Through Pre-scan under all rate at lowest channel, the data rate as below table described is the worst case, so we choose these data rate for test.

Type	Data rate
802.11b	1Mbps
802.11g	18Mbps
802.11n(20M)	MCS2
802.11n(40M)	MCS2

The basic operation modes are:

- A. On
1. WLAN mode
- a. Transmitting
- i. Low Channel
- ii. Middle Channel
- iii. High Channel
- b. Receiving
- B. Standby
- C. Off

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 9 of 68

3.2 Special Accessories and Auxiliary Equipment


Description	Manufacturer	Model Name	Serial No.
ADAPTER	SHENZHEN TEKA TECHNOLOGY CO., LTD.	TEKA-TD120200US	Input: AC 100-240V 50/60Hz 0.7A Max; Output: DC 12V 2A
Laptop 1	HP	HP ZHAN 66 Pro G1	5CD7438R1J
Laptop 2	Lenovo	TP00083A	PF-0PRDGN
USB Cable	N/A	N/A	1.00m Unshielded

3.3 Support Software

Description	Manufacturer	Software Name
Software	ESPRESSIF	ESP_RF_test_tool_v3.6

3.4 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

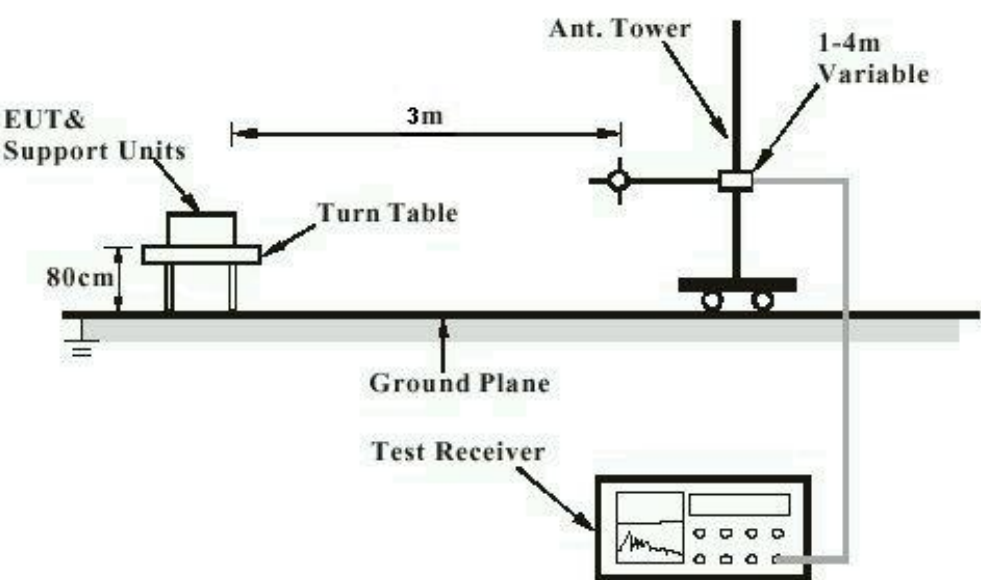

Note: Measurements above 1GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

TEST REPORT

Diagram of Measurement Equipment Configuration for Conduction Measurement


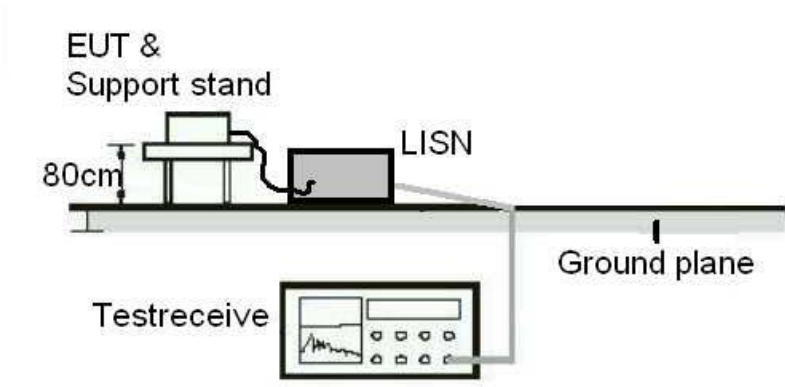


Diagram of Measurement Equipment Configuration for Transmitter Measurement

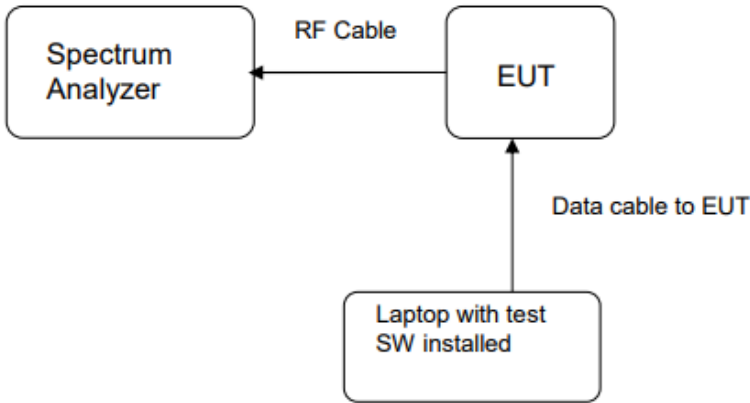

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 11 of 68

4 Test Results

4.1 Transmitter Requirement & Test Suites

4.1.1 Antenna Requirement

RESULT:

PASS

Test standard	: FCC Part 15.247(b)(4), Part 15.203
Requirement	: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. In addition, If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to the manufacturer declaration, the EUT has an antenna with a directional gain of 3.71dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user.

Therefore, the EUT is considered to comply with this provision.

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 12 of 68

4.1.2 Maximum conducted (average) output power

RESULT:

PASS

Test standard : FCC Part 15.247(b)(3)

Requirement : ANSI C63.10-2013, Clause 11.9.2
KDB 558074 D01 v05r02, Clause 8.3.2

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.2°C

Relative humidity : 46%

Table 1: Maximum conducted (average) output power

Test Mode	Duty Cycle (%)	Test Channel (MHz)	Maximum conducted (average) output power		Limit (W)
			(dBm)	(mW)	
802.11b	100	2412	16.92	49.20	≤1
		2437	15.66	36.81	
		2462	15.18	32.96	
802.11g	100	2412	15.32	34.04	
		2437	14.91	30.97	
		2462	14.72	29.65	
802.11n(HT20)	100	2412	13.85	24.27	
		2437	13.43	22.03	
		2462	12.98	19.86	
802.11n(HT40)	100	2422	11.83	15.24	
		2437	11.67	14.69	
		2452	11.26	13.37	

Notes:

1. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 13 of 68

4.1.3 6dB Bandwidth

RESULT:

PASS

Test standard : FCC Part 15.247(a)(2)

Requirement : ANSI C63.10-2013, Clause 11.8.1
KDB 558074 D01 v05r02, Clause 8.2

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.2°C

Relative humidity : 46%

Table 2: 6dB Bandwidth

Test Mode	Test Channel (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Applicable Limit (MHz)
802.11b	2412	9.54	≥0.5
	2437	10.07	
	2462	8.70	
802.11g	2412	16.49	
	2437	16.48	
	2462	16.51	
802.11n(HT20)	2412	17.27	
	2437	17.11	
	2462	17.41	
802.11n(HT40)	2422	32.88	
	2437	32.35	
	2452	32.54	

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 14 of 68

Figure 1: 6dB Bandwidth, 802.11b, 2412MHz


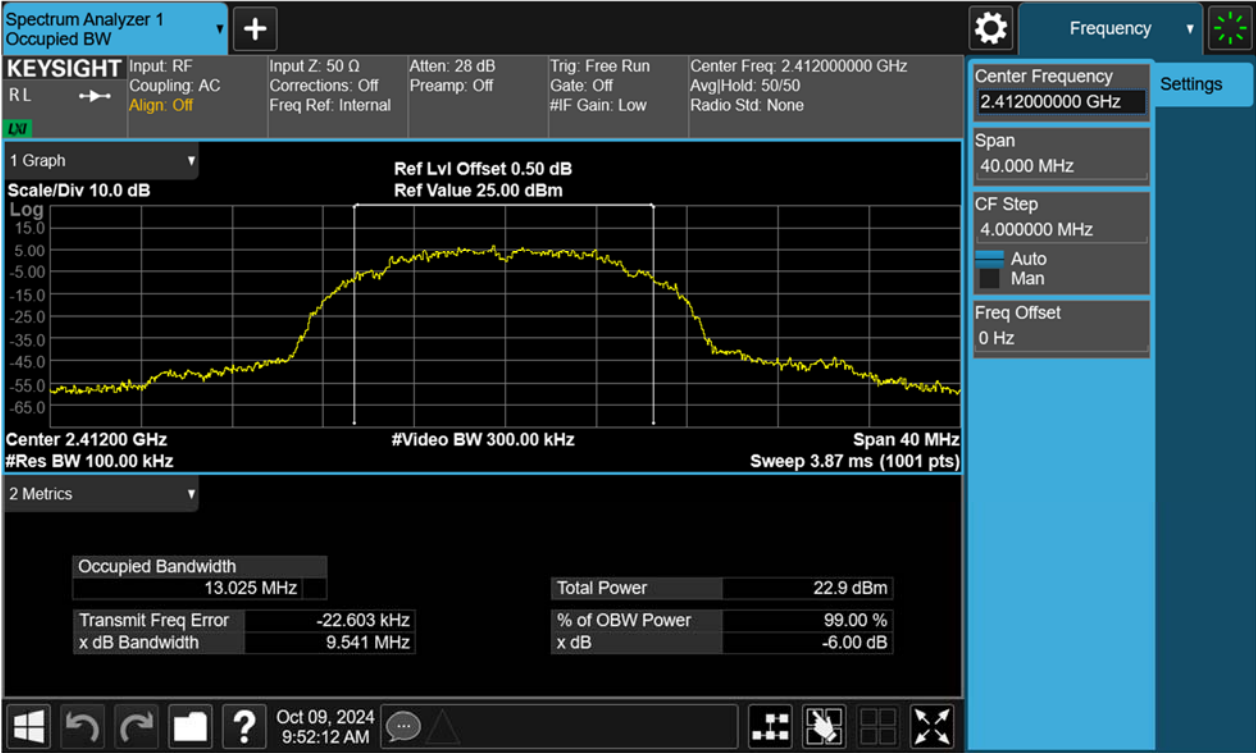


Figure 2: 6dB Bandwidth, 802.11b, 2437MHz

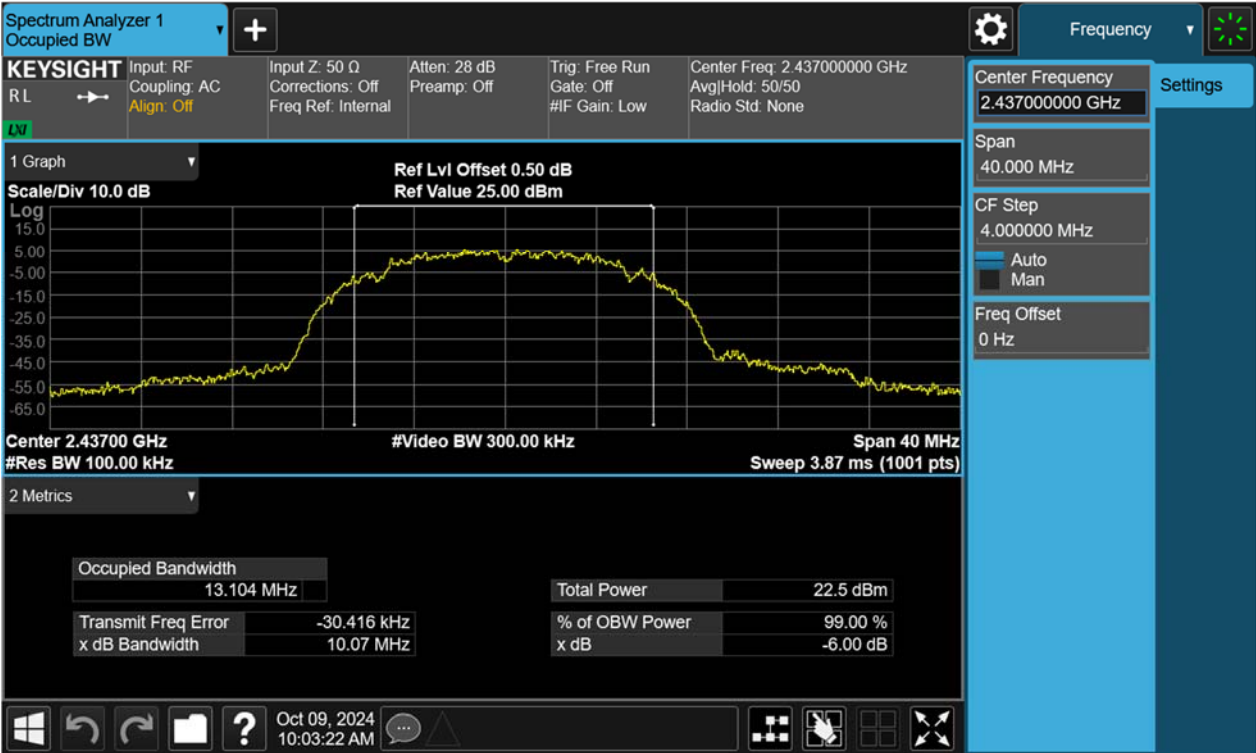

TEST REPORT

Report No.: SHE24090019-02CE


Date: 2024-10-29

Page 15 of 68

Figure 3: 6dB Bandwidth, 802.11b, 2462MHz



Figure 4: 6dB Bandwidth, 802.11g, 2412MHz

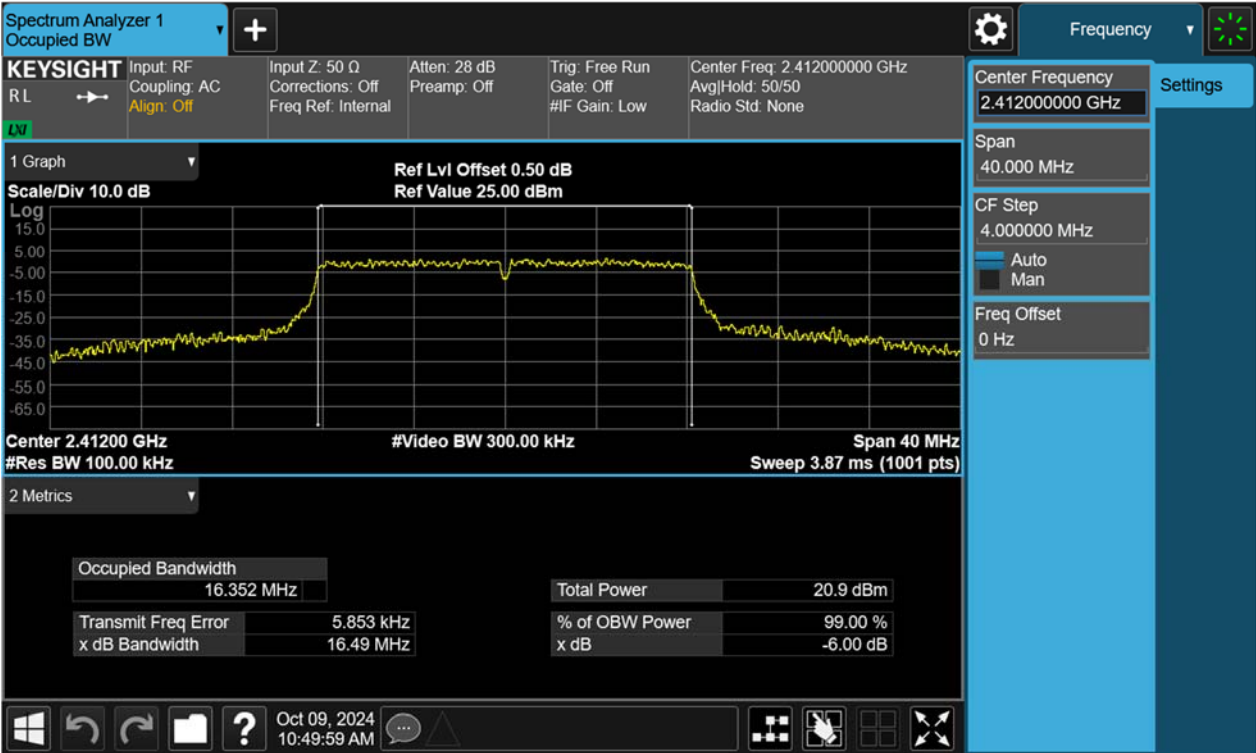

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 16 of 68

Figure 5: 6dB Bandwidth, 802.11g, 2437MHz


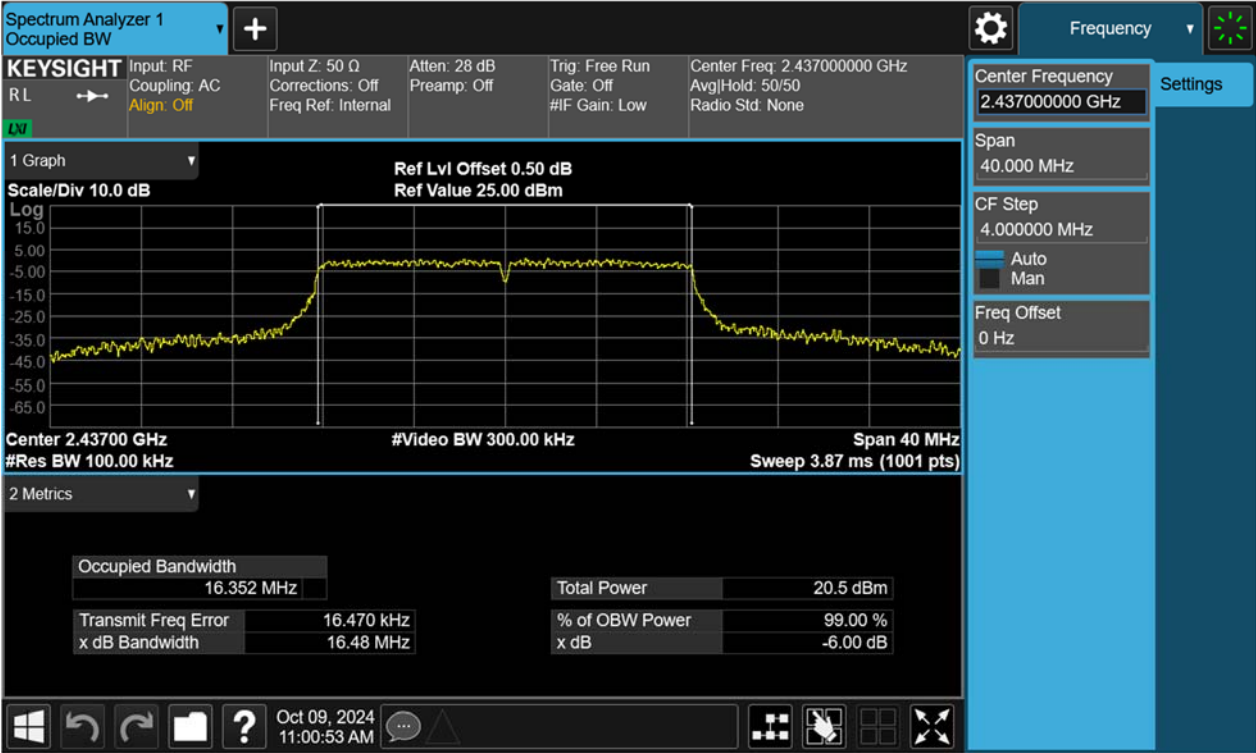


Figure 6: 6dB Bandwidth, 802.11g, 2462MHz

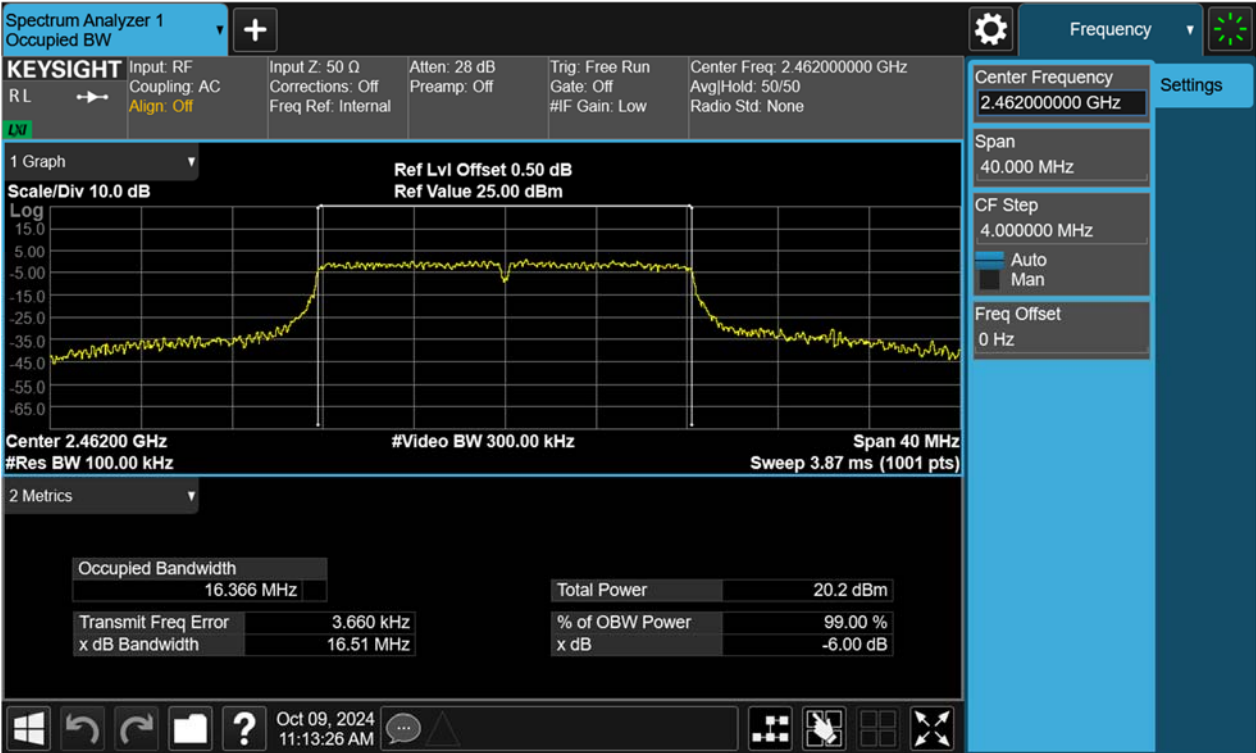

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 17 of 68

Figure 7: 6dB Bandwidth, 802.11n(HT20), 2412MHz


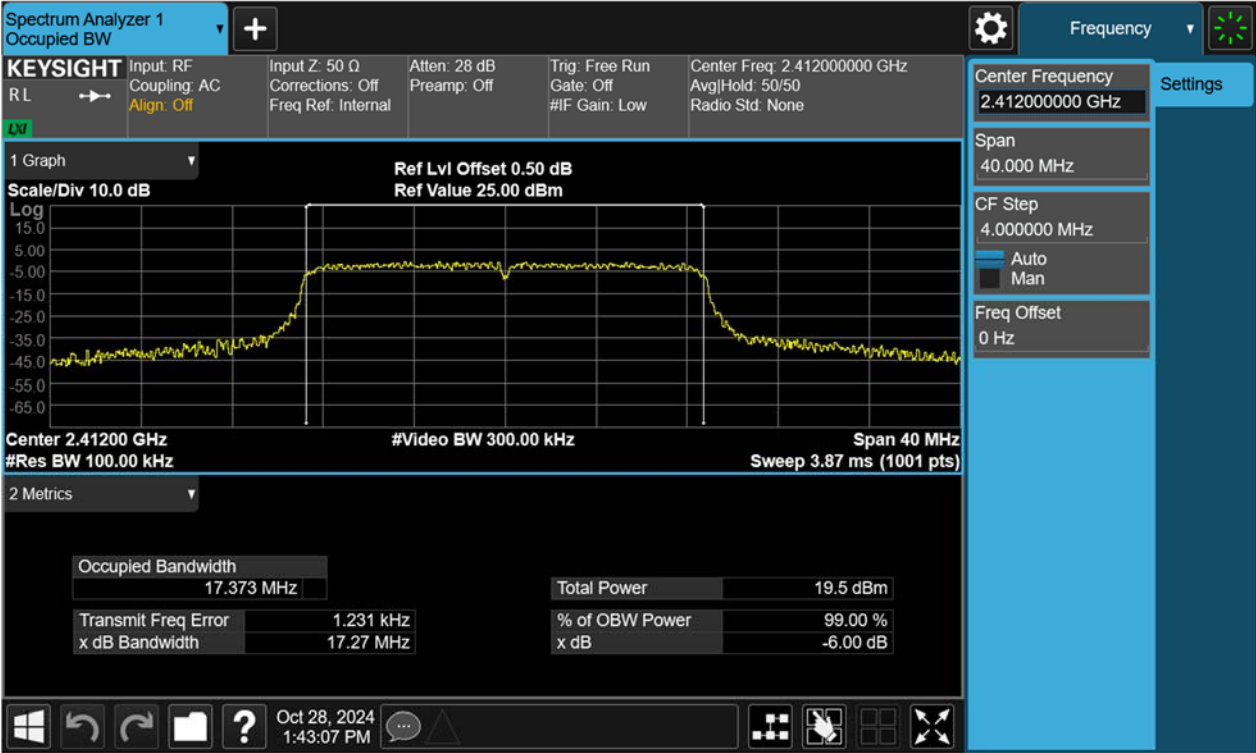


Figure 8: 6dB Bandwidth, 802.11n(HT20), 2437MHz

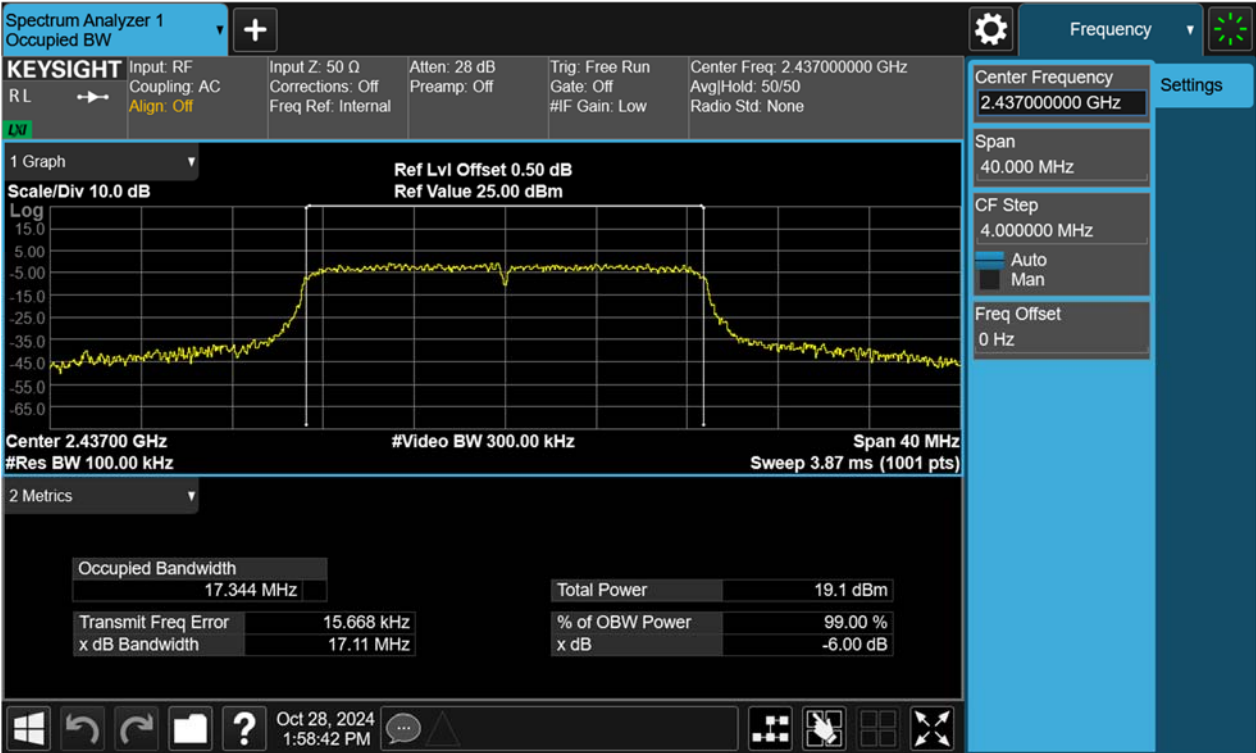

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 18 of 68

Figure 9: 6dB Bandwidth, 802.11n(HT20), 2462MHz


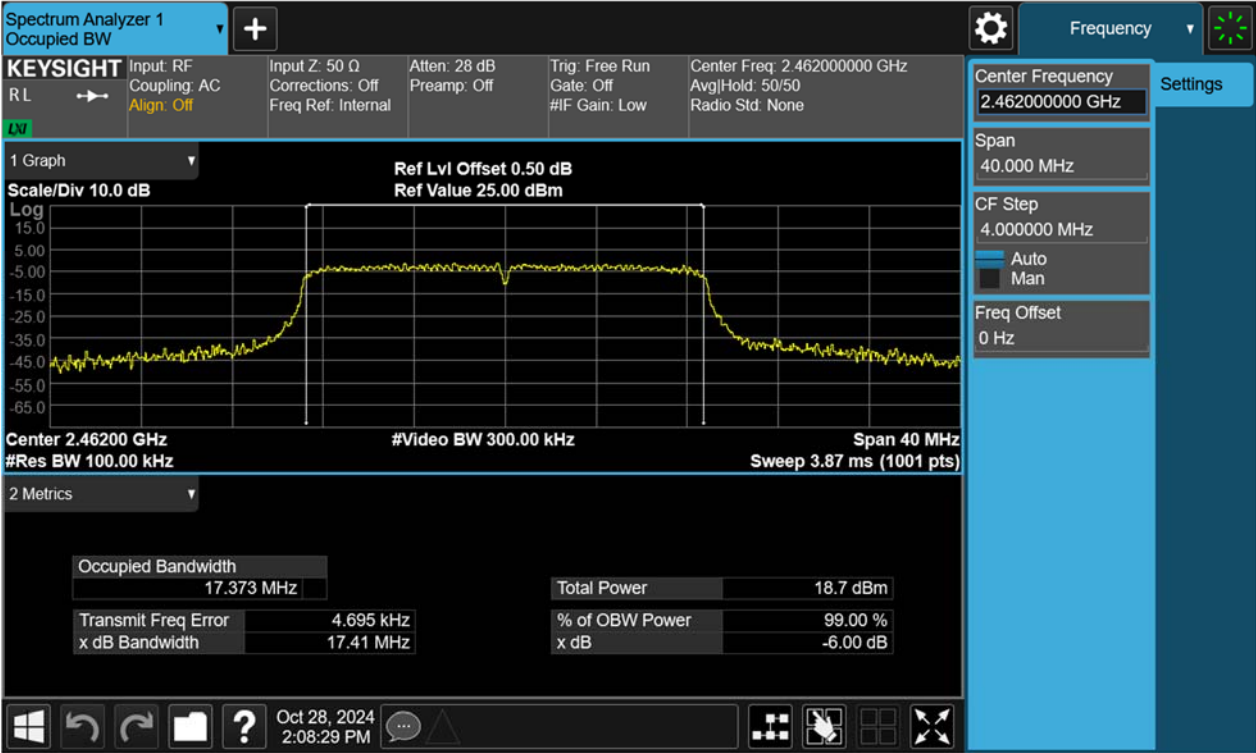


Figure 10: 6dB Bandwidth, 802.11n(HT40), 2422MHz

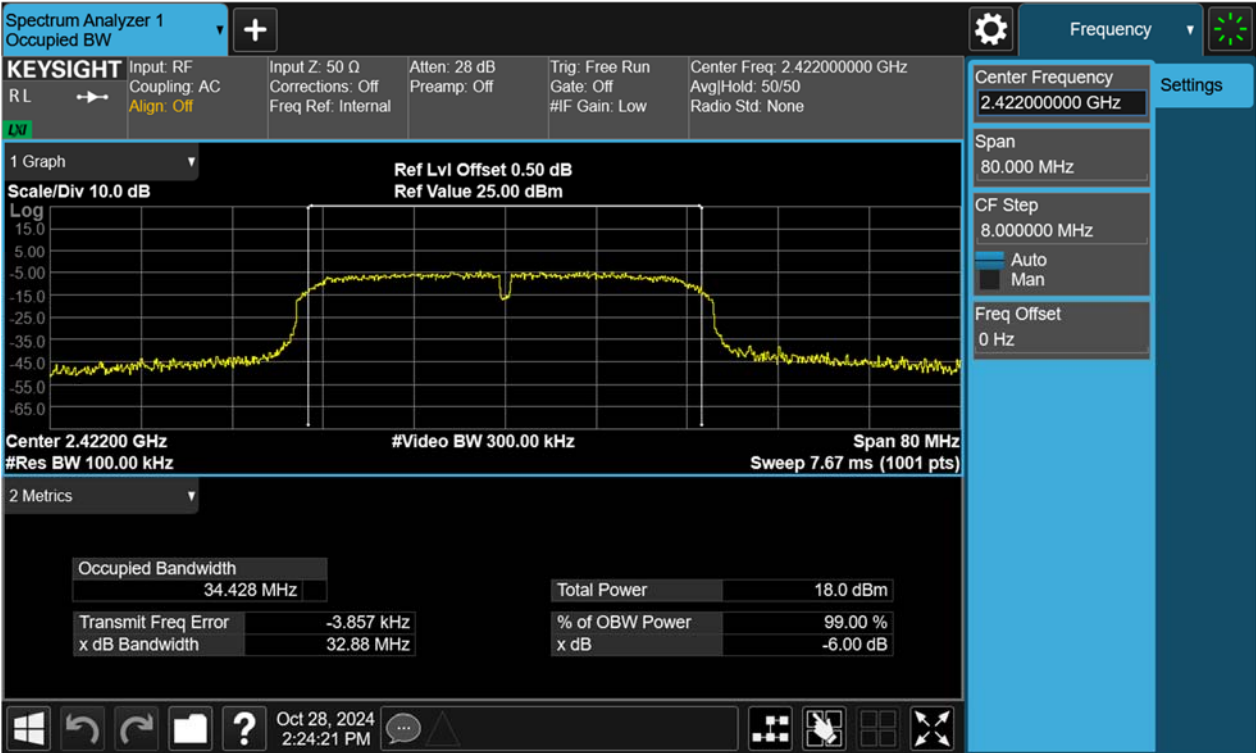

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 19 of 68

Figure 11: 6dB Bandwidth, 802.11n(HT40), 2437MHz


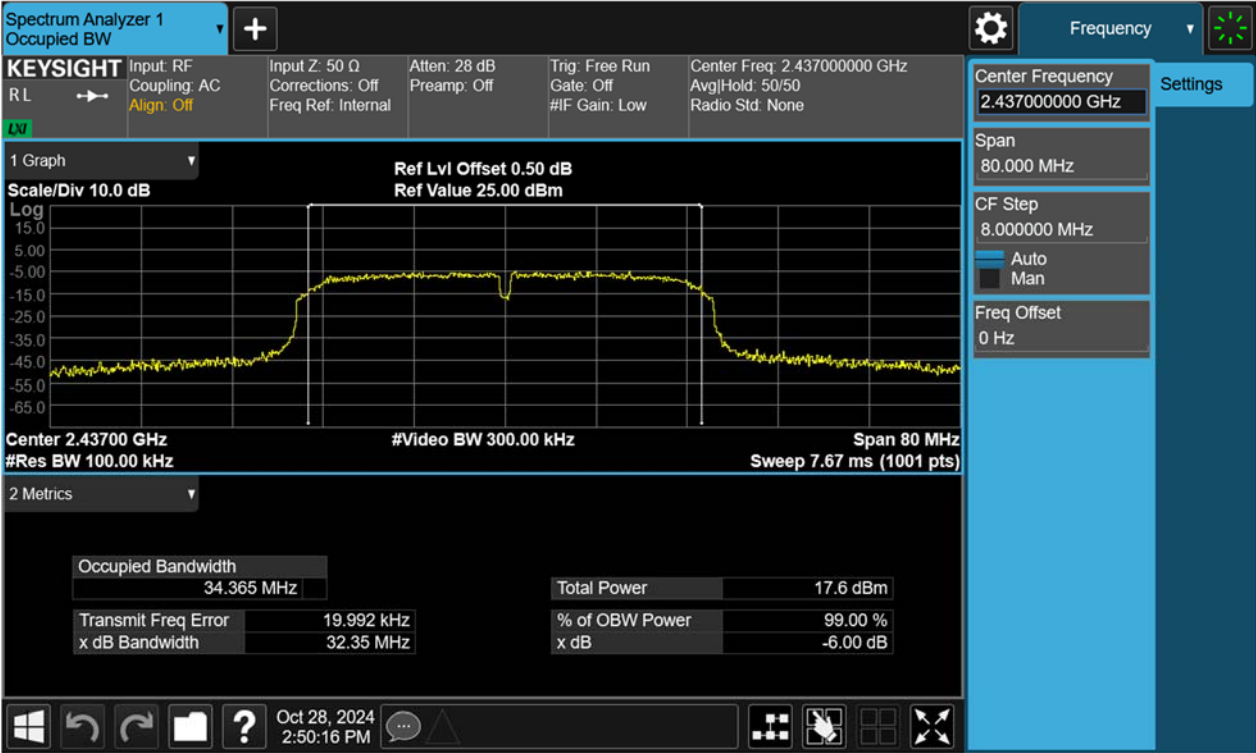


Figure 12: 6dB Bandwidth, 802.11n(HT40), 2452MHz

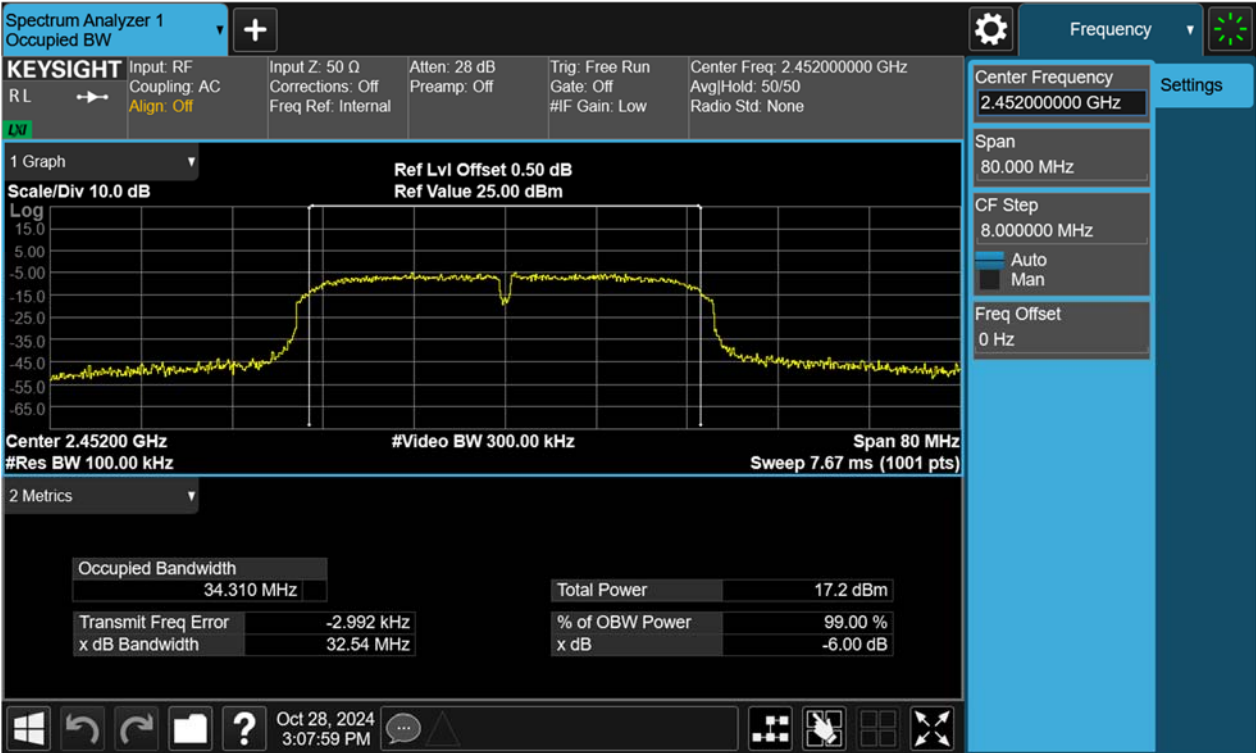

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 20 of 68

4.1.4 Maximum conducted output power spectral density

RESULT:

PASS

Test standard : FCC Part 15.247(e)

Requirement : ANSI C63.10-2013, Clause 11.10.4
KDB 558074 D01 v05r02, Clause 8.4

Kind of test site : Shielded room

Test setup

Test Channel : Low/Middle/High

Operation Mode : A.1.a

Ambient temperature : 24.2°C

Relative humidity : 46%

Table 3: Maximum (average) conducted output power spectral density

Test Mode	Test Channel (MHz)	Maximum (average) conducted output power spectral density (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	2412	-9.50	≤8
	2437	-9.63	
	2462	-10.31	
802.11g	2412	-13.45	
	2437	-13.79	
	2462	-14.37	
802.11n(HT20)	2412	-14.75	
	2437	-15.14	
	2462	-15.59	
802.11n(HT40)	2422	-18.15	
	2437	-18.55	
	2452	-18.93	

TEST REPORT

Report No.: SHE24090019-02CE Date: 2024-10-29 Page 21 of 68

Figure 13: Power Spectral Density, 802.11b, 2412MHz


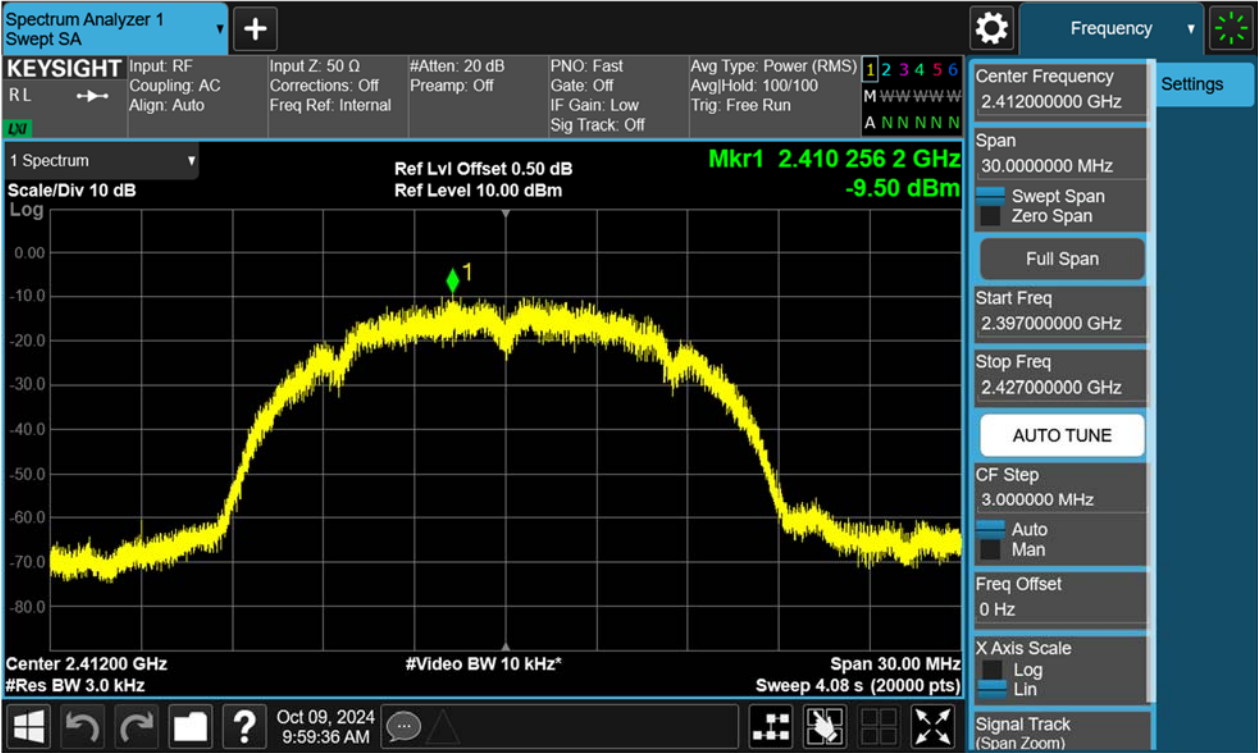


Figure 14: Power Spectral Density, 802.11b, 2437MHz

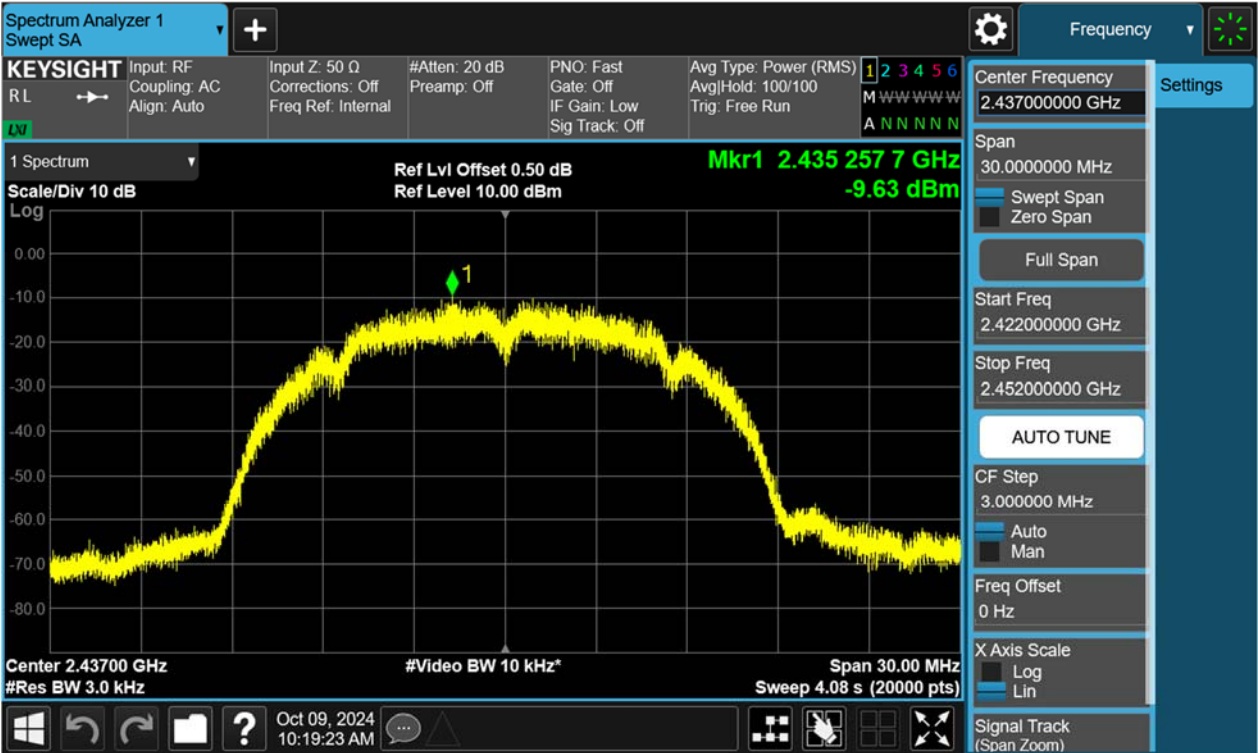

TEST REPORT

Report No.: SHE24090019-02CE Date: 2024-10-29 Page 22 of 68

Figure 15: Power Spectral Density, 802.11b, 2462MHz


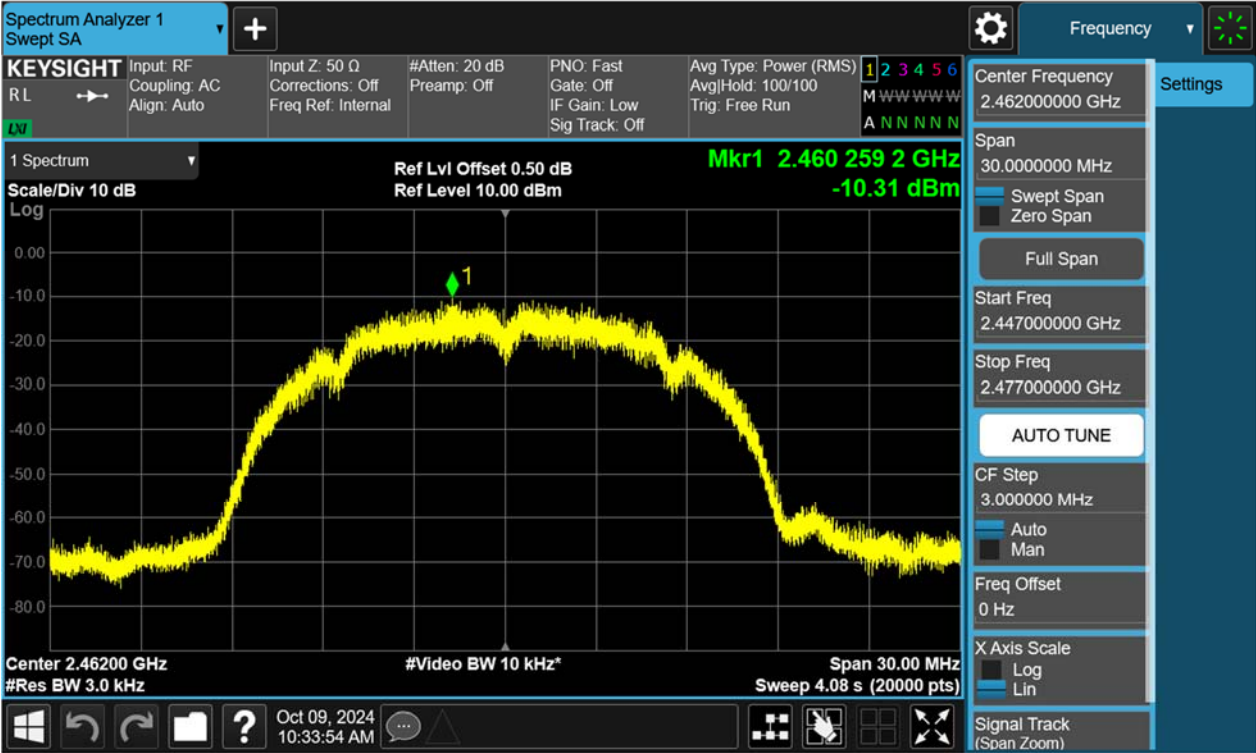


Figure 16: Power Spectral Density, 802.11g, 2412MHz

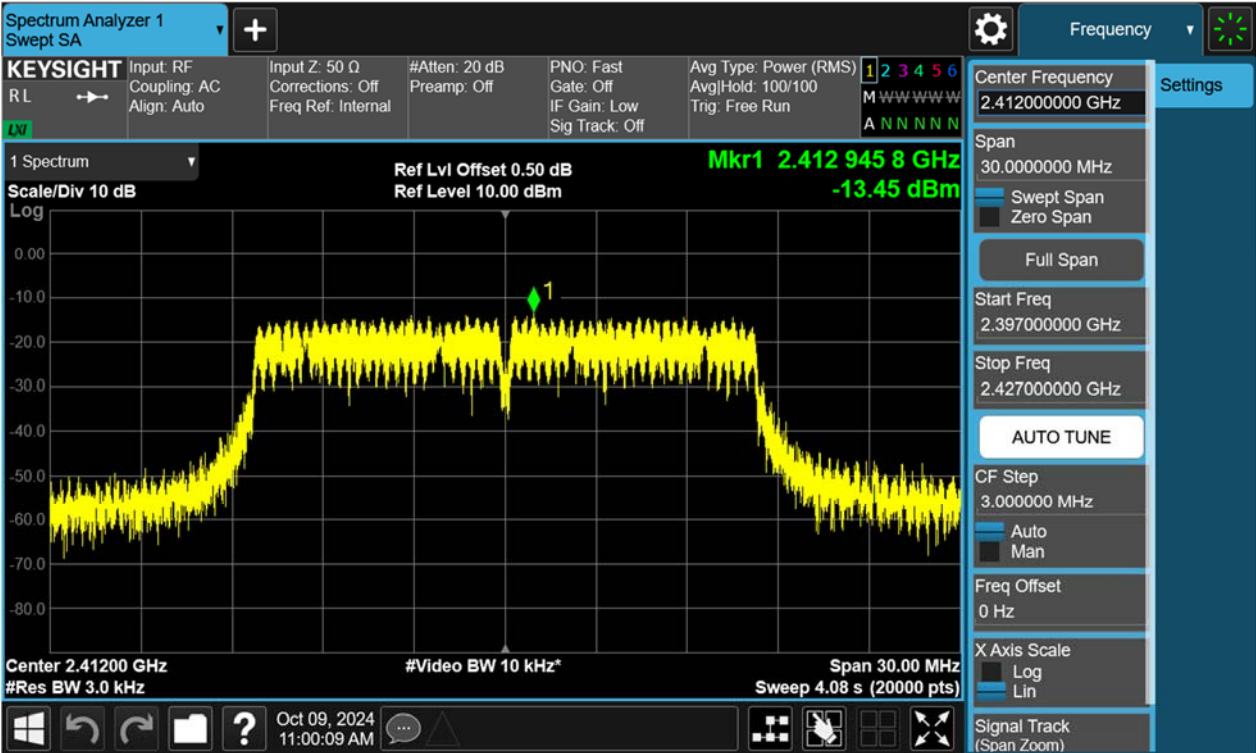

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 23 of 68

Figure 17: Power Spectral Density, 802.11g, 2437MHz


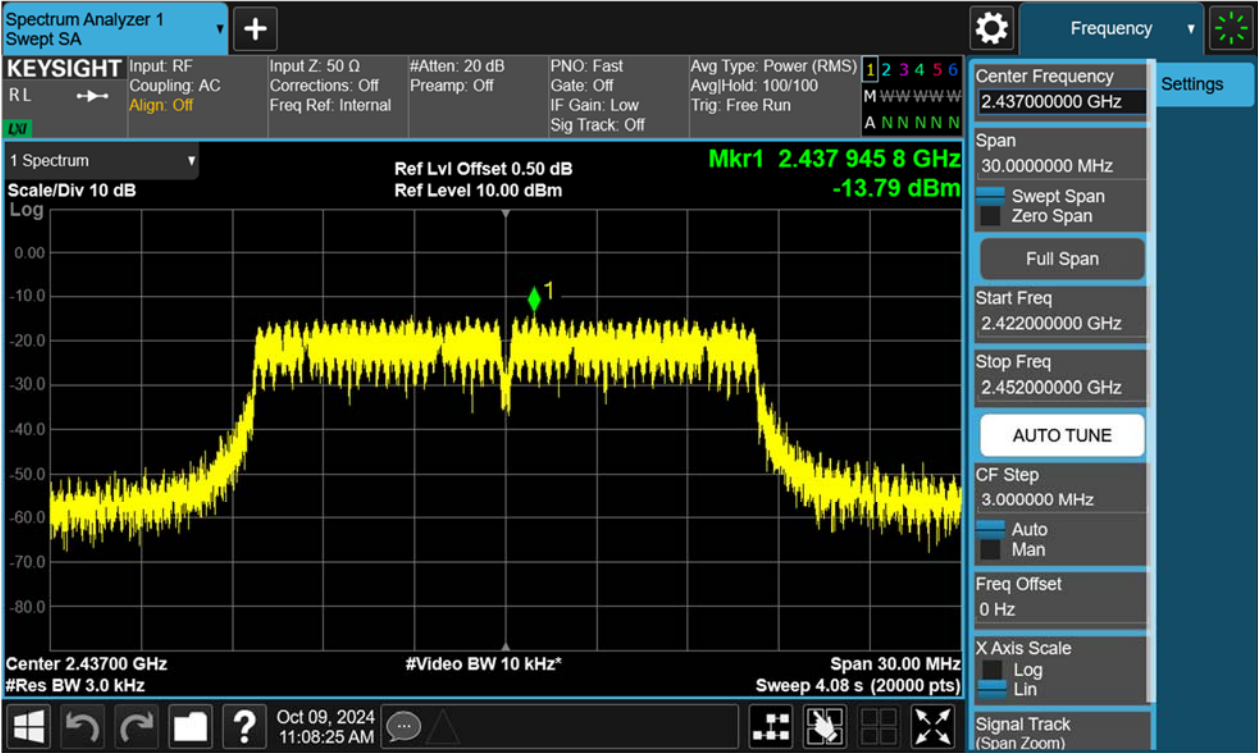


Figure 18: Power Spectral Density, 802.11g, 2462MHz

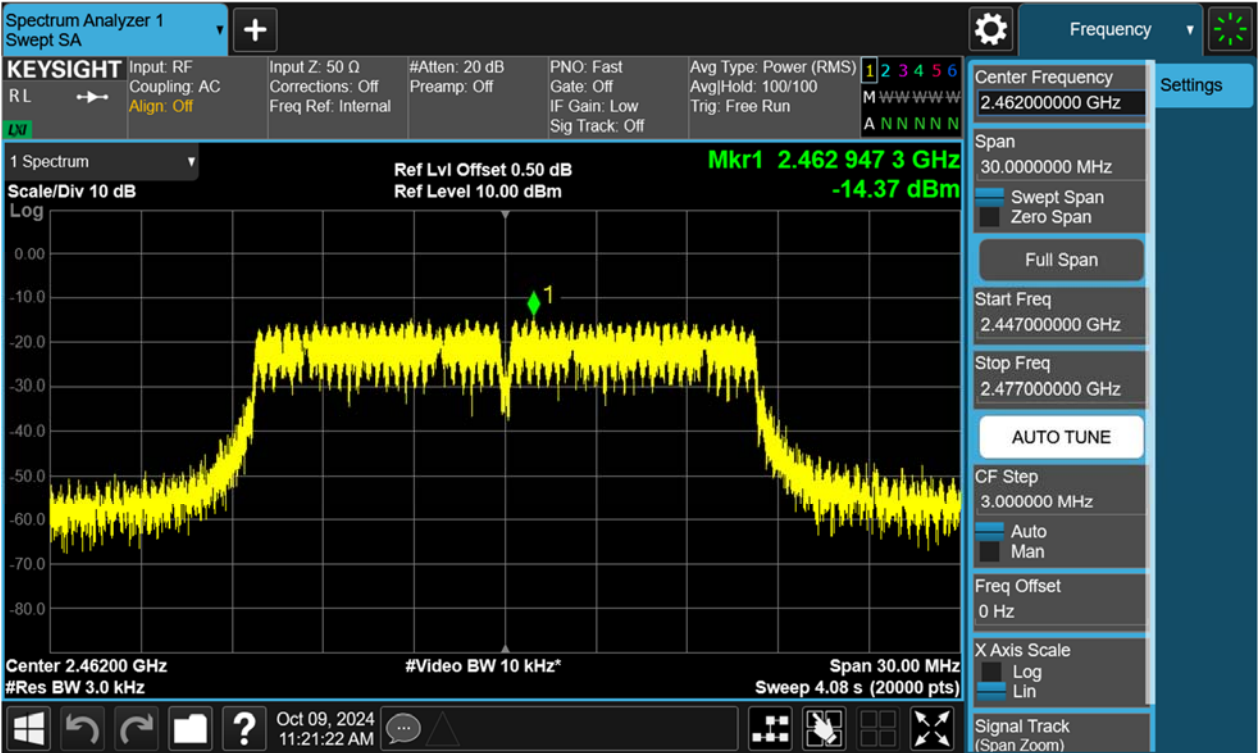

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 24 of 68

Figure 19: Power Spectral Density, 802.11n(HT20), 2412MHz


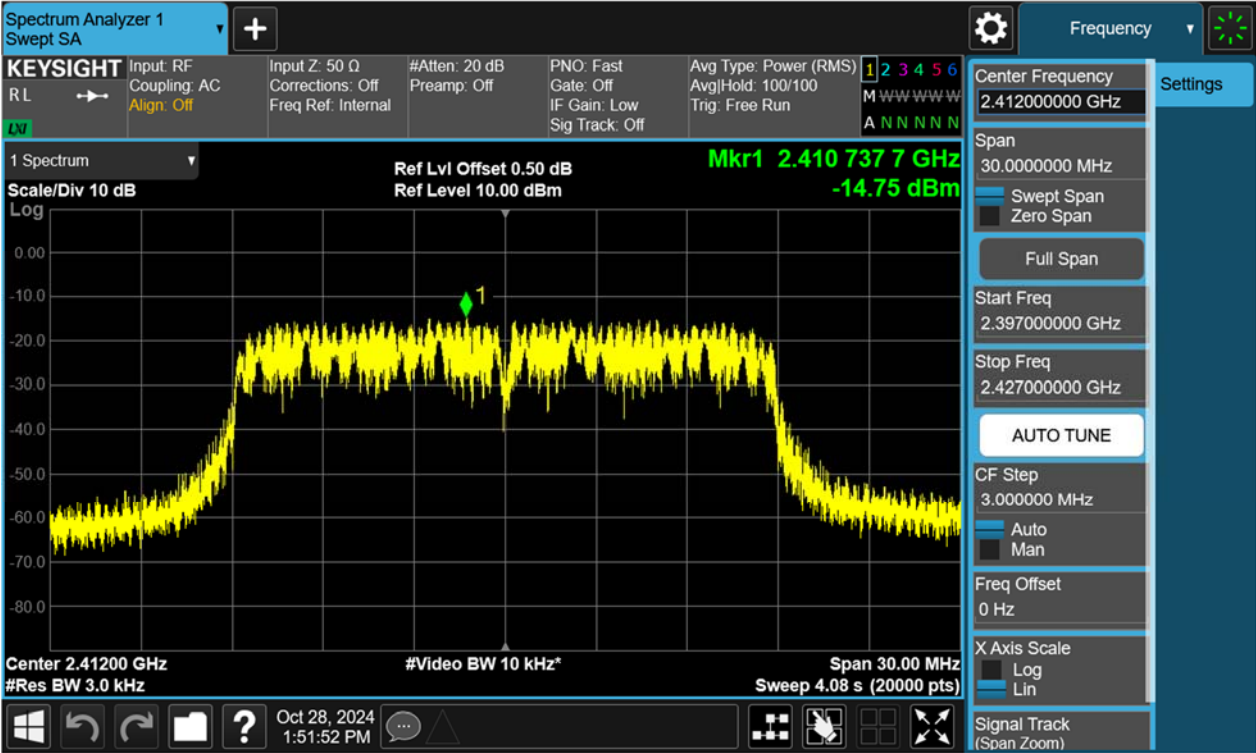


Figure 20: Power Spectral Density, 802.11n(HT20), 2437MHz

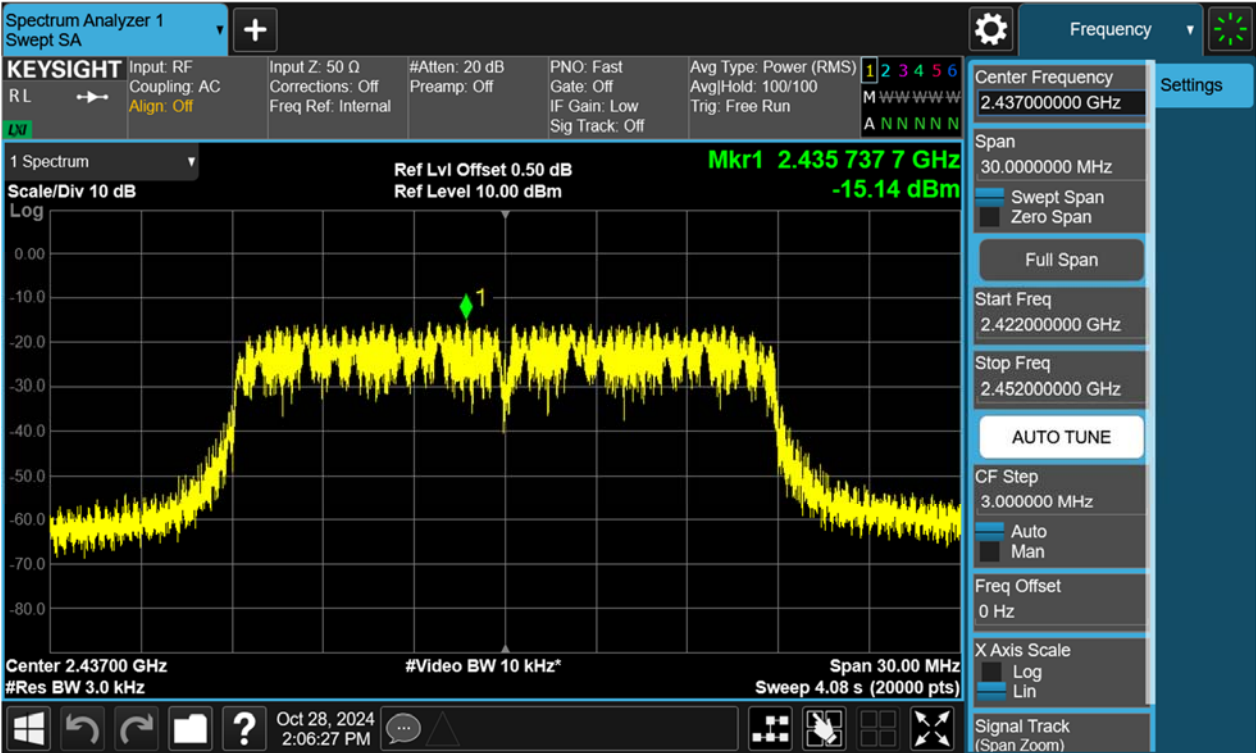

TEST REPORT

Report No.: SHE24090019-02CE Date: 2024-10-29 Page 25 of 68

Figure 21: Power Spectral Density, 802.11n(HT20), 2462MHz


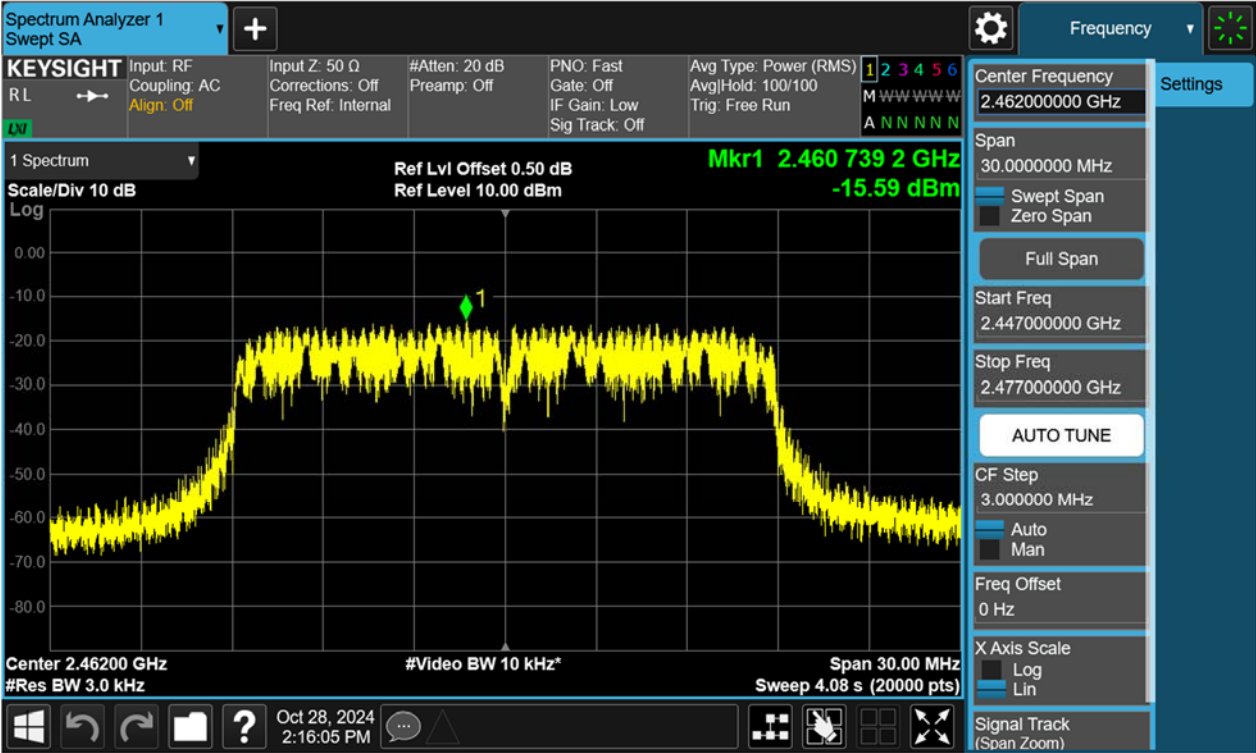


Figure 22: Power Spectral Density, 802.11n(HT40), 2422MHz

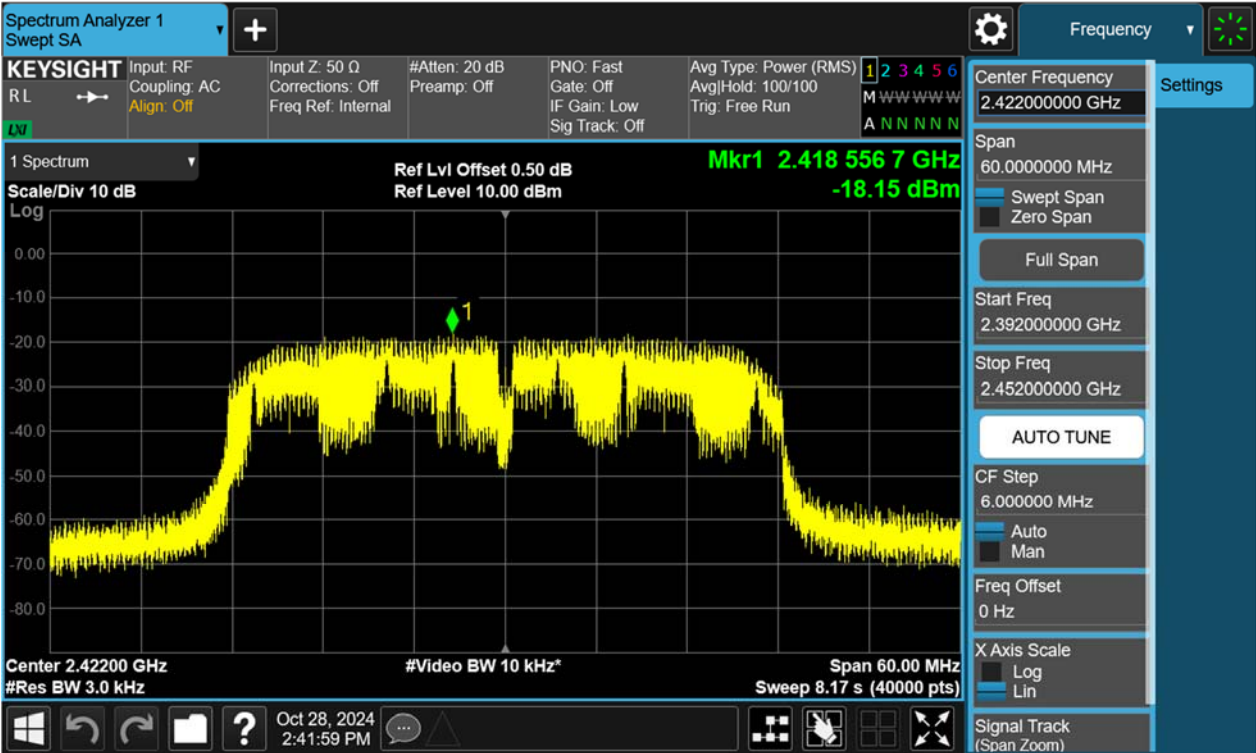

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 26 of 68

Figure 23: Power Spectral Density, 802.11n(H40), 2437MHz


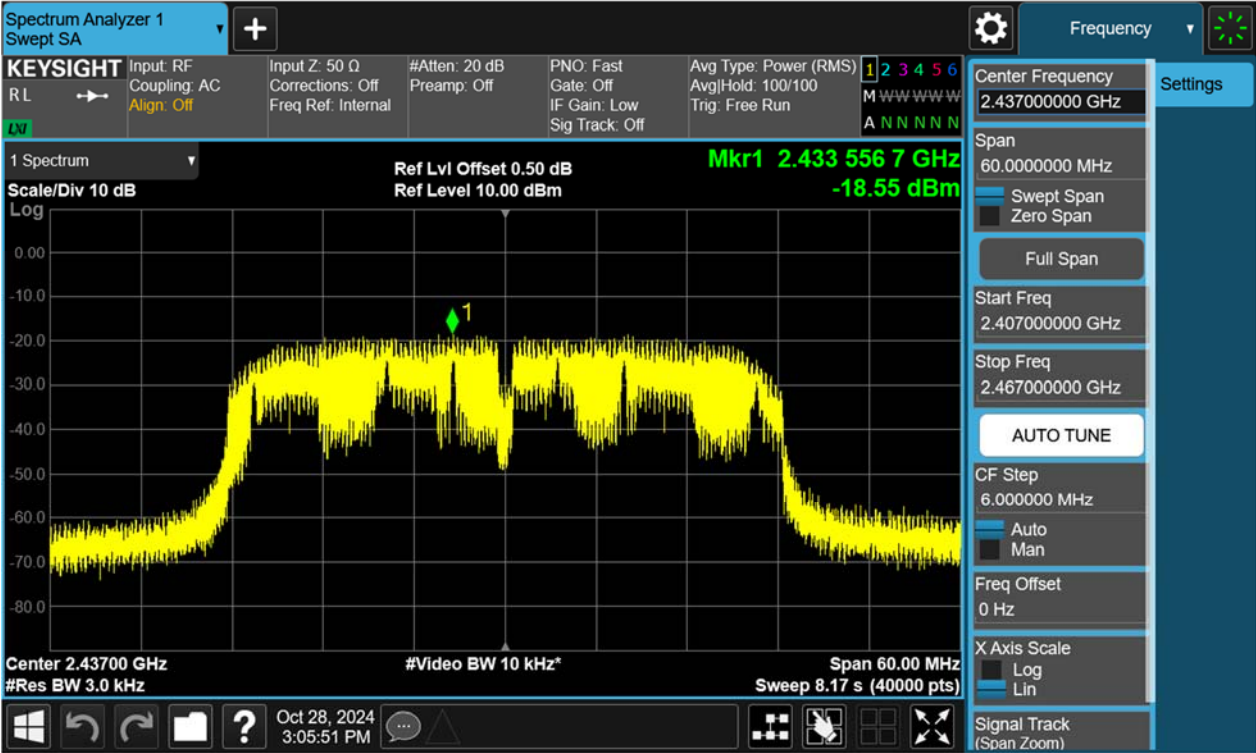


Figure 24: Power Spectral Density, 802.11n(H40), 2452MHz

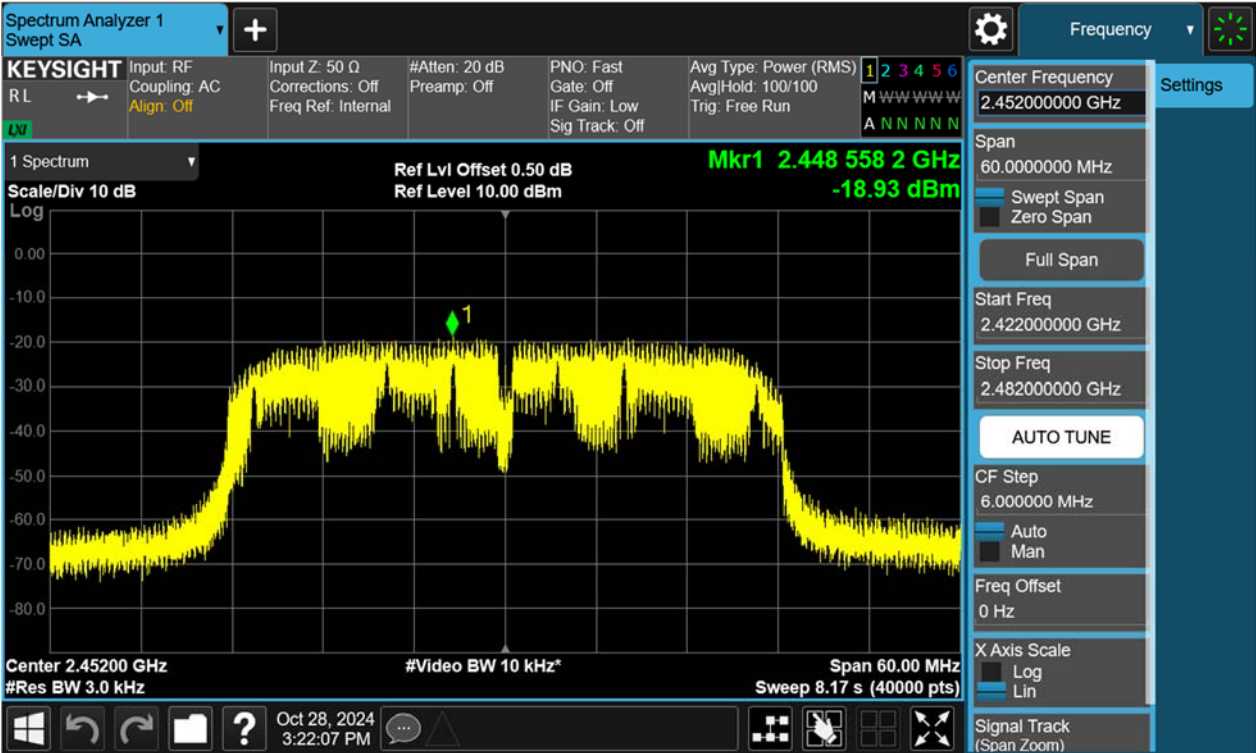

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 27 of 68

4.1.5 Conducted Spurious Emission & Authorized-band band-edge

RESULT:

PASS

Test standard

: FCC Part 15.247(d), 15.209

Requirement

: ANSI C63.10-2013, Clause 11.11.1(b)
KDB 558074 D01 v05r02, Clause 8.5

Kind of test site

: Shielded room

Test setup

Test Channel

: Low/Middle/High for spurious, Low/High for Band
Edge

Operation Mode

: A.1.a

Ambient temperature

: 24.2°C

Relative humidity

: 46%

For details refer to following test plot.

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 28 of 68

Figure 25: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2412MHz Carrier Level




Band Edge



TEST REPORT

Report No.: SHE24090019-02CE Date: 2024-10-29 Page 29 of 68

Conducted spurious emissions 30MHz-25GHz

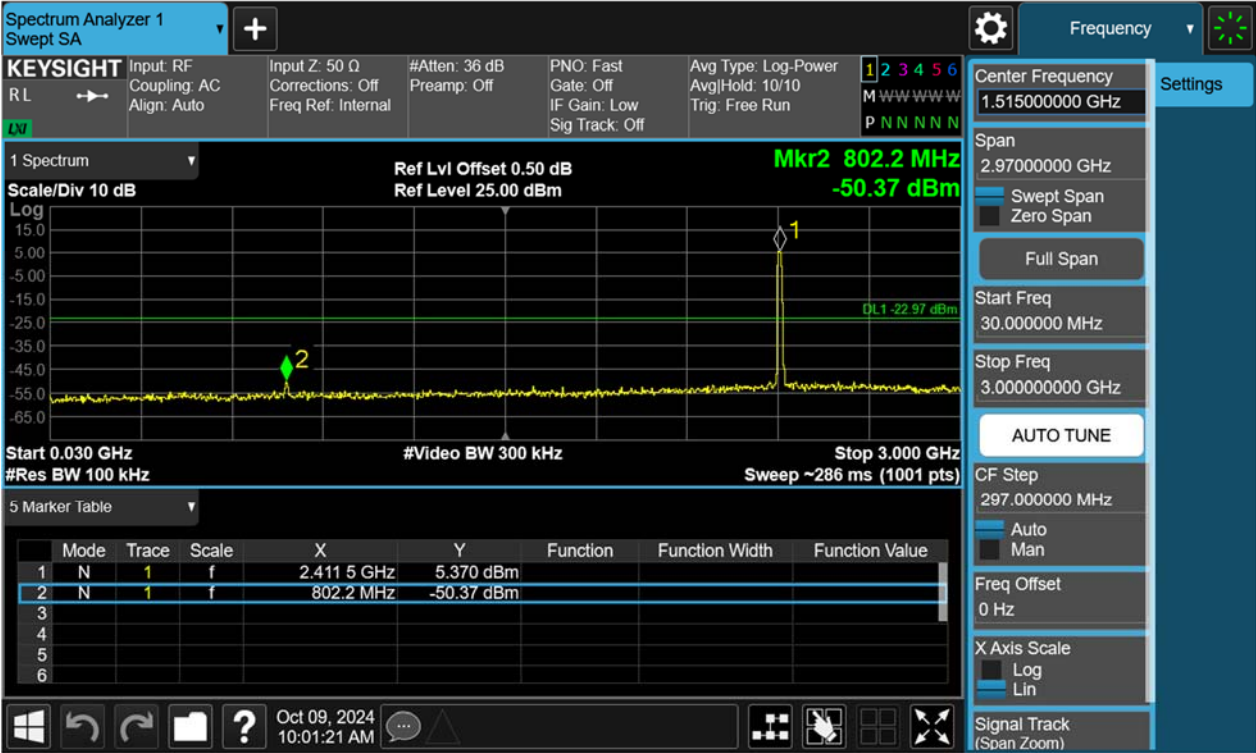


TEST REPORT

Report No.: SHE24090019-02CE


Date: 2024-10-29

Page 30 of 68

Figure 26: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2437MHz Carrier Level

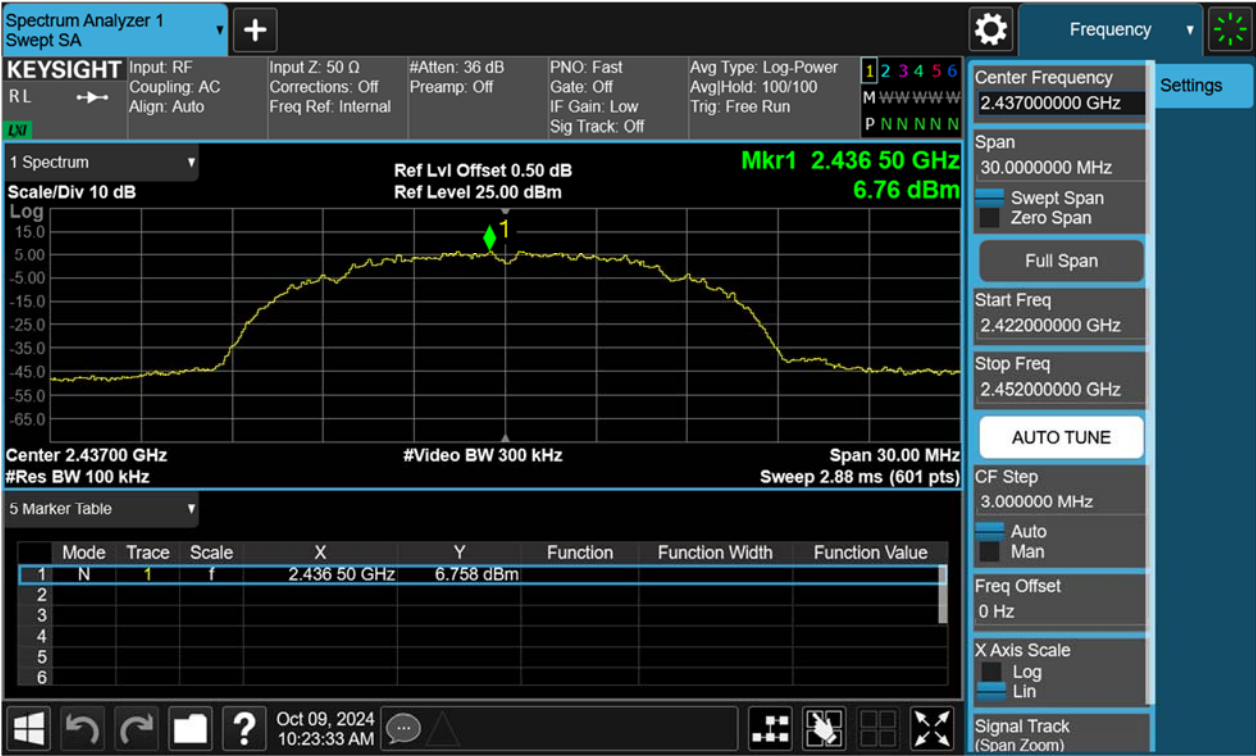

Conducted spurious emissions 30MHz-25GHz

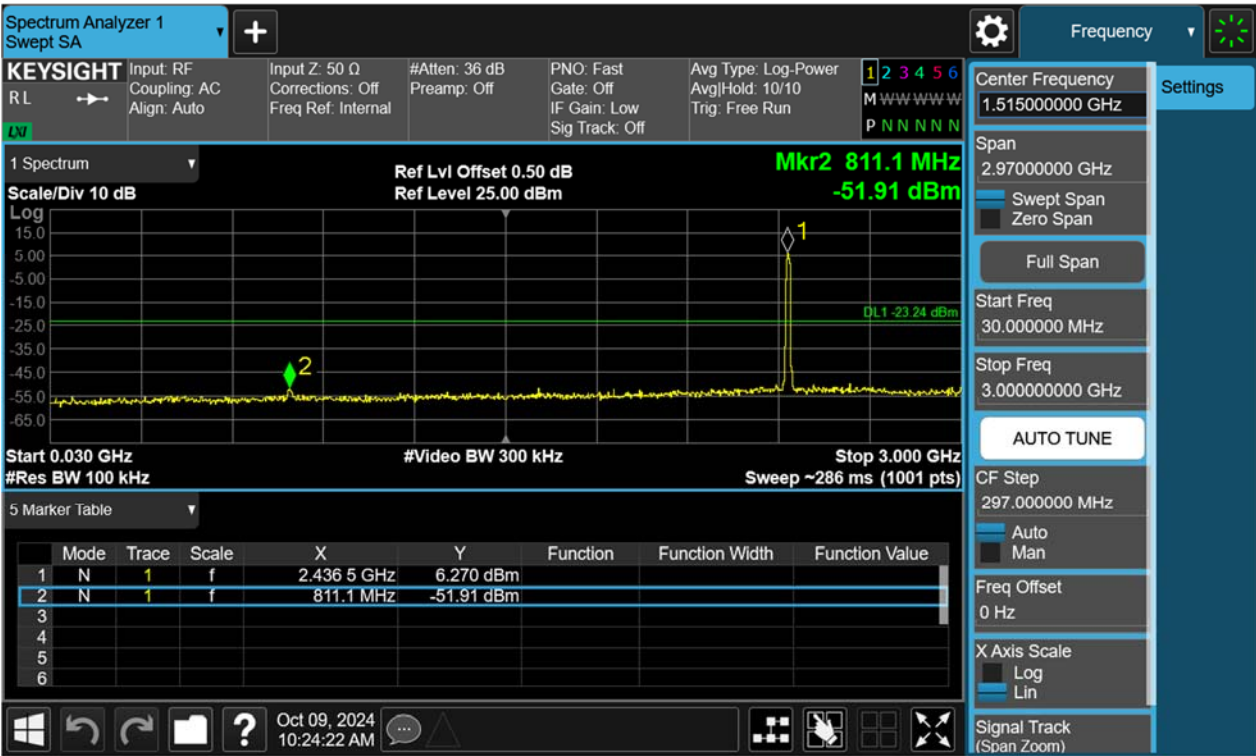

TEST REPORT

Report No.: SHE24090019-02CE Date: 2024-10-29 Page 31 of 68


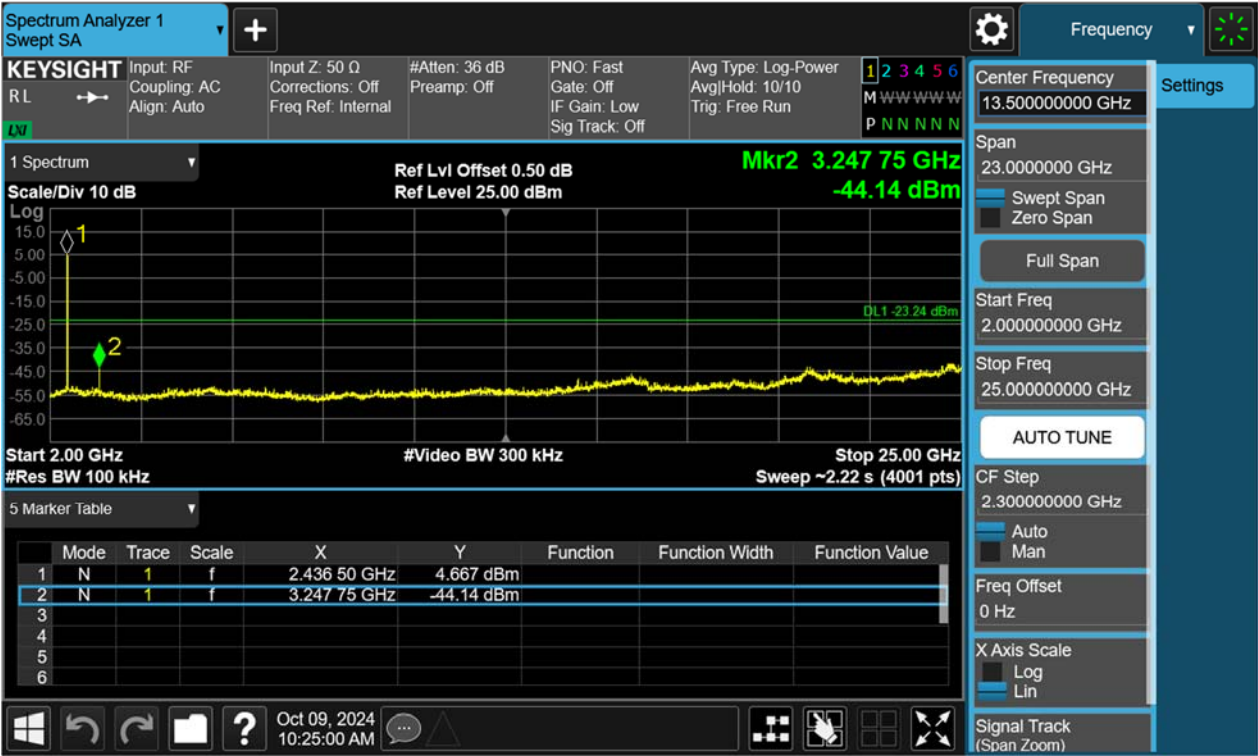


Figure 27: Conducted Spurious Emission & Authorized-band band-edge, 802.11b, 2462MHz Carrier Level

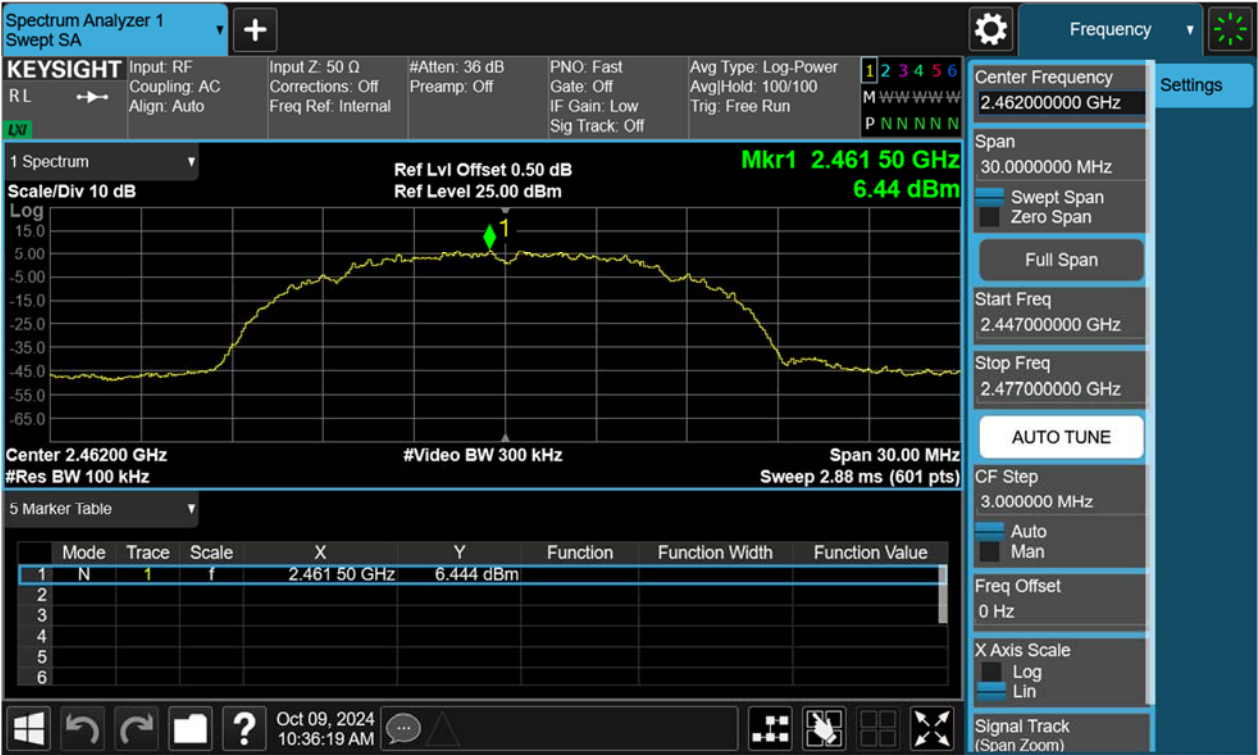

TEST REPORT

Report No.: SHE24090019-02CE


Date: 2024-10-29

Page 32 of 68

Band Edge



Conducted spurious emissions 30MHz-25GHz

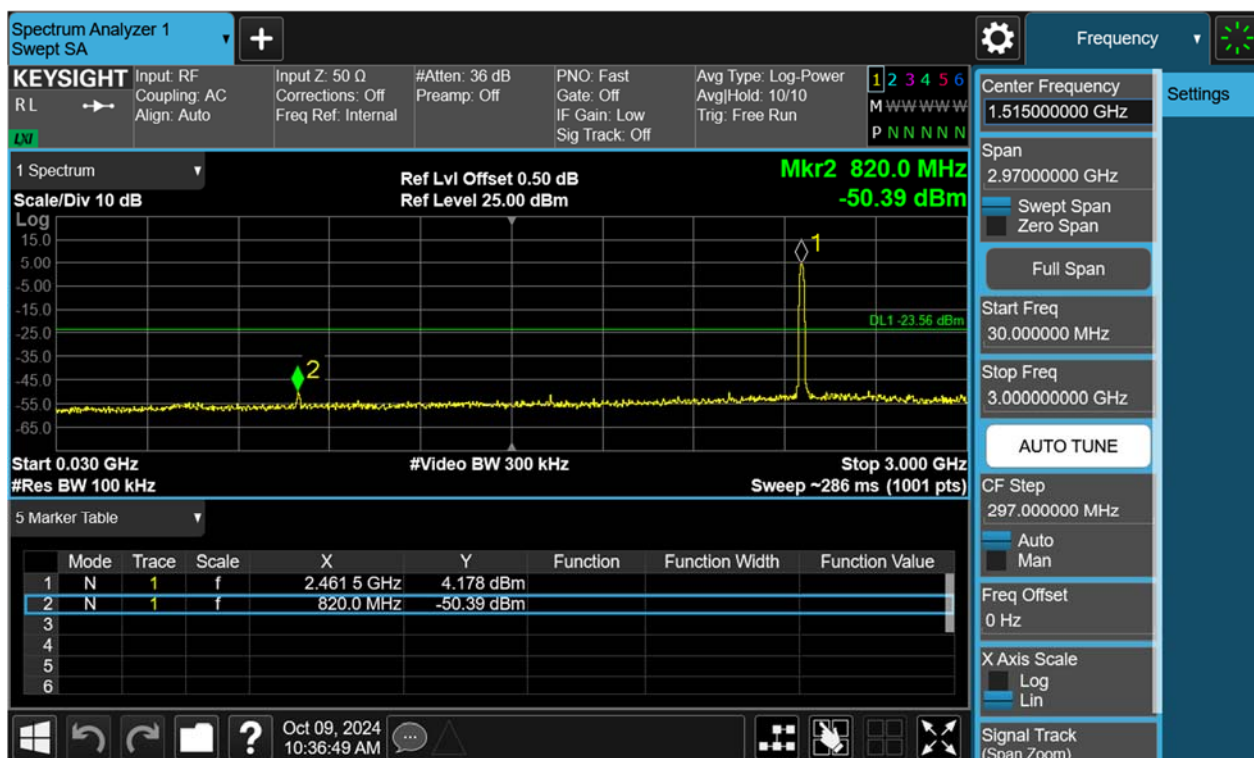

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 33 of 68


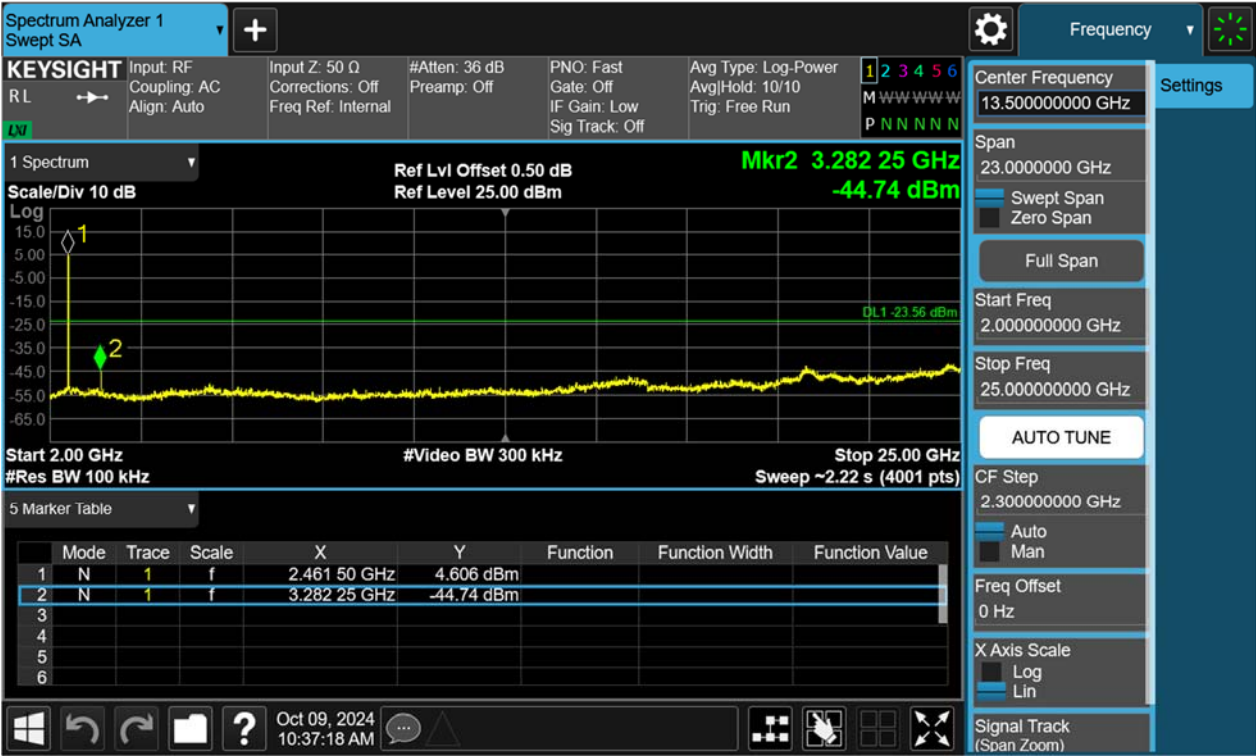


Figure 28: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2412MHz Carrier Level

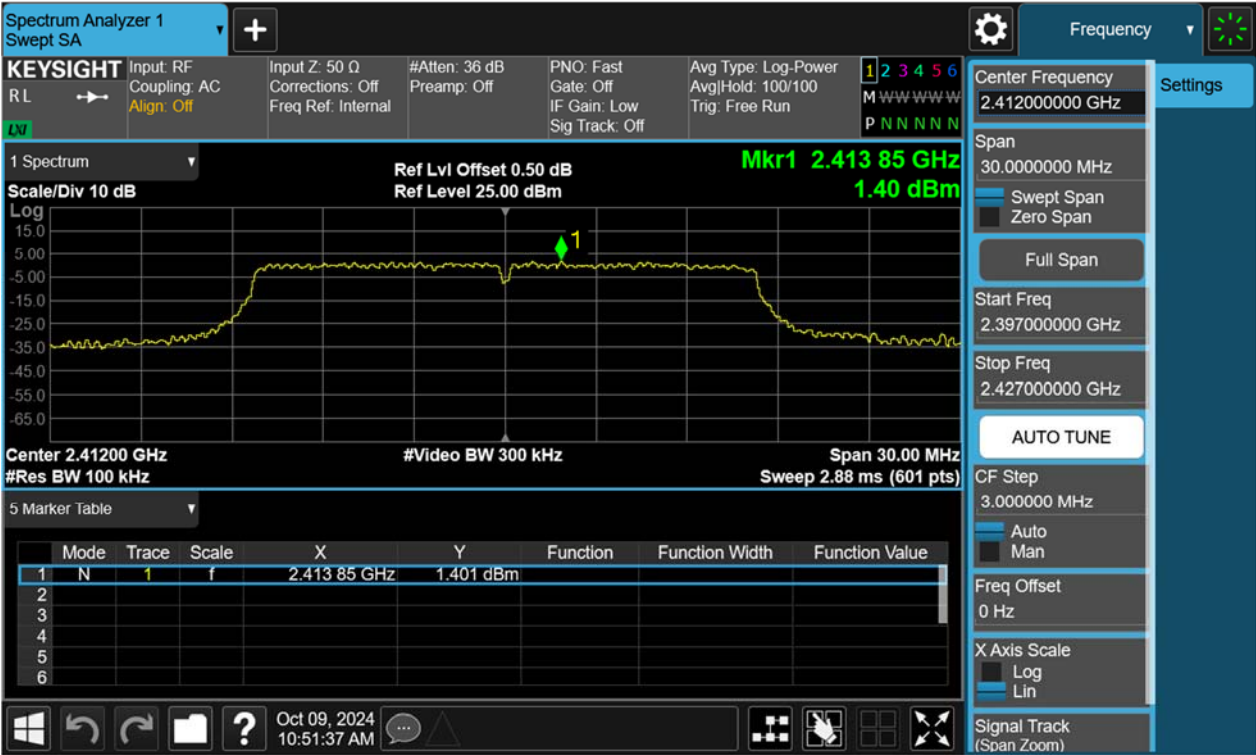


TEST REPORT

Report No.: SHE24090019-02CE


Date: 2024-10-29

Page 34 of 68

Band Edge

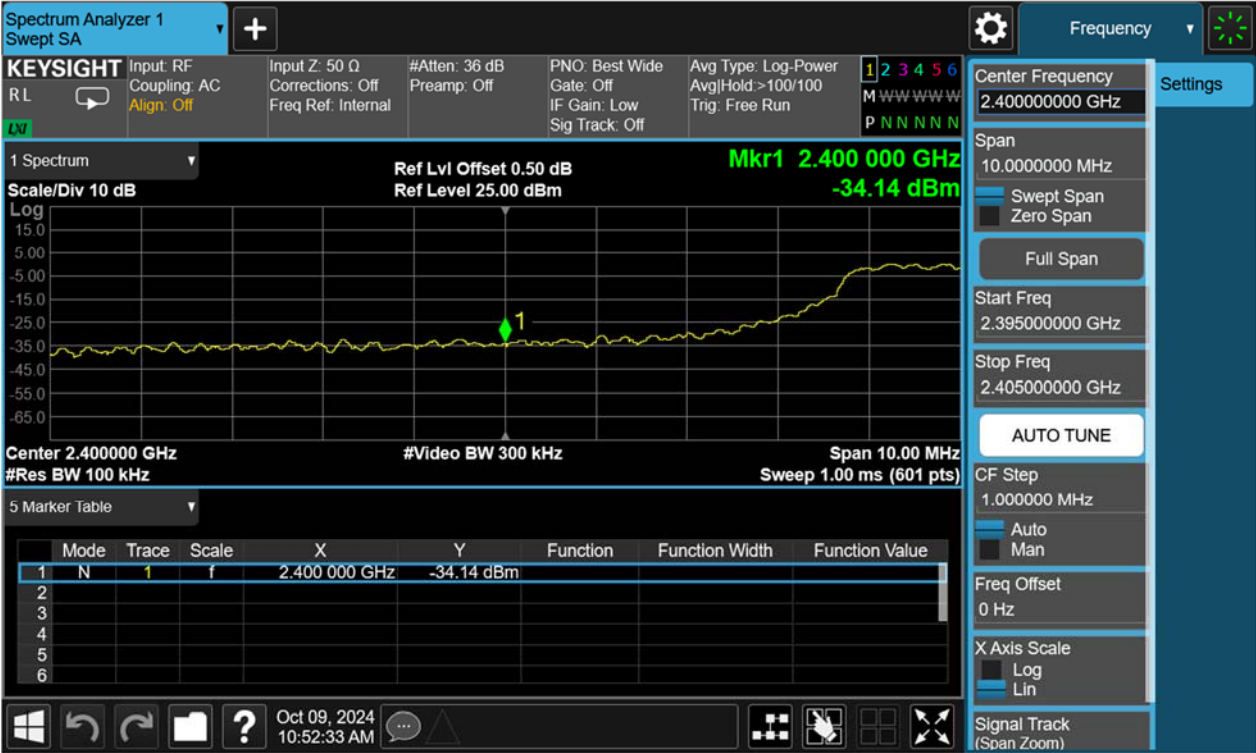

Conducted spurious emissions 30MHz-25GHz

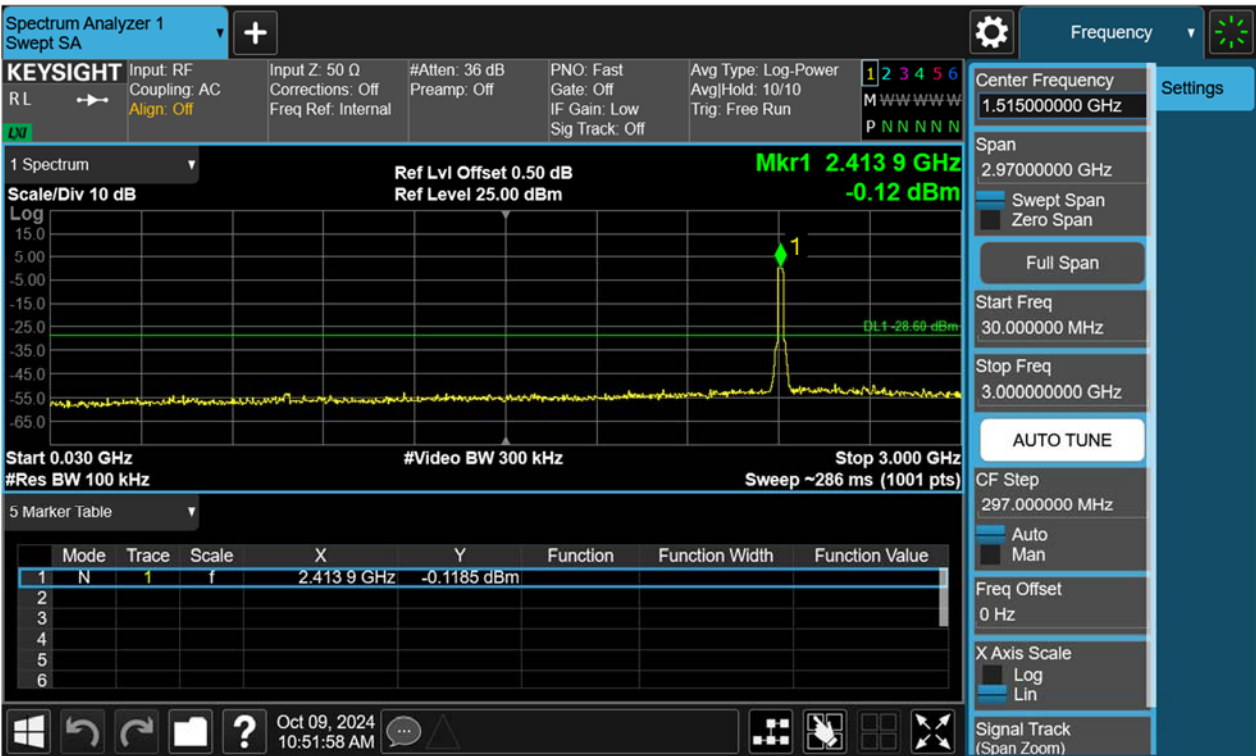

TEST REPORT

Report No.: SHE24090019-02CE

Date: 2024-10-29

Page 35 of 68

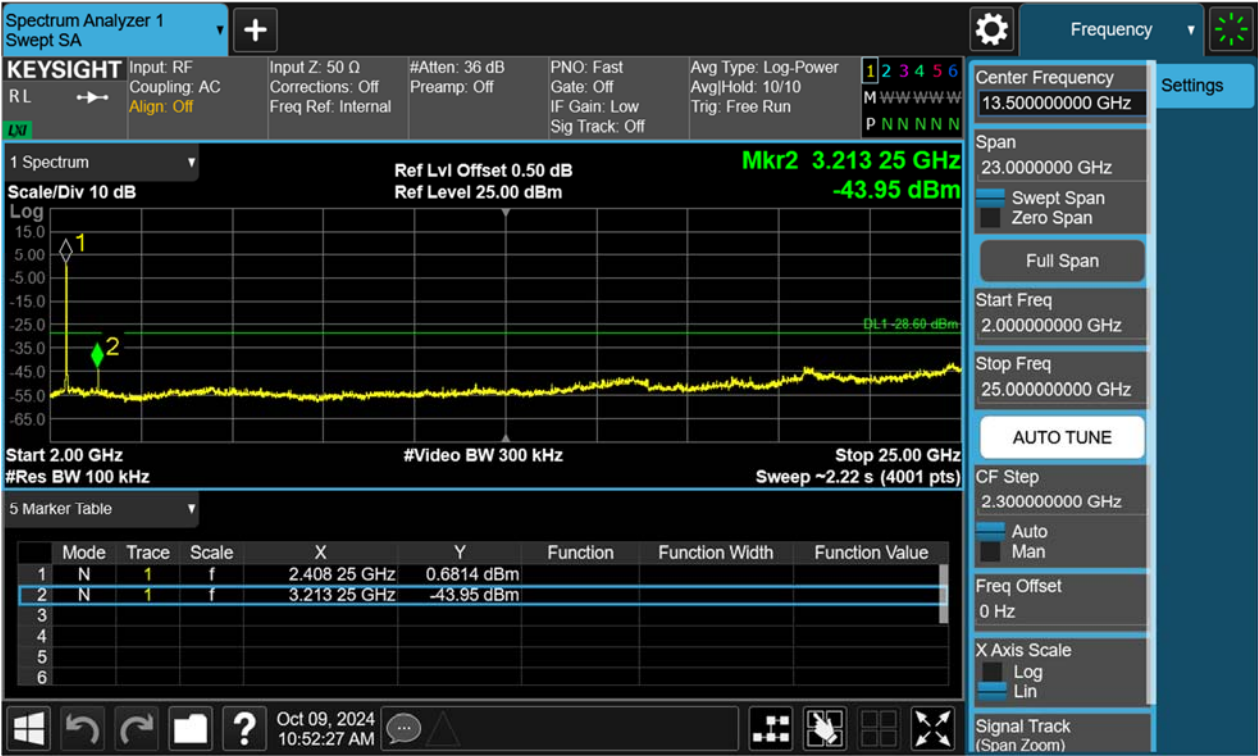


Figure 29: Conducted Spurious Emission & Authorized-band band-edge, 802.11g, 2437MHz Carrier Level

