

9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC Part 15.247(b)(1) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

■ According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW \geq RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold


Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emissionto determine the peak amplitude level.


Test Results


Temperature: 22 °C
Humidity: 53 %


Test Date: May 16, 2024
Test By: Lucas Xu

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
GFSK	0	2402	-0.51	21	PASS
	39	2441	-1.63	21	PASS
	78	2480	-3.16	21	PASS
pi/4-DQPSK	0	2402	1.79	21	PASS
	39	2441	0.76	21	PASS
	78	2480	-0.75	21	PASS
8DPSK	0	2402	1.65	21	PASS
	39	2441	0.55	21	PASS
	78	2480	-0.69	21	PASS
Note:N/A					

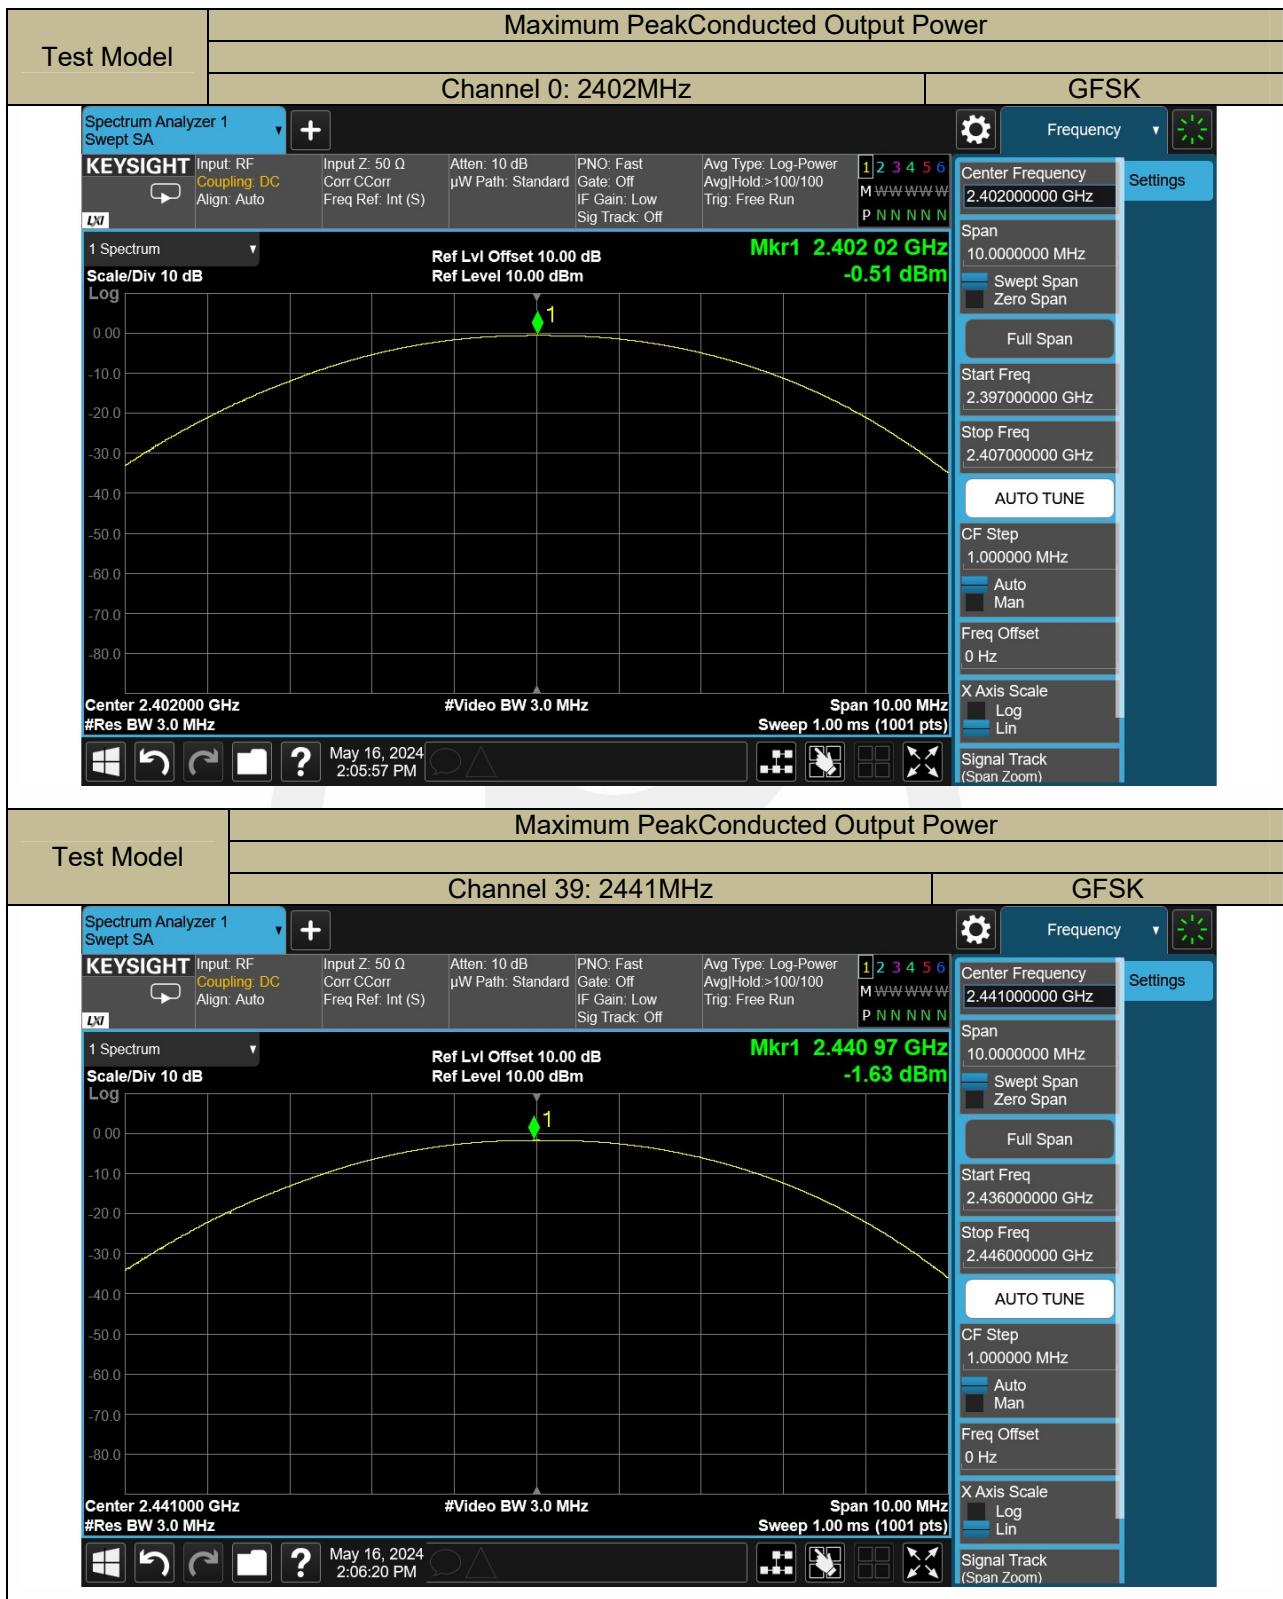

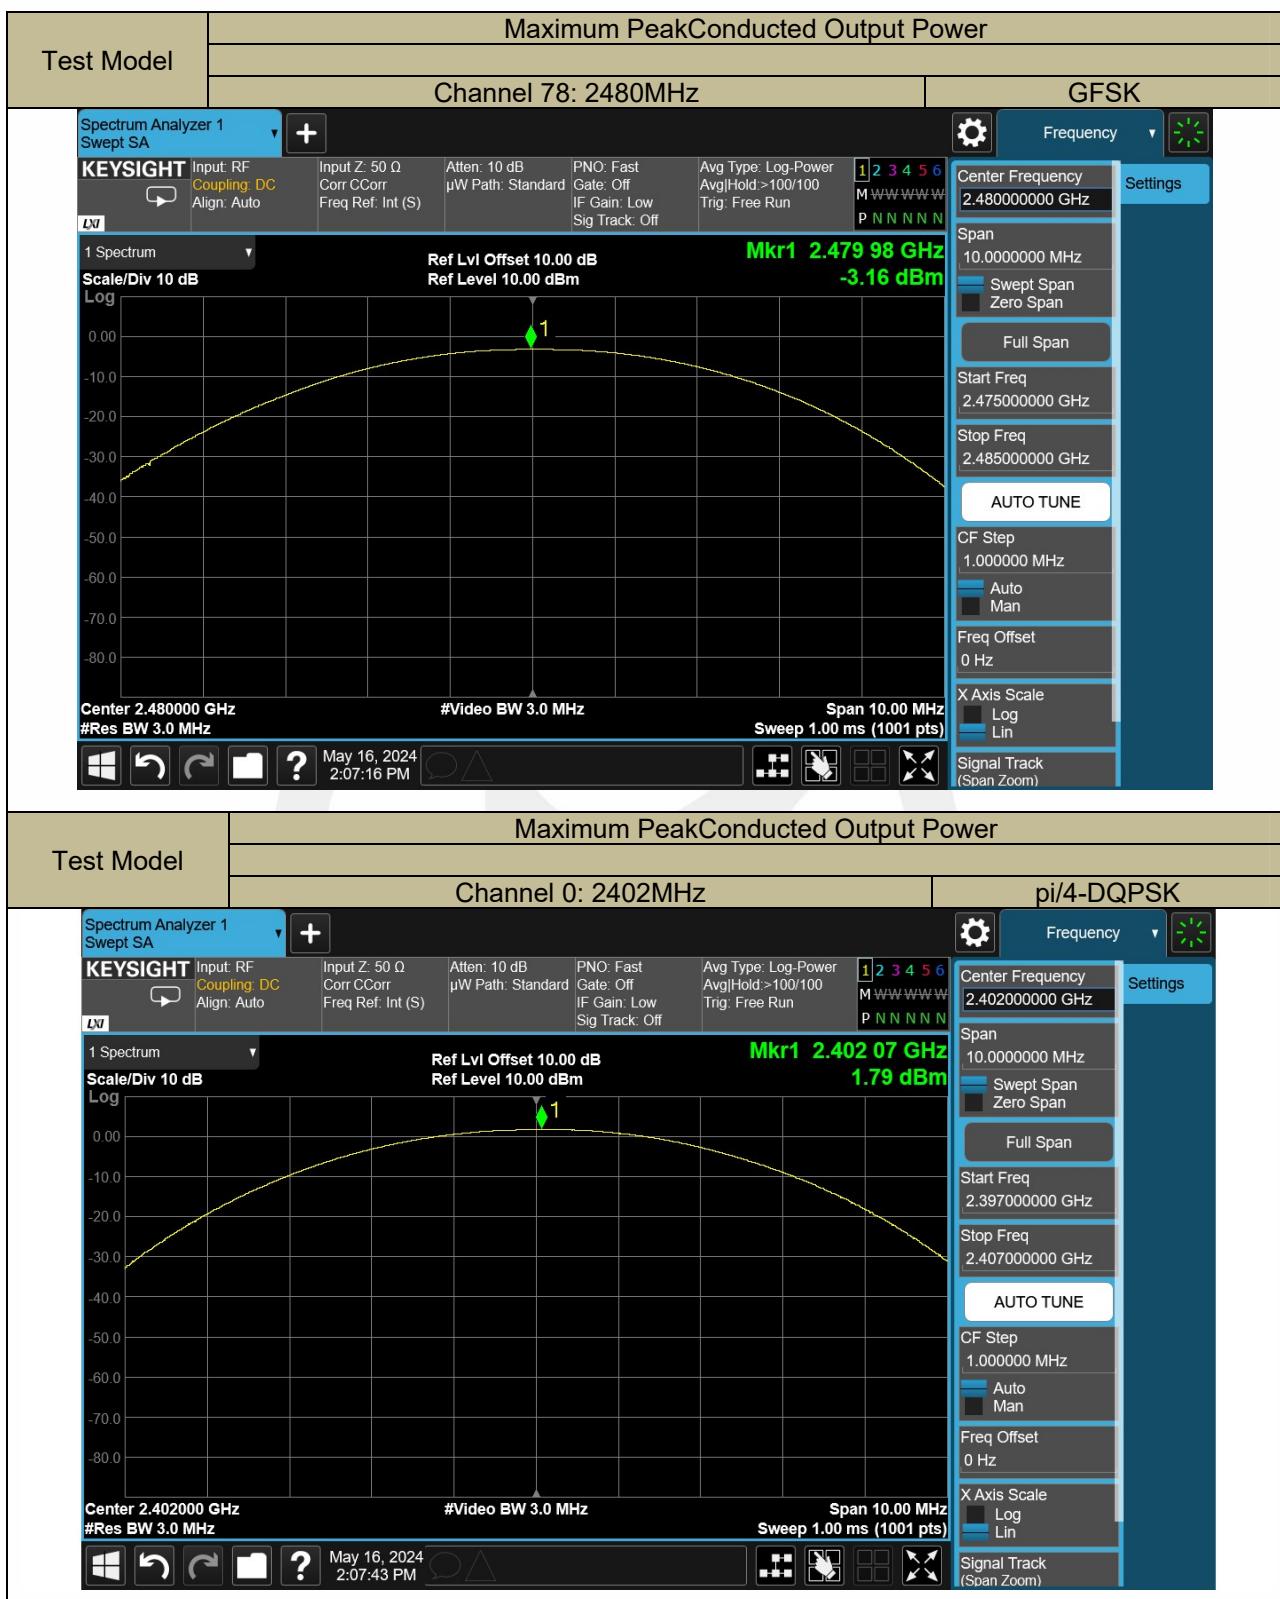

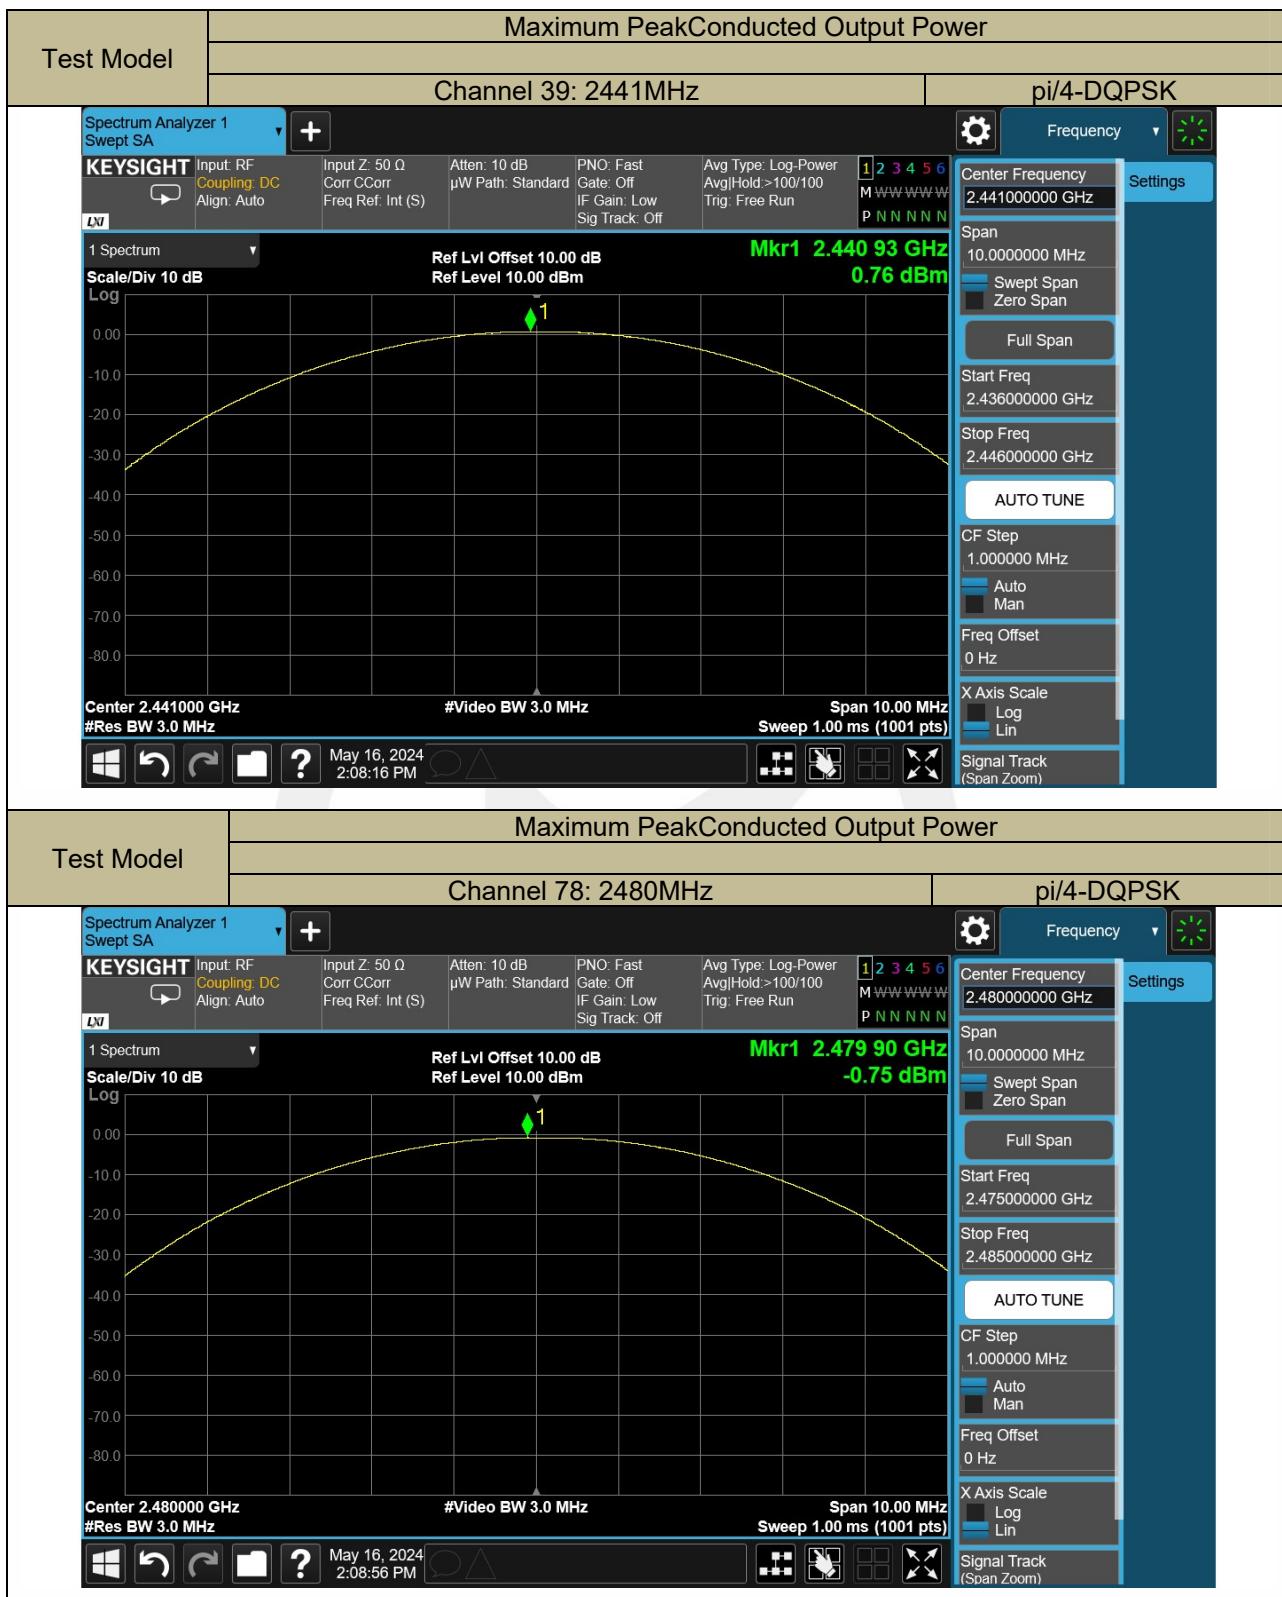

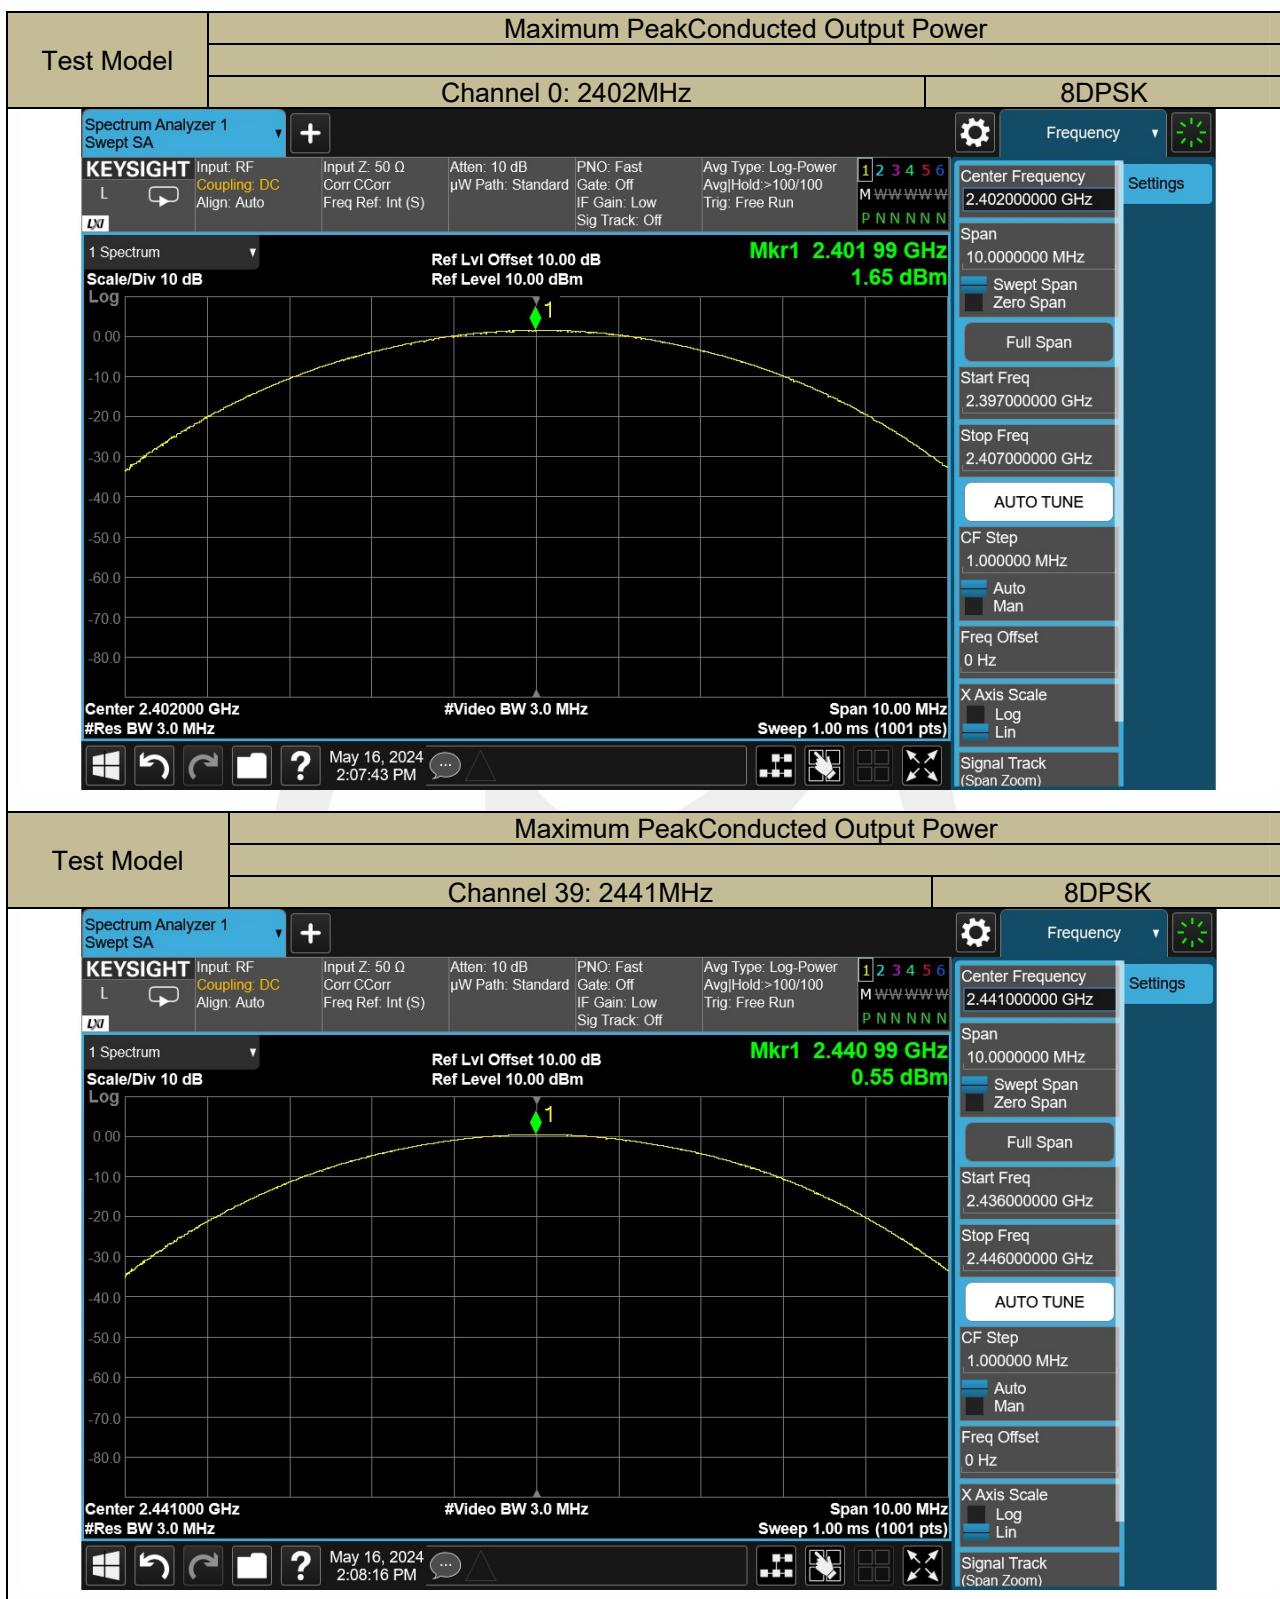



9.6 CONDUCTED SUPRIOUS EMISSION

Applicable Standard

According to FCC Part 15.247(d) and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

Test according to clause 7.1 radio frequency test setup 1

Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW \geq 3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconductedlevel.

Note that the channel found to contain the maximum conducted level can be used to establish the reference level.

■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW \geq 1% of the span=100kHzSet VBW \geq RBW

Set Sweep = autoSetDetector function = peakSetTrace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

■ ConductedSpurious RF Conducted Emission

Use the following spectrum analyzer settings:


Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSetVBW \geq RBW


Set Sweep = autoSetDetector function = peakSetTrace = max hold


Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


Test Results


Bluetooth (GFSK, pi/4-DQPSK,8DPSK) mode have been tested, and the worst result(GFSK)was report as below:

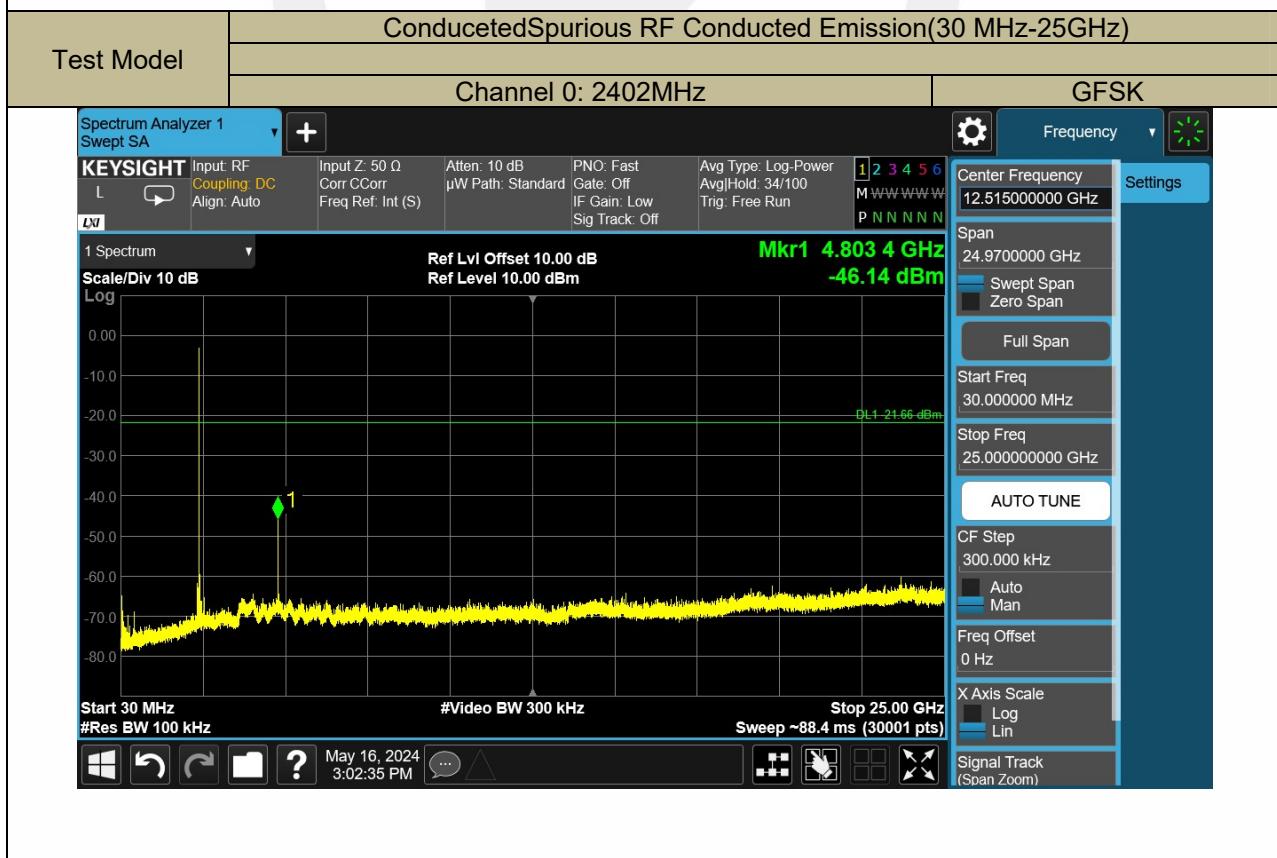


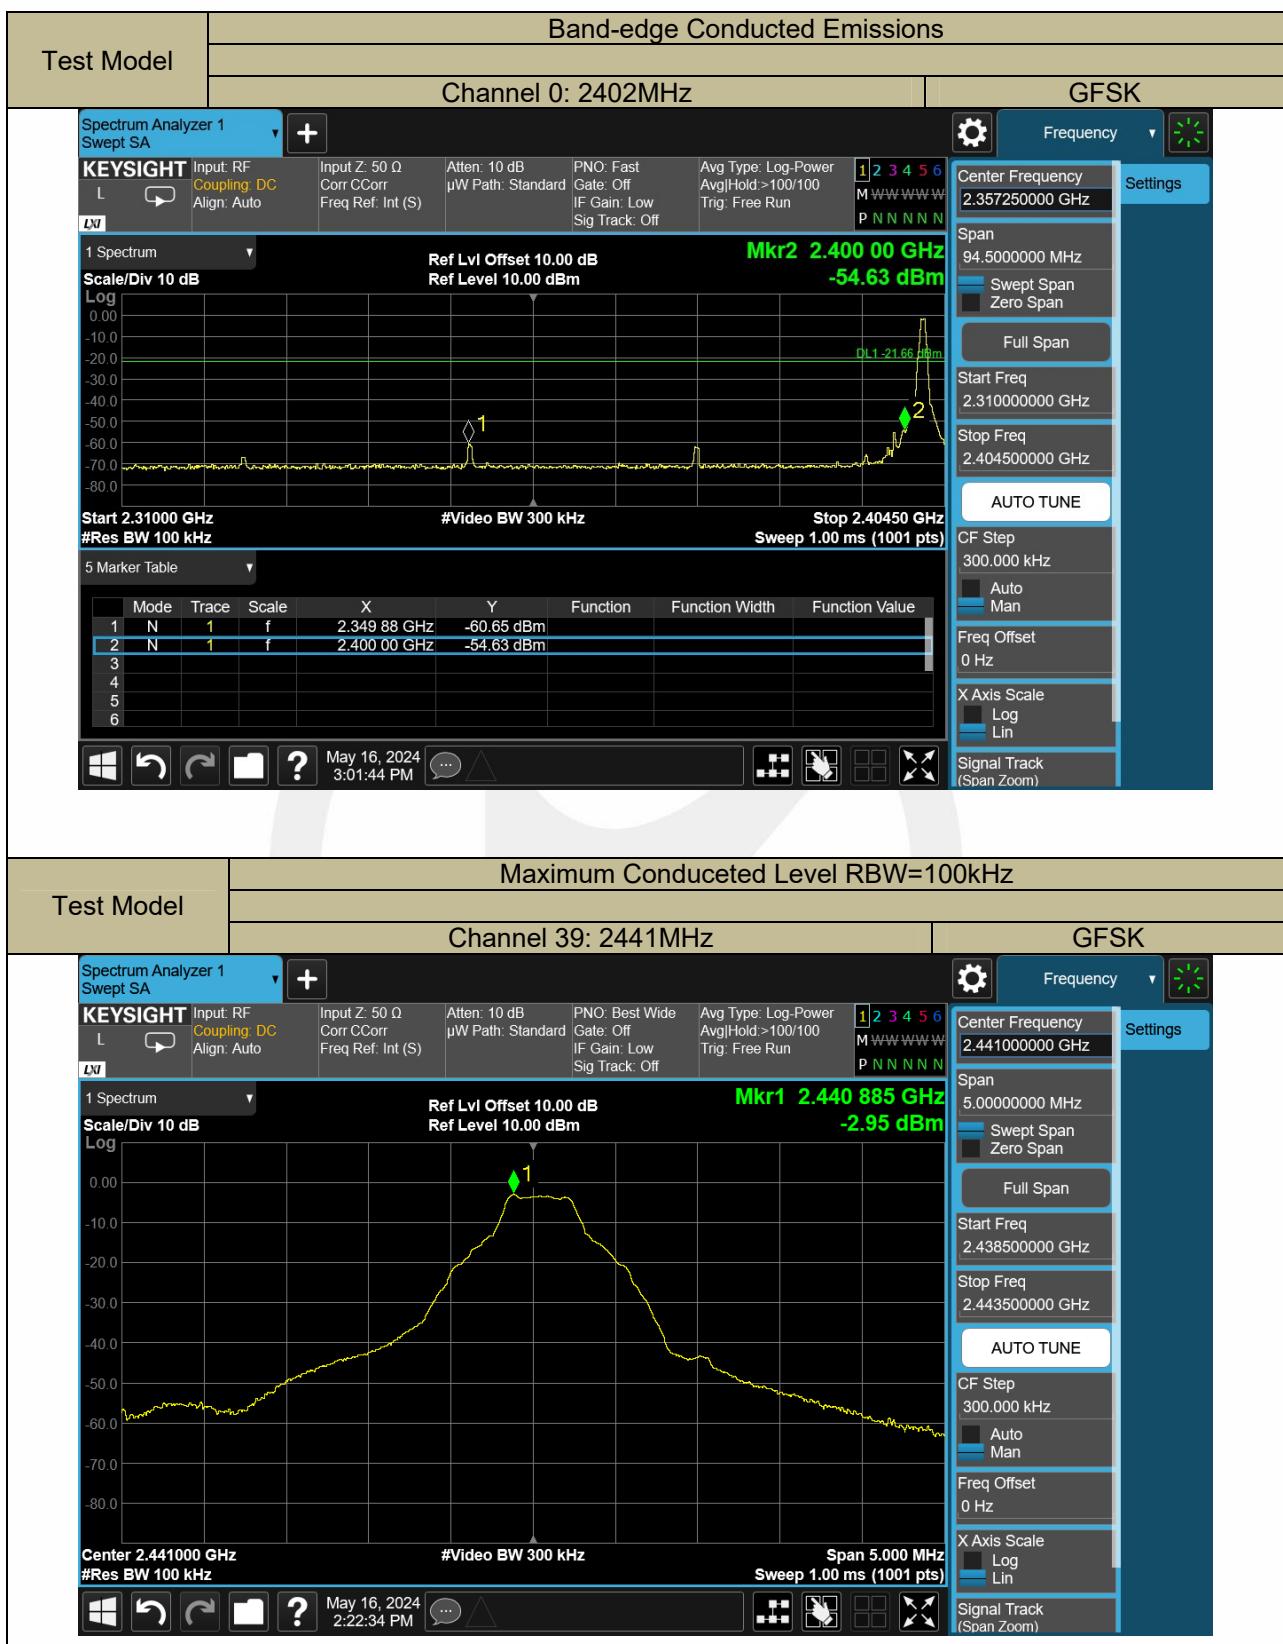

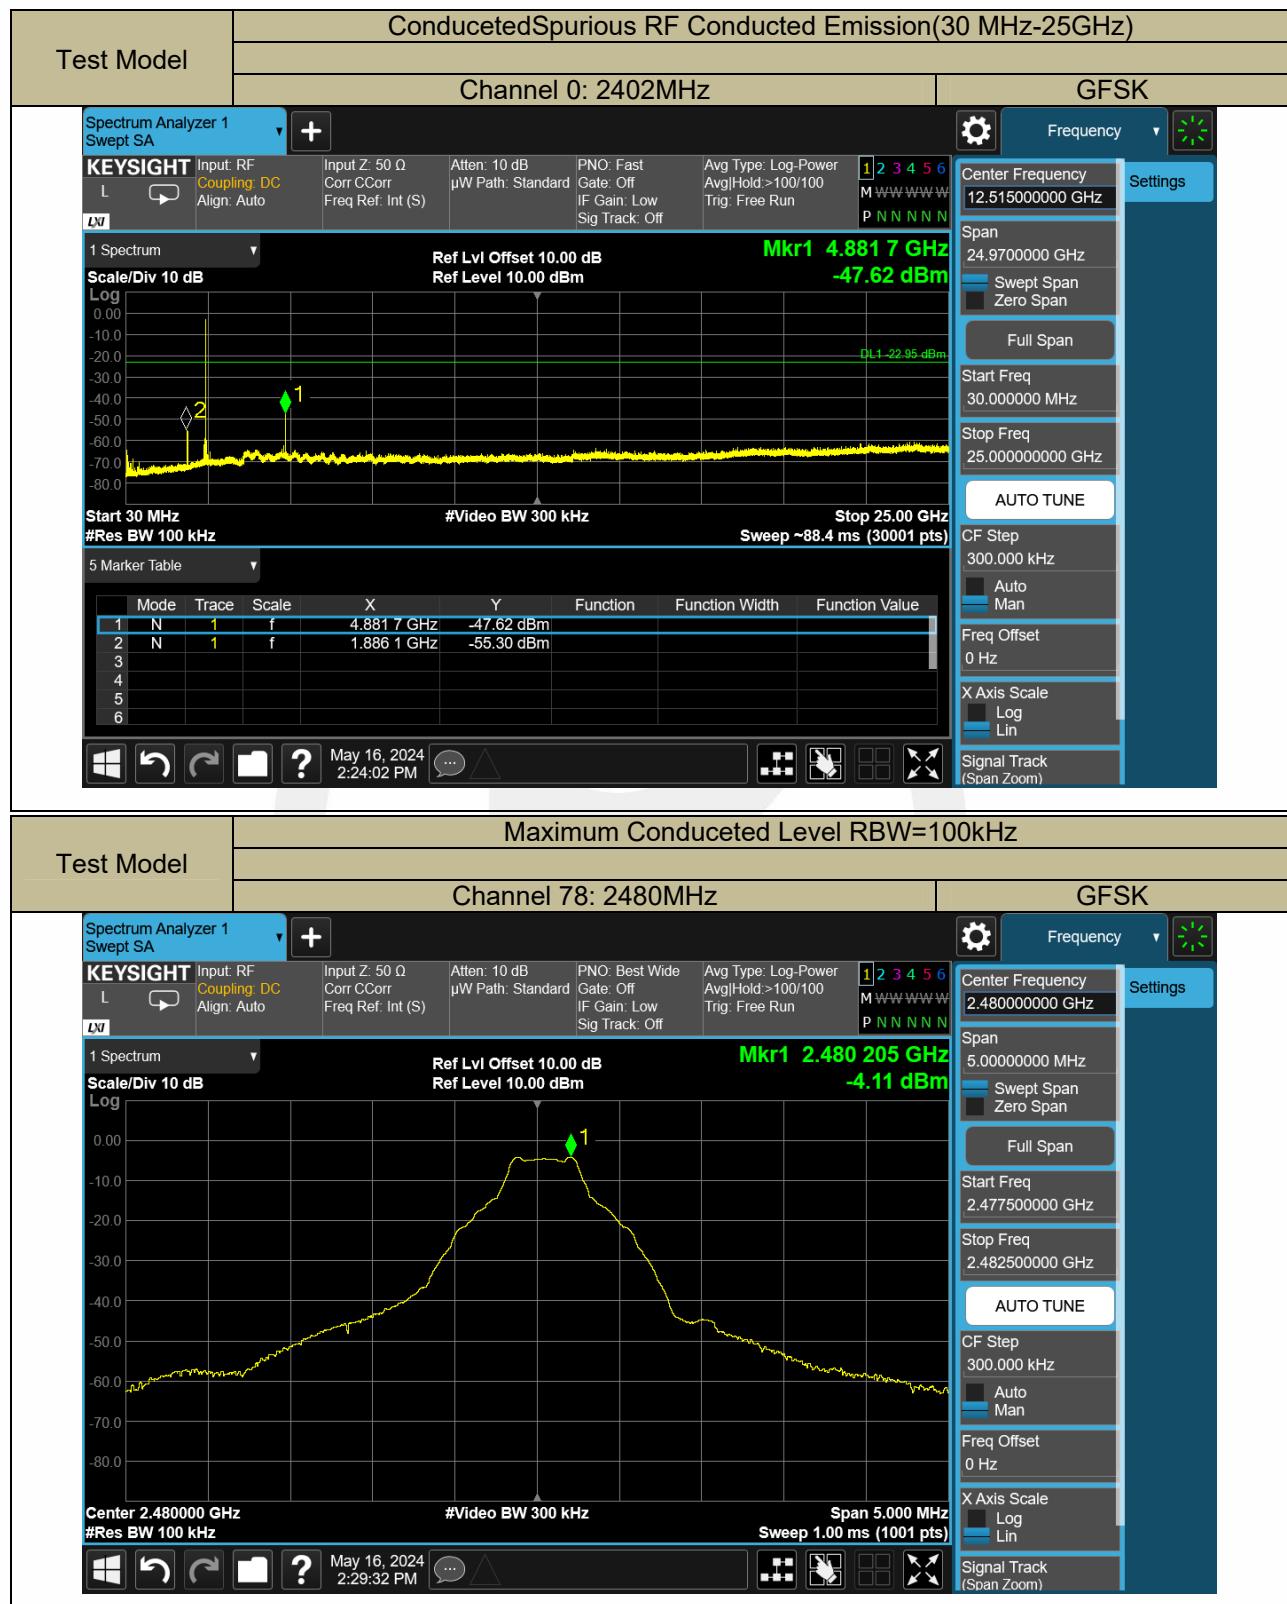

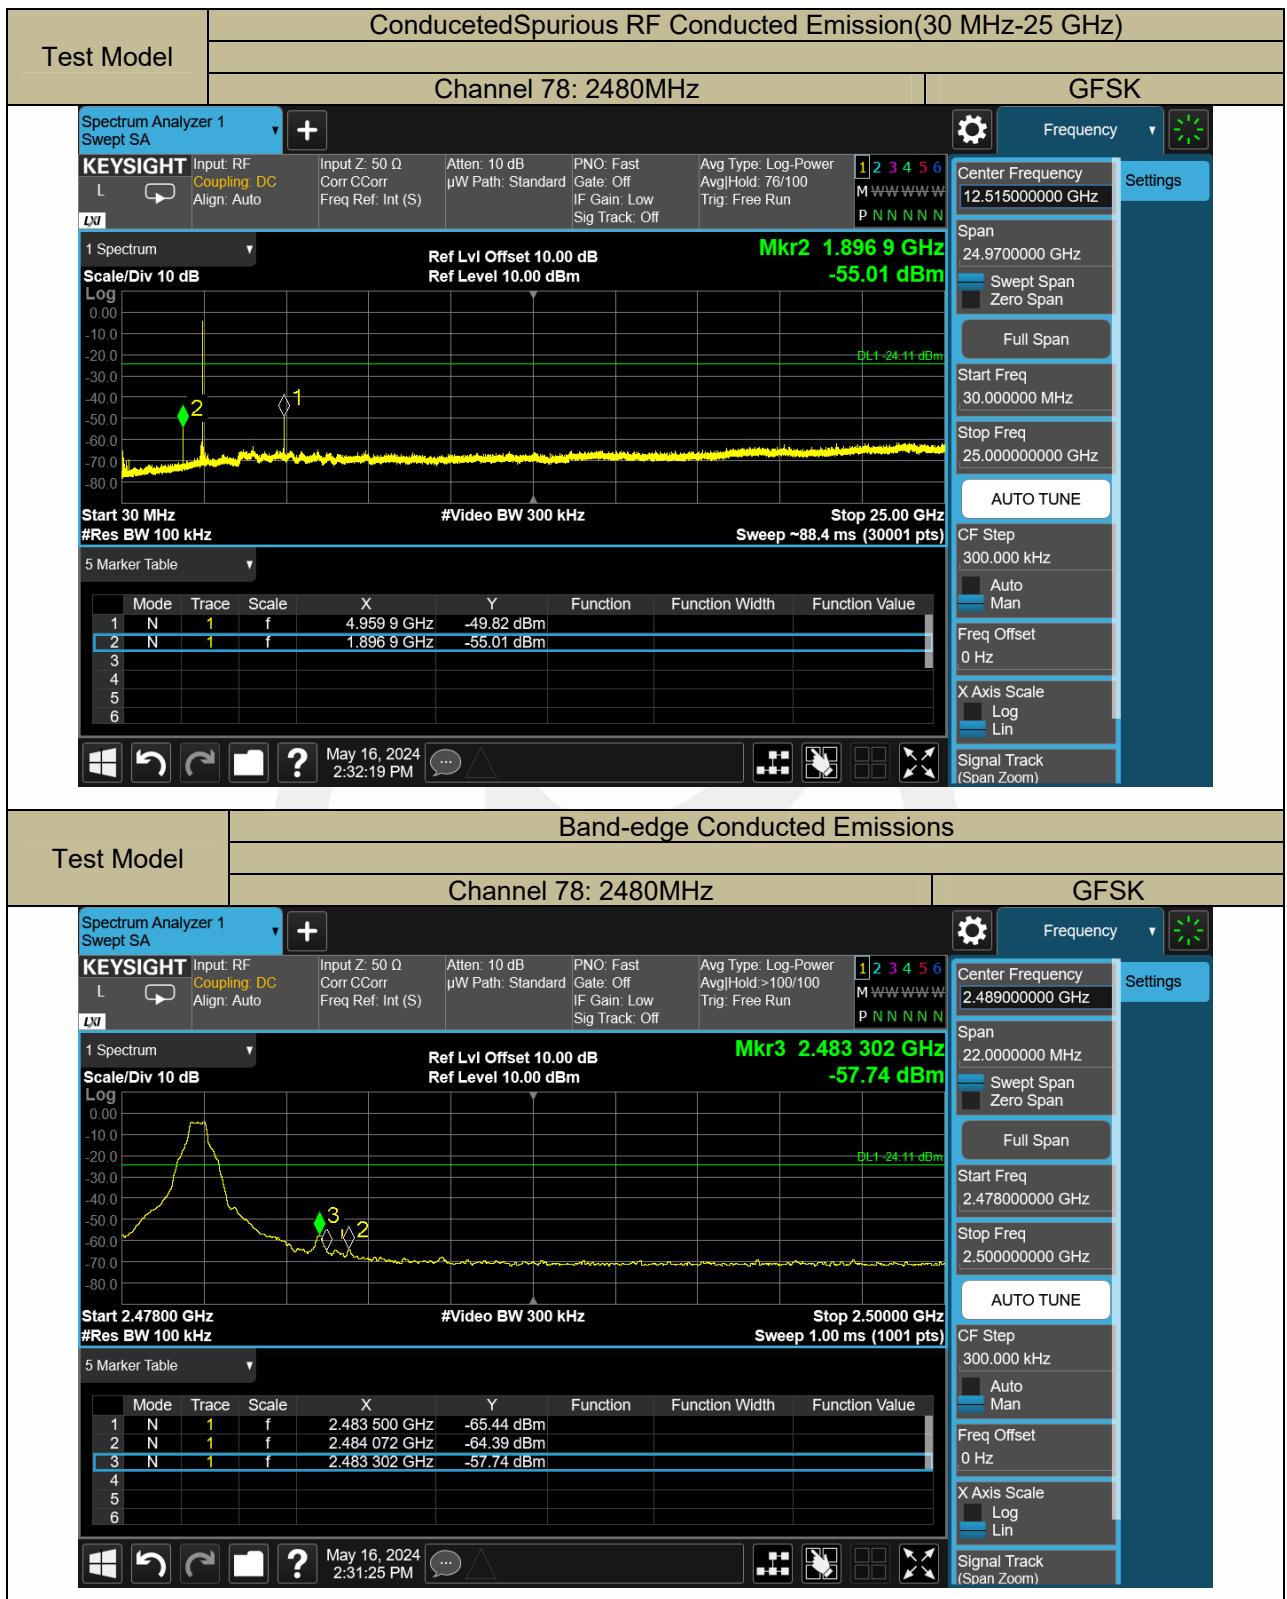

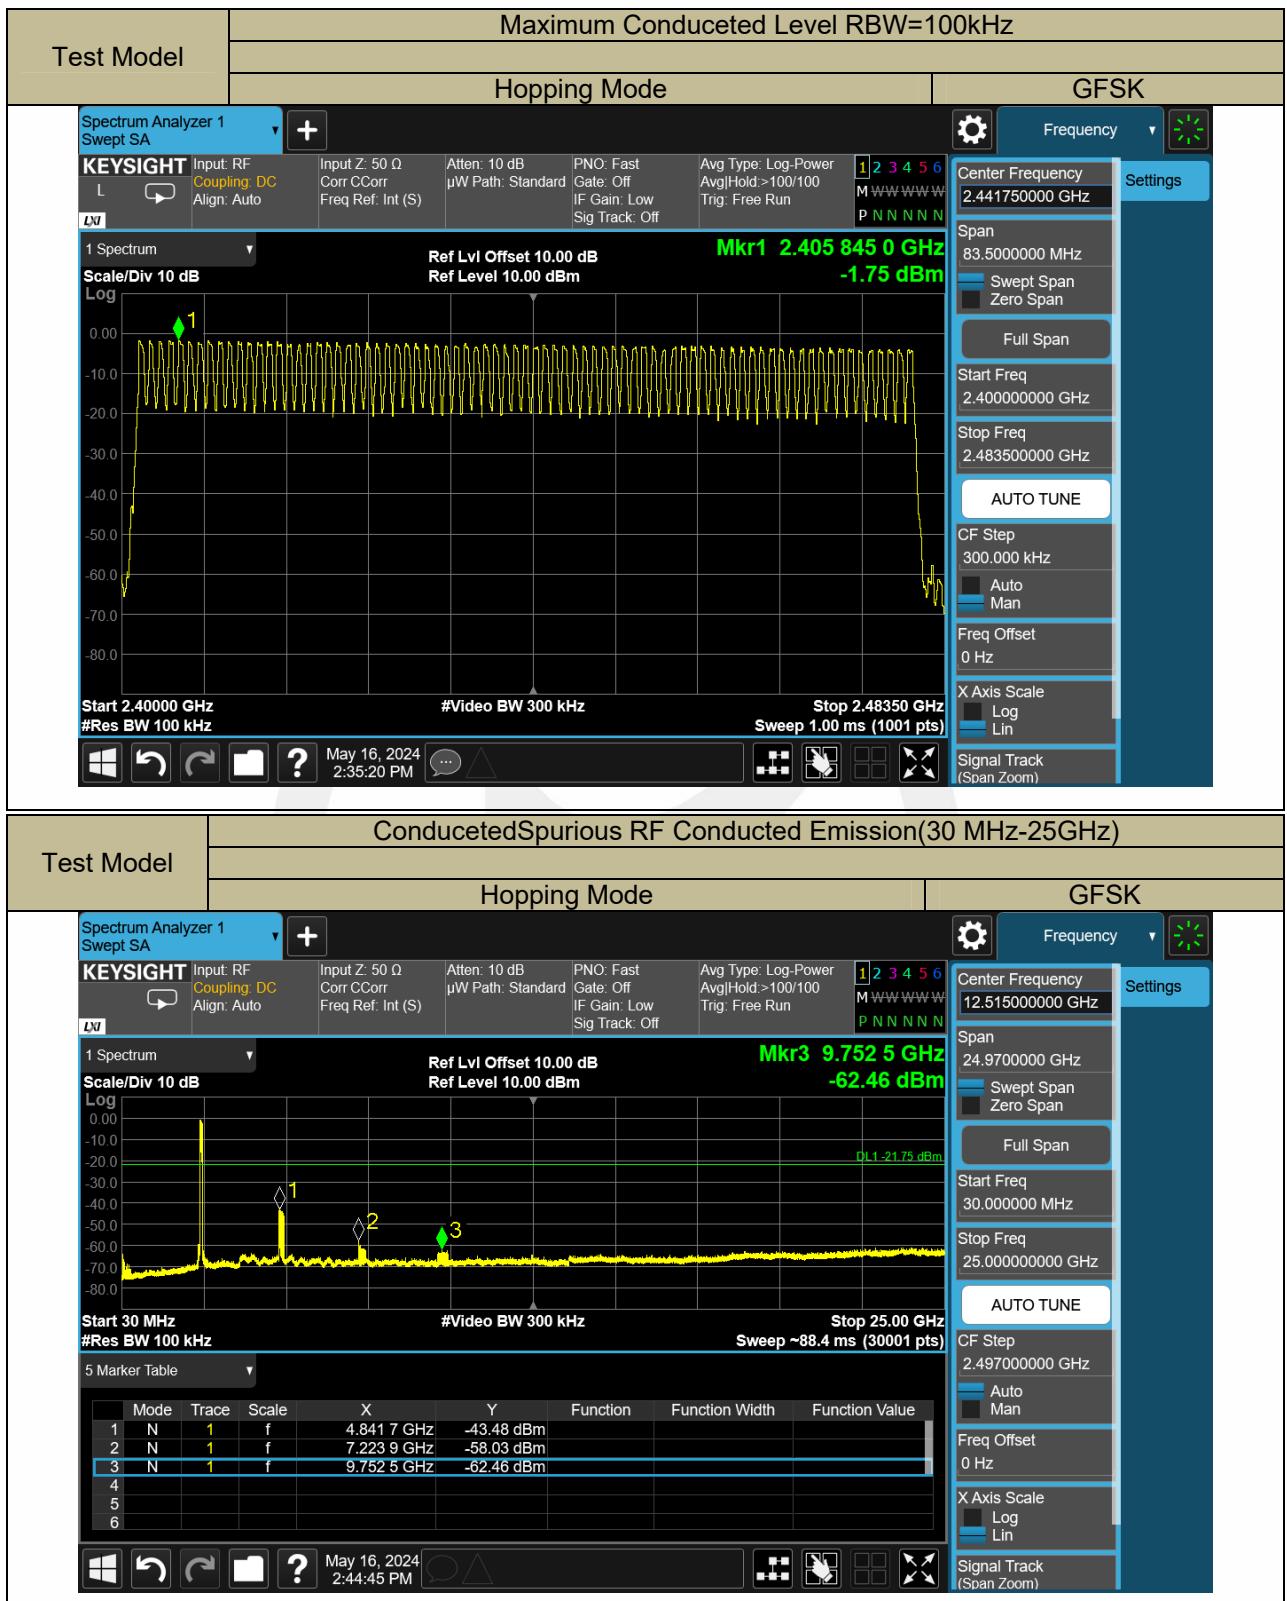

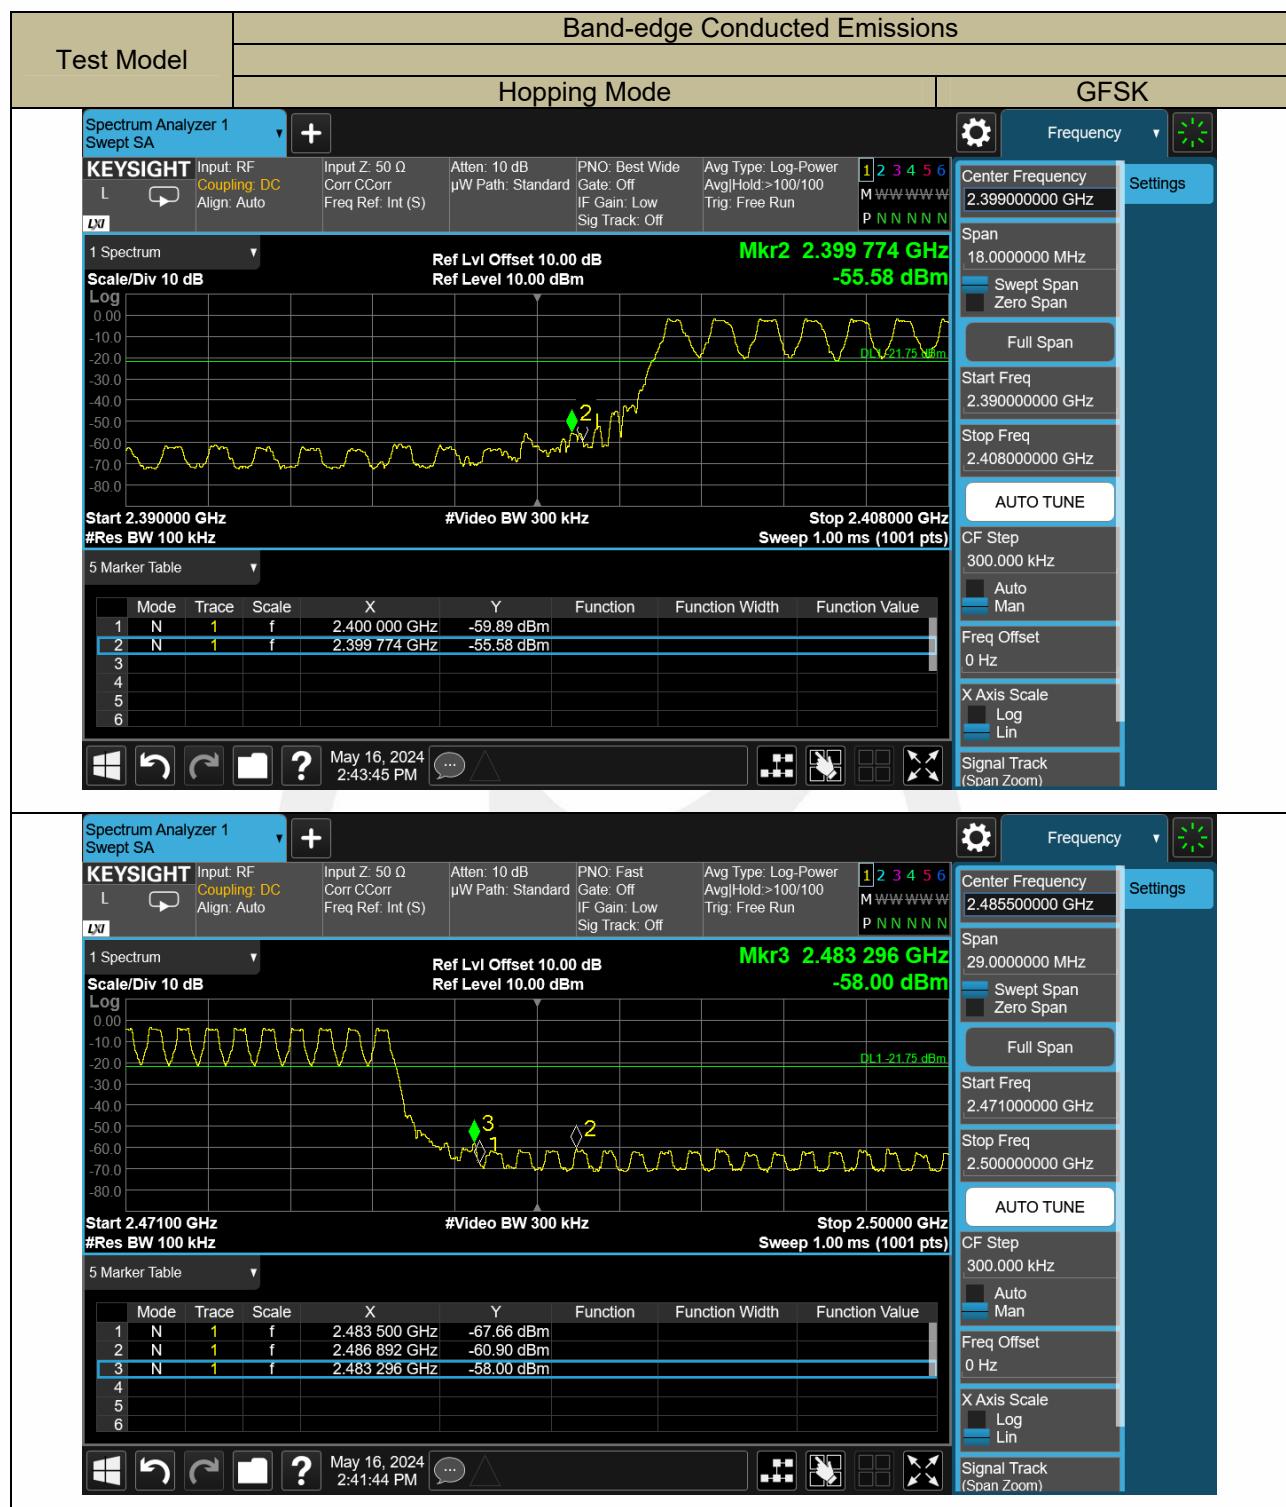

9.7 RADIATED SPURIOUS EMISSION

Applicable Standard

According to FCC Part 15.247(d) and 15.209 and 558074 D01 15.247 Meas Guidance V05r02

Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.209, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μ V/m)	Field Strength ($dB\mu$ V/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (μ V/m)	300
0.490-1.705	24000/F(KHz)	20 log (μ V/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Test Configuration

Test according to clause 7.2 radio frequency test setup 2

Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz(1GHz to 25GHz), 100 kHz for $f < 1$ GHz(30MHz to 1GHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2014 respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	21 °C	Test Date:	May 13, 2024
Humidity:	66 %	Test By:	Lucas Xu
Test mode:	TX Mode		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})(\text{dB})$;
Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK,8DPSK, non hopping) mode have been tested, and the worst result(GFSK)was report as below:

Temperature:	21 °C	Test Date:	May 13, 2024
Humidity:	66 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4804.000	V	48.10	35.68	74.00	54.00	-25.90	-18.32
9608.500	V	49.30	36.49	74.00	54.00	-24.70	-17.51
17890.500	V	53.59	40.17	74.00	54.00	-20.41	-13.83
4804.000	H	43.86	36.26	74.00	54.00	-30.14	-17.74
7206.000	H	50.20	37.75	74.00	54.00	-23.80	-16.25
9608.000	H	52.31	40.94	74.00	54.00	-21.69	-13.06

Temperature:	21 °C	Test Date:	May 14, 2024
Humidity:	66 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4882.000	V	45.32	32.51	74.00	54.00	-28.68	-21.49
13916.500	V	52.01	38.79	74.00	54.00	-21.99	-15.21
17876.500	V	53.56	39.63	74.00	54.00	-20.44	-14.37
4882.000	H	45.00	33.18	74.00	54.00	-29.00	-20.82
7323.000	H	49.21	36.86	74.00	54.00	-24.79	-17.14
17923.500	H	54.00	39.67	74.00	54.00	-20.00	-14.33

Temperature:	21 °C	Test Date:	May 14, 2024
Humidity:	66 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4960.500	V	47.44	34.61	74.00	54.00	-26.56	-19.39
13899.000	V	52.51	38.95	74.00	54.00	-21.49	-15.05
17912.500	V	53.94	39.28	74.00	54.00	-20.06	-14.72
4960.500	H	43.57	29.64	74.00	54.00	-30.43	-24.36
7440.000	H	48.16	37.91	74.00	54.00	-25.84	-16.09
17934.500	H	54.38	39.32	74.00	54.00	-19.62	-14.68

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK,8DPSK) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Temperature:	21 °C	Test Date:	May 14, 2024
Humidity:	66 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2355.920	H	57.61	74.00	-16.39	43.65	54.00	-10.35
2384.320	V	57.79	74.00	-16.21	45.14	54.00	-8.86

Temperature:	21 °C	Test Date:	May 14, 2024
Humidity:	66 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2492.451	H	58.83	74.00	-15.17	46.51	54.00	-7.49
2495.438	V	59.12	74.00	-14.88	47.09	54.00	-6.91

Temperature:	21 °C	Test Date:	May 14, 2024
Humidity:	66 %	Test By:	Lucas Xu
Test mode:	GFSK	Frequency:	Hopping


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over (dB)
2400.000	H	56.10	74.00	-17.90	41.03	54.00	-12.97
2483.500	H	57.64	74.00	-16.36	40.74	54.00	-13.26
2400.000	V	54.83	74.00	-19.17	39.64	54.00	-14.36
2483.500	V	55.29	74.00	-18.71	40.16	54.00	-13.84


Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

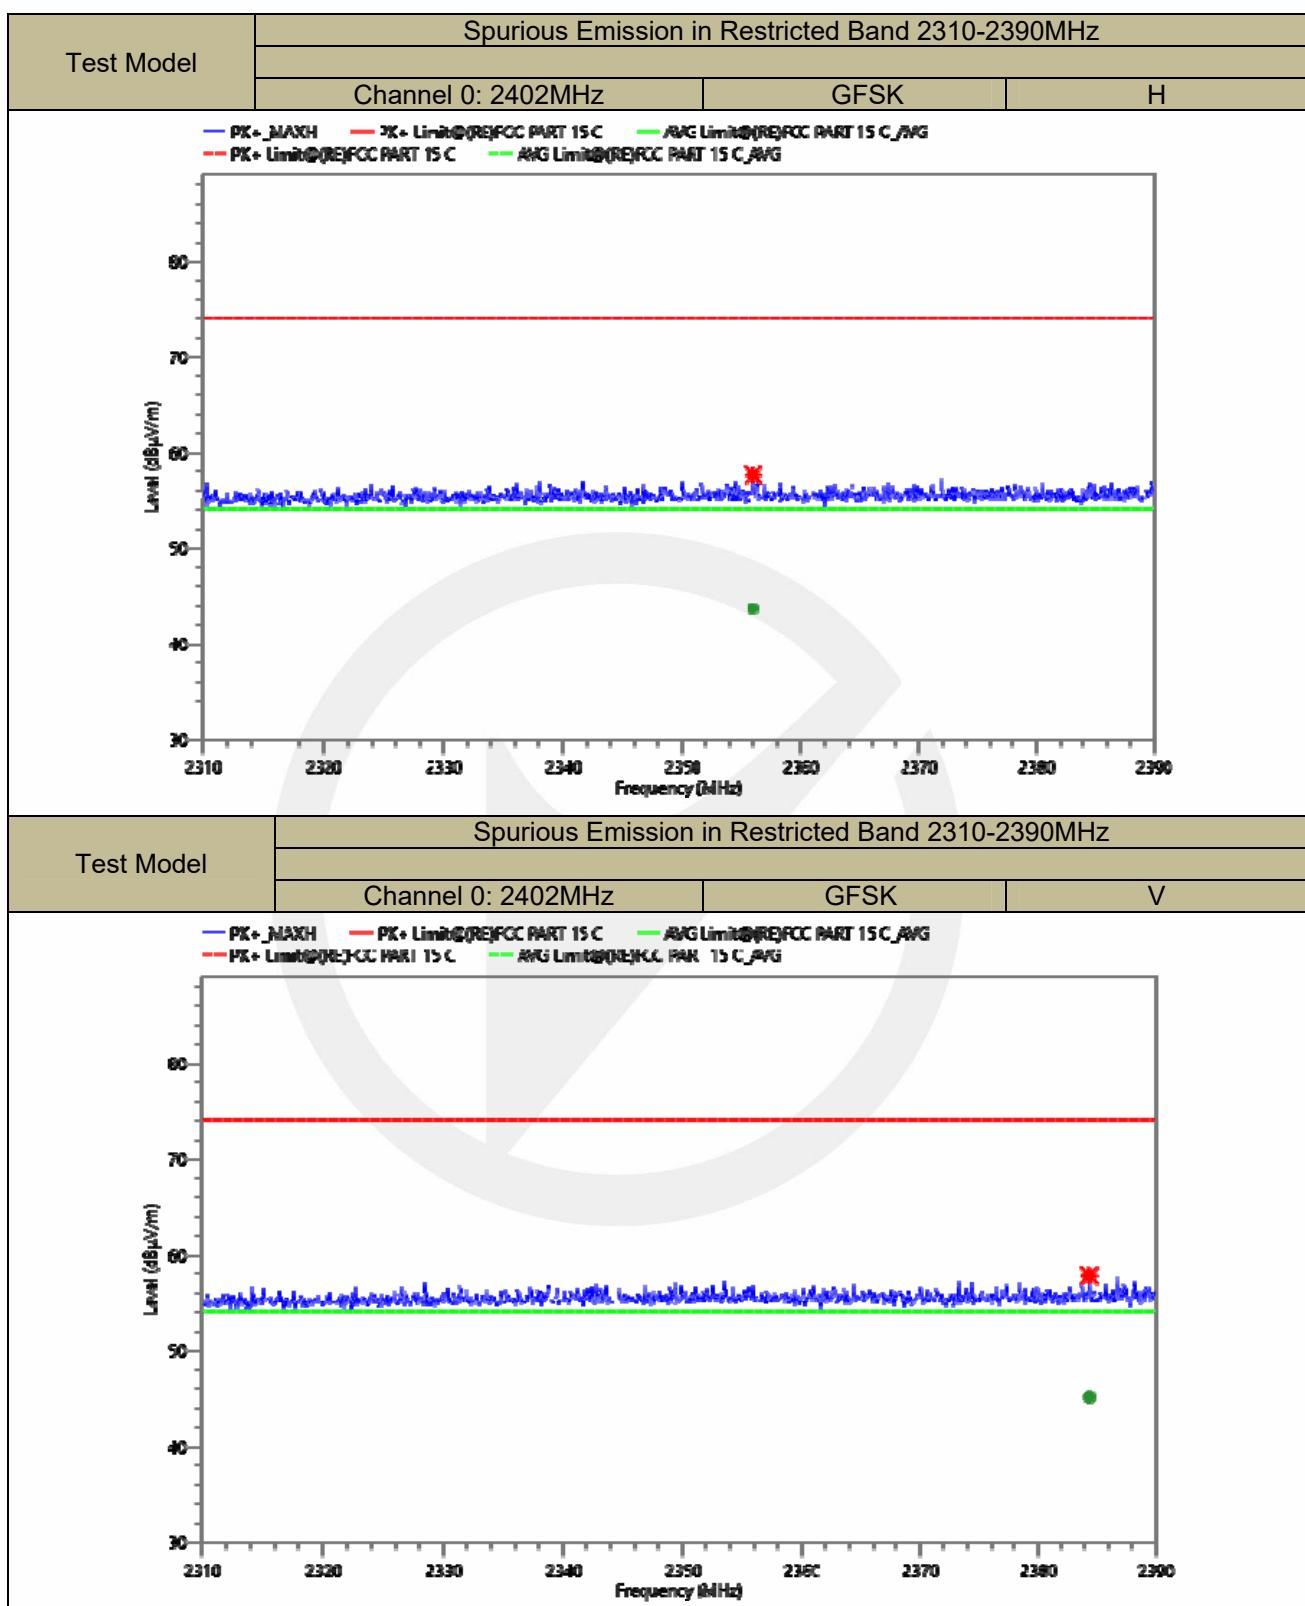


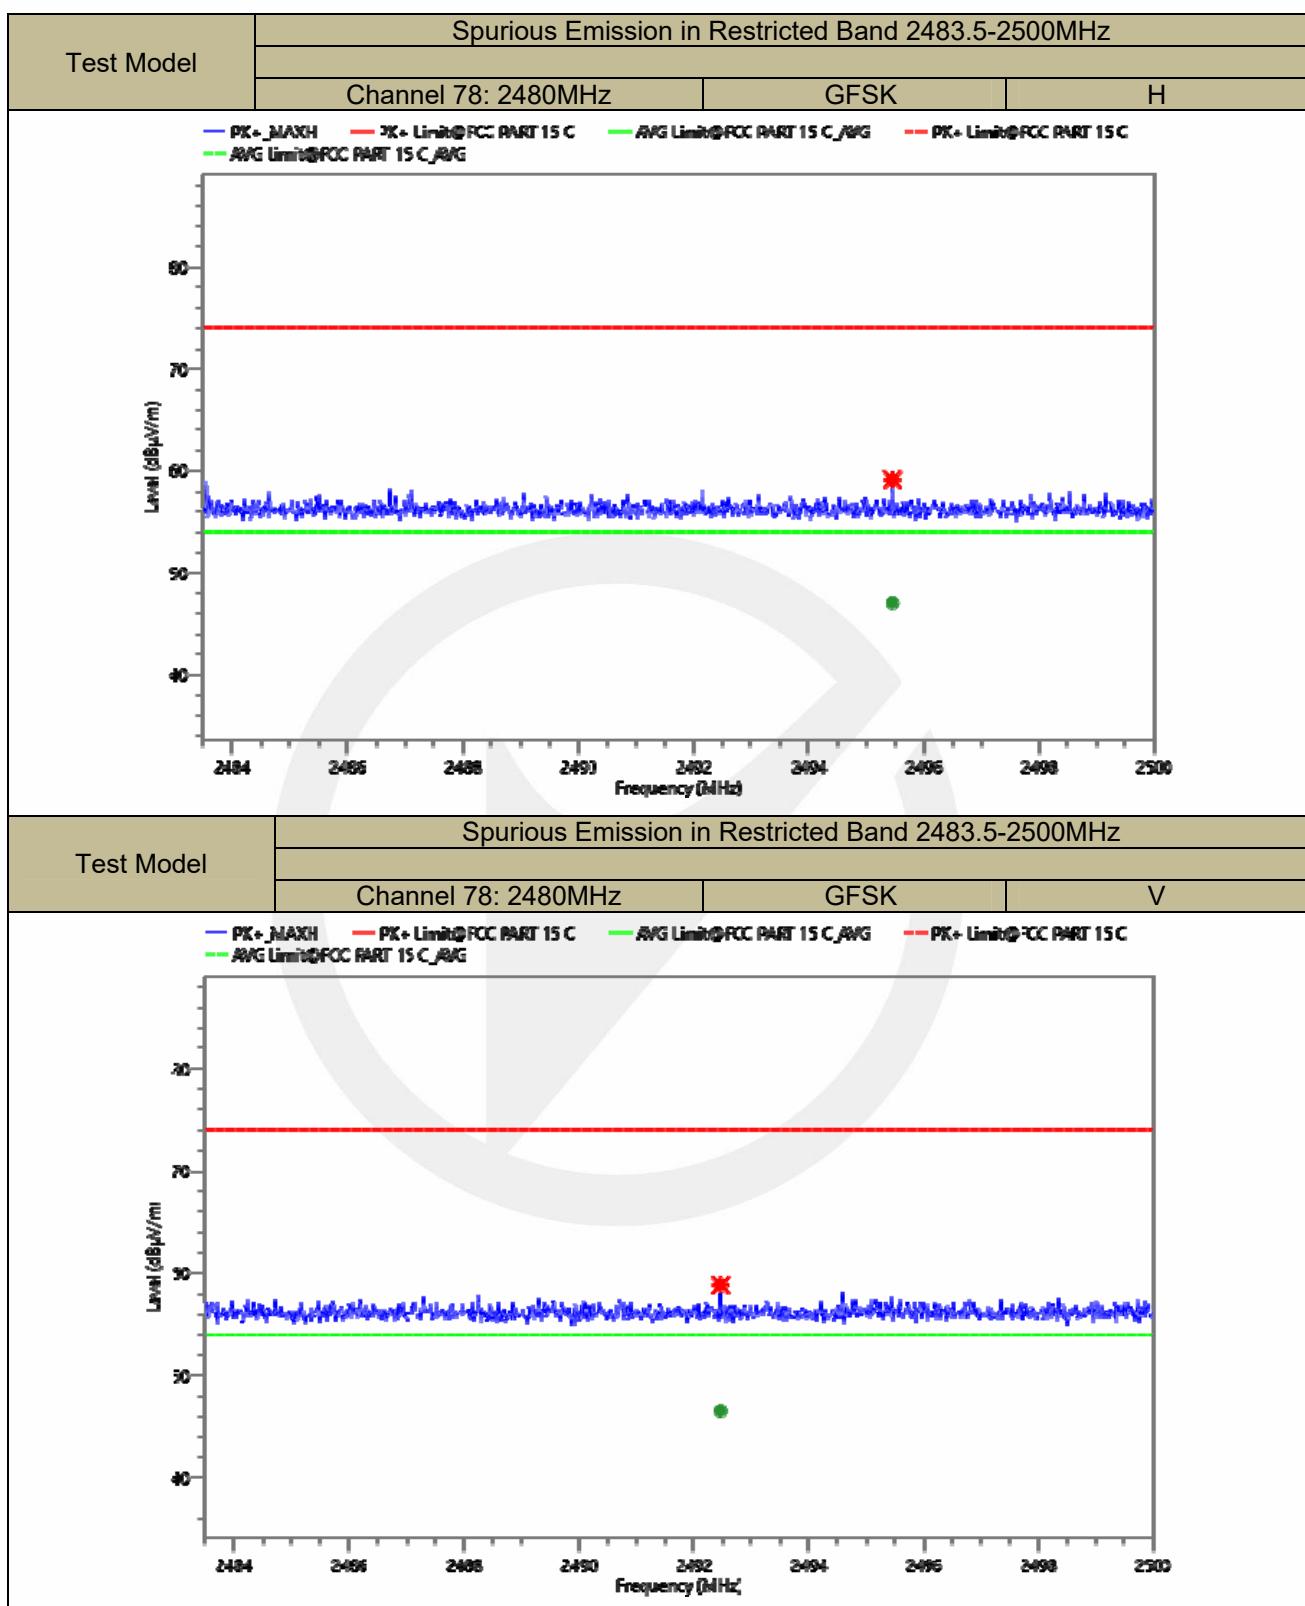

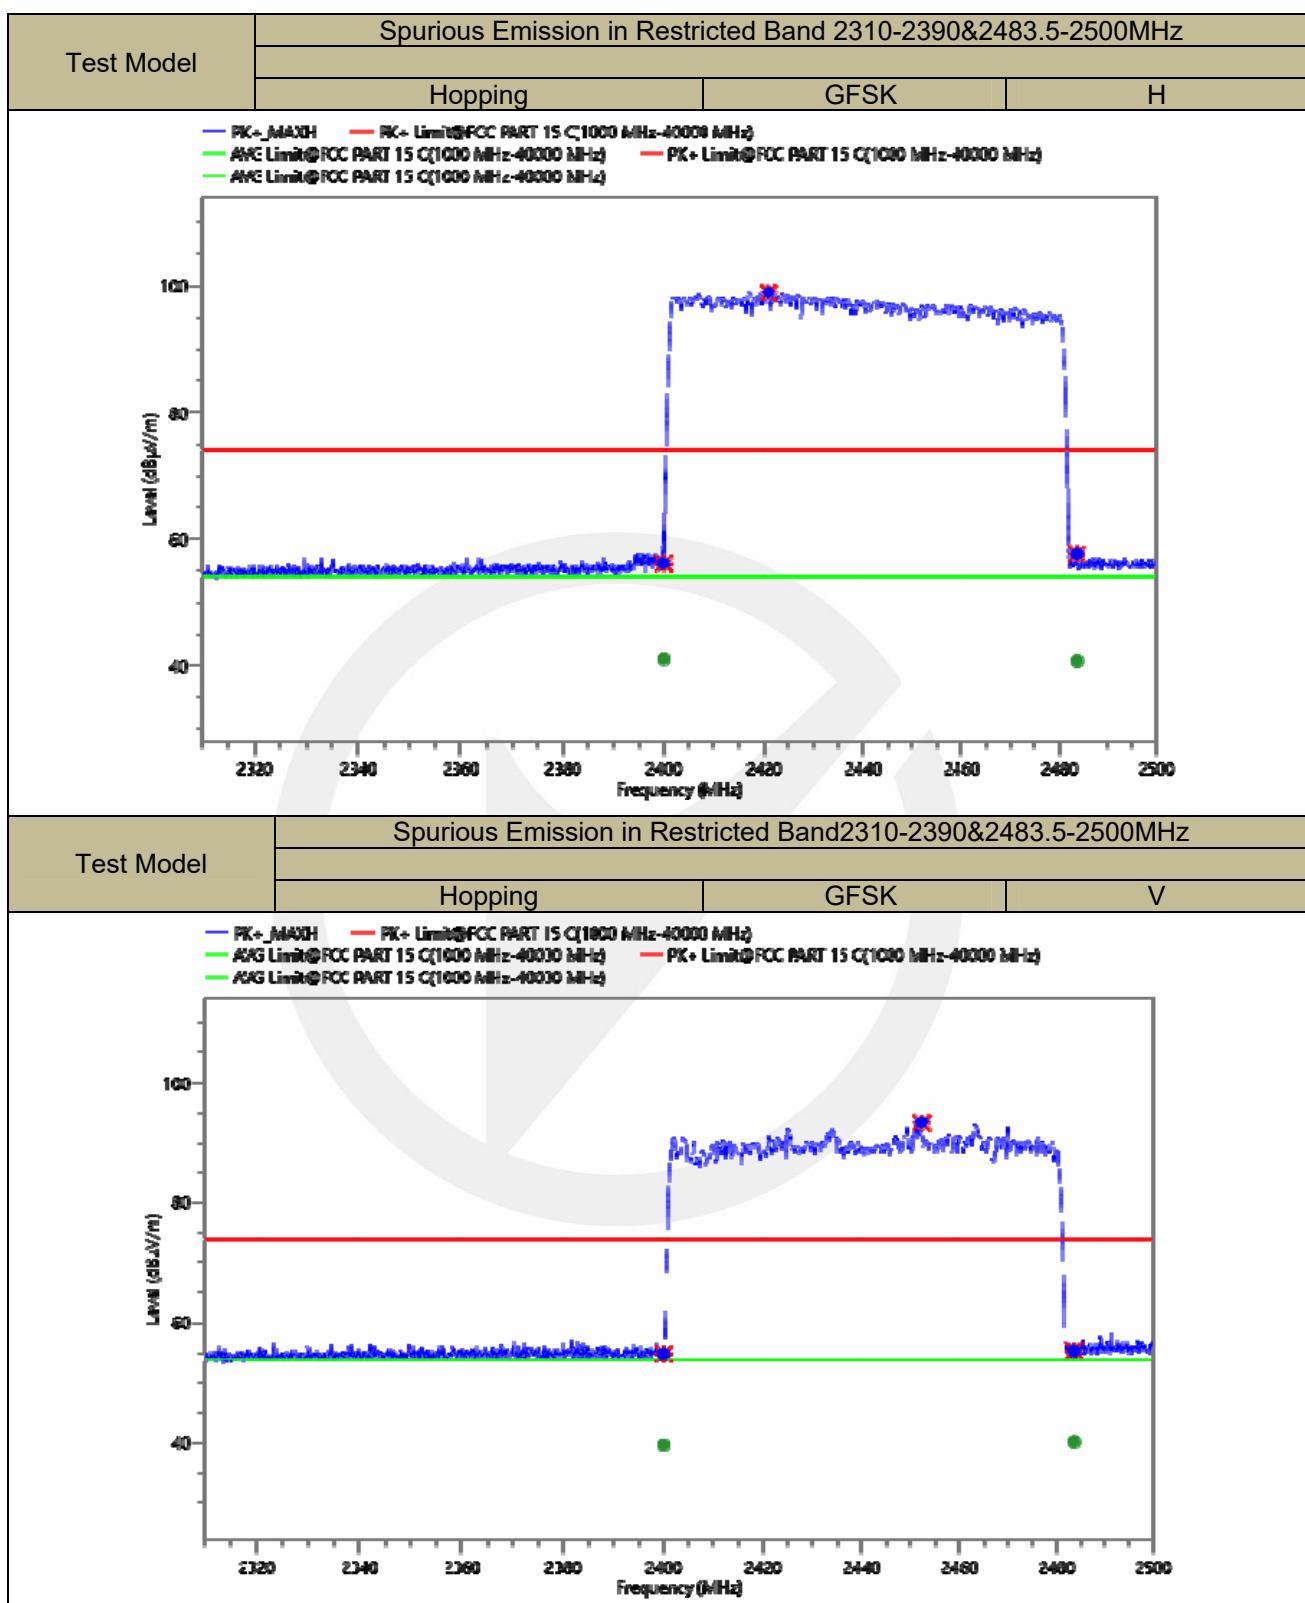


■ Spurious Emission below 1GHz(30MHz to 1GHz)
 Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result was report as below:

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:64 %	Engineer:	Cheis Fan

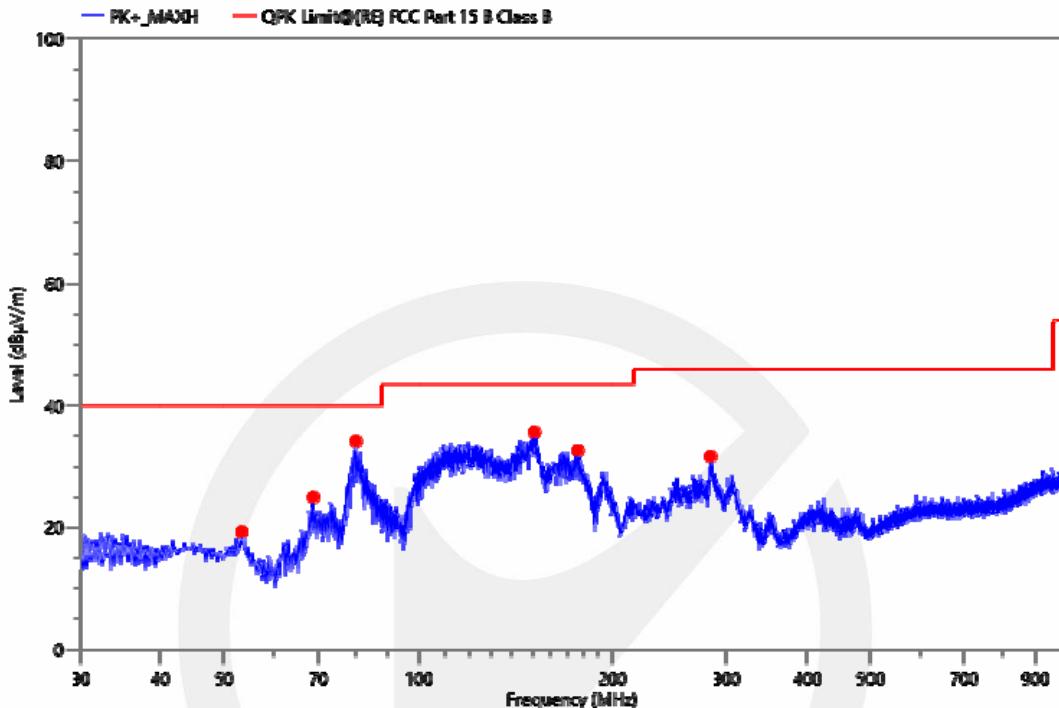


No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	53.280	44.13	-24.85	19.28	40.00	20.72	QPK	100	V	358.0	PASS
2	68.606	51.22	-26.26	24.96	40.00	15.04	QPK	200	V	277.8	PASS
3	80.052	59.54	-25.38	34.16	40.00	5.84	QPK	200	V	112.8	PASS
4	150.765	62.53	-26.87	35.66	43.50	7.84	QPK	100	V	205.0	PASS
5	176.276	59.07	-26.41	32.66	43.50	10.84	QPK	100	V	170.6	PASS
6	283.073	54.46	-22.82	31.64	46.00	14.36	QPK	100	V	149.9	PASS

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:64 %	Engineer:	Cheis Fan

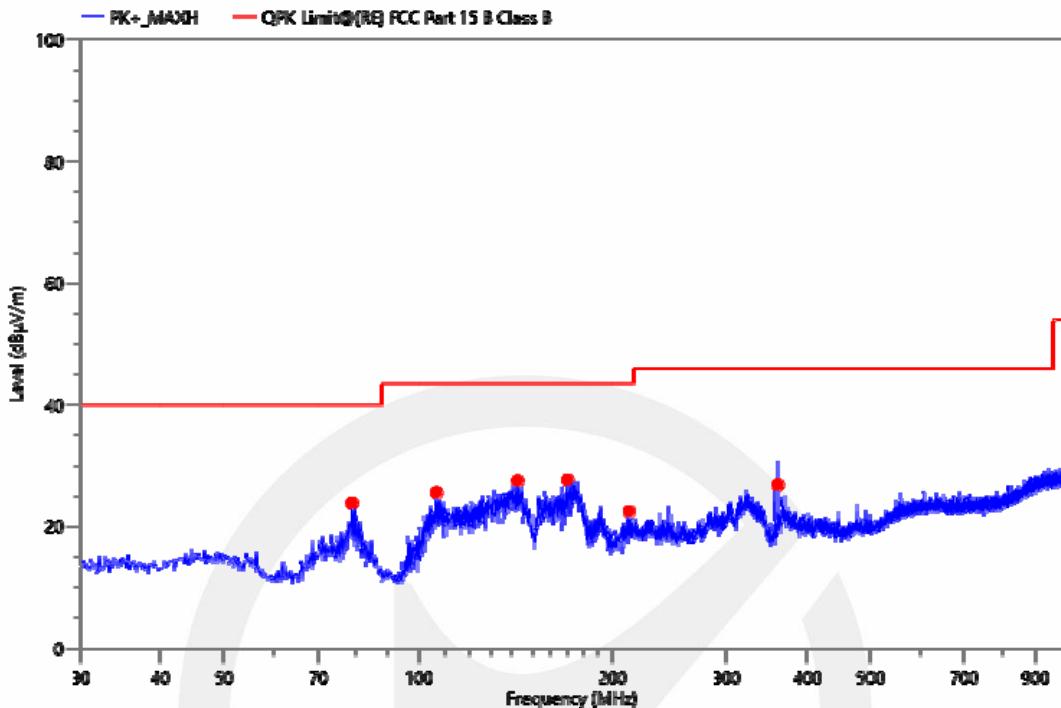


No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	78.888	49.17	-25.3	23.87	40.00	16.13	QPK	200	H	288.6	PASS
2	106.436	52.04	-26.43	25.61	43.50	17.89	QPK	200	H	249.4	PASS
3	142.617	54.18	-26.64	27.54	43.50	15.96	QPK	200	H	279.3	PASS
4	169.874	54.39	-26.71	27.68	43.50	15.82	QPK	200	H	242.3	PASS
5	212.166	47.06	-24.56	22.50	43.50	21.00	QPK	200	H	256.1	PASS
6	359.121	48.30	-21.43	26.87	46.00	19.13	QPK	100	H	217.1	PASS

Project Information			
Mode:	TX2441	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:64 %	Engineer:	Cheis Fan

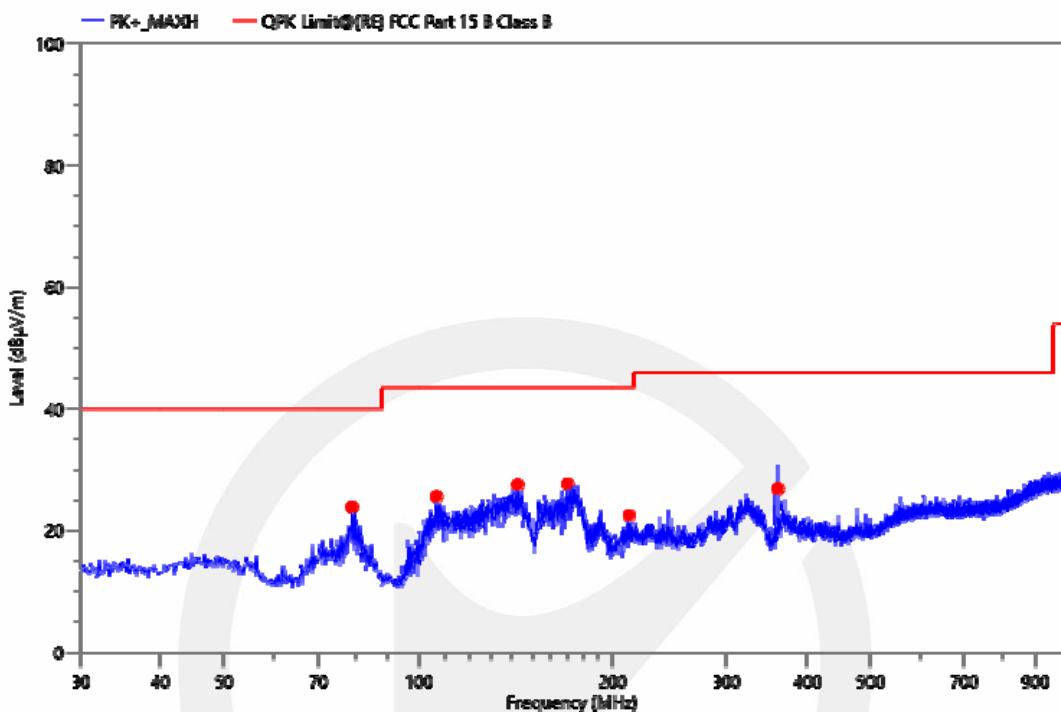


No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	78.888	49.17	-25.3	23.87	40.00	16.13	QPK	200	H	288.6	PASS
2	106.436	52.04	-26.43	25.61	43.50	17.89	QPK	200	H	249.4	PASS
3	142.617	54.18	-26.64	27.54	43.50	15.96	QPK	200	H	279.3	PASS
4	169.874	54.39	-26.71	27.68	43.50	15.82	QPK	200	H	242.3	PASS
5	212.166	47.06	-24.56	22.50	43.50	21.00	QPK	200	H	256.1	PASS
6	359.121	48.30	-21.43	26.87	46.00	19.13	QPK	100	H	217.1	PASS

Project Information			
Mode:	TX2441	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:64 %	Engineer:	Cheis Fan

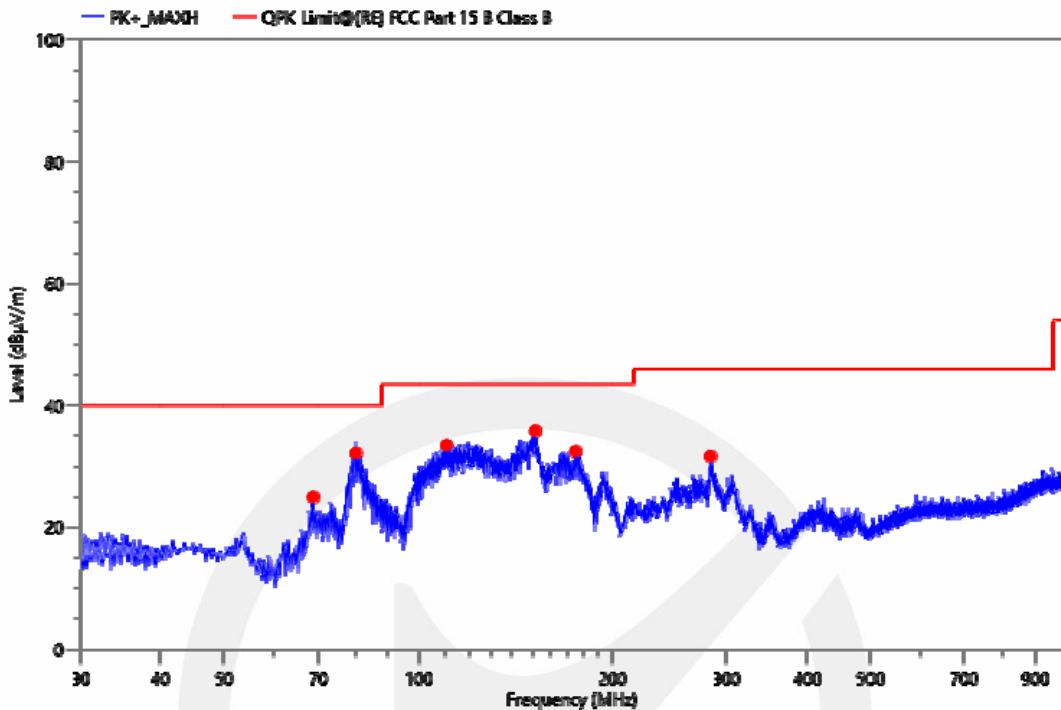


No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	68.606	51.22	-26.26	24.96	40.00	15.04	QPK	100	V	277.8	PASS
2	80.052	57.54	-25.38	32.16	40.00	7.84	QPK	200	V	112.8	PASS
3	110.413	59.65	-26.24	33.41	43.50	10.09	QPK	100	V	184.3	PASS
4	151.250	62.70	-26.87	35.83	43.50	7.67	QPK	200	V	173.0	PASS
5	174.918	58.93	-26.47	32.46	43.50	11.04	QPK	100	V	173.0	PASS
6	283.073	54.46	-22.82	31.64	46.00	14.36	QPK	100	V	149.9	PASS

Project Information			
Mode:	TX2480	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:64 %	Engineer:	Cheis Fan

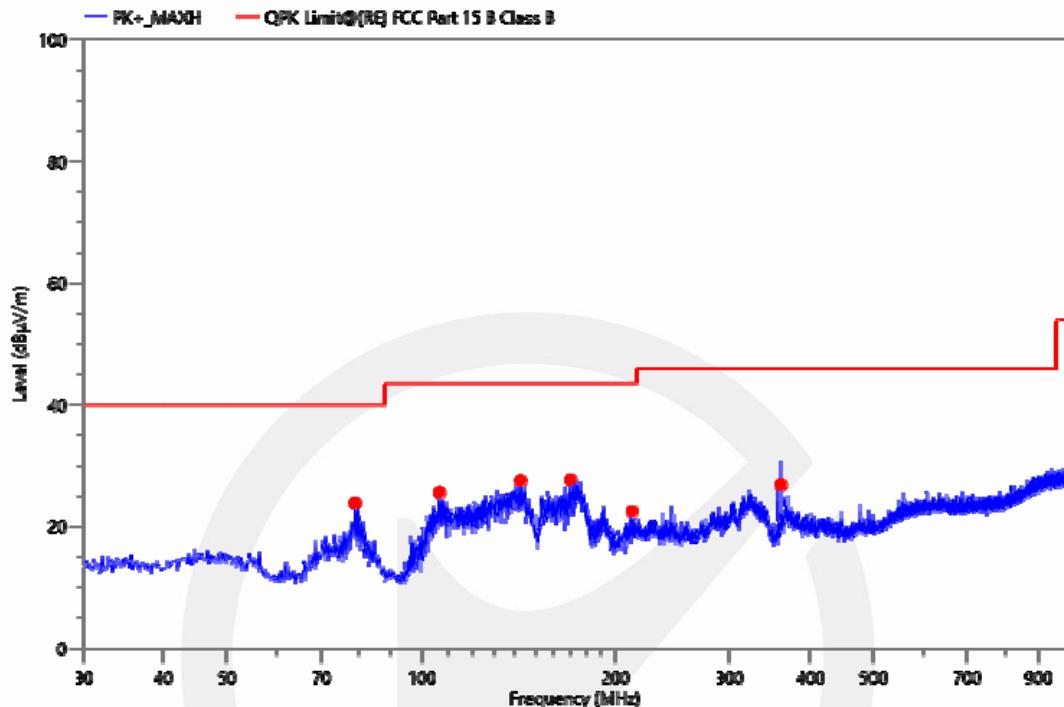

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	78.888	49.17	-25.3	23.87	40.00	16.13	QPK	200	H	288.6	PASS
2	106.436	52.04	-26.43	25.61	43.50	17.89	QPK	200	H	249.4	PASS
3	142.617	54.18	-26.64	27.54	43.50	15.96	QPK	200	H	279.3	PASS
4	169.874	54.39	-26.71	27.68	43.50	15.82	QPK	200	H	242.3	PASS
5	212.166	47.06	-24.56	22.50	43.50	21.00	QPK	200	H	256.1	PASS
6	359.121	48.30	-21.43	26.87	46.00	19.13	QPK	100	H	217.1	PASS

Project Information			
Mode:	TX2480	Voltage:	AC 120V/60Hz
Environment:	Temp: 21 °C; Humi:64 %	Engineer:	Cheis Fan

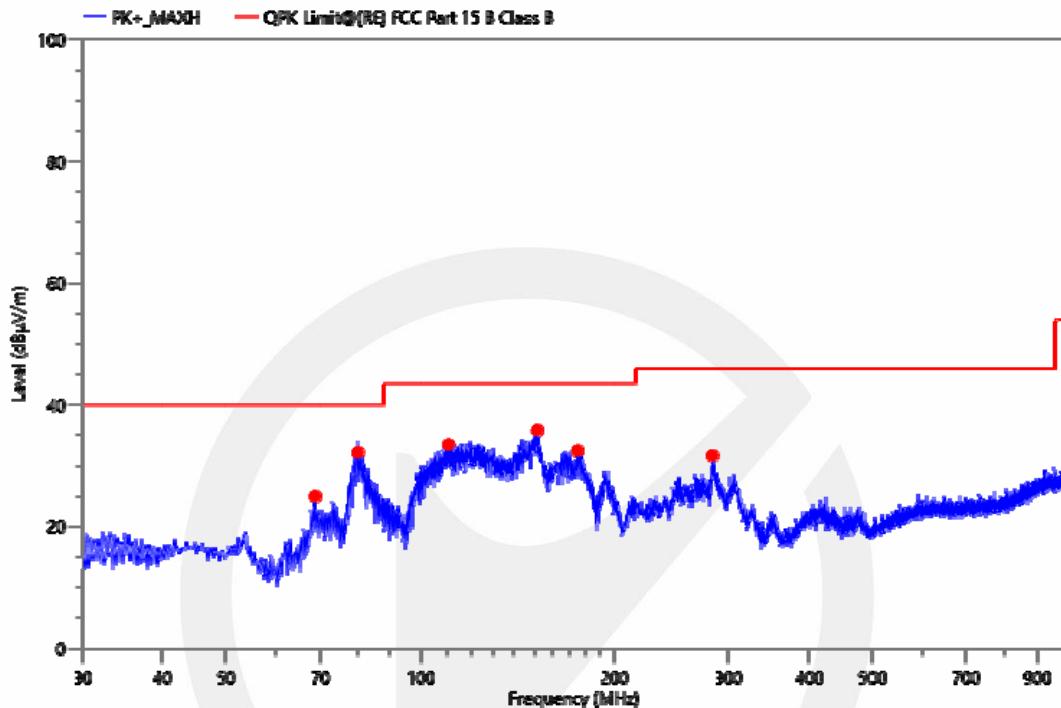

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Det.	Height (cm)	Pol.	Azimuth (deg)	Verdict
1	68.606	51.22	-26.26	24.96	40.00	15.04	QPK	100	V	277.8	PASS
2	80.052	57.54	-25.38	32.16	40.00	7.84	QPK	100	V	112.8	PASS
3	110.413	59.65	-26.24	33.41	43.50	10.09	QPK	100	V	184.3	PASS
4	151.250	62.70	-26.87	35.83	43.50	7.67	QPK	100	V	173.0	PASS
5	174.918	58.93	-26.47	32.46	43.50	11.04	QPK	100	V	173.0	PASS
6	283.073	54.46	-22.82	31.64	46.00	14.36	QPK	200	V	149.9	PASS

9.8 CONDUCTED EMISSION TEST

Applicable Standard

According to FCC Part 15.207(a)

Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

Test Configuration

Test according to clause 7.3 conducted emission test setup

Test Procedure


The EUT was placed on a table which is 0.1m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

Test Results

Pass.


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result was report as below:

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 19 °C; Humi:59 %	Engineer:	WK Luo

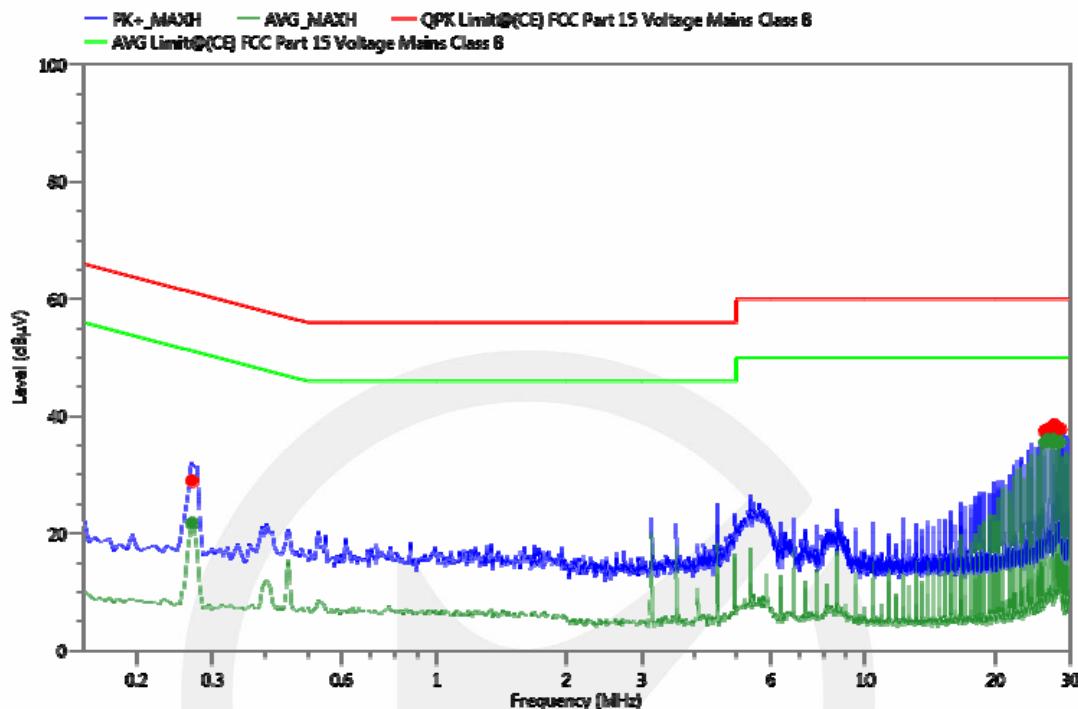

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V)	Limit (dB μ V)	Margin (dB)	Det.	Line	PE	Verdict
1	0.268	18.53	10.41	28.94	61.18	32.24	QPK	L1	GND	PASS
2	0.268	11.30	10.41	21.71	51.18	29.47	AVG	L1	GND	PASS
3	26.106	26.13	11.34	37.47	60.00	22.53	QPK	L1	GND	PASS
4	26.106	24.08	11.34	35.42	50.00	14.58	AVG	L1	GND	PASS
5	26.567	26.34	11.37	37.71	60.00	22.29	QPK	L1	GND	PASS
6	26.567	24.59	11.37	35.96	50.00	14.04	AVG	L1	GND	PASS
7	27.453	27.06	11.43	38.49	60.00	21.51	QPK	L1	GND	PASS
8	27.453	23.89	11.43	35.32	50.00	14.68	AVG	L1	GND	PASS
9	27.906	26.18	11.46	37.64	60.00	22.36	QPK	L1	GND	PASS
10	27.906	24.86	11.46	36.32	50.00	13.68	AVG	L1	GND	PASS
11	28.362	26.29	11.49	37.78	60.00	22.22	QPK	L1	GND	PASS
12	28.362	23.92	11.49	35.41	50.00	14.59	AVG	L1	GND	PASS

Project Information			
Mode:	TX2402	Voltage:	AC 120V/60Hz
Environment:	Temp: 19 °C; Humi:59 %	Engineer:	WK Luo

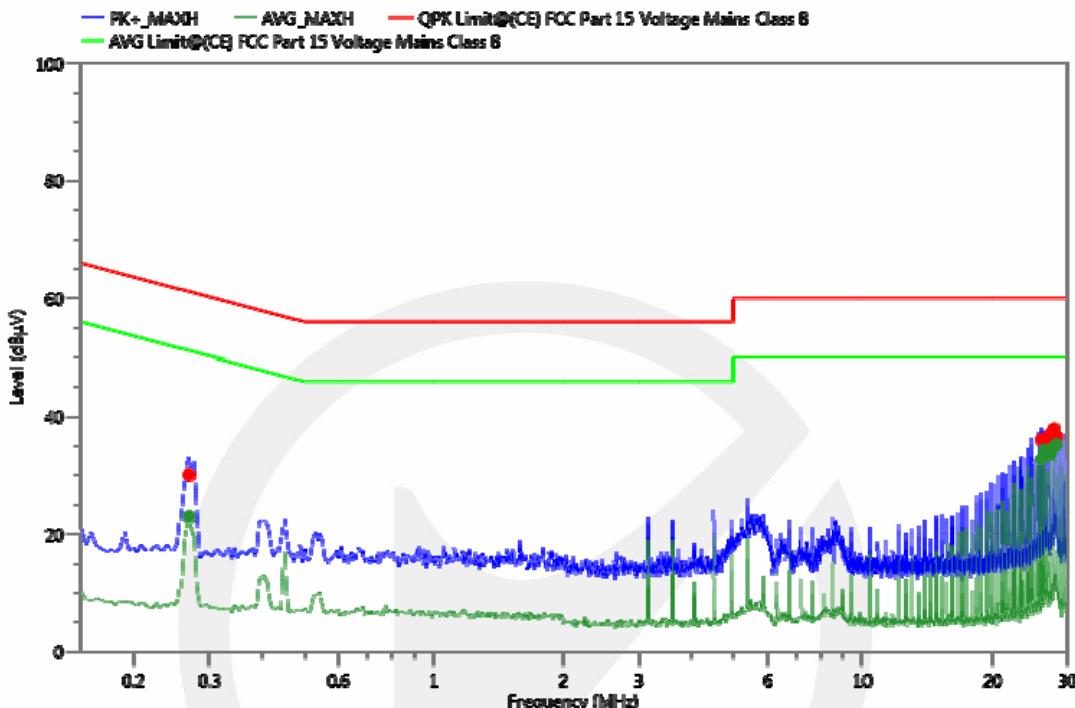

No.	Freq. (MHz)	Reading (dB μ V)	Corr. (dB)	Meas. (dB μ V)	Limit (dB μ V)	Margin (dB)	Det.	Line	PE	Verdict
1	0.268	19.72	10.37	30.09	61.18	31.09	QPK	N	GND	PASS
2	0.268	12.59	10.37	22.96	51.18	28.22	AVG	N	GND	PASS
3	26.097	24.82	11.26	36.08	60.00	23.92	QPK	N	GND	PASS
4	26.097	21.44	11.26	32.70	50.00	17.30	AVG	N	GND	PASS
5	26.554	24.82	11.29	36.11	60.00	23.89	QPK	N	GND	PASS
6	26.554	22.97	11.29	34.26	50.00	15.74	AVG	N	GND	PASS
7	27.440	25.70	11.34	37.04	60.00	22.96	QPK	N	GND	PASS
8	27.440	22.22	11.34	33.56	50.00	16.44	AVG	N	GND	PASS
9	27.897	26.51	11.37	37.88	60.00	22.12	QPK	N	GND	PASS
10	27.897	23.34	11.37	34.71	50.00	15.29	AVG	N	GND	PASS
11	28.340	25.06	11.4	36.46	60.00	23.54	QPK	N	GND	PASS
12	28.340	23.81	11.4	35.21	50.00	14.79	AVG	N	GND	PASS

9.9 ANTENNA APPLICATION

Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Result

Pass.

The EUT has 1 PCB Antenna: The PCB Antenna Gain is 1.7 dBi;

Note:

- Antenna use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

*** End of Report ***

声 明

Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效；

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制；

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；

Objections shall be raised within 20 days from the date receiving the report.