


Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

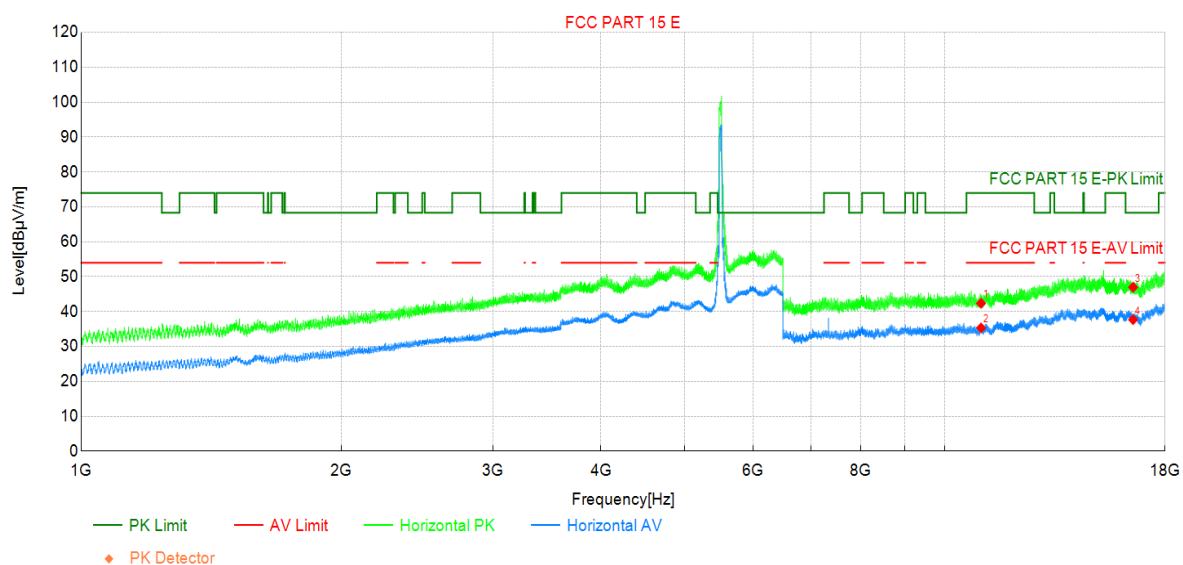

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	35.12	42.37	7.25	74.00	31.63	PK	Horizo	PASS
2	11020.00	28.06	35.31	7.25	54.00	18.69	AV	Horizo	PASS
3	16530.00	31.95	46.96	15.01	68.30	21.34	PK	Horizo	PASS
4	16530.00	22.68	37.69	15.01	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5510MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

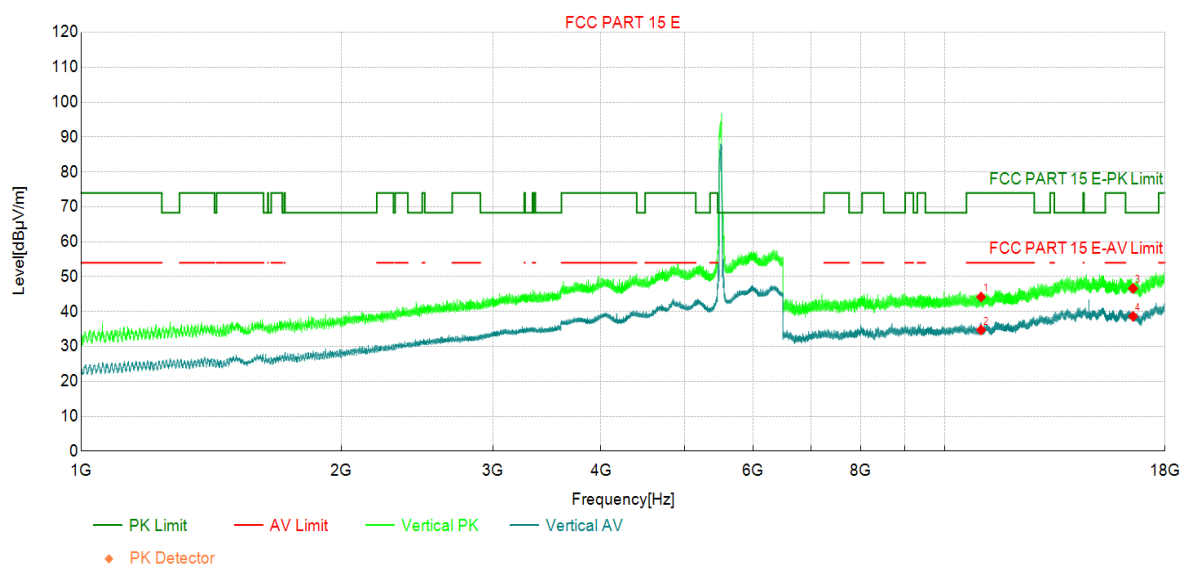

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	36.92	44.17	7.25	74.00	29.83	PK	Vertic	PASS
2	11020.00	27.47	34.72	7.25	54.00	19.28	AV	Vertic	PASS
3	16530.00	31.62	46.63	15.01	68.30	21.67	PK	Vertic	PASS
4	16530.00	23.61	38.62	15.01	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5550MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

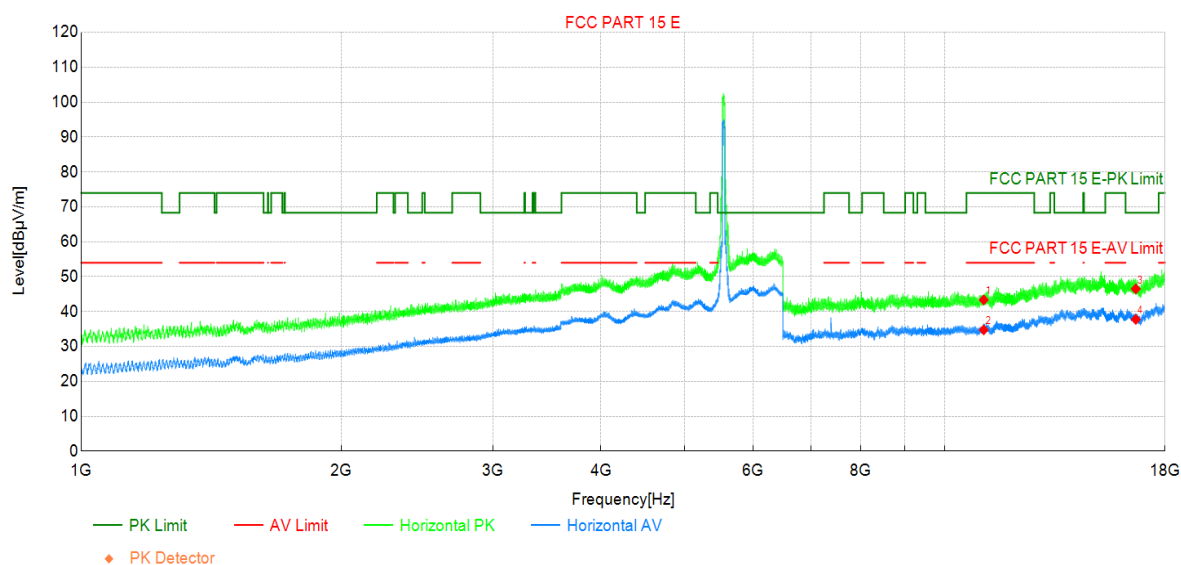

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	36.69	43.35	6.66	74.00	30.65	PK	Horizo	PASS
2	11100.00	28.11	34.77	6.66	54.00	19.23	AV	Horizo	PASS
3	16650.00	31.82	46.51	14.69	68.30	21.79	PK	Horizo	PASS
4	16650.00	23.08	37.77	14.69	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5550MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

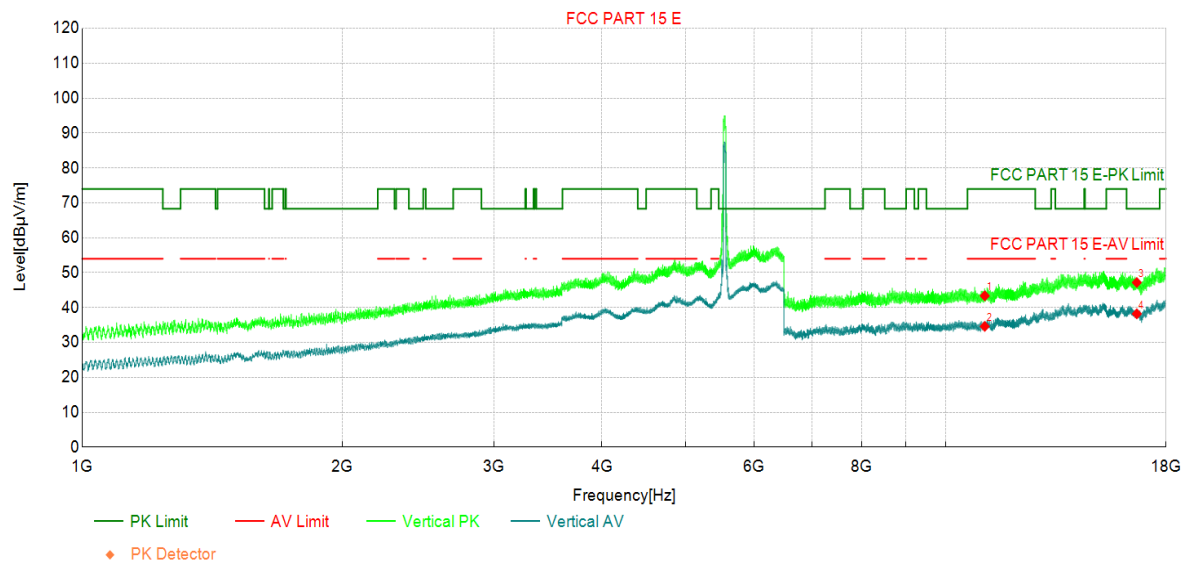

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	36.70	43.36	6.66	74.00	30.64	PK	Vertic	PASS
2	11100.00	27.94	34.60	6.66	54.00	19.40	AV	Vertic	PASS
3	16650.00	32.49	47.18	14.69	68.30	21.12	PK	Vertic	PASS
4	16650.00	23.52	38.21	14.69	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

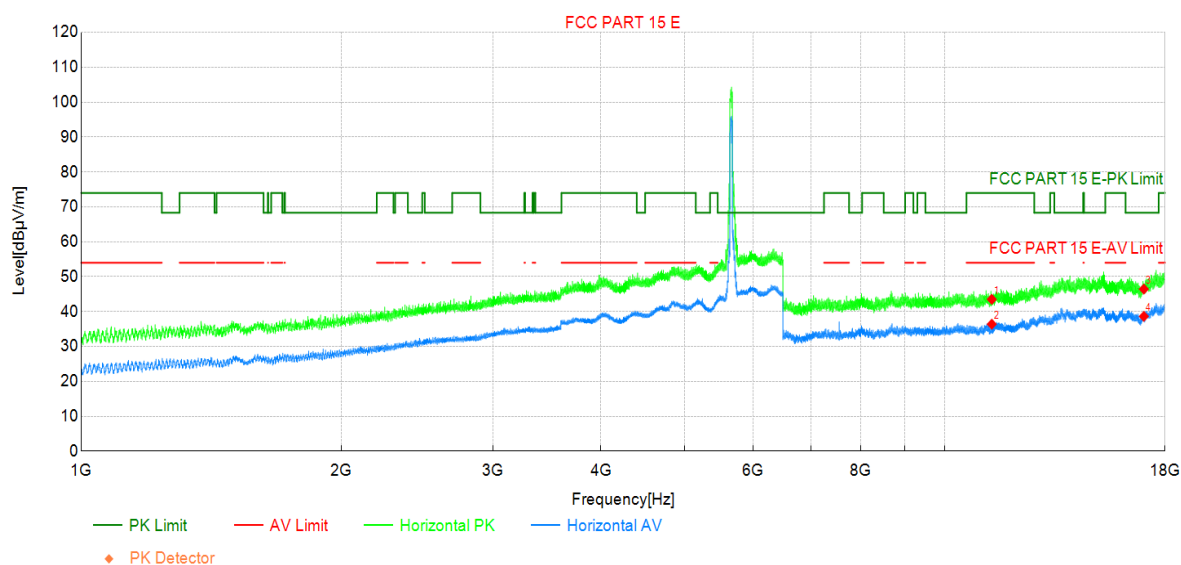

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	35.65	43.51	7.86	74.00	30.49	PK	Horizo	PASS
2	11340.00	28.53	36.39	7.86	54.00	17.61	AV	Horizo	PASS
3	17010.00	30.40	46.44	16.04	68.30	21.86	PK	Horizo	PASS
4	17010.00	22.58	38.62	16.04	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5670MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

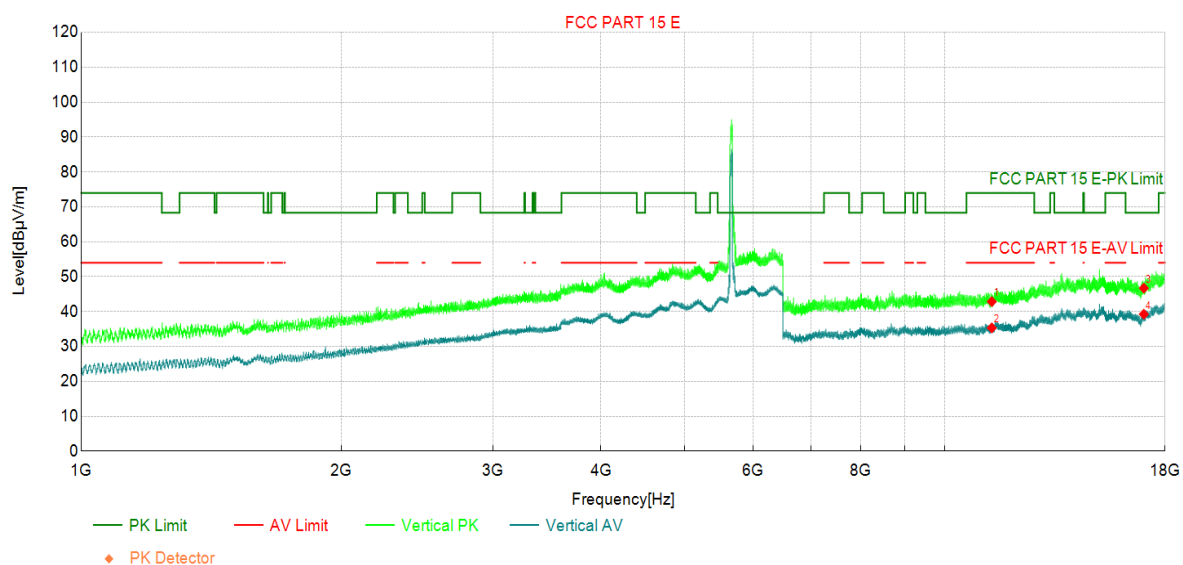

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	34.99	42.85	7.86	74.00	31.15	PK	Vertic	PASS
2	11340.00	27.46	35.32	7.86	54.00	18.68	AV	Vertic	PASS
3	17010.00	30.68	46.72	16.04	68.30	21.58	PK	Vertic	PASS
4	17010.00	23.19	39.23	16.04	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5755MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

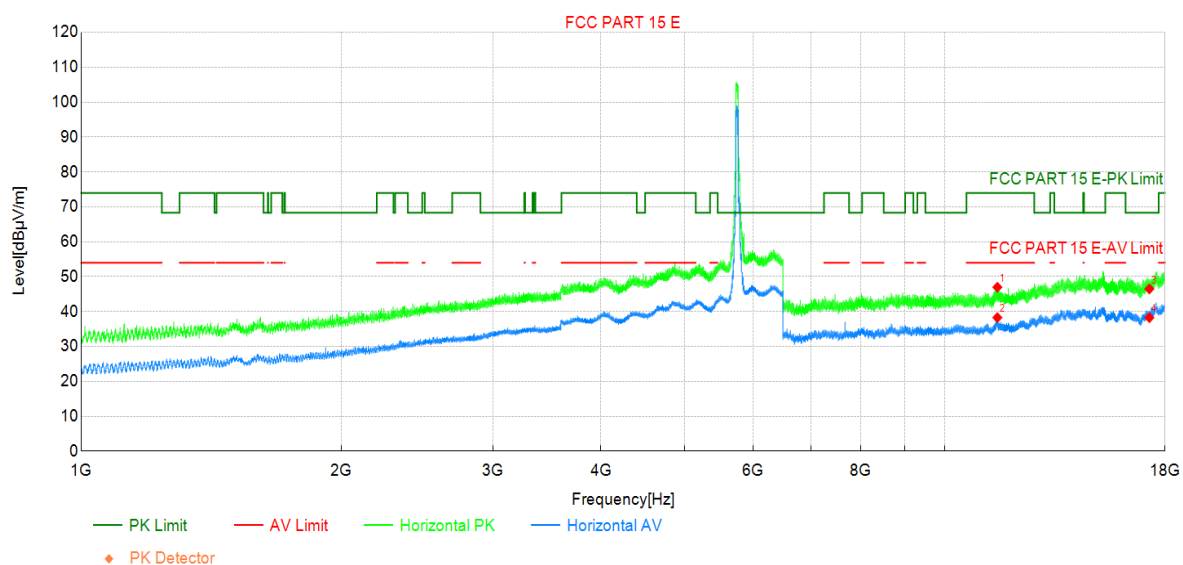

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	38.50	46.98	8.48	74.00	27.02	PK	Horizo	PASS
2	11510.00	29.78	38.26	8.48	54.00	15.74	AV	Horizo	PASS
3	17265.00	30.99	46.50	15.51	68.30	21.80	PK	Horizo	PASS
4	17265.00	22.75	38.26	15.51	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5755MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

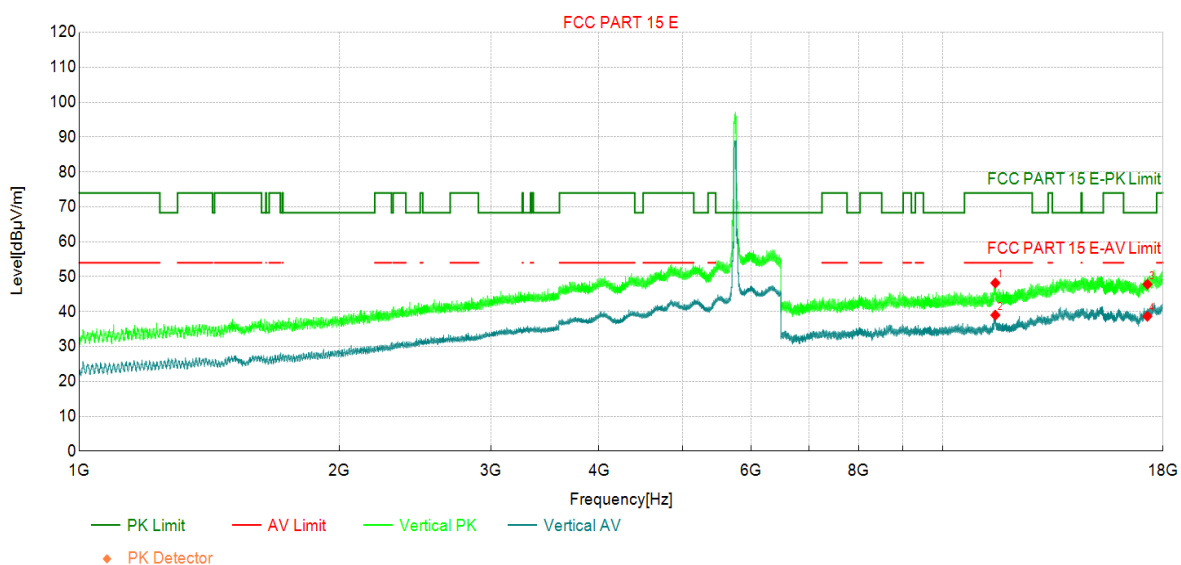

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	39.71	48.19	8.48	74.00	25.81	PK	Vertic	PASS
2	11510.00	30.49	38.97	8.48	54.00	15.03	AV	Vertic	PASS
3	17265.00	32.30	47.81	15.51	68.30	20.49	PK	Vertic	PASS
4	17265.00	23.13	38.64	15.51	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5795MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

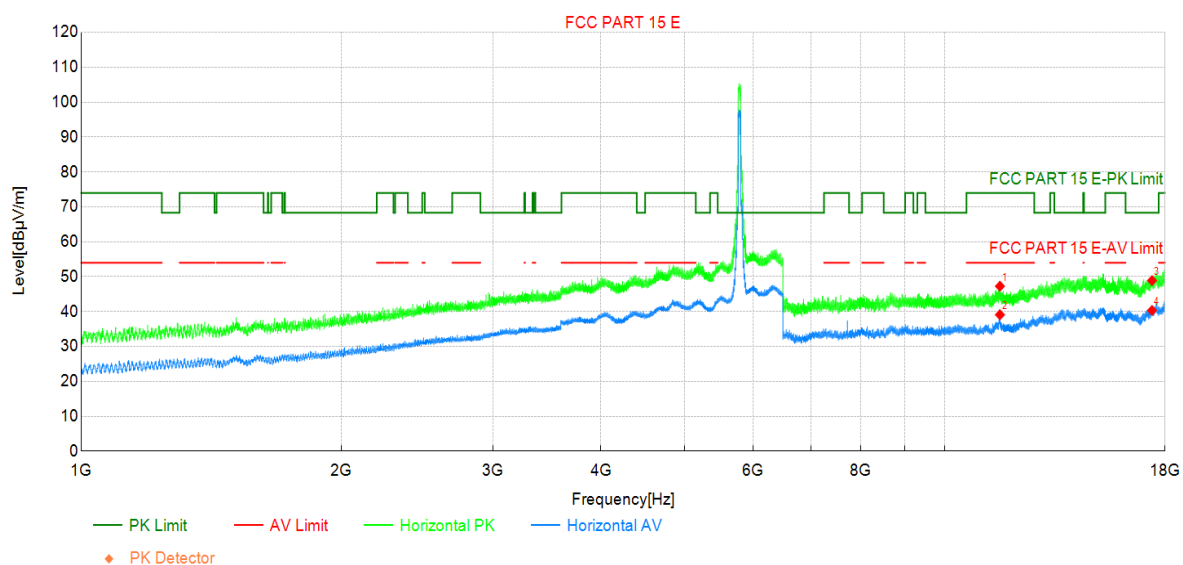

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	38.52	47.26	8.74	74.00	26.74	PK	Horizo	PASS
2	11590.00	30.35	39.09	8.74	54.00	14.91	AV	Horizo	PASS
3	17385.00	32.29	48.87	16.58	68.30	19.43	PK	Horizo	PASS
4	17385.00	23.74	40.32	16.58	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode3:Transmit at 5795MHz by 802.11n(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

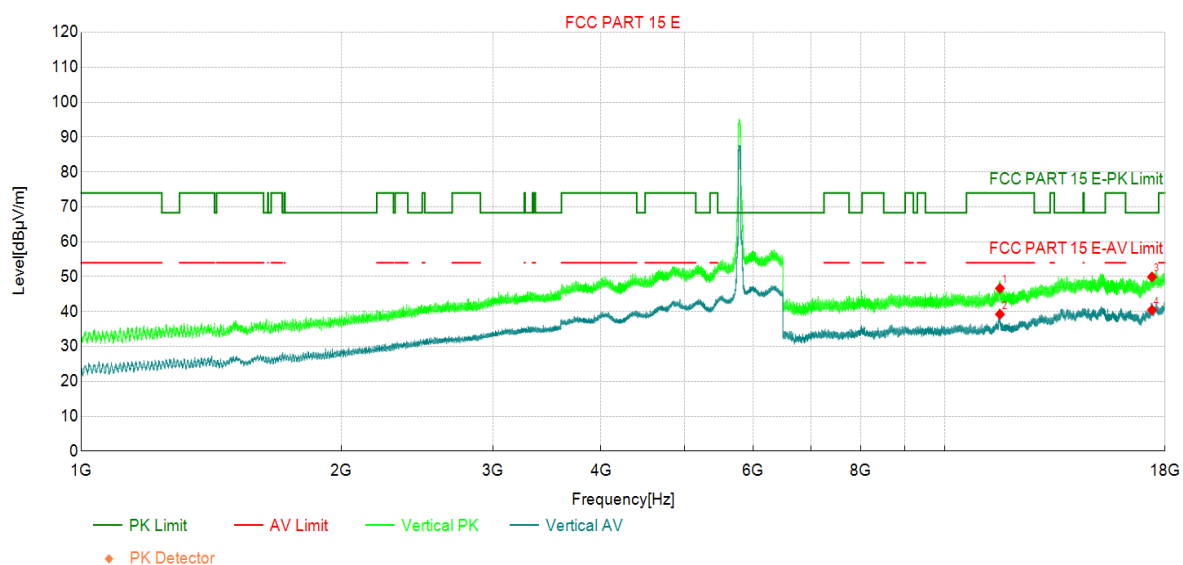

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	37.91	46.65	8.74	74.00	27.35	PK	Vertic	PASS
2	11590.00	30.48	39.22	8.74	54.00	14.78	AV	Vertic	PASS
3	17385.00	33.35	49.93	16.58	68.30	18.37	PK	Vertic	PASS
4	17385.00	23.87	40.45	16.58	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

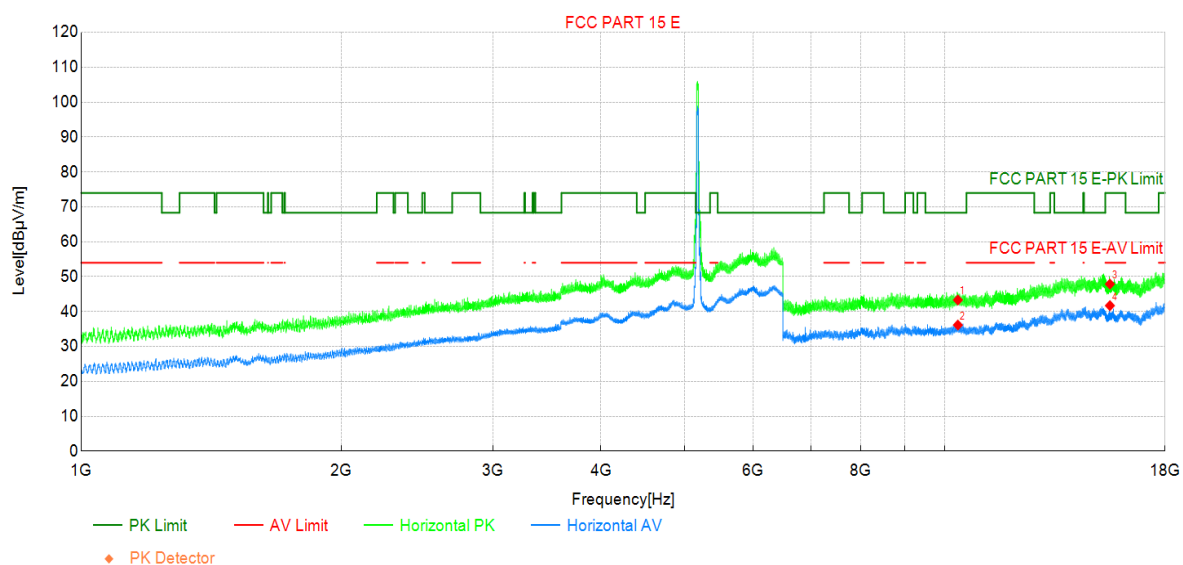

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	36.73	43.31	6.58	68.30	24.99	PK	Horizo	PASS
2	10360.00	29.56	36.14	6.58	-	-	AV	Horizo	NA
3	15540.00	33.97	47.87	13.90	74.00	26.13	PK	Horizo	PASS
4	15540.00	27.80	41.70	13.90	54.00	12.30	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5180MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

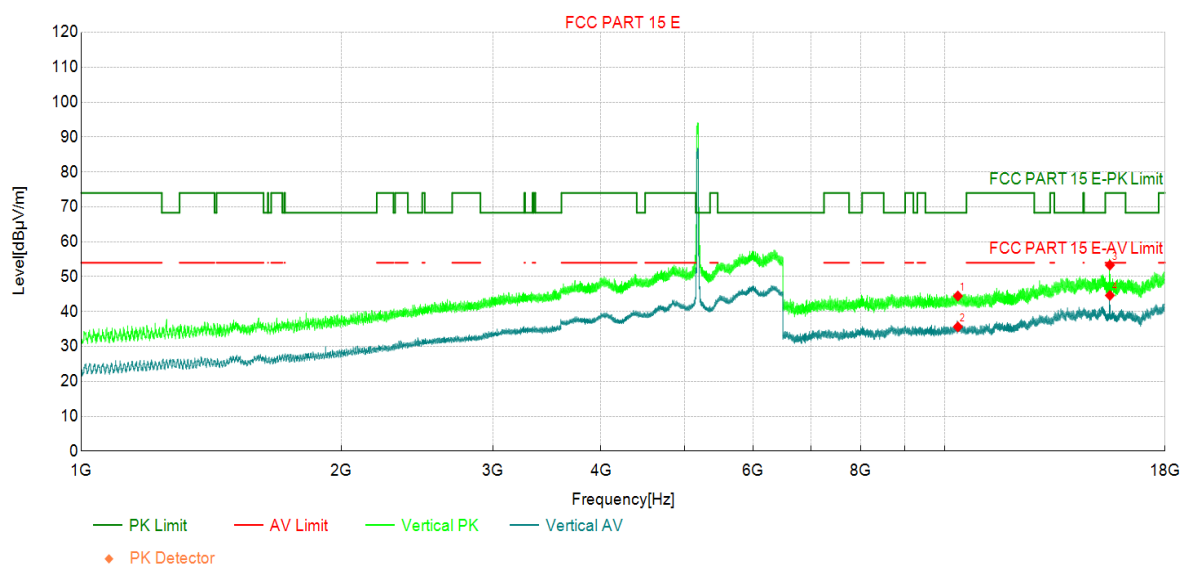

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	37.88	44.46	6.58	68.30	23.84	PK	Vertic	PASS
2	10360.00	29.04	35.62	6.58	-	-	AV	Vertic	NA
3	15540.00	39.41	53.31	13.90	74.00	20.69	PK	Vertic	PASS
4	15540.00	30.73	44.63	13.90	54.00	9.37	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5220MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

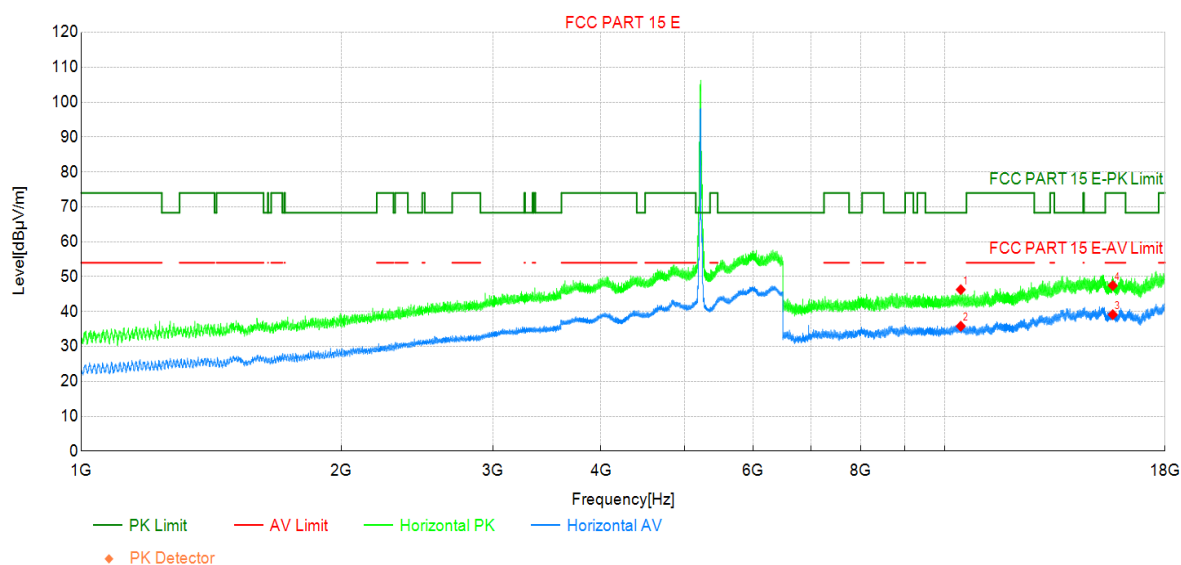

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	39.64	46.28	6.64	68.30	22.02	PK	Horizo	PASS
2	10440.00	29.16	35.80	6.64	-	-	AV	Horizo	NA
3	15660.00	25.03	39.12	14.09	54.00	14.88	AV	Horizo	PASS
4	15660.00	33.36	47.45	14.09	74.00	26.55	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5220MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

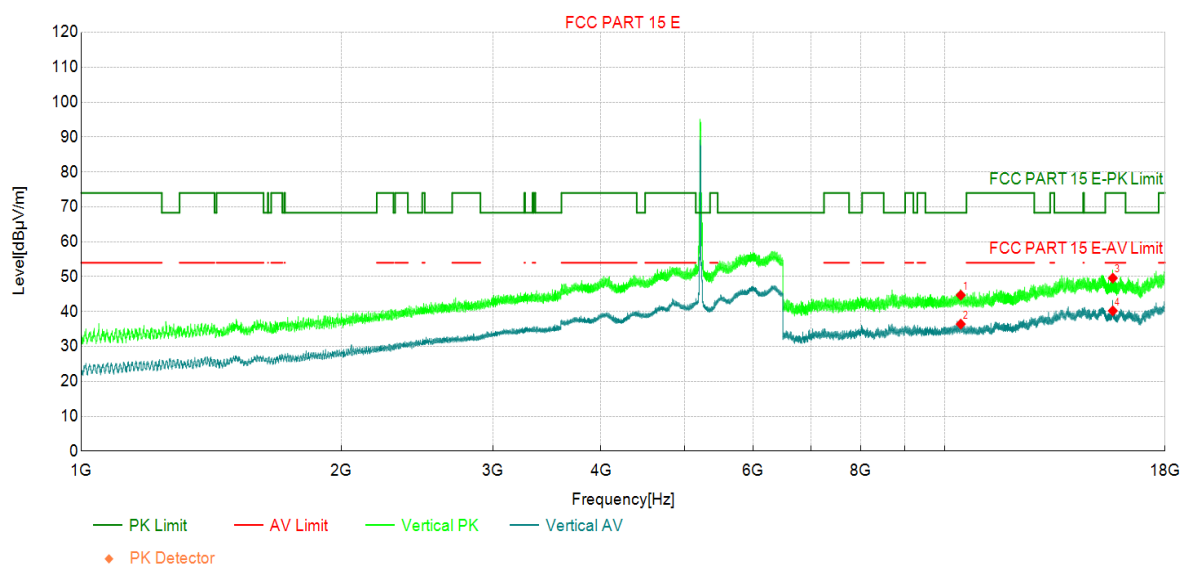

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440.00	38.06	44.70	6.64	68.30	23.60	PK	Vertic	PASS
2	10440.00	29.77	36.41	6.64	-	-	AV	Vertic	NA
3	15660.00	35.49	49.58	14.09	74.00	24.42	PK	Vertic	PASS
4	15660.00	26.12	40.21	14.09	54.00	13.79	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5240MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

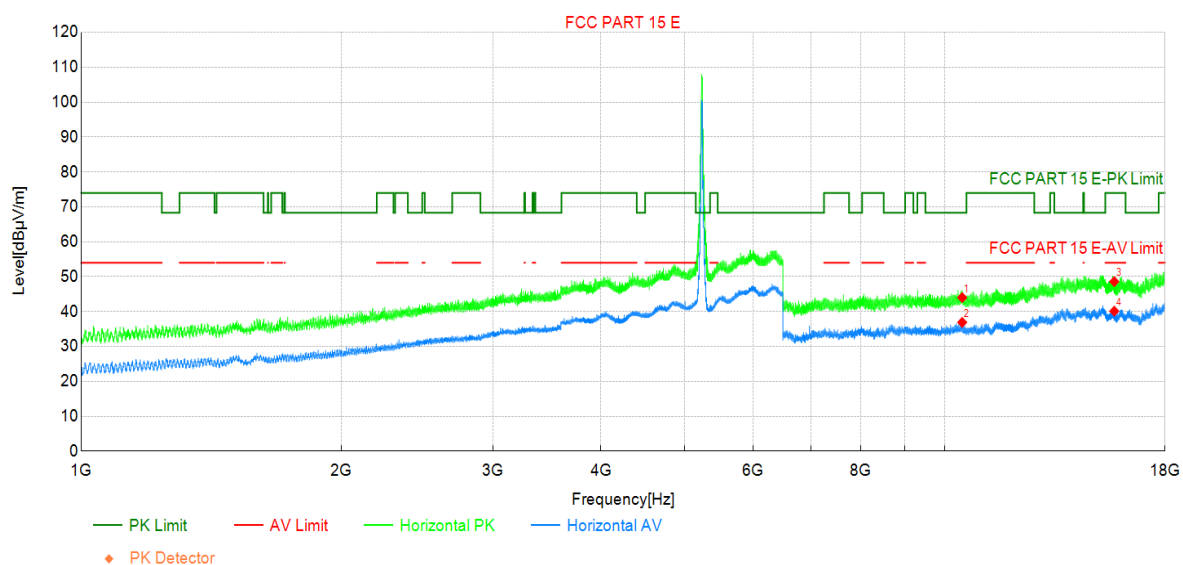

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	37.29	44.00	6.71	68.30	24.30	PK	Horizo	PASS
2	10480.00	30.19	36.90	6.71	-	-	AV	Horizo	NA
3	15720.00	34.19	48.60	14.41	74.00	25.40	PK	Horizo	PASS
4	15720.00	25.71	40.12	14.41	54.00	13.88	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5240MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

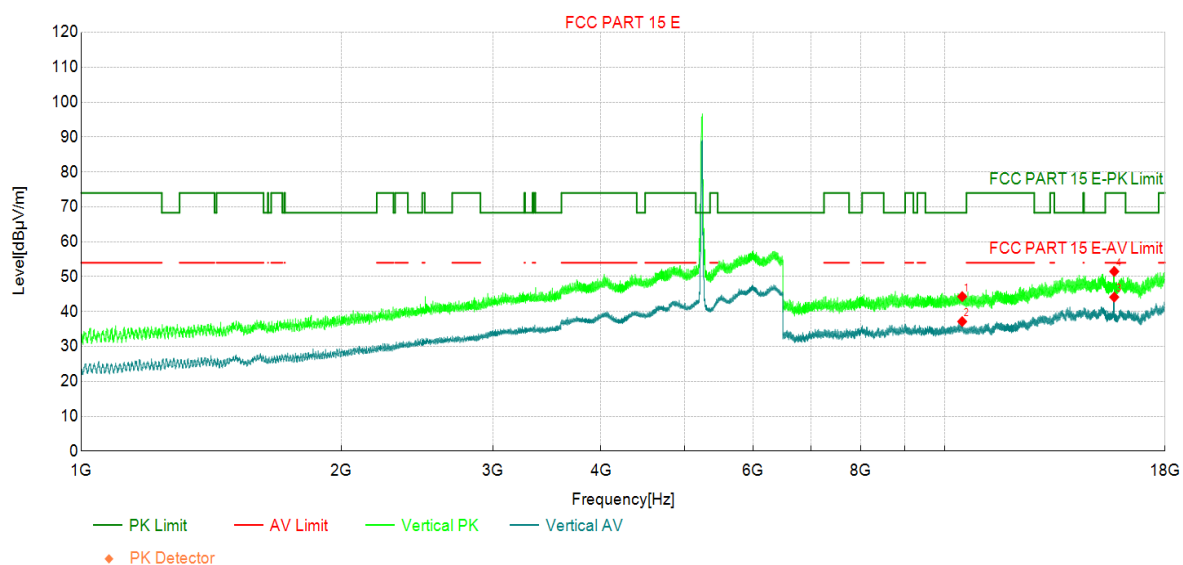

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480.00	37.58	44.29	6.71	68.30	24.01	PK	Vertic	PASS
2	10480.00	30.43	37.14	6.71	-	-	AV	Vertic	NA
3	15718.69	29.73	44.14	14.41	54.00	9.86	AV	Vertic	PASS
4	15720.00	37.07	51.48	14.41	74.00	22.52	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5260MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

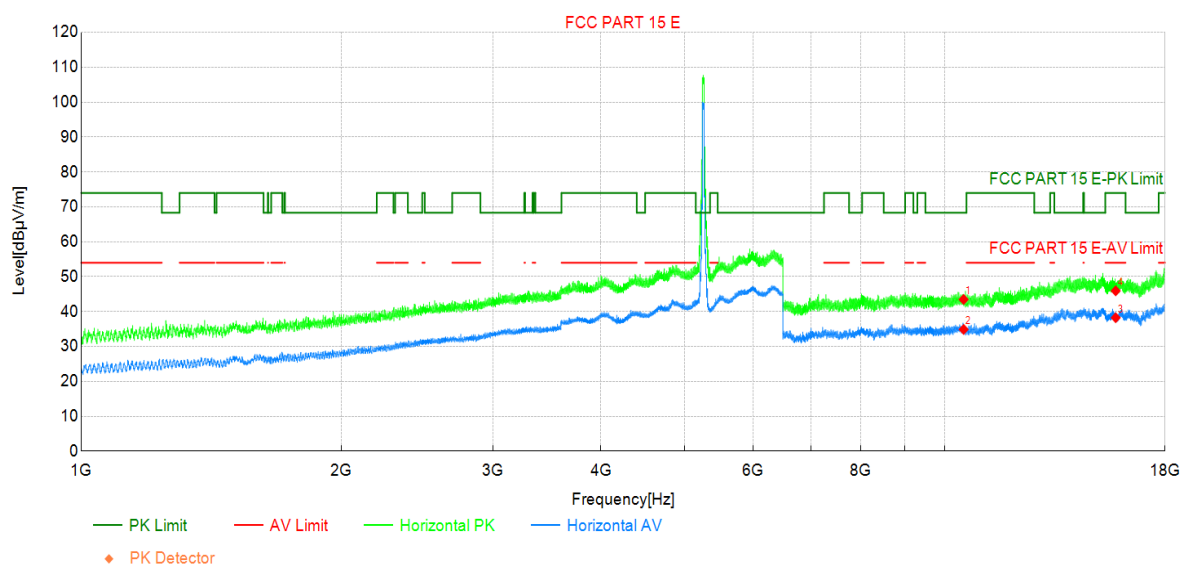

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	36.71	43.47	6.76	68.30	24.83	PK	Horizo	PASS
2	10520.00	28.12	34.88	6.76	-	-	AV	Horizo	NA
3	15780.00	24.15	38.24	14.09	54.00	15.76	AV	Horizo	PASS
4	15780.00	31.84	45.93	14.09	74.00	28.07	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5260MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

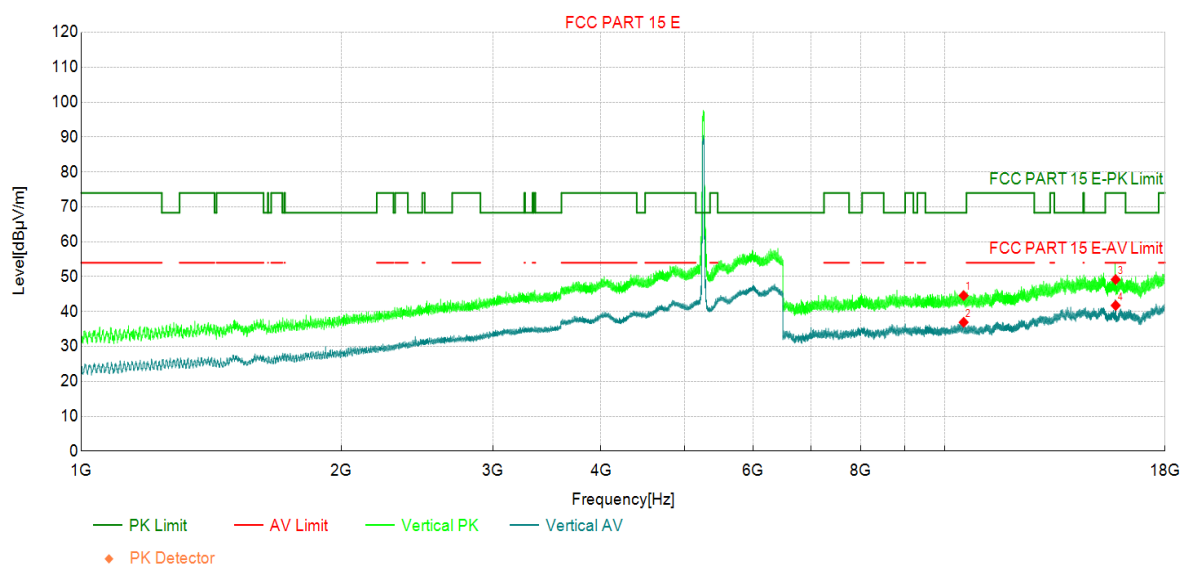

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520.00	37.82	44.58	6.76	68.30	23.72	PK	Vertic	PASS
2	10520.00	30.16	36.92	6.76	-	-	AV	Vertic	NA
3	15780.00	35.08	49.17	14.09	74.00	24.83	PK	Vertic	PASS
4	15780.00	27.65	41.74	14.09	54.00	12.26	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5300MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

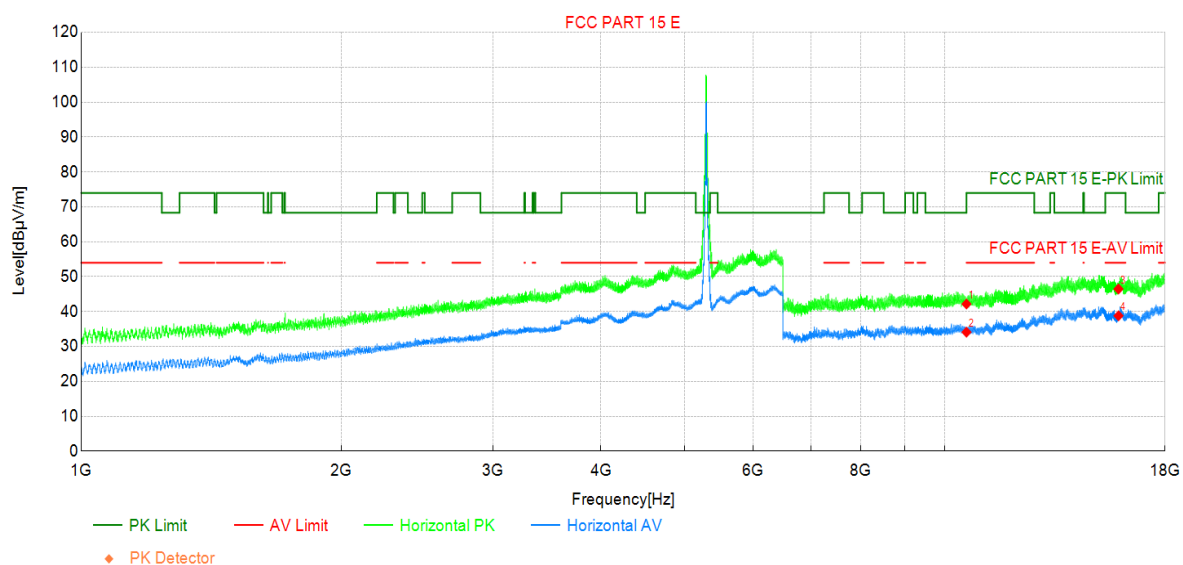

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	35.38	42.16	6.78	68.30	26.14	PK	Horizo	PASS
2	10600.00	27.32	34.10	6.78	54.00	19.90	AV	Horizo	PASS
3	15900.00	32.35	46.47	14.12	74.00	27.53	PK	Horizo	PASS
4	15900.00	24.68	38.80	14.12	54.00	15.20	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5300MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

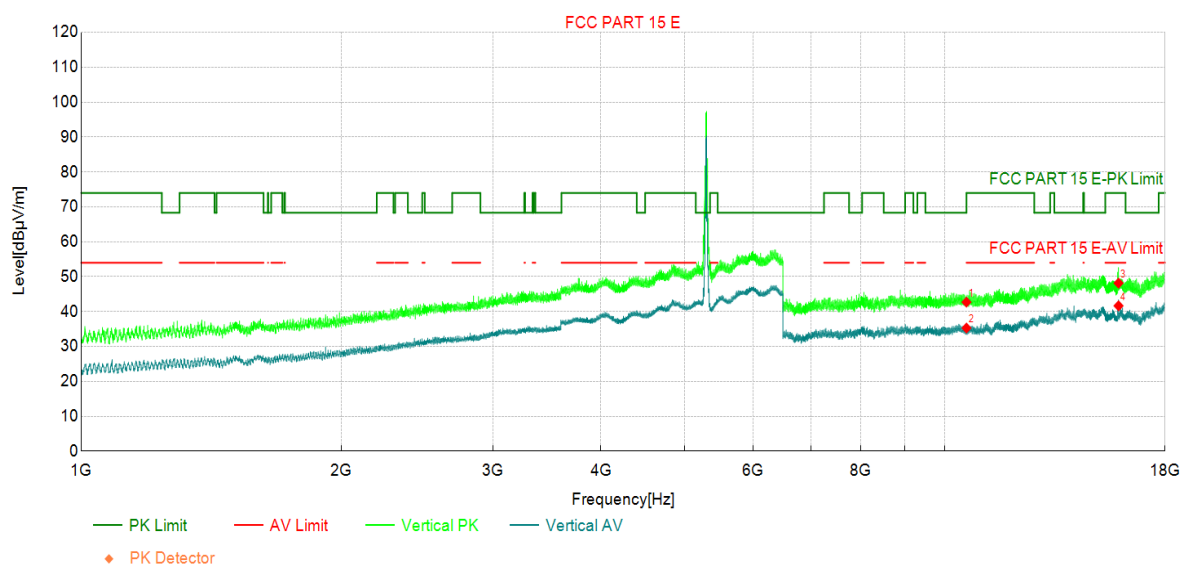

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600.00	35.92	42.70	6.78	68.30	25.60	PK	Vertic	PASS
2	10600.00	28.50	35.28	6.78	54.00	18.72	AV	Vertic	PASS
3	15900.00	34.03	48.15	14.12	74.00	25.85	PK	Vertic	PASS
4	15900.00	27.52	41.64	14.12	54.00	12.36	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

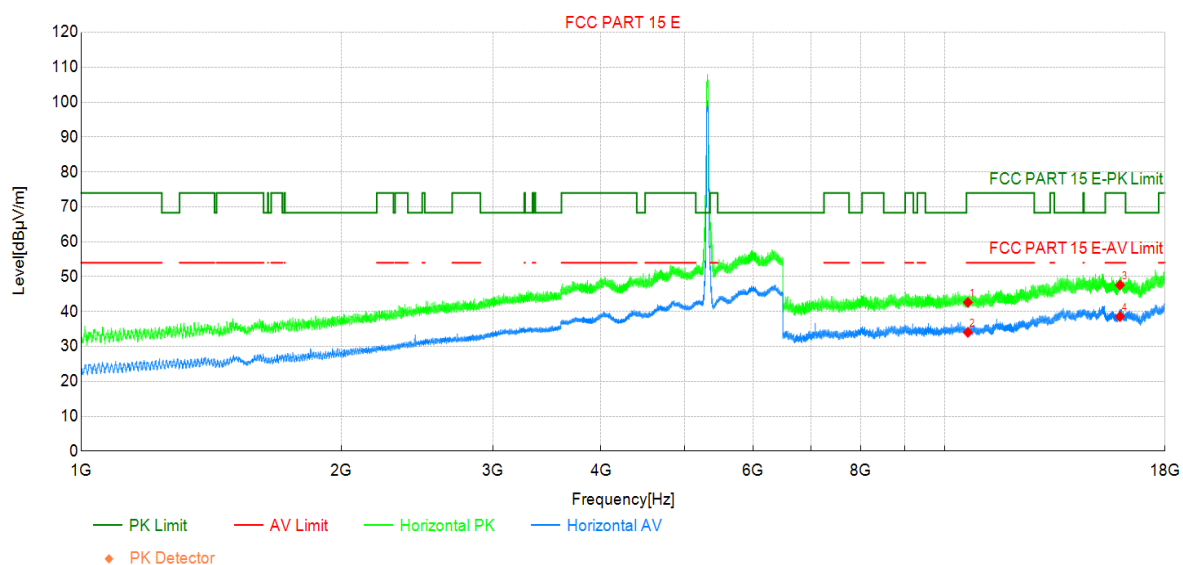

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	35.81	42.61	6.80	74.00	31.39	PK	Horizo	PASS
2	10640.00	27.23	34.03	6.80	54.00	19.97	AV	Horizo	PASS
3	15960.00	32.96	47.59	14.63	74.00	26.41	PK	Horizo	PASS
4	15960.00	23.93	38.56	14.63	54.00	15.44	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5320MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

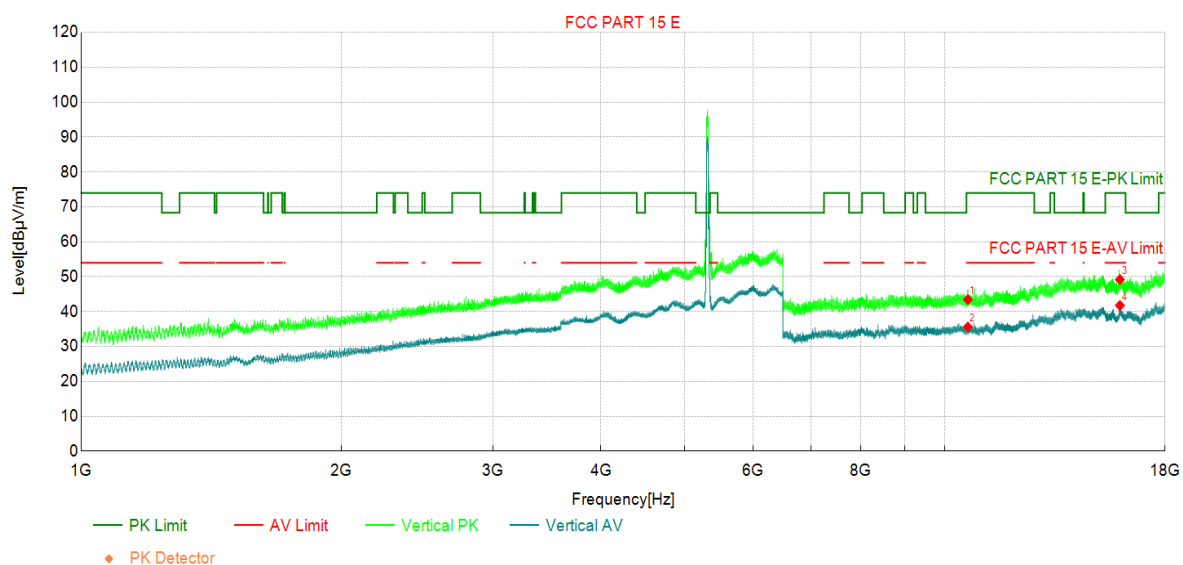

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640.00	36.64	43.44	6.80	74.00	30.56	PK	Vertic	PASS
2	10640.00	28.77	35.57	6.80	54.00	18.43	AV	Vertic	PASS
3	15960.00	34.55	49.18	14.63	74.00	24.82	PK	Vertic	PASS
4	15960.00	27.14	41.77	14.63	54.00	12.23	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

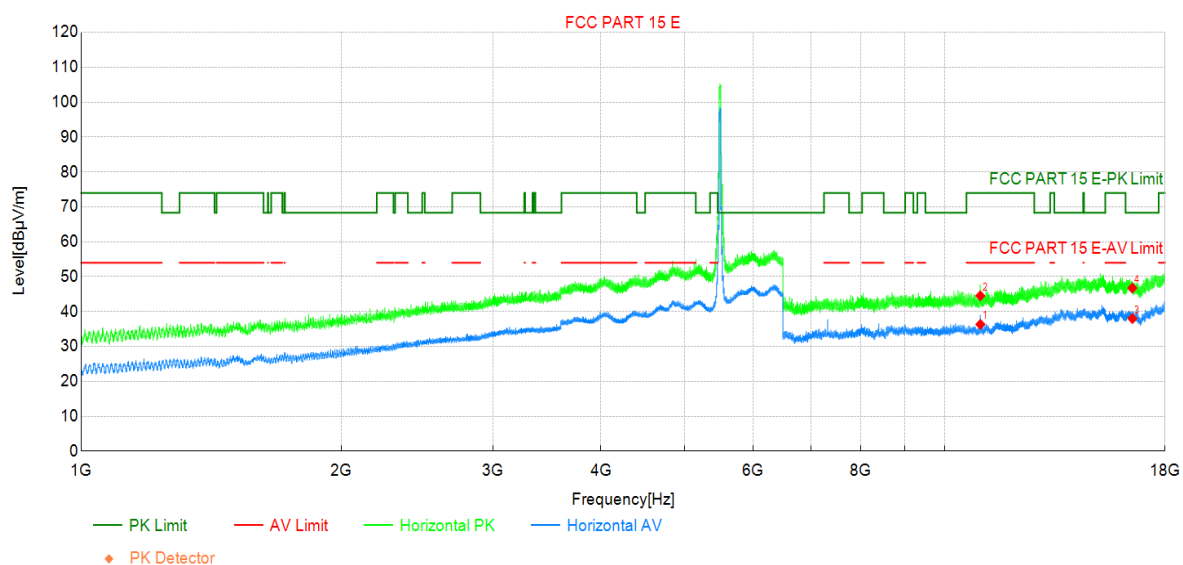

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	28.93	36.33	7.40	54.00	17.67	AV	Horizo	PASS
2	11000.00	37.11	44.51	7.40	74.00	29.49	PK	Horizo	PASS
3	16500.00	22.89	38.00	15.11	-	-	AV	Horizo	NA
4	16500.00	31.63	46.74	15.11	68.30	21.56	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5500MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

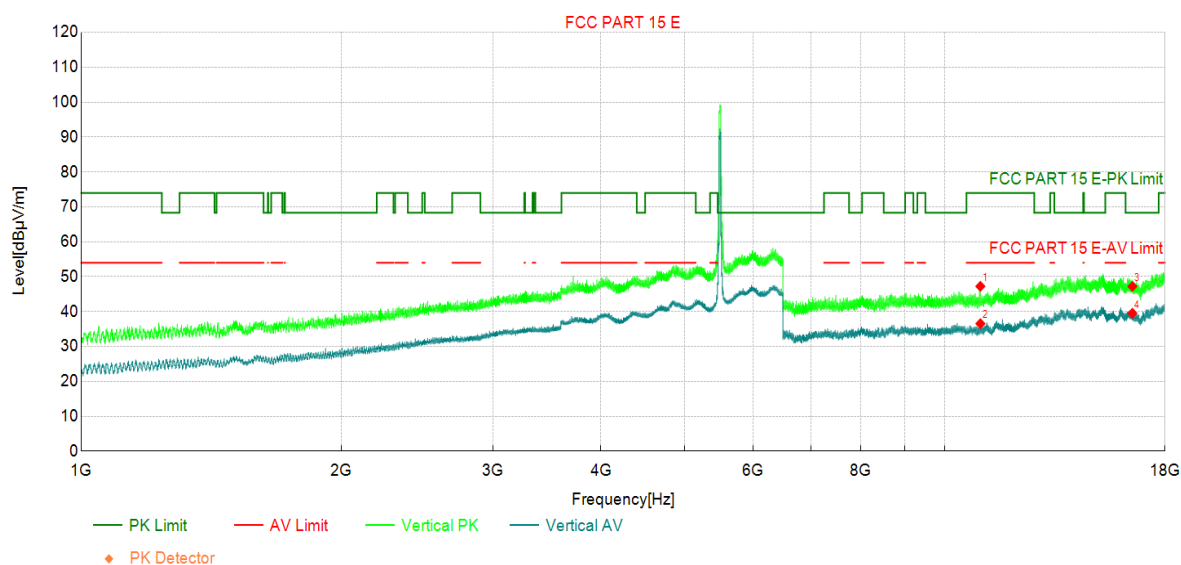

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000.00	39.84	47.24	7.40	74.00	26.76	PK	Vertic	PASS
2	11000.00	29.14	36.54	7.40	54.00	17.46	AV	Vertic	PASS
3	16500.00	32.09	47.20	15.11	68.30	21.10	PK	Vertic	PASS
4	16500.00	24.40	39.51	15.11	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5580MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

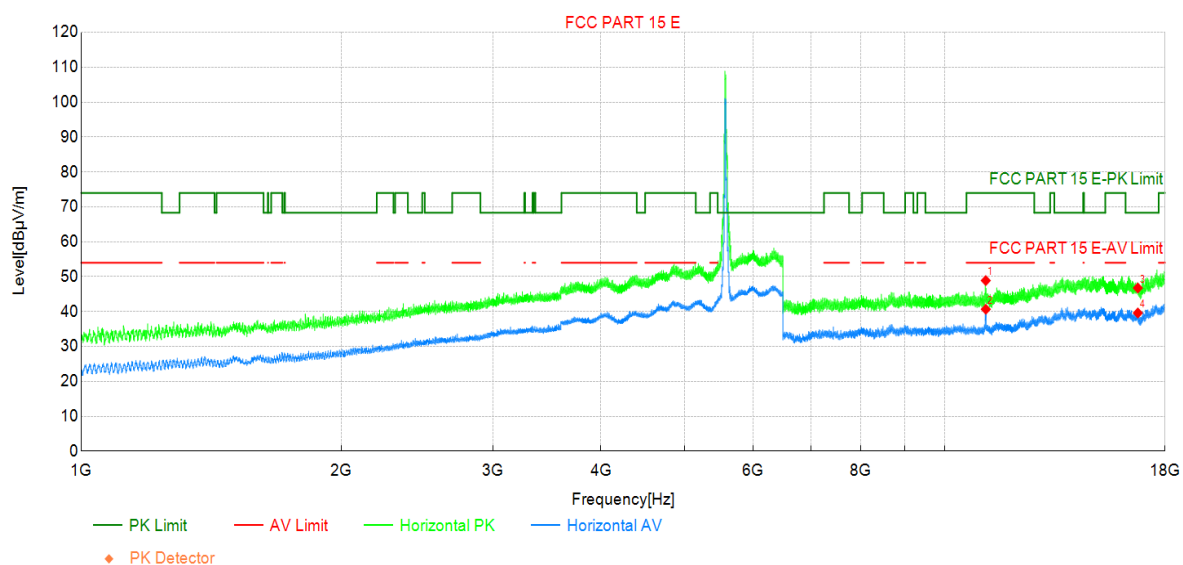

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	41.59	48.88	7.29	74.00	25.12	PK	Horizo	PASS
2	11160.85	33.37	40.66	7.29	54.00	13.34	AV	Horizo	PASS
3	16740.00	32.14	46.76	14.62	68.30	21.54	PK	Horizo	PASS
4	16740.00	24.97	39.59	14.62	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5580MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

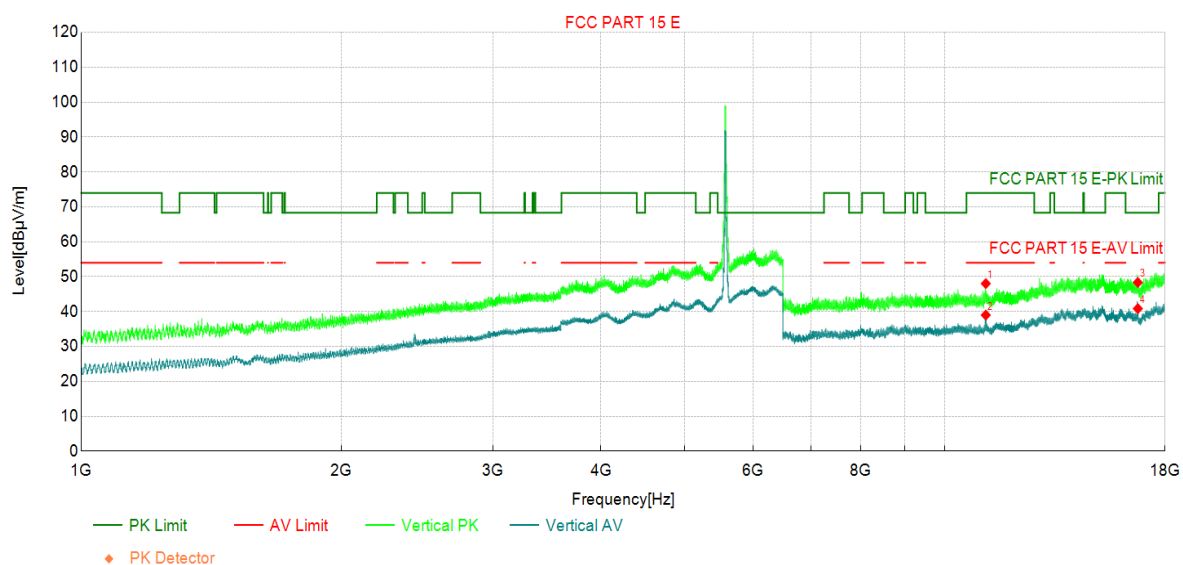

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11160.00	40.72	48.01	7.29	74.00	25.99	PK	Vertic	PASS
2	11160.00	31.70	38.99	7.29	54.00	15.01	AV	Vertic	PASS
3	16740.00	33.73	48.35	14.62	68.30	19.95	PK	Vertic	PASS
4	16740.00	26.22	40.84	14.62	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5700MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

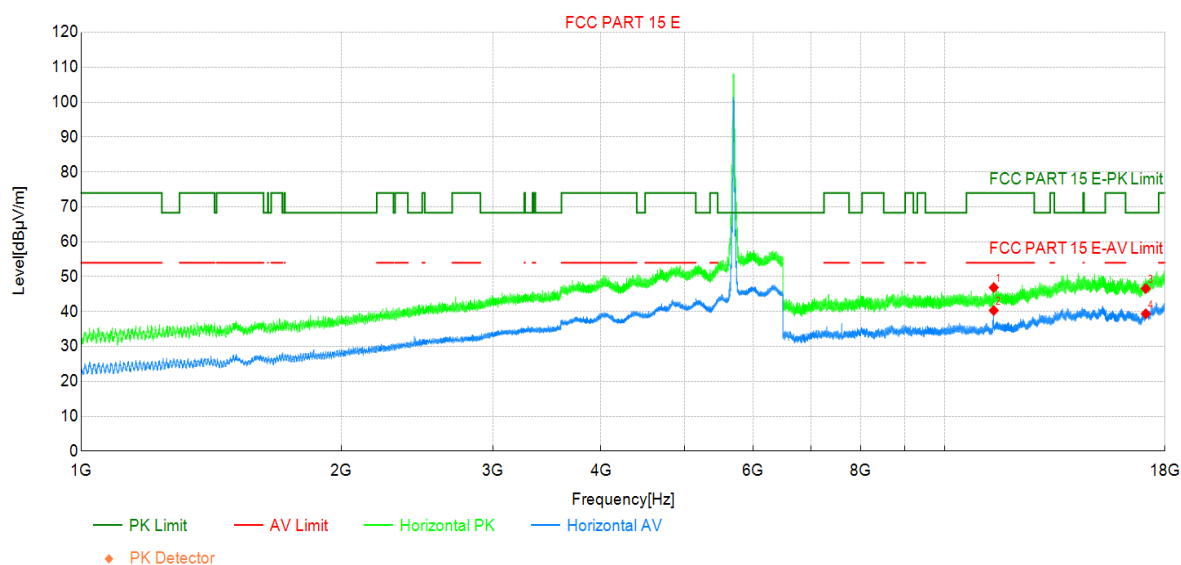

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	39.04	46.87	7.83	74.00	27.13	PK	Horizo	PASS
2	11400.00	32.47	40.30	7.83	54.00	13.70	AV	Horizo	PASS
3	17100.00	30.76	46.58	15.82	68.30	21.72	PK	Horizo	PASS
4	17100.00	23.54	39.36	15.82	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5700MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

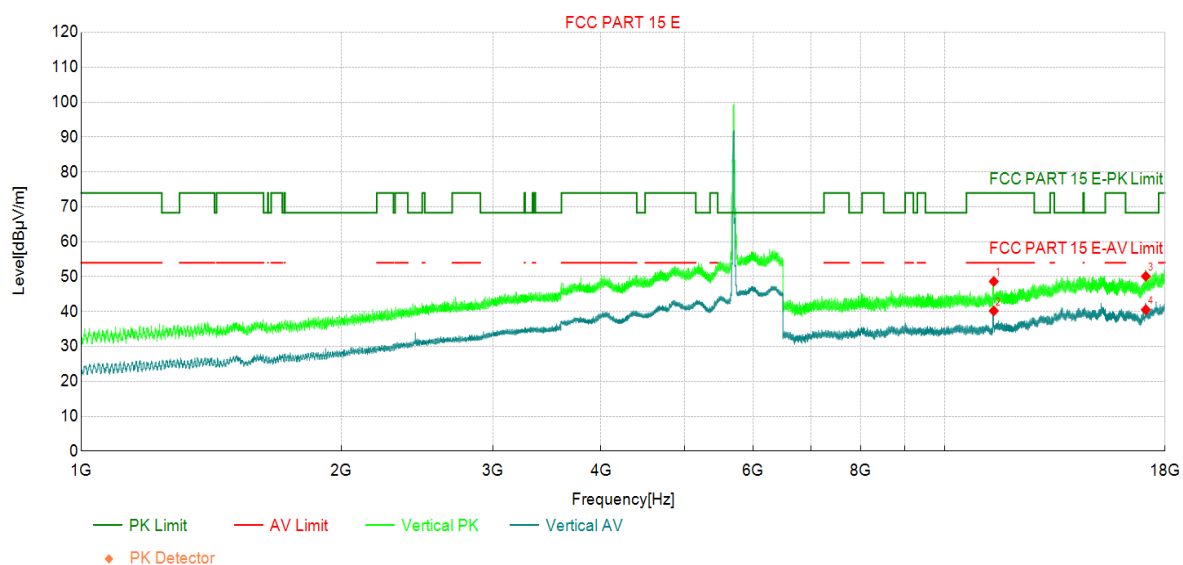

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400.00	40.79	48.62	7.83	74.00	25.38	PK	Vertic	PASS
2	11400.00	32.37	40.20	7.83	54.00	13.80	AV	Vertic	PASS
3	17100.00	34.29	50.11	15.82	68.30	18.19	PK	Vertic	PASS
4	17100.00	24.73	40.55	15.82	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5745MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

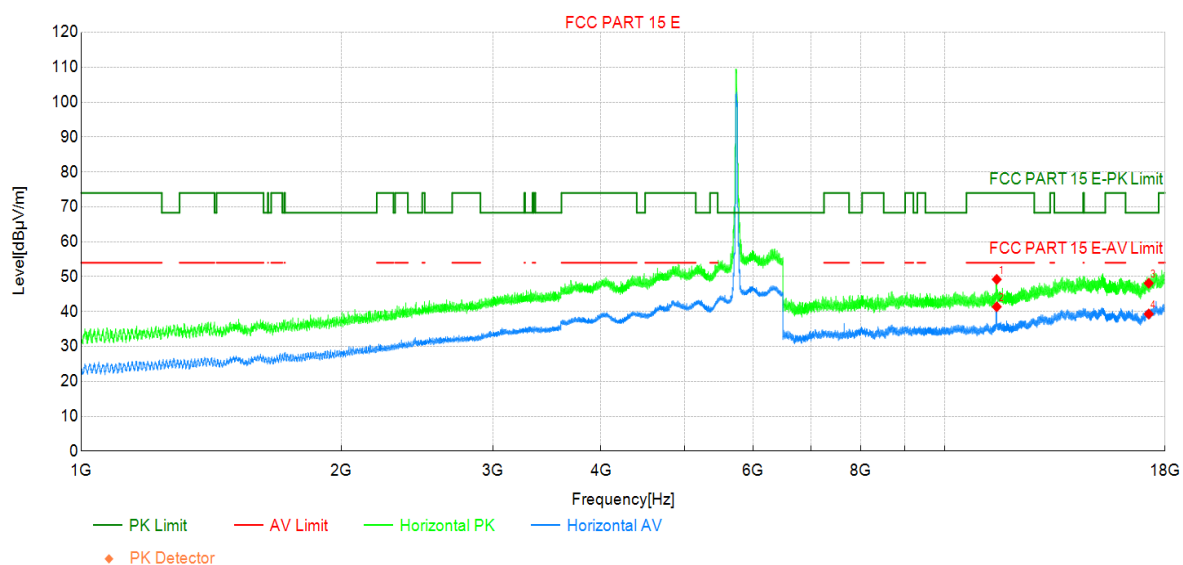

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	40.84	49.22	8.38	74.00	24.78	PK	Horizo	PASS
2	11490.00	32.99	41.37	8.38	54.00	12.63	AV	Horizo	PASS
3	17235.00	32.67	48.13	15.46	68.30	20.17	PK	Horizo	PASS
4	17235.00	23.84	39.30	15.46	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5745MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

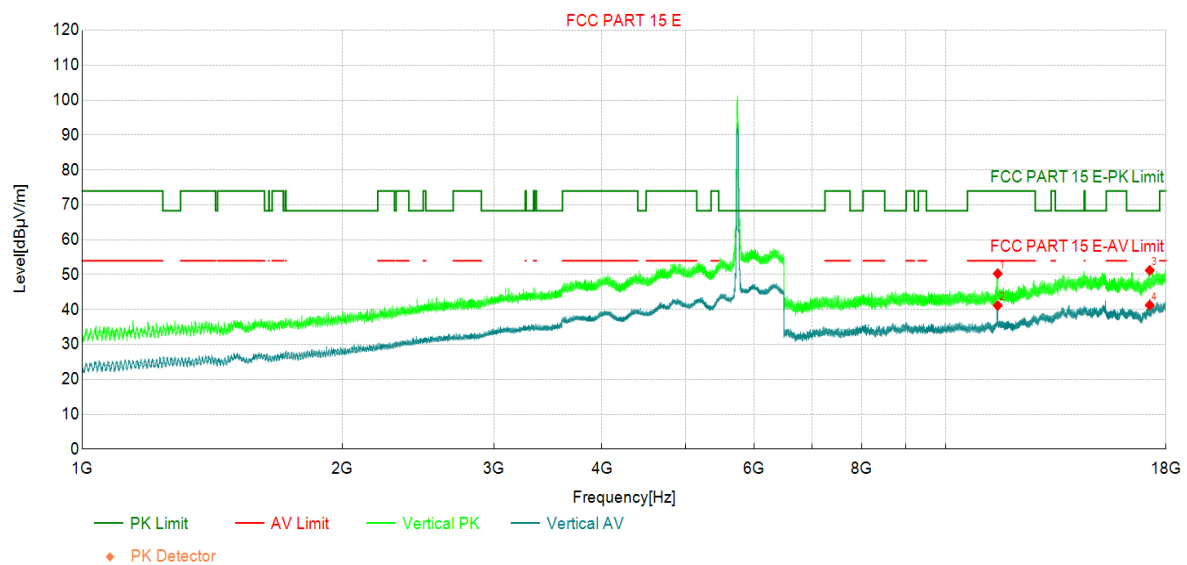

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490.00	41.91	50.29	8.38	74.00	23.71	PK	Vertic	PASS
2	11490.00	32.77	41.15	8.38	54.00	12.85	AV	Vertic	PASS
3	17235.00	35.78	51.24	15.46	68.30	17.06	PK	Vertic	PASS
4	17235.00	25.79	41.25	15.46	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5785MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

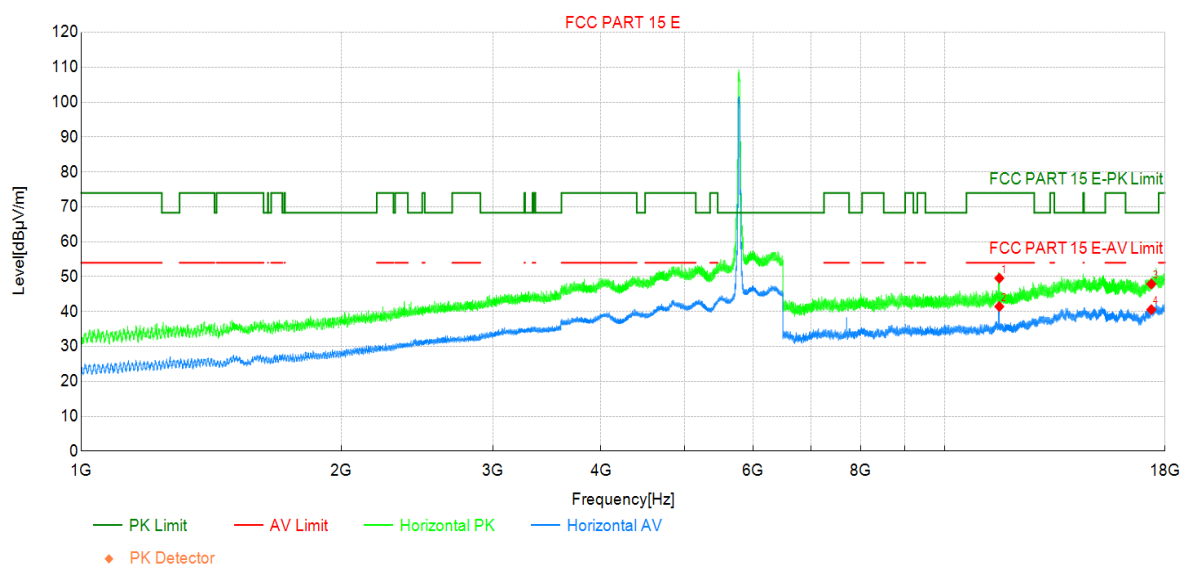

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	40.88	49.56	8.68	74.00	24.44	PK	Horizo	PASS
2	11570.00	32.76	41.44	8.68	54.00	12.56	AV	Horizo	PASS
3	17355.00	31.68	47.90	16.22	68.30	20.40	PK	Horizo	PASS
4	17355.00	24.33	40.55	16.22	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5785MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

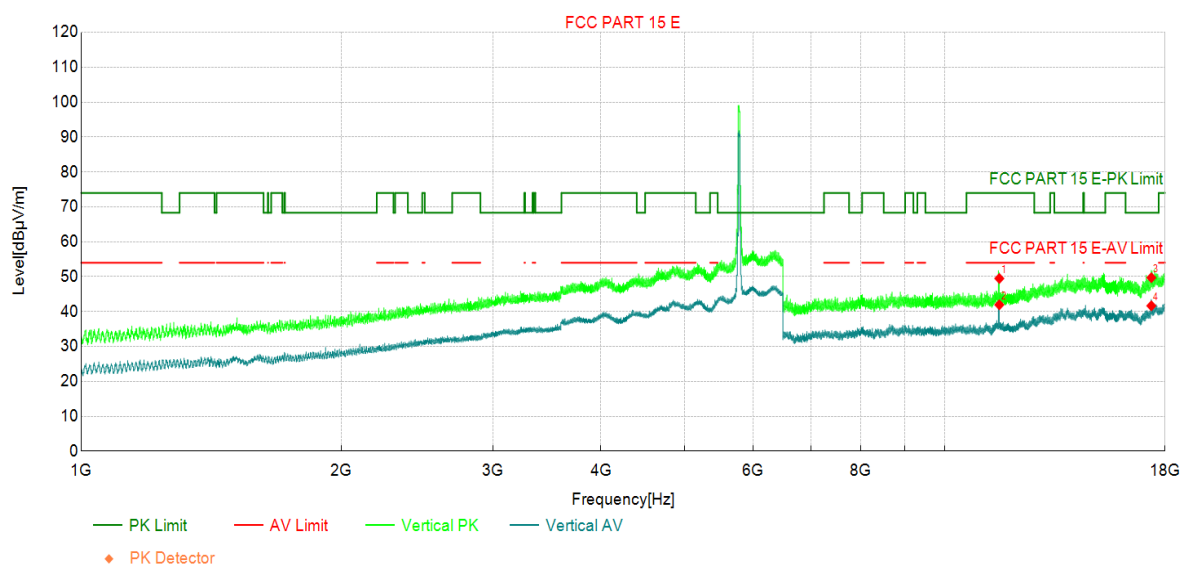

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570.00	40.80	49.48	8.68	74.00	24.52	PK	Vertic	PASS
2	11570.00	33.26	41.94	8.68	54.00	12.06	AV	Vertic	PASS
3	17355.00	33.49	49.71	16.22	68.30	18.59	PK	Vertic	PASS
4	17355.00	25.43	41.65	16.22	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5825MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

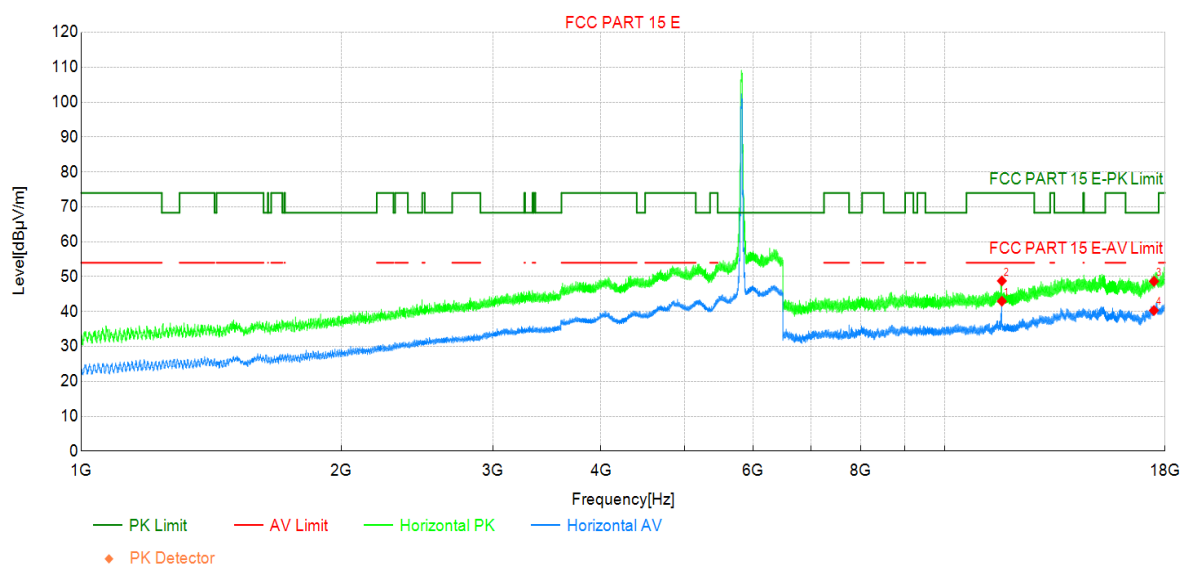

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	34.23	42.97	8.74	54.00	11.03	AV	Horizo	PASS
2	11650.00	40.04	48.78	8.74	74.00	25.22	PK	Horizo	PASS
3	17475.00	31.60	48.67	17.07	68.30	19.63	PK	Horizo	PASS
4	17475.00	23.25	40.32	17.07	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode4:Transmit at 5825MHz by 802.11ac(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

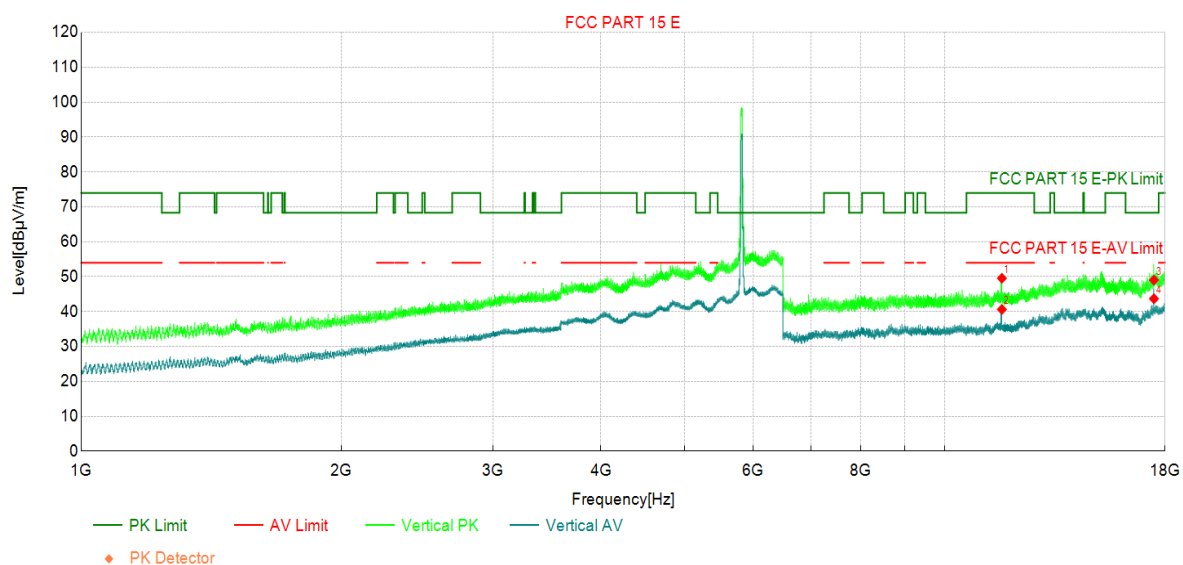

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11650.00	40.80	49.54	8.74	74.00	24.46	PK	Vertic	PASS
2	11650.00	31.87	40.61	8.74	54.00	13.39	AV	Vertic	PASS
3	17475.00	31.96	49.03	17.07	68.30	19.27	PK	Vertic	PASS
4	17475.00	26.61	43.68	17.07	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

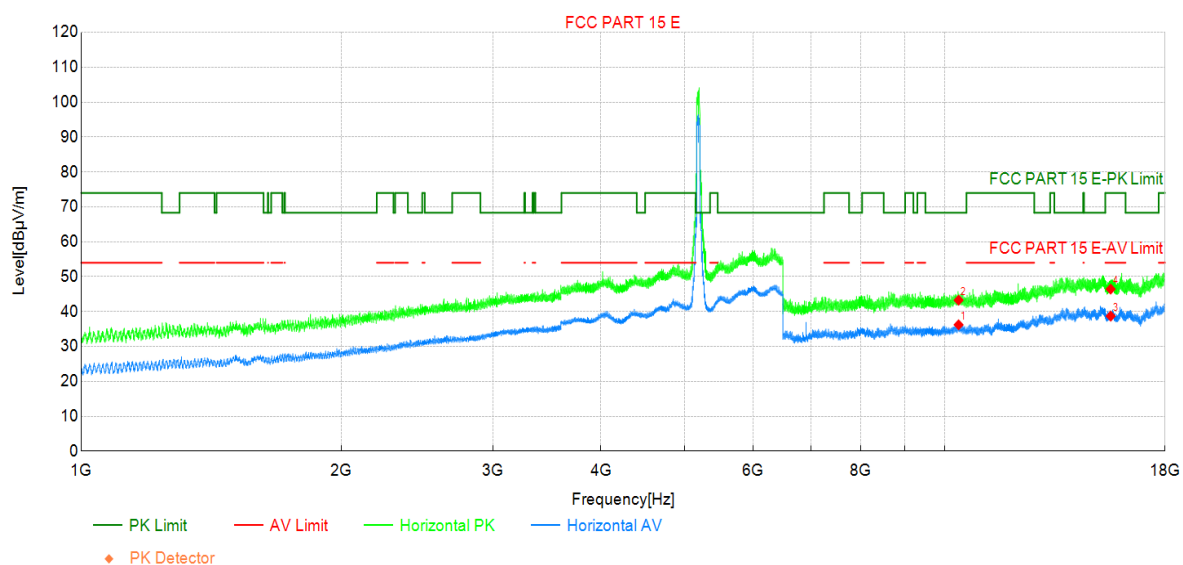

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380.00	29.63	36.20	6.57	-	-	AV	Horizo	NA
2	10380.00	36.69	43.26	6.57	68.30	25.04	PK	Horizo	PASS
3	15570.00	25.00	38.69	13.69	54.00	15.31	AV	Horizo	PASS
4	15570.00	32.75	46.44	13.69	74.00	27.56	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5190MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

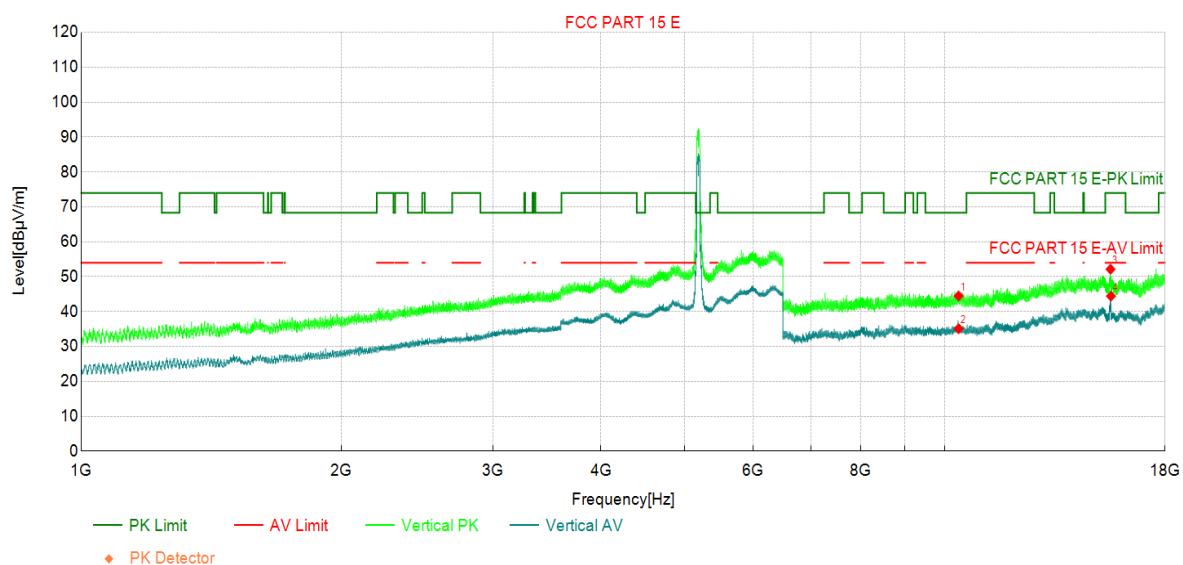

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380.00	37.89	44.46	6.57	68.30	23.84	PK	Vertic	PASS
2	10380.00	28.50	35.07	6.57	-	-	AV	Vertic	NA
3	15564.40	38.40	52.12	13.72	74.00	21.88	PK	Vertic	PASS
4	15581.65	30.83	44.43	13.60	54.00	9.57	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5230MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

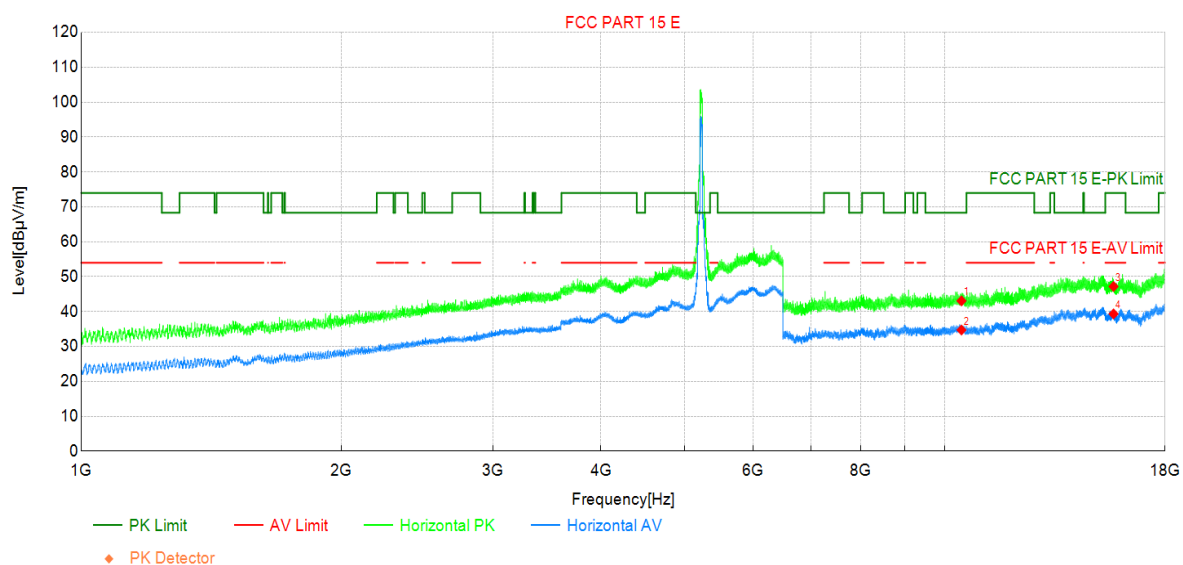

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10460.00	36.39	43.06	6.67	68.30	25.24	PK	Horizo	PASS
2	10460.00	28.04	34.71	6.67	-	-	AV	Horizo	NA
3	15690.00	32.77	47.18	14.41	74.00	26.82	PK	Horizo	PASS
4	15690.00	24.91	39.32	14.41	54.00	14.68	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5230MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

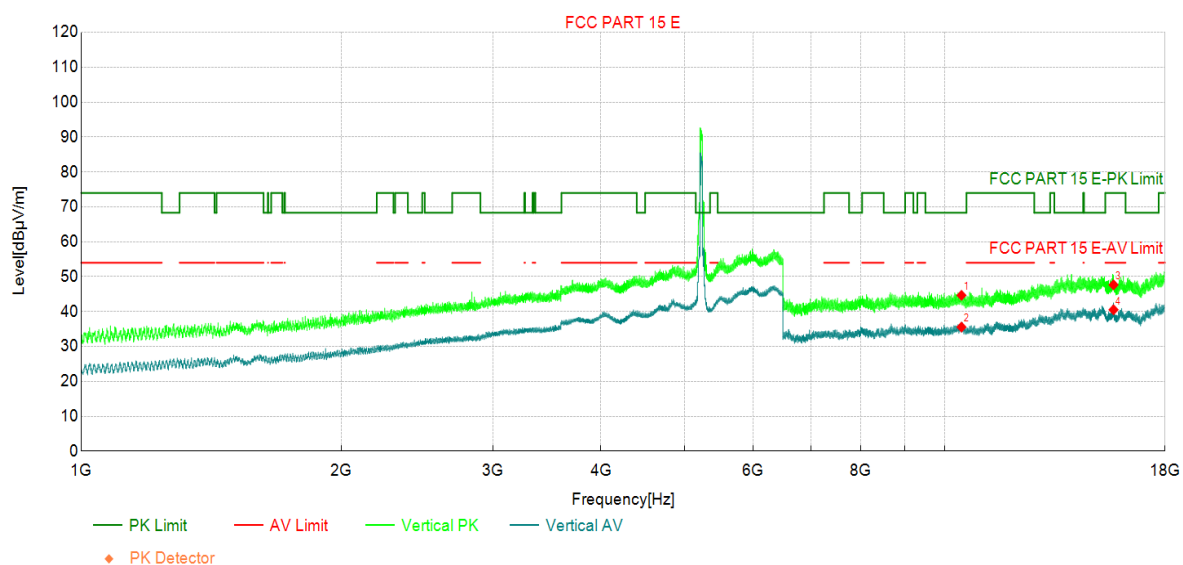

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460.00	37.98	44.65	6.67	68.30	23.65	PK	Vertic	PASS
2	10460.00	28.90	35.57	6.67	-	-	AV	Vertic	NA
3	15690.00	33.24	47.65	14.41	74.00	26.35	PK	Vertic	PASS
4	15690.00	26.10	40.51	14.41	54.00	13.49	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5270MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

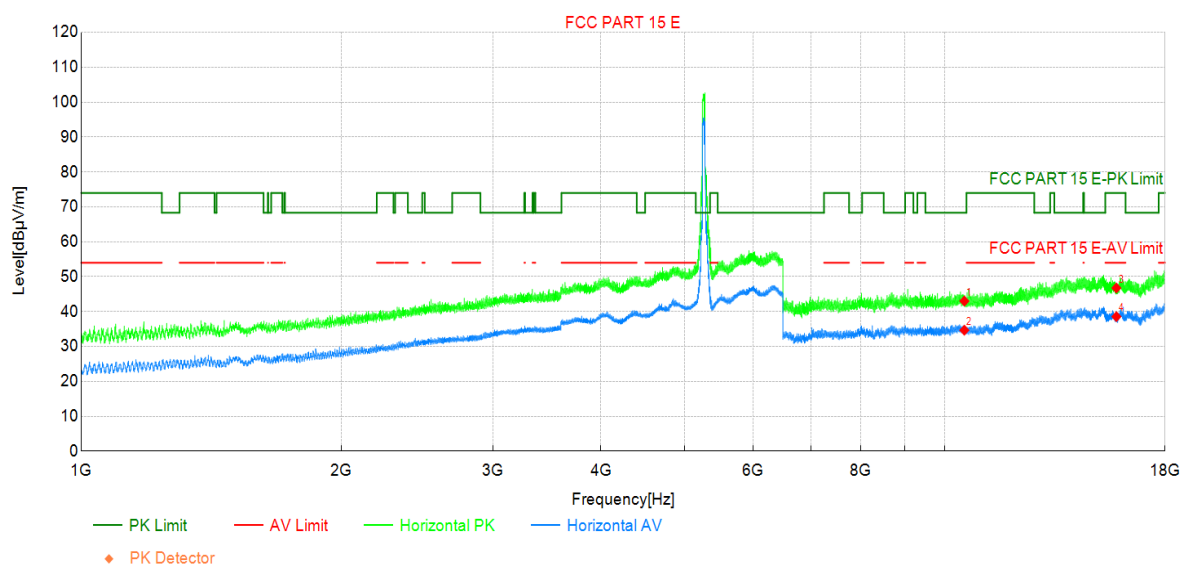

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10540.00	36.25	43.01	6.76	68.30	25.29	PK	Horizo	PASS
2	10540.00	27.90	34.66	6.76	-	-	AV	Horizo	NA
3	15810.00	32.74	46.75	14.01	74.00	27.25	PK	Horizo	PASS
4	15810.00	24.54	38.55	14.01	54.00	15.45	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5270MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

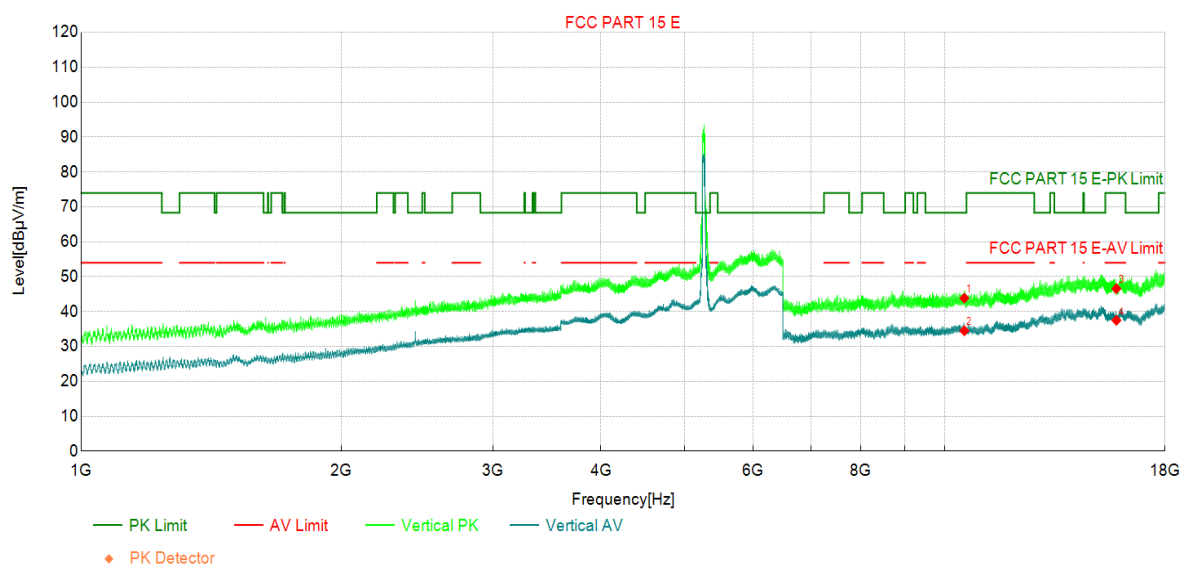

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10540.00	37.08	43.84	6.76	68.30	24.46	PK	Vertic	PASS
2	10540.00	27.75	34.51	6.76	-	-	AV	Vertic	NA
3	15810.00	32.56	46.57	14.01	74.00	27.43	PK	Vertic	PASS
4	15810.00	23.49	37.50	14.01	54.00	16.50	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

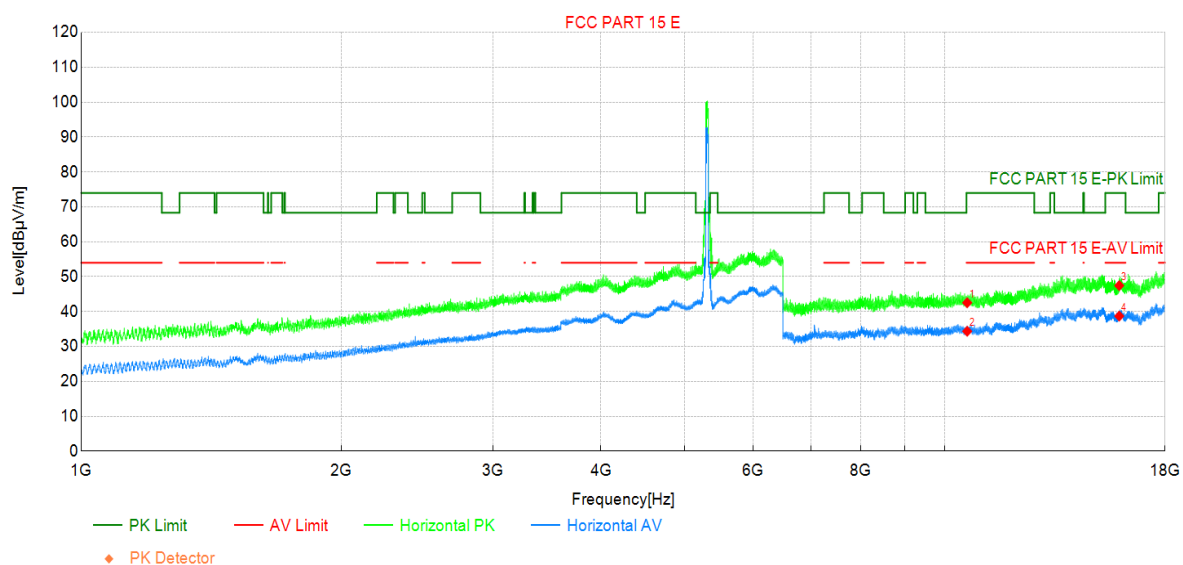

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620.00	35.73	42.52	6.79	74.00	31.48	PK	Horizo	PASS
2	10620.00	27.56	34.35	6.79	54.00	19.65	AV	Horizo	PASS
3	15930.00	33.07	47.44	14.37	74.00	26.56	PK	Horizo	PASS
4	15930.00	24.33	38.70	14.37	54.00	15.30	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5310MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

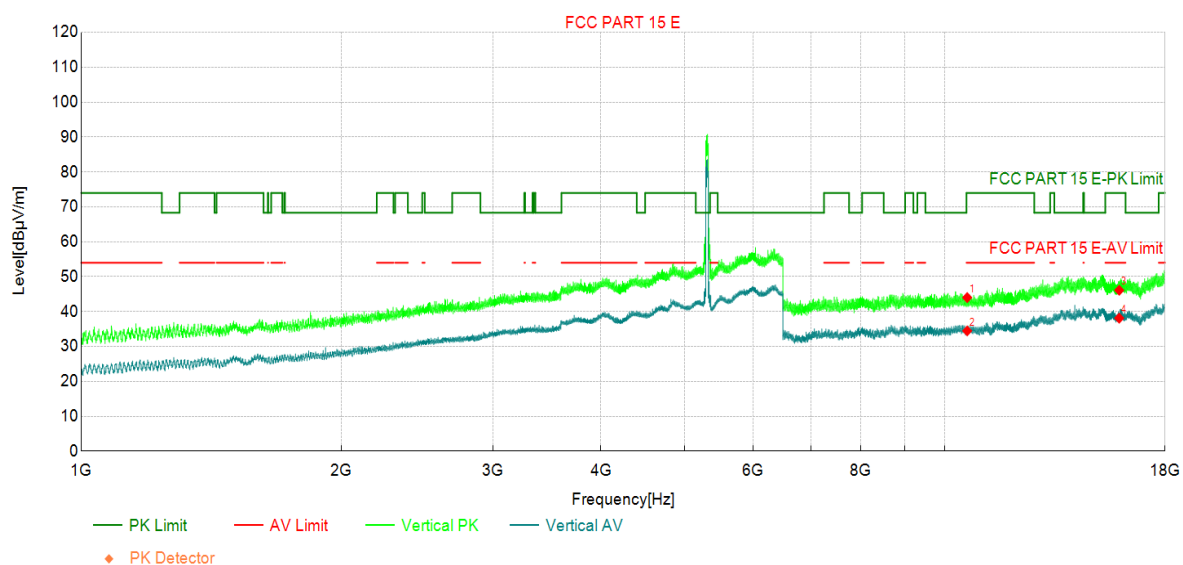

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620.00	37.21	44.00	6.79	74.00	30.00	PK	Vertic	PASS
2	10620.00	27.67	34.46	6.79	54.00	19.54	AV	Vertic	PASS
3	15930.00	31.73	46.10	14.37	74.00	27.90	PK	Vertic	PASS
4	15930.00	23.74	38.11	14.37	54.00	15.89	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

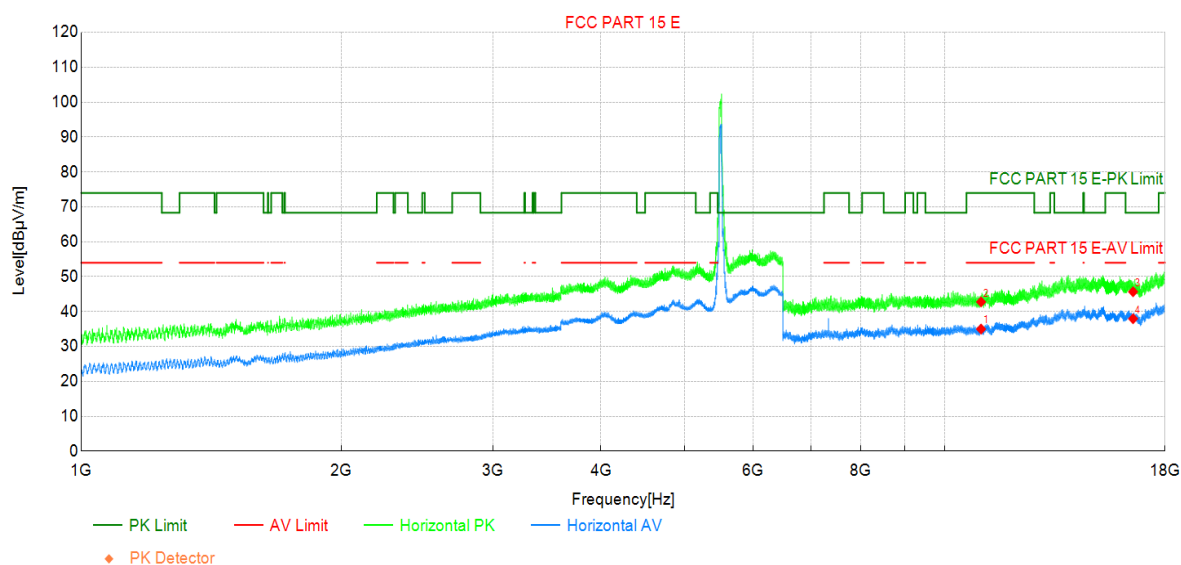

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	27.74	34.99	7.25	54.00	19.01	AV	Horizo	PASS
2	11020.00	35.52	42.77	7.25	74.00	31.23	PK	Horizo	PASS
3	16530.00	30.67	45.68	15.01	68.30	22.62	PK	Horizo	PASS
4	16530.00	22.94	37.95	15.01	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5510MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

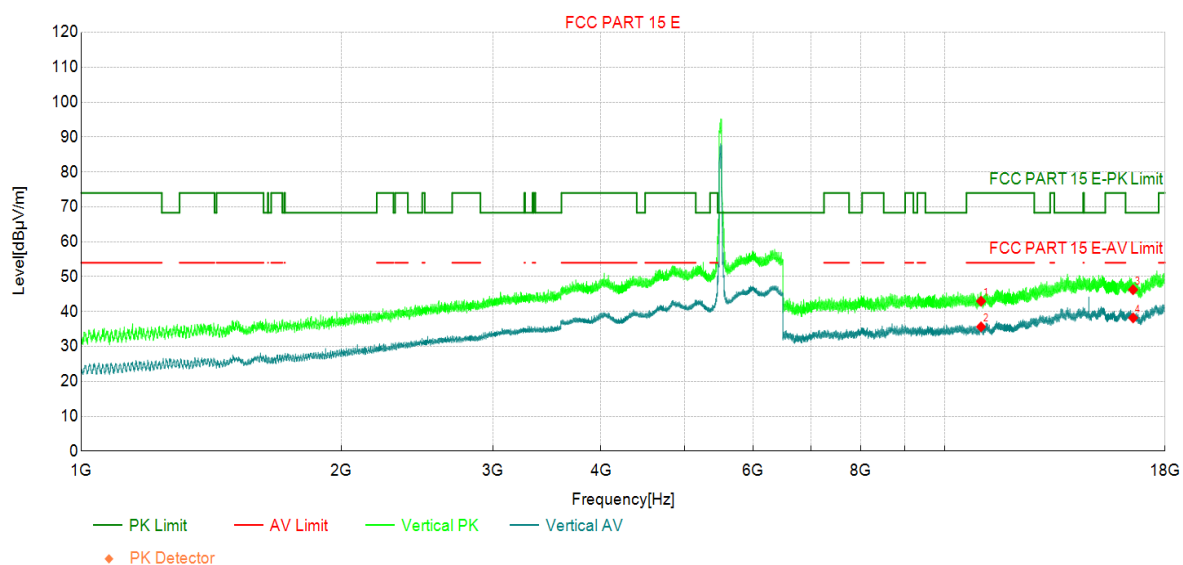

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020.00	35.72	42.97	7.25	74.00	31.03	PK	Vertic	PASS
2	11020.00	28.38	35.63	7.25	54.00	18.37	AV	Vertic	PASS
3	16530.00	31.24	46.25	15.01	68.30	22.05	PK	Vertic	PASS
4	16530.00	23.18	38.19	15.01	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5550MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

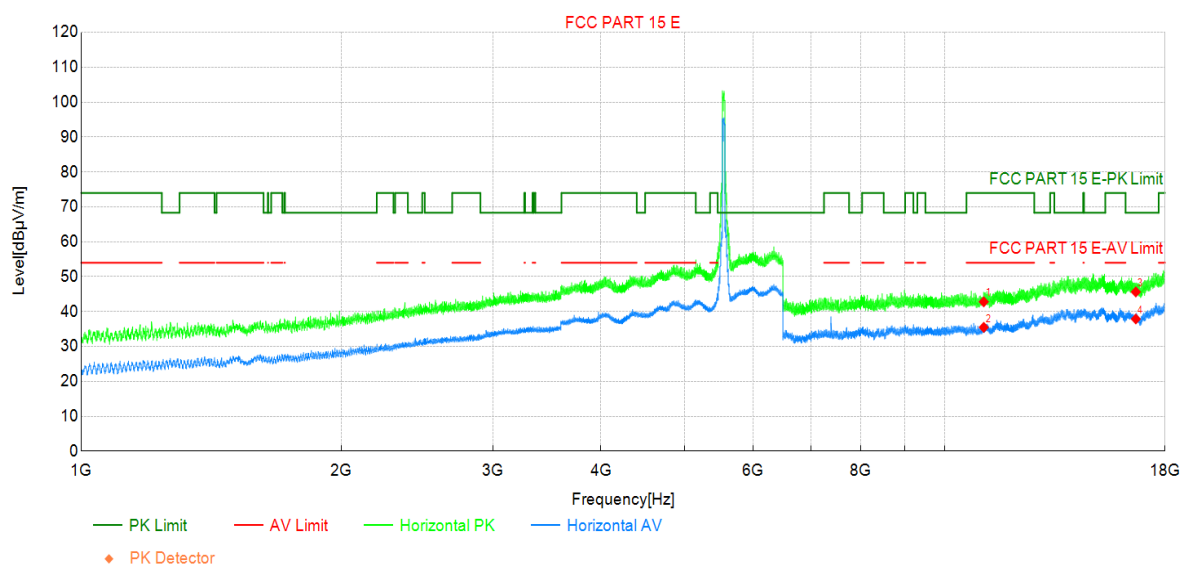

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	36.14	42.80	6.66	74.00	31.20	PK	Horizo	PASS
2	11100.00	28.81	35.47	6.66	54.00	18.53	AV	Horizo	PASS
3	16650.00	30.93	45.62	14.69	68.30	22.68	PK	Horizo	PASS
4	16650.00	23.19	37.88	14.69	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5550MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

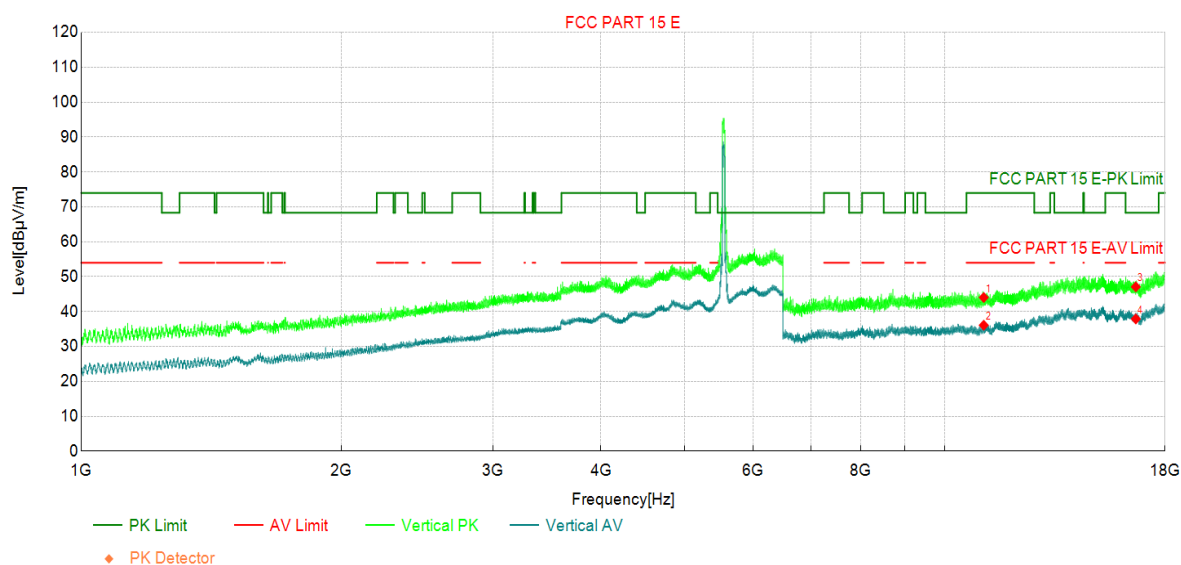

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100.00	37.38	44.04	6.66	74.00	29.96	PK	Vertic	PASS
2	11100.00	29.42	36.08	6.66	54.00	17.92	AV	Vertic	PASS
3	16650.00	32.39	47.08	14.69	68.30	21.22	PK	Vertic	PASS
4	16650.00	23.20	37.89	14.69	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

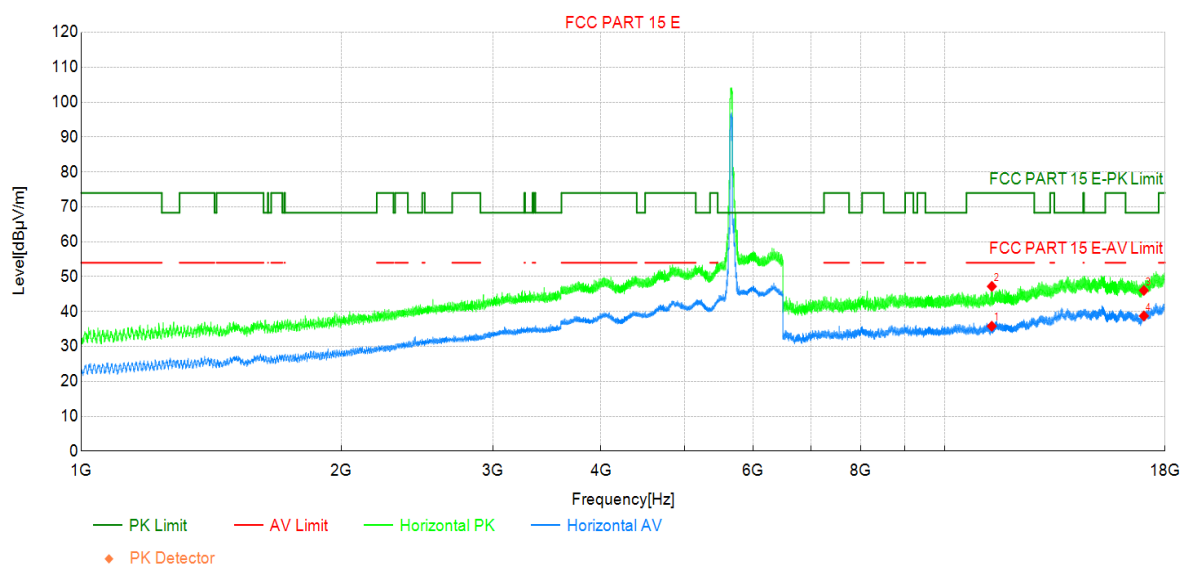

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	27.94	35.80	7.86	54.00	18.20	AV	Horizo	PASS
2	11341.02	39.35	47.21	7.86	74.00	26.79	PK	Horizo	PASS
3	17010.00	30.01	46.05	16.04	68.30	22.25	PK	Horizo	PASS
4	17010.00	22.70	38.74	16.04	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5670MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

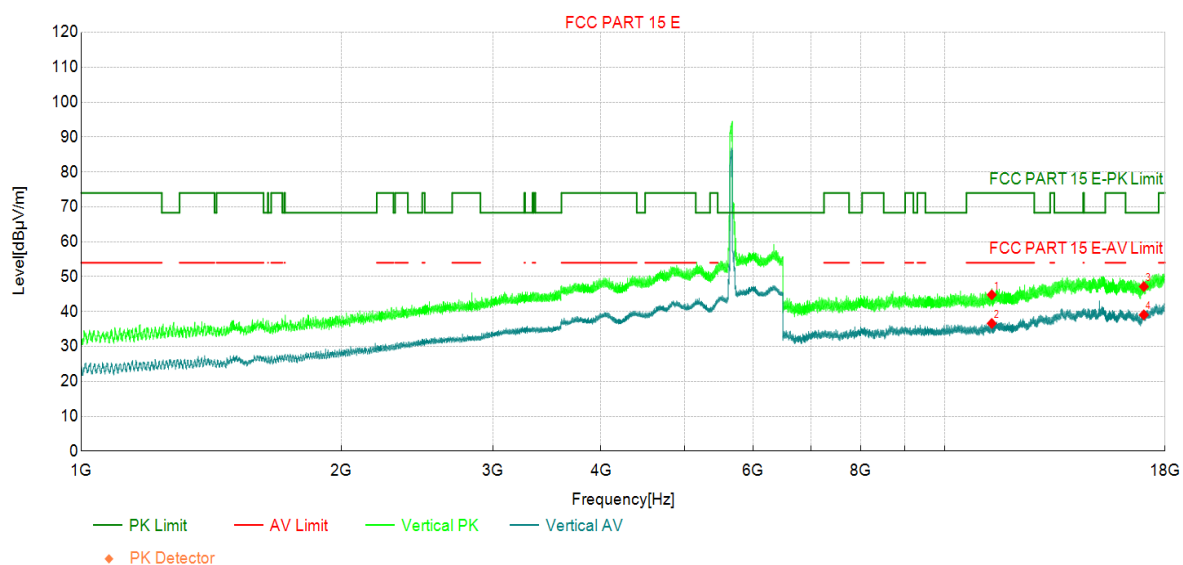

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340.00	36.93	44.79	7.86	74.00	29.21	PK	Vertic	PASS
2	11340.00	28.73	36.59	7.86	54.00	17.41	AV	Vertic	PASS
3	17010.00	31.11	47.15	16.04	68.30	21.15	PK	Vertic	PASS
4	17010.00	23.02	39.06	16.04	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5755MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

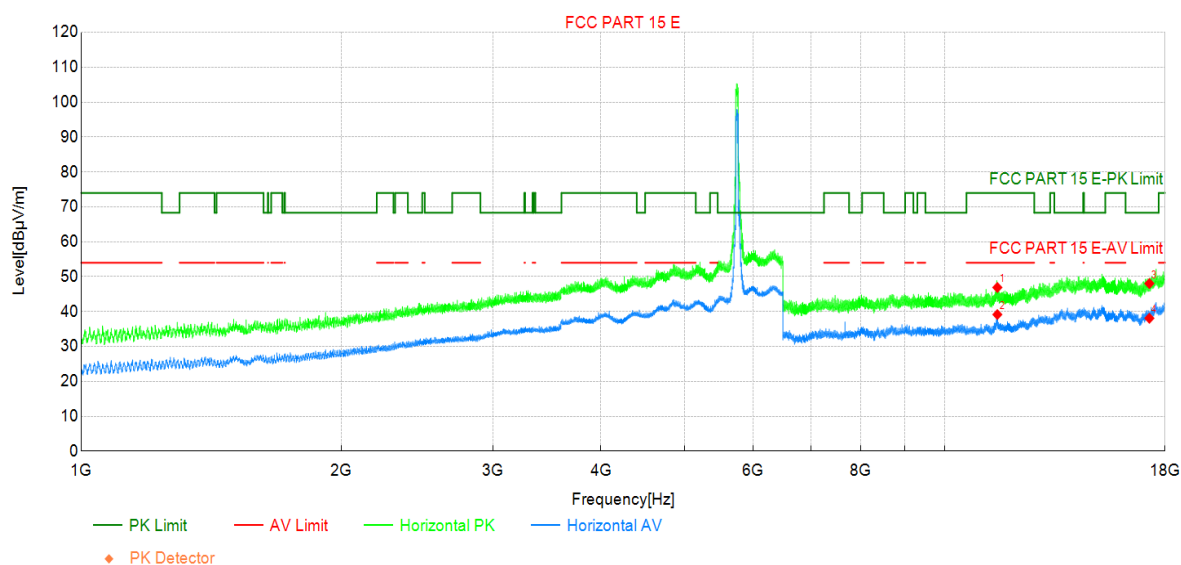

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	38.42	46.90	8.48	74.00	27.10	PK	Horizo	PASS
2	11510.00	30.66	39.14	8.48	54.00	14.86	AV	Horizo	PASS
3	17265.00	32.53	48.04	15.51	68.30	20.26	PK	Horizo	PASS
4	17265.00	22.57	38.08	15.51	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5755MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

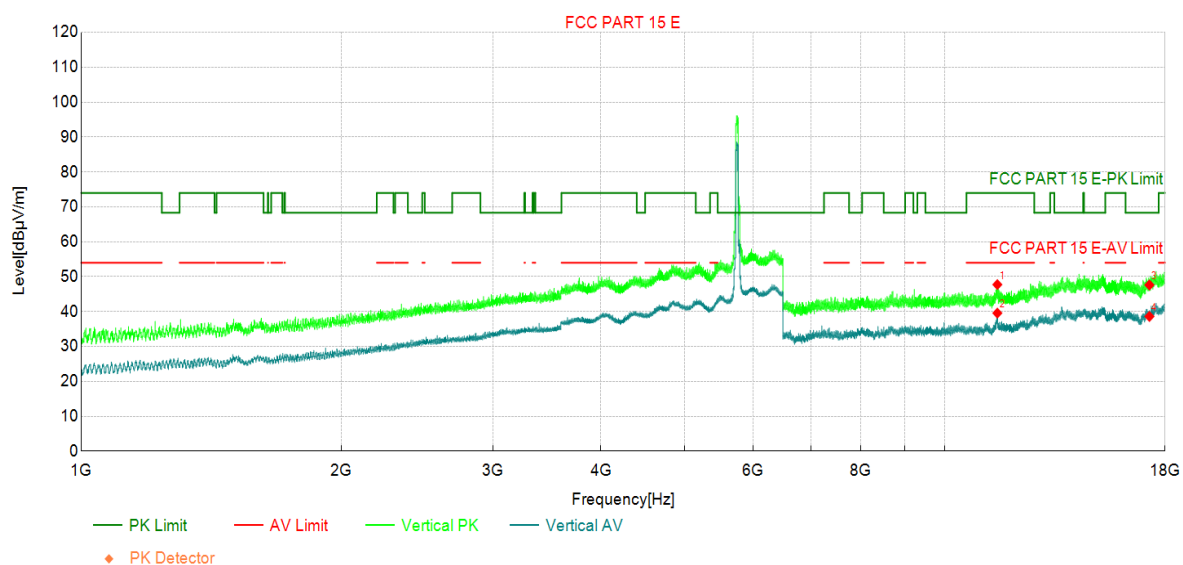

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510.00	39.25	47.73	8.48	74.00	26.27	PK	Vertic	PASS
2	11510.00	31.08	39.56	8.48	54.00	14.44	AV	Vertic	PASS
3	17265.00	32.11	47.62	15.51	68.30	20.68	PK	Vertic	PASS
4	17265.00	23.09	38.60	15.51	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5795MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

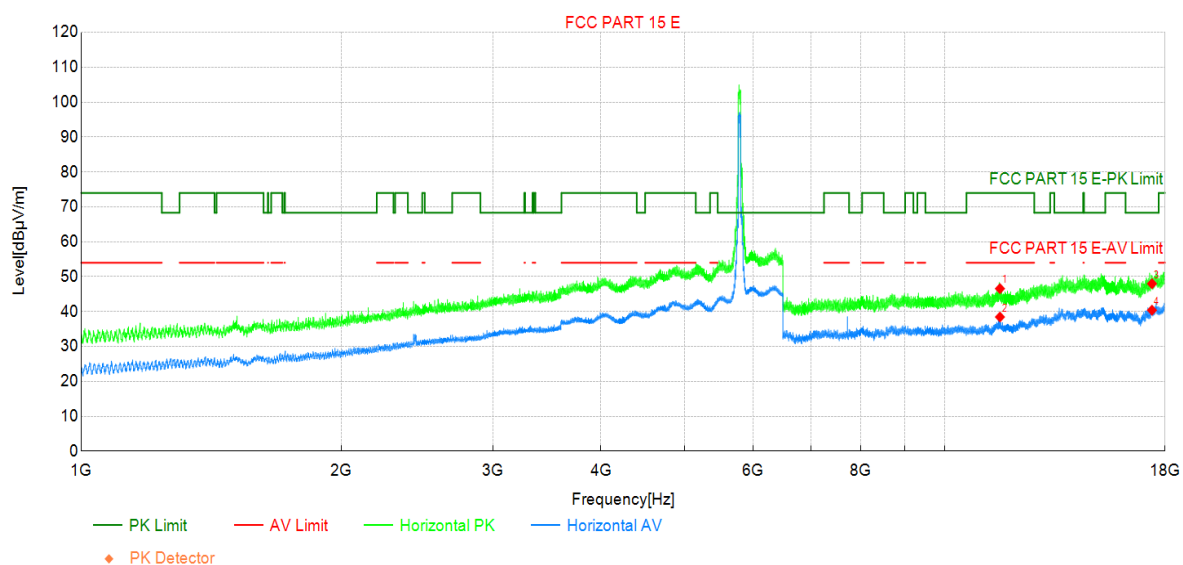

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	37.82	46.56	8.74	74.00	27.44	PK	Horizo	PASS
2	11590.00	29.70	38.44	8.74	54.00	15.56	AV	Horizo	PASS
3	17385.00	31.40	47.98	16.58	68.30	20.32	PK	Horizo	PASS
4	17385.00	23.81	40.39	16.58	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode5:Transmit at 5795MHz by 802.11ac(40Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

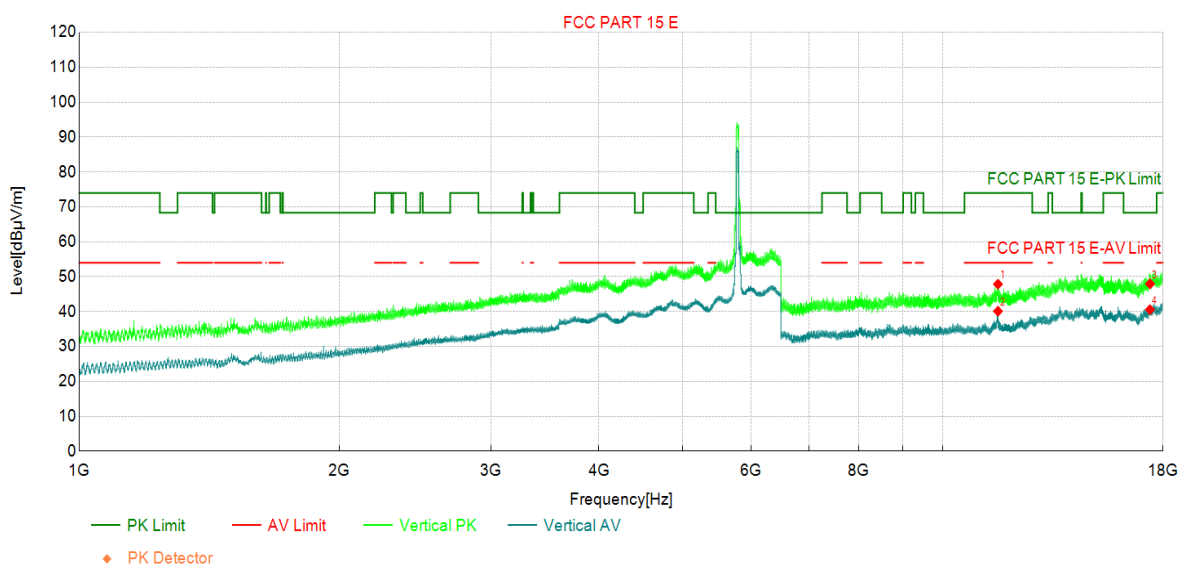

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590.00	39.10	47.84	8.74	74.00	26.16	PK	Vertic	PASS
2	11590.00	31.36	40.10	8.74	54.00	13.90	AV	Vertic	PASS
3	17385.00	31.37	47.95	16.58	68.30	20.35	PK	Vertic	PASS
4	17385.00	23.97	40.55	16.58	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

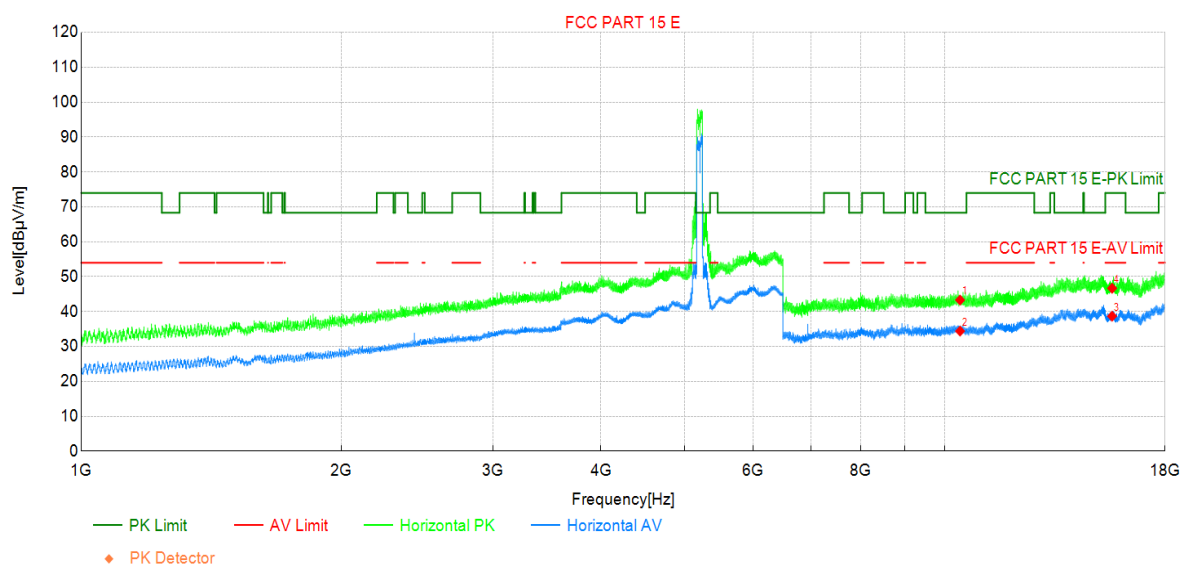

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420.00	36.70	43.30	6.60	68.30	25.00	PK	Horizo	PASS
2	10420.00	27.80	34.40	6.60	-	-	AV	Horizo	NA
3	15630.00	24.89	38.67	13.78	54.00	15.33	AV	Horizo	PASS
4	15630.00	32.90	46.68	13.78	74.00	27.32	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5210MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

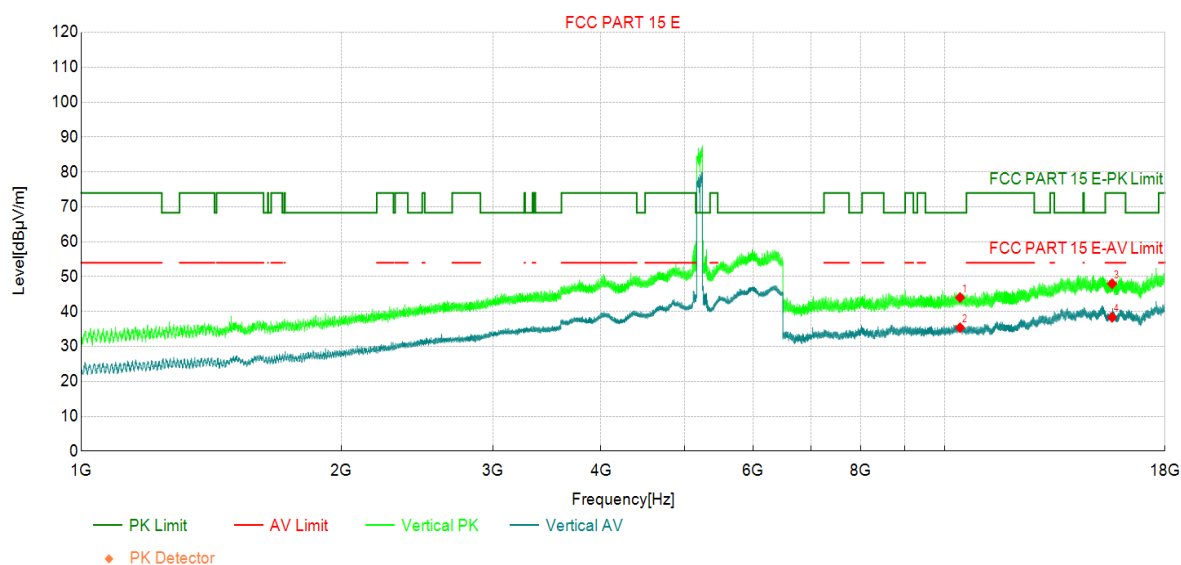

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10420.00	37.41	44.01	6.60	68.30	24.29	PK	Vertic	PASS
2	10420.00	28.77	35.37	6.60	-	-	AV	Vertic	NA
3	15630.00	34.18	47.96	13.78	74.00	26.04	PK	Vertic	PASS
4	15630.00	24.57	38.35	13.78	54.00	15.65	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

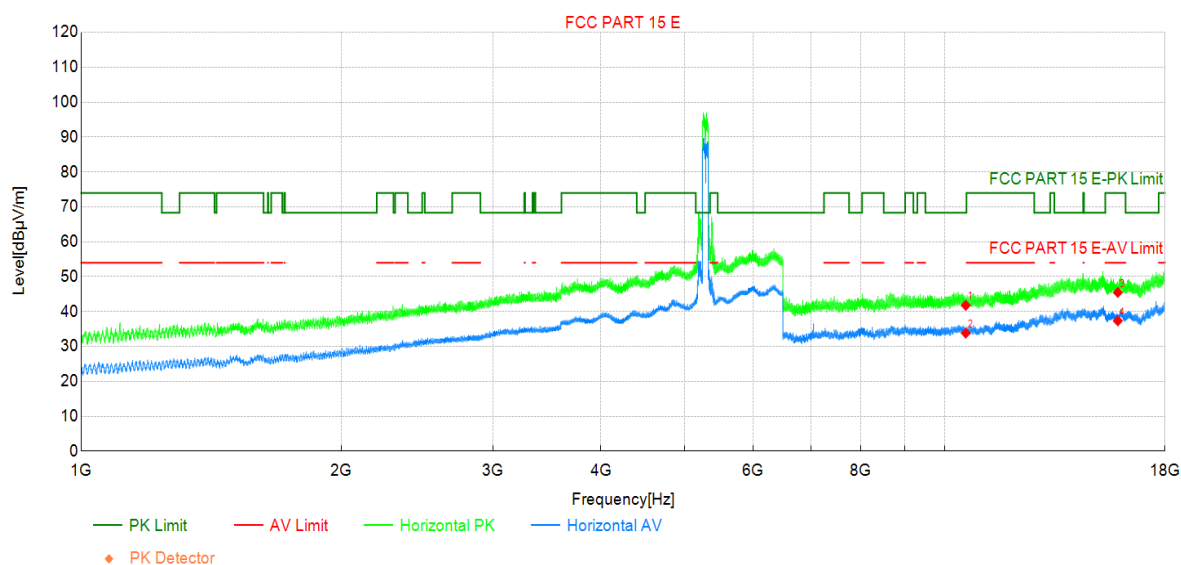

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10580.00	35.01	41.78	6.77	68.30	26.52	PK	Horizo	PASS
2	10580.00	27.05	33.82	6.77	-	-	AV	Horizo	NA
3	15870.00	31.39	45.48	14.09	74.00	28.52	PK	Horizo	PASS
4	15870.00	23.25	37.34	14.09	54.00	16.66	AV	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5290MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

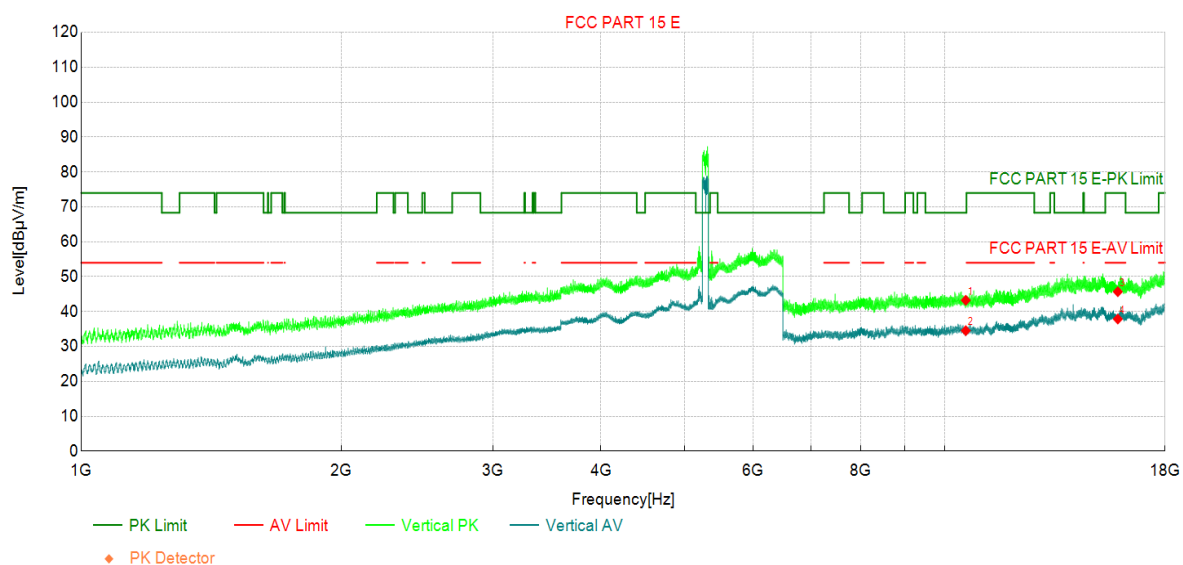

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10580.00	36.46	43.23	6.77	68.30	25.07	PK	Vertic	PASS
2	10580.00	27.75	34.52	6.77	-	-	AV	Vertic	NA
3	15870.00	31.60	45.69	14.09	74.00	28.31	PK	Vertic	PASS
4	15870.00	23.77	37.86	14.09	54.00	16.14	AV	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5530MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

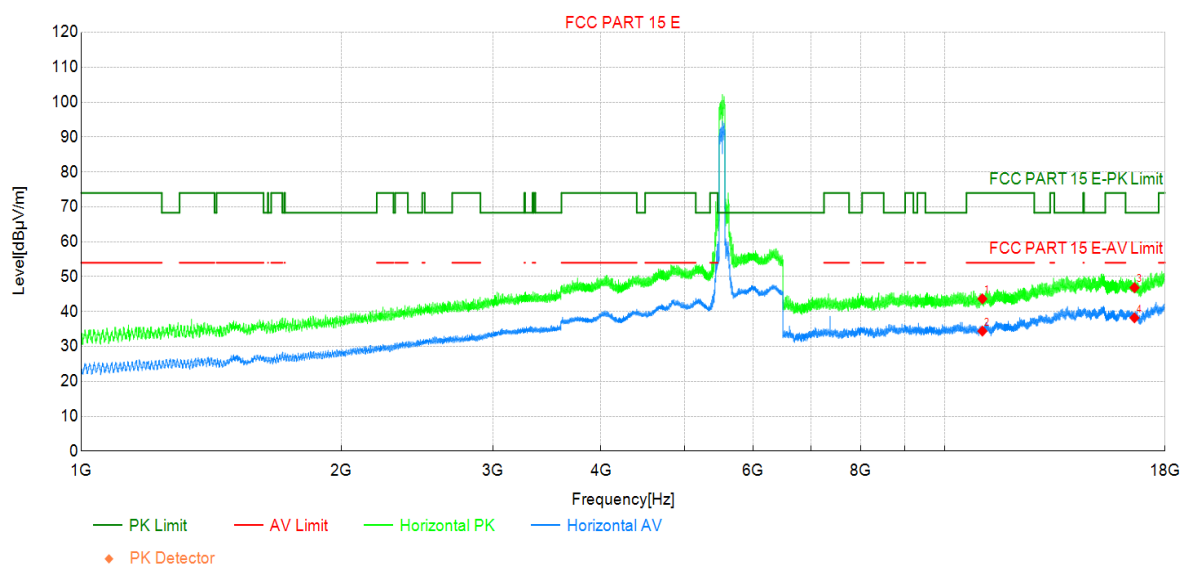

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11060.00	36.70	43.66	6.96	74.00	30.34	PK	Horizo	PASS
2	11060.00	27.44	34.40	6.96	54.00	19.60	AV	Horizo	PASS
3	16590.00	32.05	46.85	14.80	68.30	21.45	PK	Horizo	PASS
4	16590.00	23.40	38.20	14.80	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5530MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

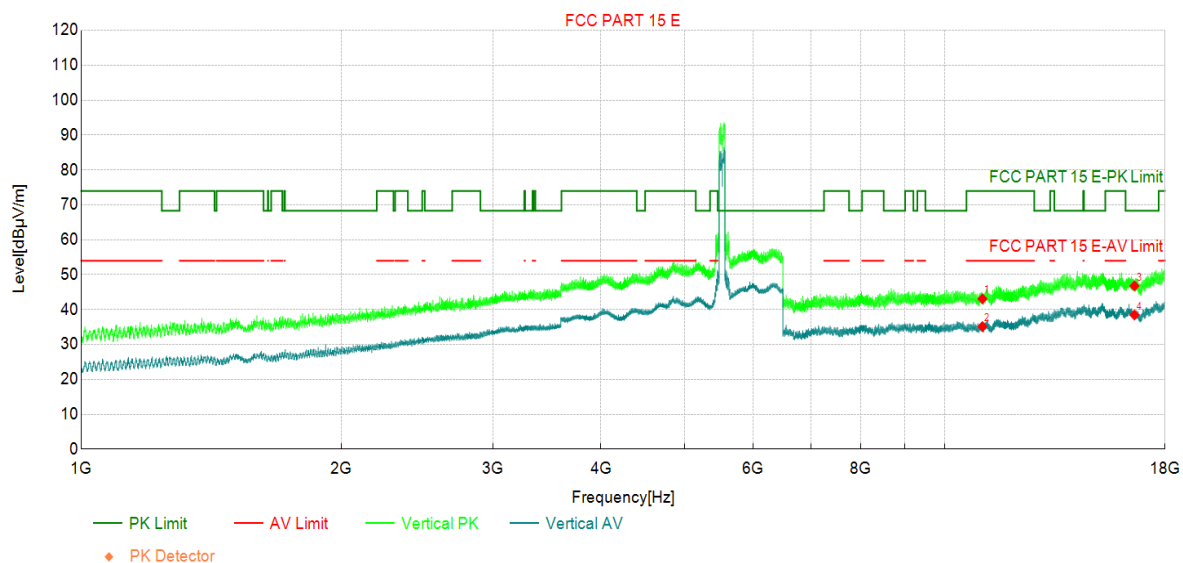

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11060.00	36.12	43.08	6.96	74.00	30.92	PK	Vertic	PASS
2	11060.00	28.17	35.13	6.96	54.00	18.87	AV	Vertic	PASS
3	16590.00	31.98	46.78	14.80	68.30	21.52	PK	Vertic	PASS
4	16590.00	23.65	38.45	14.80	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5610MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

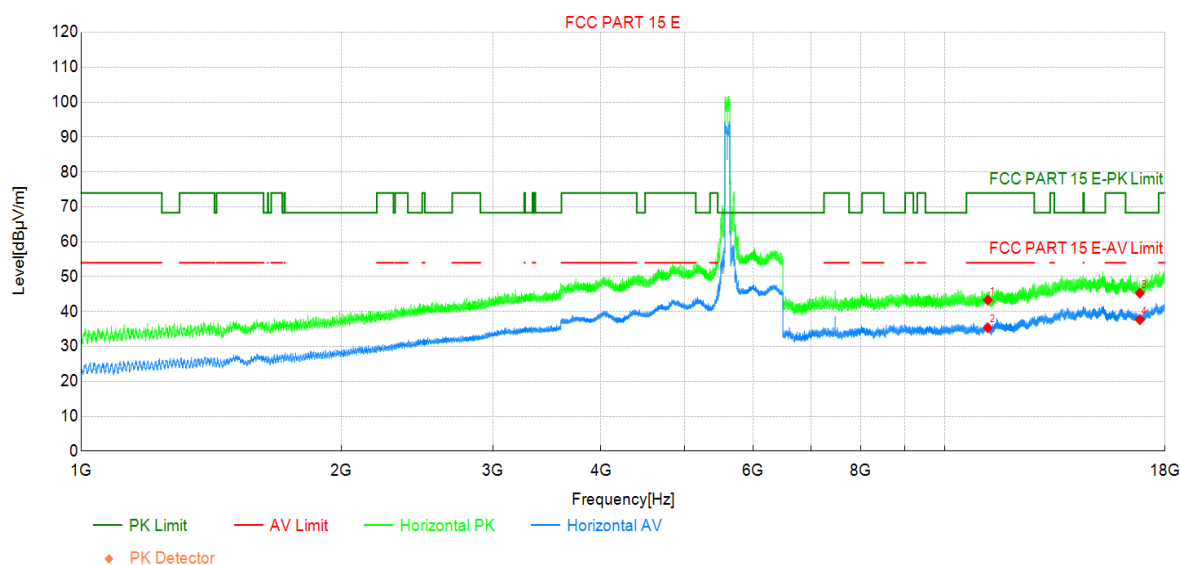

Suspected Data List


NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	11220.00	35.54	43.27	7.73	74.00	30.73	PK	Horizo	PASS
2	11220.00	27.64	35.37	7.73	54.00	18.63	AV	Horizo	PASS
3	16830.00	30.35	45.27	14.92	68.30	23.03	PK	Horizo	PASS
4	16830.00	22.74	37.66	14.92	-	-	AV	Horizo	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5610MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

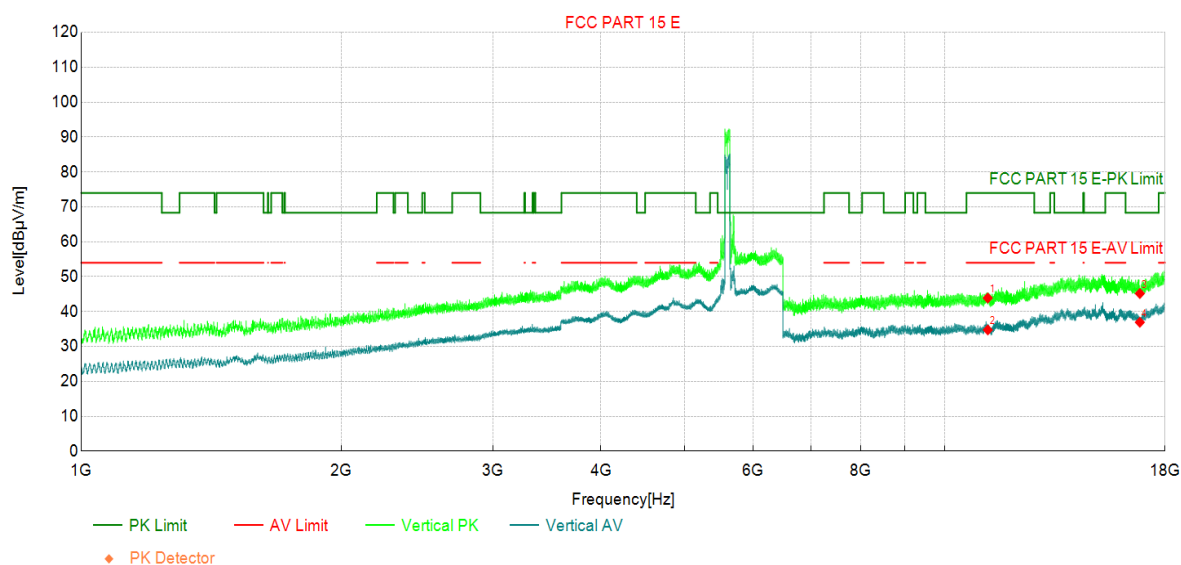

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11220.00	36.15	43.88	7.73	74.00	30.12	PK	Vertic	PASS
2	11220.00	27.01	34.74	7.73	54.00	19.26	AV	Vertic	PASS
3	16830.00	30.24	45.16	14.92	68.30	23.14	PK	Vertic	PASS
4	16830.00	22.01	36.93	14.92	-	-	AV	Vertic	NA

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5775MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

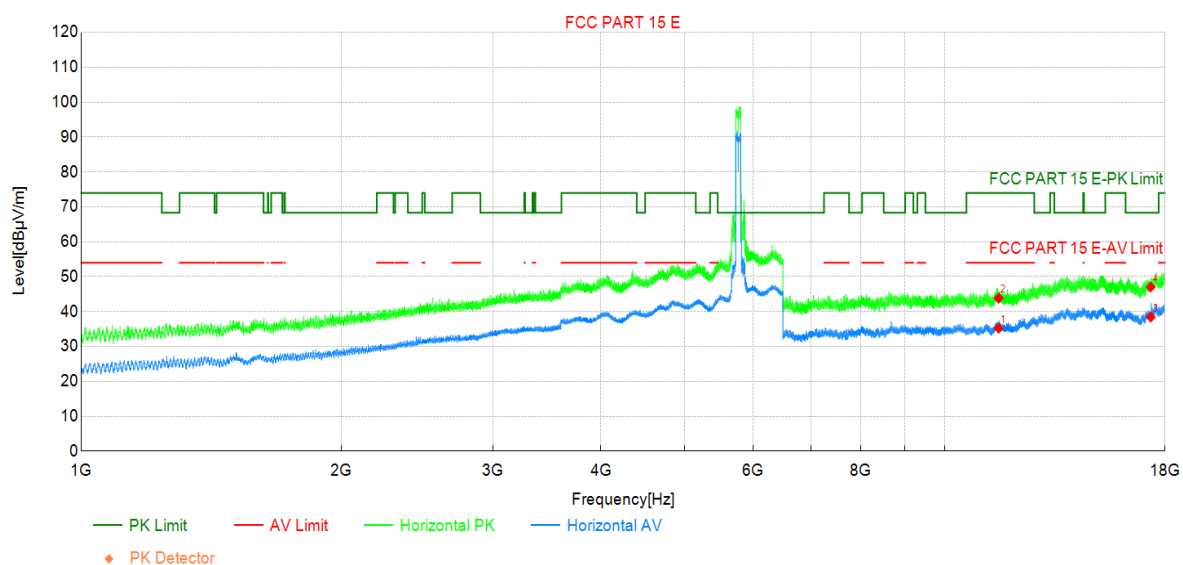

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11550.00	26.60	35.21	8.61	54.00	18.79	AV	Horizo	PASS
2	11550.00	35.23	43.84	8.61	74.00	30.16	PK	Horizo	PASS
3	17325.00	22.54	38.41	15.87	-	-	AV	Horizo	NA
4	17325.00	31.16	47.03	15.87	68.30	21.27	PK	Horizo	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode6:Transmit at 5775MHz by 802.11ac(80Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

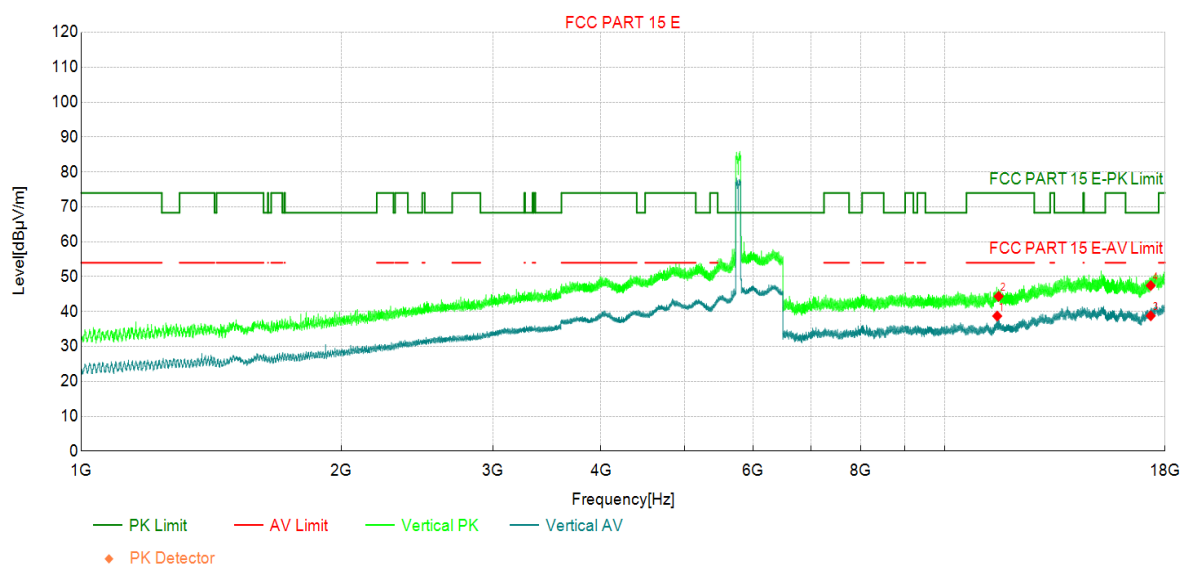

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11505.38	30.24	38.71	8.47	54.00	15.29	AV	Vertic	PASS
2	11550.00	35.75	44.36	8.61	74.00	29.64	PK	Vertic	PASS
3	17325.00	22.91	38.78	15.87	-	-	AV	Vertic	NA
4	17325.00	31.58	47.45	15.87	68.30	20.85	PK	Vertic	PASS

Test Report

Project Information

Profile:	2510795R	EUT:	IEEE 802.11 a/b/g/n/ac/ax 2T/2R Band USB2.0 Combo Module Integrated Bluetooth V2.1/3.0/4.0/4.1/4.2/5.2
Mode:	Mode7:Transmit at 5180MHz by 802.11ax(20Mhz)	Volta	3.3 Vac
Environment:	Temp: 25°C ; Humi:60%	Engi	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

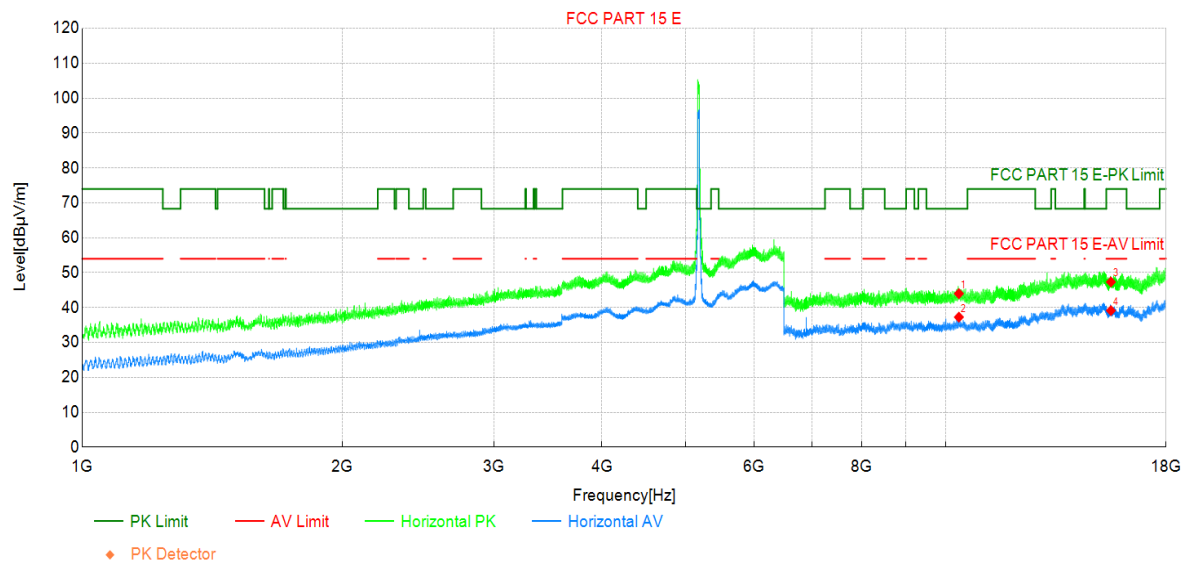

Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10360.00	37.41	43.99	6.58	68.30	24.31	PK	Horizo	PASS
2	10360.00	30.67	37.25	6.58	-	-	AV	Horizo	NA
3	15540.00	33.43	47.33	13.90	74.00	26.67	PK	Horizo	PASS
4	15540.00	25.23	39.13	13.90	54.00	14.87	AV	Horizo	PASS